

Index Of Sheets

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	ESTIMATED ROADWAY QUANTITIES
2A	TYPICAL SECTIONS AND PAVEMENT
	SCHEDULE
3 & 3A	GENERAL NOTES AND SPECIAL NOTES

STANDARD ROADWAY DRAWINGS
DWG. NO. REV. DESCRIPTION

ROADWAY DESIGN STANDARDS		
RD-A-1	12-18-99	STANDARD ABBREVIATIONS
RD-L-1	10-26-94	STANDARD LEGEND
DRAINAGE - CULVERTS AND ENDWALL		
D-PG-3	04-15-97	FERROUS AND ALUMINUM CORRUGATED METAL PIPE
SAFETY APPURTENANCES AND FENCE		
S-GR31-1	12-01-14	W-BEAM GUARDRAIL
S-GRS-2		SPECIAL CASE: GUARDRAIL ATTACHMENT TO CONCRETE DECKS
S-GR-3		GUARDRAIL ANCHOR FOR TYPE 21, 13, AND IN-LINE TERMINALS
GUARDRAIL TERMINALS		
S-GRT-2	12-01-14	TYPE 38 GUARDRAIL TERMINAL
S-GRT-2R		EARTH PAD FOR TYPE 38 (RETROFIT)
S-GRT-3		TYPE 21 GUARDRAIL TERMINAL
S-GRT-4	11-06-14	TYPE 13 GUARDRAIL TERMINAL (TRAILING END)
TRAFFIC CONTROL APPURTENANCES		
T-M-1	07-24-14	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS AND MARKING ABBREVIATIONS
T-M-2	07-24-14	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS
T-M-3	07-24-14	MARKING STANDARDS FOR TRAFFIC ISLANDS, MEDIANS & PAVED SHOULDER ON CONVENTIONAL ROADS
T-M-4	07-24-14	STANDARD INTERSECTION PAVEMENT MARKINGS
T-M-16	12-01-14	ASPHALT SHOULDER RUMBLE STRIPE INSTALLATION DETAILS FOR NON-ACCESS CONTROLLED ROUTES
T-S-20	11-01-11	SIGN DETAILS
T-WZ-10	04-02-12	ADVANCE ROAD WORK SIGNING ON HIGHWAYS AND FREEWAYS


STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
BUREAU OF ENGINEERING

DICKSON-HOUSTON COUNTIES

STATE ROUTE NO. 46
FROM UNION ROAD IN DICKSON COUNTY (L.M. 17.76)
TO SR-49 IN HOUSTON COUNTY (L.M. 2.29)
RESURFACING


STATE HIGHWAY NO. 46 F.A.H.S. NO. N.A.

TENN.	YEAR	SHEET NO.
	2015	1
FED. AID PROJ. NO.	STP/HSIP-46(26)	
STATE PROJ. NO.	22015-8212-14	
STATE PROJ. NO.	22015-3212-94	
STATE PROJ. NO.	42006-8206-14	
STATE PROJ. NO.	42006-3206-94	

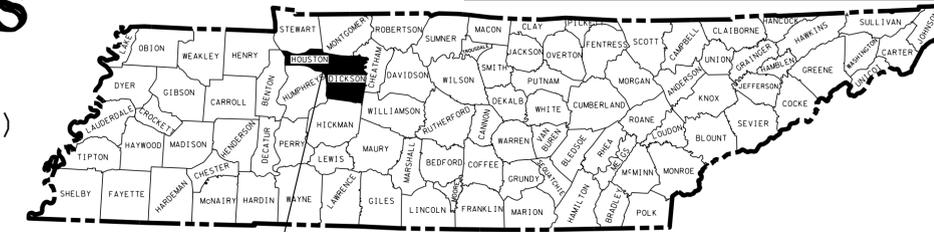

PROJECT LOCATION

END PROJ. NO.	42006-8206-14
(L.M. 2.29)	42006-3206-94
BEGIN PROJ. NO.	STP/HSIP-46(26)
(L.M. 0.00)	HOUSTON CO.
END PROJ. NO.	42006-8206-14
(L.M. 23.13)	42006-3206-94
BEGIN PROJ. NO.	STP/HSIP-46(26)
(L.M. 17.76)	HOUSTON CO.
END PROJ. NO.	22015-8212-14
(L.M. 0.00)	22015-3212-94
BEGIN PROJ. NO.	STP/HSIP-46(26)
(L.M. 17.76)	DICKSON CO.
END PROJ. NO.	22015-8212-14
(L.M. 23.13)	22015-3212-94
BEGIN PROJ. NO.	STP/HSIP-46(26)
(L.M. 17.76)	DICKSON CO.

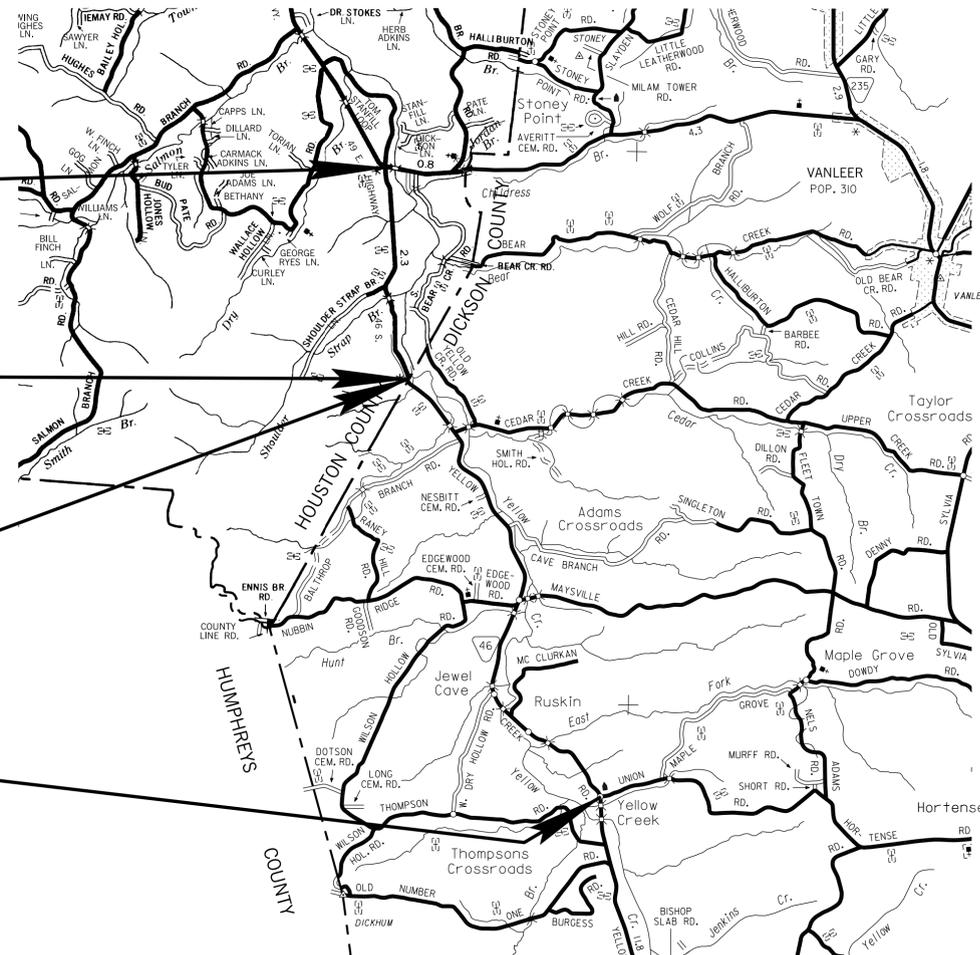


SCALE: 1" = 1 MILE

NO EXCLUSIONS

UNOFFICIAL SET
NOT FOR BIDDING



TRAFFIC DATA	
ADT (2015)	6760
V	45-55 MPH

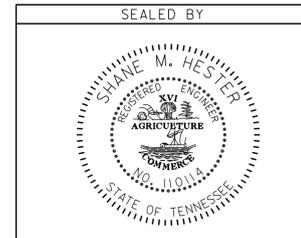

APPROVED: *Paul D. Degges*
PAUL D. DEGGES, CHIEF ENGINEER

DATE: _____

APPROVED: *John Schroer*
JOHN SCHROER, COMMISSIONER

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED: _____
DIVISION ADMINISTRATOR DATE

PROJECT LENGTH-DICKSON CO.	5.37 MILES
PROJECT LENGTH-HOUSTON CO.	2.29 MILES
TOTAL PROJECT LENGTH	7.66 MILES
TOTAL LANE MILES RESURFACED	15.3 MILES

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED JANUARY 1, 2015 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT TRANS. PROJ. SP. SV. 2 BILLY BINION
DESIGNER NATHAN BARTLETT CHECKED BY DARRELL GRAY
P.E. NO. 98034-4299-04 (DESIGN)
PIN NO. 120937.00

D:\03\30\F01.tdot.state.tn.us\03\Shorbed\SURVEY\DESIGN\Resurfacing Plans\2015\Dickson-Houston\SR46\01-20937-00-Const\001.sht

ESTIMATED ROADWAY QUANTITIES

ITEM NO.	DESCRIPTION	UNIT	HOUSTON	SAFETY	DICKSON	SAFETY	TOTAL
			QUANTITY	QUANTITY	QUANTITY	QUANTITY	QUANTITY
			42006-8206-14	42006-3206-94	22015-8212-14	22015-3212-94	
1	303-01 MINERAL AGGREGATE, TYPE A BASE, GRADING D	TON	433	200	1013	175	1821
	307-01.08 ASPHALT CONCRETE MIX (PG64-22) (BPMB-HM) GRADING B-M2	TON	200		200		400
	403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)	TON	16		35		51
2	411-03.12 ACS MIX(PG64-22) THIN LIFT D ASPHALT	TON	1492		3493		4963
	411-12.03 SCORING FOR RUMBLE STRIPE (NON-CONTINUOUS) (8IN WIDTH)	L.M.		3.7		8.6	12.2
3	415-01.01 COLD PLANING BITUMINOUS PAVEMENT	TON	1383		3235		4598
	607-39.02 18" PIPE CULVERT (SIDE DRAIN)	L.F.	25		25		50
	705-01.04 METAL BEAM GUARD FENCE	L.F.		25			25
	705-02.02 SINGLE GUARDRAIL (TYPE 2)	L.F.		1000		175	1175
	705-02.20 SINGLE GUARDRAIL (TYPE 2) LONG POST (6 FT-9 FT)	L.F.		3700			3700
	705-04.05 GUARDRAIL TERMINAL (TYPE-IN-LINE)	EACH		4			4
	705-04.07 TAN ENERGY ABSORBING TERM (NCHRP 350, TL3)	EACH		8		7	15
	706-01 GUARDRAIL REMOVED	L.F.		4725		350	5075
4	712-01 TRAFFIC CONTROL	LS	0.5		0.5		1
	712-04.01 FLEXIBLE DRUMS (CHANNELIZING)	EACH	12		13		25
	712-05.01 WARNING LIGHTS (TYPE A)	EACH	2		2		4
5	712-06 SIGNS (CONSTRUCTION)	S.F.	174		286		459
	716-01.21 Snwplwble Pvmt Mrks (Bi-Dir)(1 Color)	EACH		151		354	505
6	716-03.03 PLASTIC WORD PAVEMENT MARKING (STOP AHEAD)	EACH	1				1
7	716-05.01 PAINTED PAVEMENT MARKING (4" LINE)	L.M.		9.2		20.1	29.3
8	716-12.02 ENHANCED FLATLINE THERMO PVMT MRKNG (6IN LINE)	L.M.		4.6		9.4	14.0
	716-13.02 SPRAY THERMO PVMT MRKNG (60 mil) (6IN LINE)	L.M.		4.6		10.7	15.3
	717-01 MOBILIZATION	LS	0.5		0.5		1

FOOTNOTES

1. TO BE USED AS DIRECTED BY THE ENGINEER FOR SPOT LEVELING. INCLUDES 375 TONS FOR GUARDRAIL TERMINALS.
2. INCLUDES 22 TONS FOR BUSINESS ENTRANCES AND COUNTY ROADS.
3. INCLUDES 20 TONS FOR BUSINESS ENTRANCES AND COUNTY ROADS.
4. THE CONTRACTOR SHALL COMPLY WITH SECTION 712 OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION REGARDING TEMPORARY TRAFFIC CONTROL AND THE CURRENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
5. IN THE EVENT THAT A CONSTRUCTION AND/OR REGULATORY SIGN IS TEMPORAIRILY DESIGNATED NOT IN USE DURING THE CONSTRUCTION PHASE OF A PROJECT, THE CONTRACTOR SHALL CHOOSE A SIGN COVERING METHOD FROM A DESIGNATED LIST OF METHODS ACCEPTED BY THE DEPARTMENT. SAID SIGN COVERING METHOD SHALL BE SELECTED FROM QUALIFIED PRODUCTS LIST 10, SECTION D OR APPROVED BY THE DIVISION OF MATERIALS AND TEST AND SHALL BE USED TO COVER THESE SIGNS. NO OTHER METHOD FOR SIGN COVERING WILL BE ALLOWED. TEMPORARY SIGN COVERINGS SHALL NOT BE PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE PRICE BID FOR ITEM NO. 712-06 SIGNS (CONSTRUCTION).
6. THE CONTRACTOR MAY ELECT TO SUBSTITUTE PREFORMED PLASTIC FOR THERMOPLASTIC. PREFORMED PLASTIC SHALL BE PAID FOR AT THE SAME UNIT PRICE AS BID FOR THERMOPLASTIC.
7. TO BE USED ON COLD PLANED SURFACE
8. FOR CENTERLINE ON FINAL LAYER OF PAVEMENT, QUANTITY ON BASED ON 79% NO PASS BOTH SIDES, 20% PASS ONE SIDE, 2% PASS BOTH SIDES PASS.

GUARDRAIL						
LOCATION (L.M.)	DECK ATTACHMENT	SINGLE TYPE 2	SINGLE LONG POST	ANCHOR IN-LINE	ANCHOR TYPE 38	GUARDRAIL REMOVED
18.599		25			1	50
19.086-19.128		25			1	50
21.000		25			1	50
21.396		25			1	50
22.000		25			1	50
22.533		25			1	50
22.703		25			1	50
0.08-0.78			3700		2	3700
0.82-0.88	25	275			2	275
1.03-1.13		500		2	2	525
1.68-1.72		225		2	2	225
	25	1175	3700	4	15	5075

THERE ARE NO UTILITY ADJUSTMENTS ON THIS PROJECT

SIGNS (CONSTRUCTION) 712-06				
QUANTITY	M.U.T.C.D. NO.	DESCRIPTION	SIZE	712-06 S.F.
2	G20-1	ROAD WORK NEXT 8 MILES	64 x 24	21
2	G20-2	END ROAD WORK	48 x 24	16
2	W20-1	ROAD WORK 1500'	48 x 48	32
2	W20-1	ROAD WORK 1000'	48 x 48	32
2	W20-1	ROAD WORK 500'	48 x 48	32
11	W20-1	ROAD WORK AHEAD	48 x 48	176
2	W20-4	ONE LANE ROAD 1000' - PORTABLE	36 x 36	18
2	W20-7a	FLAGGER SYMBOL - PORTABLE	36 x 36	18
2	W16-2	SUPPLEMENTAL PLATE	24 x 18	6
2	W21-2	FRESH OIL - PORTABLE	36 x 36	18
2	W21-5	SHOULDER WORK - PORTABLE	36 x 36	18
2	W8-9a	SHOULDER DROP-OFF - PORTABLE	36 x 36	18
6	W8-11	UNEVEN LANES - PORTABLE	36 x 36	54
TOTAL S.F.				459

OTHER SIGNS, AS DIRECTED BY THE ENGINEER MAY BE REQUIRED DURING VARIOUS PHASES OF CONSTRUCTION AND WILL BE MEASURED AND PAID FOR AT THE UNIT BID PRICE. SEE CURRENT M.U.T.C.D. FOR STANDARDS AND TYPICAL APPLICATIONS.

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2015	STP/HSIP-46(26)	2

UNOFFICIAL
SET
NOT FOR
BIDDING


SEALED BY




STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

ESTIMATED
ROADWAY
QUANTITIES

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2015	STP/HSIP-46(26)	2A

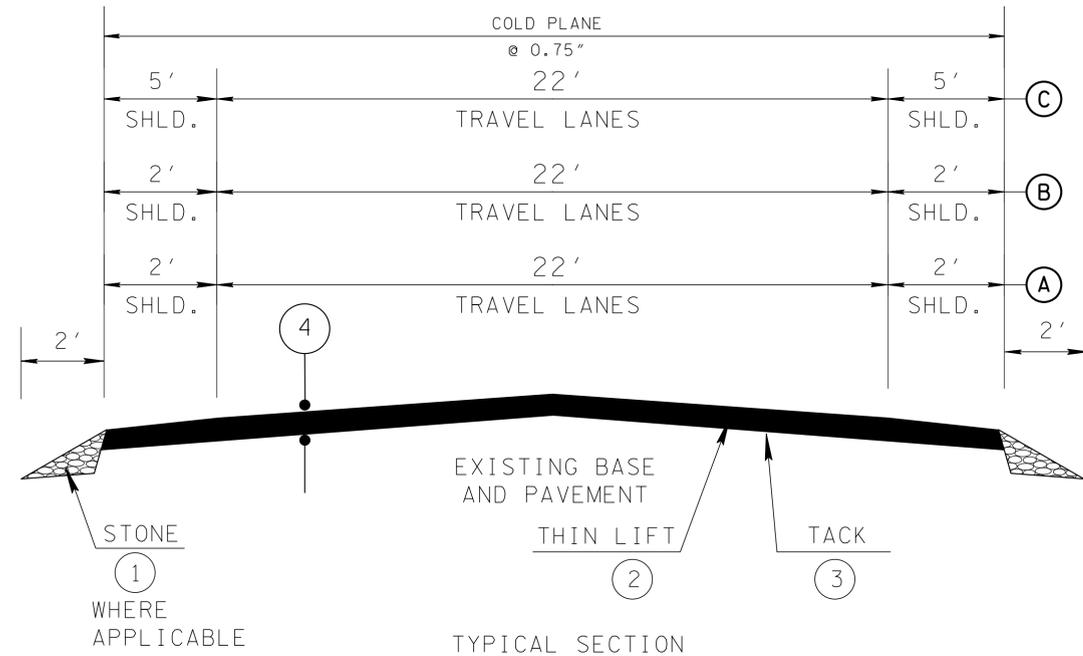

- ① L.M. 17.76 - L.M. 23.12
- ② L.M. 0.00 - L.M. 2.25
- ③ L.M. 2.25 - L.M. 2.28

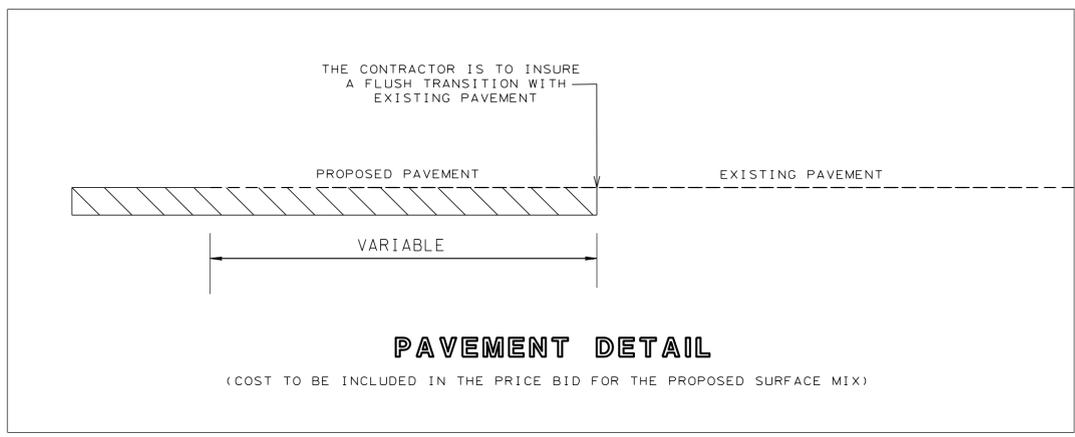

*** SPECIAL PAVING NOTE ***

ALL SHOULDERS WILL BE DEGRADED / CLIPPED AND CLEANED OF ALL VEGETATION, GRASS, AND DEBRIS. SEE SPECIAL NOTES. ALL COST TO BE INCLUDED IN OTHER ITEMS OF WORK.

PROPOSED PAVEMENT SCHEDULE	
①	MINERAL AGGREGATE BASE @ 2" THICK 303-01 MINERAL AGGREGATE, TYPE A BASE, GRADING D
②	ASPHALT FOR THIN LIFT @ 85 LBS/S.Y. 411-03.12 ACS MIX (PG64-22) THIN LIFT D ASPHALT
③	TACK COAT @ 0.10 GAL./S.Y. 403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)
④	COLD PLANING @ 0.75" THICK 415-01.01 COLD PLANING BITUMINOUS PAVEMENT (TON)

BRIDGE NOTES		
LOCATION	LENGTH (FT.)	RECOMMENDATION
L.M. 17.72	32'	PAVE WITH PLANS QUANTITY
L.M. 18.57	63' 6"	PAVE WITH PLANS QUANTITY
L.M. 19.05	221'	COLD PLANE 0.75" OF THE EXISTING ASPHALT AND REPLACE WITH 0.75" NEW ASPHALT
L.M. 19.35	34'	PAVE WITH PLANS QUANTITY
L.M. 20.28	39'	PAVE WITH PLANS QUANTITY
L.M. 0.52	34'	PAVE WITH PLANS QUANTITY

UNOFFICIAL SET NOT FOR BIDDING

SEALED BY

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS AND PAVEMENT SCHEDULE

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2015	STP/HS1P-46(26)	3

GENERAL NOTES

DRAINAGE

- (1) EXCAVATION FOR CULVERT WILL NOT BE MEASURED AND PAID FOR DIRECTLY, BUT WILL BE INCLUDED IN THE PRICE BID PER LINEAR FOOT OF PIPE (PIPE CULVERTS, STORM SEWERS, CONDUITS, ALL OTHER CULVERTS AND MINOR STRUCTURES).

GUARDRAIL

- (2) THE PROPOSED GUARDRAIL, INCLUDING ANY ANCHOR SYSTEM, SHALL BE INSTALLED QUICKLY TO MINIMIZE TRAFFIC EXPOSURE TO ANY HAZARD. NO PAYMENT WILL BE MADE FOR A SECTION OF PROPOSED GUARDRAIL, INCLUDING ANCHORS, UNTIL IT IS COMPLETE IN PLACE.

MISCELLANEOUS

- (3) NOTHING IN THE GENERAL NOTES OR SPECIAL PROVISIONS SHALL RELIEVE THE CONTRACTOR FROM HIS RESPONSIBILITIES TOWARD THE SAFETY AND CONVENIENCE OF THE GENERAL PUBLIC AND THE RESIDENTS ALONG THE PROPOSED CONSTRUCTION AREA

PAVEMENT MARKINGS

TEMPORARY PAVEMENT MARKING ON INTERMEDIATE LAYERS

- (4) TEMPORARY PAVEMENT LINE MARKINGS ON INTERMEDIATE LAYERS OF PAVEMENT SHALL BE REFLECTIVE TAPE OR REFLECTORIZED PAINT INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK. SHORT, UNMARKED SECTIONS SHALL NOT BE ALLOWED. THESE MARKINGS WILL BE MEASURED AND PAID FOR UNDER ITEM NO. 716-05.01, PAINTED PAVEMENT MARKING (4" LINE), L.M.

FINAL PAVEMENT MARKING IF 6" ENHANCED FLATLINE THERMOPLASTIC IS USED

- (5) PERMANENT PAVEMENT LINE MARKINGS SHALL BE 6" ENHANCED FLATLINE THERMOPLASTIC INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK. SHORT UNMARKED SECTIONS SHALL NOT BE ALLOWED. PAVEMENT MARKINGS WILL BE MEASURED AND PAID FOR UNDER ITEM NO. 716-12.02, ENHANCED FLATLINE THERMO PVMT MRKNG (6IN LINE), L.M. THE CONTRACTOR SHALL HAVE THE OPTION OF USING REFLECTORIZED PAINT INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK AND THEN INSTALLING THE PERMANENT MARKINGS AFTER THE PAVING OPERATION IS COMPLETED. THE TEMPORARY MARKINGS FOR THE FINAL SURFACE WILL NOT BE MEASURED AND PAID FOR DIRECTLY, BUT THE COSTS ARE TO BE INCLUDED IN THE PRICE BID FOR THE PERMANENT MARKINGS.

FINAL PAVEMENT MARKING IF 6" SPRAY THERMOPLASTIC (60 mil) IS USED

- (6) PERMANENT PAVEMENT LINE MARKINGS SHALL BE 6" SPRAY THERMOPLASTIC (60 mil) INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK. SHORT UNMARKED SECTIONS SHALL NOT BE ALLOWED. PAVEMENT MARKINGS WILL BE MEASURED AND PAID FOR UNDER ITEM NO. 716-13.02, SPRAY THERMO PVMT MRKNG (60 mil) (6IN LINE), L.M. THE CONTRACTOR SHALL HAVE THE OPTION OF USING REFLECTORIZED PAINT INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK AND THEN INSTALLING THE PERMANENT MARKINGS AFTER THE PAVING OPERATION IS COMPLETED. THE TEMPORARY MARKINGS FOR THE FINAL SURFACE WILL NOT BE MEASURED AND PAID FOR DIRECTLY, BUT THE COSTS ARE TO BE INCLUDED IN THE PRICE BID FOR THE PERMANENT MARKINGS.

PAVEMENT

PAVING

- (7) THE CONTRACTOR SHALL BE REQUIRED TO PAVE AND COLD PLANE IN THE DIRECTION OF TRAFFIC.

RESURFACING

- (8) WHERE DIRECTED BY THE TDOT ENGINEER, THE CONTRACTOR SHALL BE REQUIRED TO SHAPE PUBLIC SIDE ROADS, BUSINESS ENTRANCES, AND PRIVATE DRIVES, AS WELL AS CLEANING OF EXISTING DRAINS BEFORE PLACING MATERIALS. ALL COSTS ARE TO BE INCLUDED IN THE PRICE BID FOR OTHER ITEMS OF CONSTRUCTION.

- (9) ALL PUBLIC SIDE ROADS SHALL BE PAVED ONE PAVER WIDTH THROUGH THE INTERSECTION AS A MINIMUM. A SATISFACTORY TRANSITION FROM THE NEW PAVEMENT TO THE EXISTING GRADE OF THE INTERSECTING PUBLIC ROAD OR BUSINESS ENTRANCE SHALL BE PROVIDED. SHOULD THE PAVEMENT OF THE INTERSECTING PUBLIC ROAD BE DISTRESSED, THE RESURFACING WIDTH MAY BE INCREASED TO THE NORMAL RIGHT OF WAY LINE.

- (10) PRIVATE DRIVEWAYS, FIELD ENTRANCES, AND BUSINESS ENTRANCES WILL BE RESURFACED A PAVER WIDTH (LANE WIDTH) AS A MINIMUM. A PAVEMENT TAPER TO TRANSITION THE NEW PAVEMENT SHALL BE REQUIRED, IT SHALL BE BASED ON AN ADDITIONAL ONE FOOT OF WIDTH PER ONE INCH DEPTH OF PAVEMENT. IF THE SHOULDER IS NARROW ENOUGH THAT THE SUM OF THE SHOULDER AND THE TRANSITION ARE LESS THAN A PAVER WIDTH, THE TRANSITION SHALL OCCUR WITHIN THE PAVER WIDTH. IF THE SUM OF THE SHOULDER AND THE TRANSITION IS GREATER THAN A PAVER WIDTH (LANE WIDTH), THE TRANSITION SHALL OCCUR OUTSIDE OF THE PAVER WIDTH.

- (11) IN ALL CASES, THE LENGTH OF THE PAVEMENT TRANSITION, THE THICKNESS AND WIDTH OF THE RESURFACING AND ANY ADDITIONAL PAVEMENT MATERIALS SHALL BE AS DIRECTED BY THE TDOT ENGINEER.

CONSTRUCTION WORK ZONE & TRAFFIC CONTROL

- (12) ADVANCED WARNING SIGNS SHALL NOT BE DISPLAYED MORE THAN FORTY-EIGHT (48) HOURS BEFORE PHYSICAL CONSTRUCTION BEGINS. SIGNS MAY BE ERECTED UP TO ONE WEEK BEFORE NEEDED, IF THE SIGN FACE IS FULLY COVERED.

- (13) IF THE CONTRACTOR MOVES OFF THE PROJECT, HE SHALL COVER OR REMOVE ALL UNNEEDED SIGNS AS DIRECTED BY THE ENGINEER. COSTS OF REMOVAL, COVERING, AND REINSTALLING SIGNS SHALL NOT BE MEASURED AND PAID FOR SEPARATELY, BUT ALL COSTS SHALL BE INCLUDED IN THE ORIGINAL UNIT PRICE BID FOR ITEM NO 712-06, SIGNS (CONSTRUCTION) PER SQUARE FOOT.

- (14) A LONG TERM BUT SPORADIC USE WARNING SIGN, SUCH AS A FLAGGER SIGN, MAY REMAIN IN PLACE WHEN NOT REQUIRED PROVIDED THE SIGN FACE IS FULLY COVERED.

- (15) TRAFFIC CONTROL DEVICES SHALL NOT BE DISPLAYED OR ERECTED UNLESS RELATED CONDITIONS ARE PRESENT NECESSITATING WARNING.

- (16) USE OF BARRICADES, PORTABLE BARRIER RAILS, VERTICAL PANELS, AND DRUMS SHALL BE LIMITED TO THE IMMEDIATE AREAS OF CONSTRUCTION WHERE A HAZARD IS PRESENT. THESE DEVICES SHALL NOT BE STORED ALONG THE ROADWAY WITHIN THIRTY (30) FEET OF THE EDGE OF THE TRAVELED WAY BEFORE OR AFTER USE UNLESS PROTECTED BY GUARDRAIL, BRIDGE RAIL, AND/OR BARRIERS INSTALLED FOR OTHER PURPOSES FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL INCREASE TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. THESE DEVICES SHALL BE REMOVED FROM THE CONSTRUCTION WORK ZONE WHEN THE ENGINEER DETERMINES THEY ARE NO LONGER NEEDED. WHERE THERE IS INSUFFICIENT RIGHT-OF-WAY TO PROVIDE FOR THIS REQUIRED SETBACK, THE CONTRACTOR SHALL DETERMINE THE ALTERNATE LOCATIONS AND REQUEST THE ENGINEER'S APPROVAL TO USE THEM.

- (17) THE CONTRACTOR SHALL NOT BE PERMITTED TO PARK ANY VEHICLES OR CONSTRUCTION EQUIPMENT DURING PERIODS OF INACTIVITY, WITHIN THIRTY (30) FEET OF THE EDGE OF PAVEMENT WHEN THE LANE IS OPEN TO TRAFFIC UNLESS PROTECTED BY GUARDRAIL, BRIDGE RAIL, AND/OR BARRIERS INSTALLED FOR OTHER PURPOSES FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL BE INCREASED TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. PRIVATELY OWNED VEHICLES SHALL NOT BE ALLOWED TO PARK WITHIN THIRTY (30) FEET OF AN OPEN TRAFFIC LANE AT ANY TIME UNLESS PROTECTED AS DESCRIBED ABOVE FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL BE INCREASED TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. WHERE THERE IS INSUFFICIENT RIGHT-OF-WAY TO PROVIDE FOR THIS REQUIRED SETBACK, THE CONTRACTOR SHALL DETERMINE THE ALTERNATE LOCATIONS AND REQUEST THE ENGINEER'S APPROVAL TO USE THEM.

- (18) ALL DETOUR AND CONSTRUCTION SIGNING SHALL BE IN STRICT ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

EROSION PREVENTION AND SEDIMENT CONTROL

LITTER, DEBRIS, WASTE, PETROLEUM

- (19) THE CONTRACTOR SHALL ESTABLISH AND MAINTAIN A PROACTIVE METHOD TO PREVENT LITTER, CONSTRUCTION DEBRIS, AND CONSTRUCTION WASTES FROM ENTERING WATERS OF THE STATE/U.S. THESE MATERIALS WILL BE PICKED UP AND REMOVED FROM STORMWATER EXPOSURE PRIOR TO ANTICIPATED STORM EVENTS. AFTER USE, MATERIALS USED FOR EPSC WILL BE REMOVED FROM THE SITE.

- (20) THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS TO ENSURE THAT PETROLEUM PRODUCTS OR OTHER CHEMICAL POLLUTANTS ARE PREVENTED FROM ENTERING WATERS OF THE STATE/U.S. ALL EQUIPMENT REFUELING, SERVICING, AND STAGING AREAS SHALL COMPLY WITH ALL LOCAL, STATE, AND FEDERAL LAWS, RULES, REGULATIONS, AND ORDINANCES, INCLUDING THOSE OF THE NATIONAL FIRE PROTECTION ASSOCIATION (NFPA). APPROPRIATE CONTAINMENT MEASURES FOR THESE AREAS SHALL BE USED. ALL SPILLS MUST BE REPORTED TO THE APPROPRIATE AGENCY, AND MEASURES SHALL BE TAKEN IMMEDIATELY TO PREVENT THE POLLUTION OF WATERS OF THE STATE/U.S., INCLUDING GROUNDWATER, SHOULD A SPILL OCCUR.

**UNOFFICIAL
SET
NOT FOR
BIDDING**

SEALED BY



STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

**GENERAL
NOTES**

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2015	STP/HSIP-46(26)	3A

SPECIAL NOTES

MISCELLANEOUS

- (1) THE CONTRACTOR WILL BE REQUIRED TO PERFORM THE FOLLOWING WORK AND INCLUDE ALL COSTS THEREOF IN THE PRICES BID FOR OTHER ITEMS OF CONSTRUCTION: REPAIR OF SHOULDERS AND DITCHES. SHOULDERS SHALL BE DEGRASSED, MATERIAL SHALL BE PICKED UP AND REMOVED. CLEANING AND STRAIGHTENING ENDS OF EXISTING SIDEDRAINS AND CROSSDRAINS WHERE DIRECTED BY THE ENGINEER.
- (2) THE CONTRACTOR SHALL TAKE EXTREME CARE WHEN WORKING AROUND EXISTING GUARDRAIL, HIGHWAY SIGNS, OR ANY DEPARTMENT OF TRANSPORTATION STRUCTURE TO AVOID DAMAGE DURING THE COURSE OF CONSTRUCTION. ANY DAMAGE WILL BE REPLACED OR REPAIRED AT HIS OWN EXPENSE.

PAVEMENT MARKINGS

- (3) THE CONTRACTOR WILL BE REQUIRED TO ESTABLISH AND LOCATE ALL NO-PASSING ZONES. THE ESTABLISHMENT OF NO-PASSING ZONES IS TO BE IN ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, 2009, PART III, MARKING. ALL NO-PASSING ZONES WILL BE APPROVED BY THE ENGINEER WITH ADVICE FROM THE REGIONAL TRAFFIC ENGINEER PRIOR TO THE MARKING APPLICATION.
- (4) THE CONTRACTOR IS TO PROVIDE THE LAYOUT OF ALL EXISTING PAVEMENT MARKINGS BEFORE BEGINNING THE RESURFACING PROJECT. EXISTING MARKINGS SHALL BE REFERENCED AS NEEDED TO ENSURE THAT ALL NEW MARKINGS ARE REPLACED IN THEIR CORRESPONDING LOCATIONS UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

PAVEMENT

PAVING

- (5) SURFACE TO BE CROWNED AS DIRECTED BY THE ENGINEER.
- (6) ALL STRUCTURES (DRAINAGE STRUCTURES, MANHOLES, UTILITY BOXES, ETC.) SHALL HAVE A FINISHED GRADE COMPATIBLE WITH THE FINISHED GRADE OF THE ROADWAY.

CONSTRUCTION WORK ZONE & TRAFFIC CONTROL

- (7) THE CONSTRUCTION SIGNS, FLAGMEN AND OTHER TRAFFIC CONTROL DEVICES WILL BE IN ACCORDANCE WITH THE CURRENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
- (8) ONE ADVANCE ROAD CONSTRUCTION AHEAD SIGN IS TO BE PLACED ON ALL SIDE ROADS PRIOR TO THEIR INTERSECTION WITH THE PROPOSED PROJECT. LOCATION TO BE DETERMINED IN THE FIELD BY THE ENGINEER OR CONTRACTORS SUPERINTENDENT.

EROSION PREVENTION AND SEDIMENT CONTROL

FOR GUARDRAIL TERMINALS

- (9) THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS BEFORE CONSTRUCTING EARTH PADS FOR THE TYPE 38 TERMINALS TO ENSURE THAT ENVIRONMENTAL FEATURES (STREAMS, WETLANDS, OR SPRINGS) ARE NOT IMPACTED DURING CONSTRUCTION. IF THE CONTRACTOR / TDOT INSPECTOR IS UNSURE WHETHER THE ENVIRONMENTAL FEATURES ARE STREAMS, SPRINGS OR WETLANDS, THE INSPECTOR SHALL CONTACT THE TDOT ENVIRONMENTAL DIVISION ECOLOGY OR PERMITS SECTION SO AN ACCURATE DETERMINATION CAN BE ASSESSED.
- (10) DURING CONSTRUCTION OF THE EARTH PADS FOR THE TYPE 38 GUARDRAIL TERMINALS, EXISTING VEGETATION WILL BE REQUIRED TO BE REMOVED FOR THE PROPOSED PAD AND SLOPES. IF DURING THE VEGETATION REMOVAL, ANY TREES GREATER THAN 3 INCHES IN DIAMETER ARE REQUIRED TO BE REMOVED, CONTACT THE TDOT ENVIRONMENTAL DIVISION ECOLOGY SECTION IMMEDIATELY. DUE TO THE RECENT MODIFICATION OF THE USFWS STANCE REGARDING THE INDIANA BAT NO TREES > 3" DBH SHOULD BE CUT WITHOUT CLEARANCE FROM THE TDOT ENVIRONMENTAL DIVISION ECOLOGY SECTION.

NPDES

- (11) THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS, BEFORE CLEANING OUT OR REMOVAL/REPLACEMENT OF DITCHES, SIDE DRAINS, AND CROSS DRAINS, TO ENSURE THAT THE DRAINAGE FEATURES / WATERCOURSES ARE NOT STREAMS OR WETLANDS. IF THE CONTRACTOR / TDOT INSPECTOR IS UNSURE WHETHER THE DRAINAGE FEATURES ARE STREAMS OR WETLANDS, THE INSPECTOR SHALL CONTACT THE TDOT ENVIRONMENTAL DIVISION, PERMITS SECTION TO OBTAIN THE APPROPRIATE PERMITS.
- (12) DUE TO THE TYPE OF WORK IT IS OUR UNDERSTANDING THAT THE PROJECT WILL NOT DISTURB MORE THAN ONE ACRE. IF THE DISTURBED AREA IS MORE THAN ONE ACRE, PLEASE CONTACT THE TDOT ENVIRONMENTAL DIVISION, PERMITS SECTION BECAUSE A NPDES PERMIT WILL BE REQUIRED.

**UNOFFICIAL
SET
NOT FOR
BIDDING**

SEALED BY



STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

**SPECIAL
NOTES**

09-MAR-2015 09:57
 \\J03WF01.tdot.state.tn.us\03Shor\ed\SURVEY\DESIGN\Resurfacing Plans\2015\Dickson-Houston\SR46\B\01\20937-00-Construction-0005.dgn