TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2014	NH/HSIP-10(57)	3

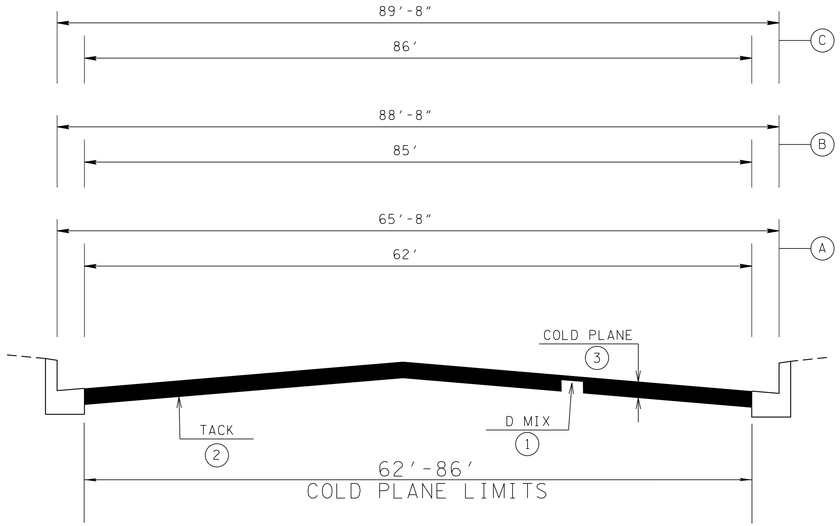

TYPICAL SECTION

A — LM. 14.450 TO LM. 14.585
LM. 14.661 TO LM. 15.865
LM. 16.453 TO LM. 17.890

B — LM. 14.585 TO LM. 14.661

C — LM. 15.865 TO LM. 16.453

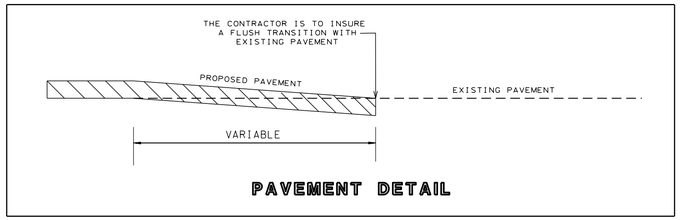

PROPOSED PAVEMENT SCHEDULE

1. SURFACE @ (132.5 LB/S.Y.)
   411-01.10 ACS MIX (PG64-22) GRADING "D"
2. TACK COAT @ 0.1 GAL/SY
   403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)
3. COLD PLANING @ 1.25" THICK
   415-01.01 COLD PLANING BITUMINOUS PAVEMENT (TON)

BRIDGE NOTES

LOCATION	LENGTH (FT.)	RECOMMENDATION
L.M. 14.68	34'	PAVE WITH PLANS QUANTITY

SEALED BY



STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS AND PAVEMENT SCHEDULE

21-JAN-2014 14:25
\\JU03WF01.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2014\04-April-2014 Letting\Rutherford SR 10 NB\003-Typical.SHT