TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2014	NH/HSIP-1(319)	3

TENNESSEE D.O.T.
DESIGN DIVISION
FILE NO.

TYPICAL SECTION

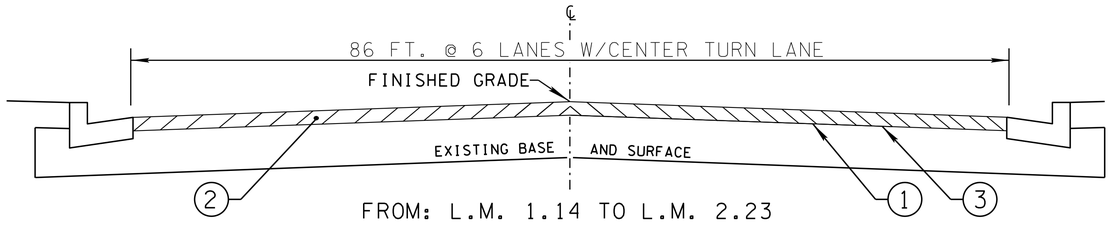

FROM: L.M. 1.14 TO L.M. 2.23

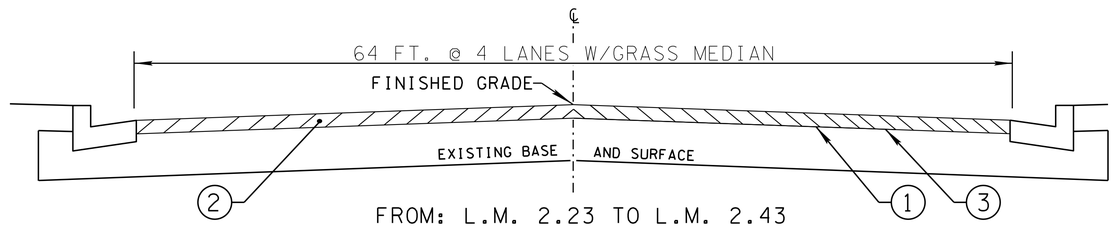

FROM: L.M. 2.23 TO L.M. 2.43

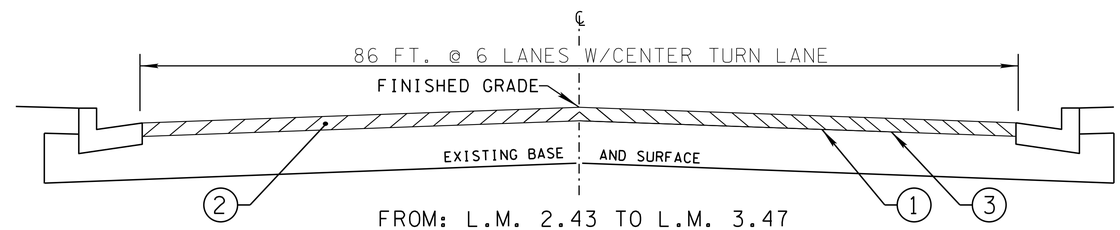

FROM: L.M. 2.43 TO L.M. 3.47

BRIDGE NOTE

THE CONTRACTOR SHALL:

COLD PLANE 1.25" DEPTH AND PAVE ACROSS EXISTING STRUCTURES WITH PLANS QUANTITIES ONLY @ L.M. 3.11 & 3.29 (654')

PROPOSED PAVEMENT SCHEDULE

1	TACK COAT (TC) FOR MILLING - COLD PLANE ITEM 403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC) (AT 0.10 GAL./S.Y.)
2	ASPHALTIC CONCRETE SURFACE (ACS) @ 1.25"± THICK (APPROX. 132.50 LBS./S.Y.) ITEM 411-03.10 ACS MIX (PG76-22)GRADING "D"
3	COLD PLANING @ 1.25"± THICK (APPROX. 131.25 LBS./S.Y.) ITEM 415-01.02 COLD PLANING BITUMINOUS PAVEMENT

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS
(NOT TO SCALE)

27-JAN-2014 13:24
\\j04wf01.tdot.state.tn.us\04SHARED\Design\DESIGN\RESURF REG4 PROJ\SHELBY\SRI\LM0-00-LM3-47\79001LM0-00 TYPICAL.dgn