



PLAN VIEW

VARIABLE REINFORCING DIMENSIONS IN CONCRETE LID			
INSIDE DIA. OF CATCH BASIN (INCHES)	OUTSIDE DIA. OF LID (INCHES)	DIMENSION J (INCHES)	DIMENSION K (INCHES)
60	72	4.67	3.67
72	86	7.00	6.00


DIAMETER FOR T500 REINFORCING BARS EQUAL 50 INCHES.
 DIAMETER FOR T501 REINFORCING BARS EQUAL OUTSIDE DIAMETER OF LID MINUS 6 INCHES.

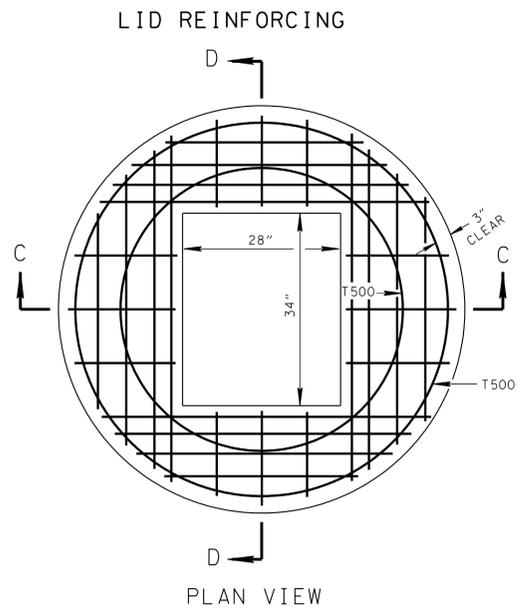


PLAN VIEW

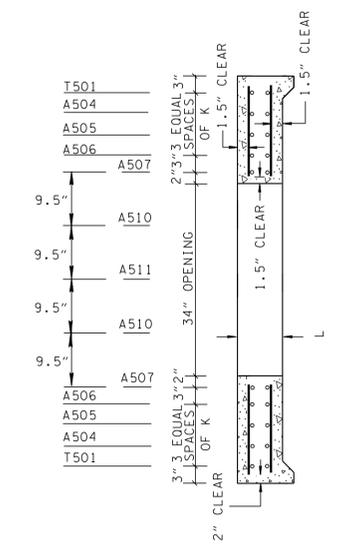


SECTION D-D
(BAR T500 NOT INCLUDED)

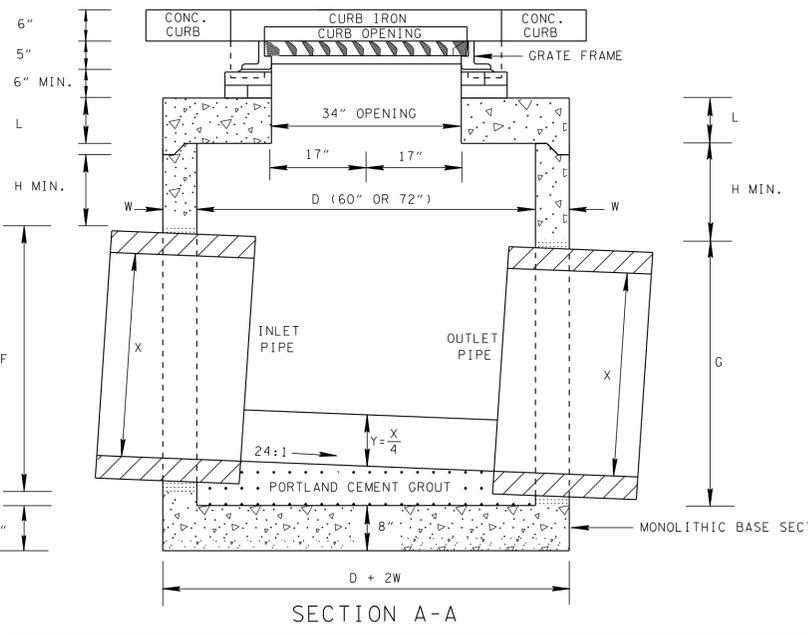

SECTION A-A

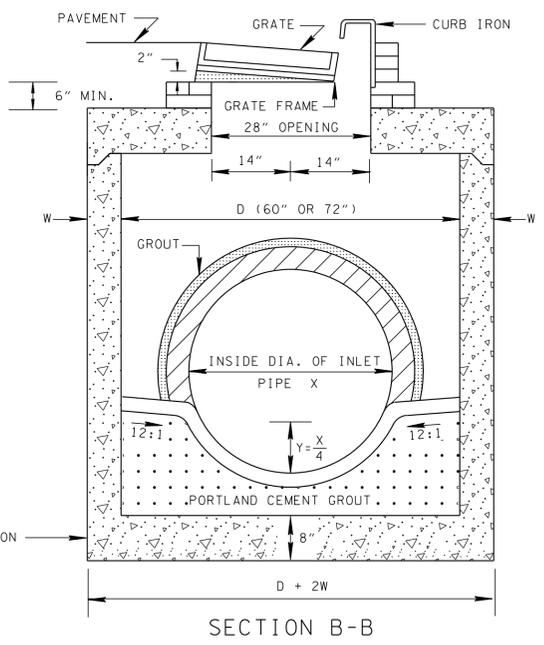

SECTION B-B

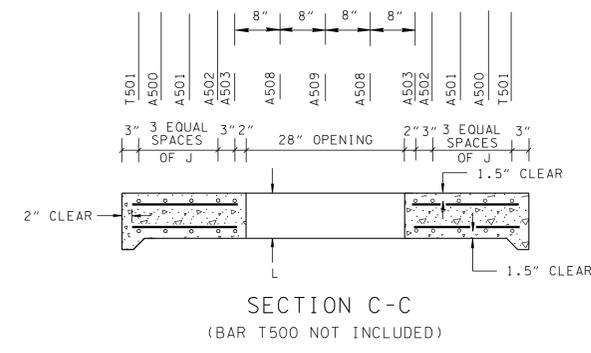

SECTION C-C
(BAR T500 NOT INCLUDED)

CATCH BASIN MAXIMUM DEPTH NOTE
 MAXIMUM DEPTH FOR PRECAST CONCRETE CIRCULAR CATCH BASINS IS 40.00'.

CATCH BASIN MINIMUM DEPTH TABLE FOR 60" INSIDE DIAMETER CATCH BASIN			
INSIDE DIAMETER (X) OF PIPE (INCHES)	MINIMUM DEPTH - (FEET)		
	CONCRETE PIPE	CORRUGATED METAL PIPE	POLYETHYLENE PIPE
18	4.29	4.08	4.21
24	4.79	4.58	4.75
30	5.38	5.08	5.33
36	5.92	5.63	5.83
42	6.46	6.13	6.29
48	7.00	6.63	6.79

CUT-OUT HOLES FOR INLET & OUTLET PIPES			
INSIDE DIAMETER (X) OF PIPE (INCHES)	DIAMETER OF CUT-OUT HOLES F & G - (INCHES)		
	CONCRETE PIPE	CORRUGATED METAL PIPE	POLYETHYLENE PIPE
18	26	21	24
24	32	27	31
30	40	33	39
36	47	40	45
42	54	46	50
48	61	52	56

CUT-OUT HOLES FOR PRECAST STRUCTURES TO BE CORED OR FORMED IN ORDER TO OBTAIN A SMOOTH EDGED HOLE. SCORED OR ETCHED HOLES WITH REINFORCING STEEL LEFT UN CUT WILL NOT BE PERMITTED.

- GENERAL NOTES**
- (A) ALL PRECAST ELEMENTS TO MEET ASTM C478 (CURRENT EDITION) AND AASHTO M199 (CURRENT EDITION) UNLESS SUPERSEDED BY THIS DRAWING.
 CONCRETE: $F_c = 4,000$ POUNDS PER SQUARE INCH AT 28 DAYS
 REINFORCING STEEL: ASTM A615, $F_y = 60,000$ POUNDS PER SQUARE INCH
 ALL REINFORCING IS TO BE INSTALLED AS DETAILED ON THIS DRAWING.
 - (B) PRECAST CATCH BASIN UNITS WHICH ARE DAMAGED DURING SHIPMENT OR INSTALLATION WILL BE REJECTED. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO REPLACE DAMAGED CATCH BASIN UNITS AT HIS OWN EXPENSE.
 - (C) ADDITIONAL REINFORCING STEEL NECESSARY ABOVE THE CORED OR FORMED CUT-OUT HOLES TO MAINTAIN THE INTEGRITY OF THE STRUCTURE DURING HANDLING AND PLACEMENT SHALL BE THE RESPONSIBILITY OF THE FABRICATOR.
 - (D) APPROPRIATE SIZING AND LOCATION OF LIFTING DEVICES SHALL BE THE RESPONSIBILITY OF THE FABRICATOR TO ASSURE BALANCED HANDLING DURING INSTALLATION OF THE PRECAST CATCH BASIN.
 - (E) THE CONTRACTOR IS TO PATCH ALL LIFTING DEVICE HOLES AND PLACE A MINIMUM OF ONE(1) INCH OF COVER OVER THE HARDWARE OF THESE DEVICES ON BOTH TOP AND BOTTOM SURFACES.
 - (F) INVERT ELEVATIONS ARE TO BE ADJUSTED AS DIRECTED BY THE ENGINEER IN ORDER TO ACCOMMODATE INLET AND OUTLET PIPES.
 - (G) SEE STANDARD DRAWING D-CBB-12A FOR DETAILS REGARDING CAST IRON GRATES, FRAMES AND CURB INLETS.
 - (H) SEE STANDARD DRAWING D-CB-12RA FOR DETAILS REGARDING 48" CIRCULAR NO. 12 CATCH BASIN (FOR USE WITH 6" NONMOUNTABLE CURB).
 - (I) SEE STANDARD DRAWING D-CB-12RC FOR DETAILS REGARDING 84" THRU 120" CIRCULAR NO. 12 CATCH BASIN (FOR USE WITH 6" NONMOUNTABLE CURB).
 - (J) PAYMENT FOR CATCH BASIN WILL BE MADE UNDER ITEM NUMBERS 611-12.02 CATCH BASINS, TYPE 12, > 4'-8' DEPTH THROUGH 611-12.07, CATCH BASINS, TYPE 12, > 24'-28' DEPTH PER EACH. PAYMENT FOR CATCH BASINS DEEPER THAN 28' WILL BE MADE UNDER ITEM NUMBER 611-12.08, CATCH BASINS, TYPE 12, ___'-___' DEPTH PER EACH.

CATCH BASIN DIMENSIONS							
INSIDE DIA. OF CATCH BASIN D (INCHES)	WALL THICKNESS W (INCHES)	LID THICKNESS L (INCHES)	OUTSIDE DIA. OF CATCH BASIN D + 2W (INCHES)	MAX. INLET OR OUTLET CONC. PIPE SIZE - STR. (INCHES)	MAX. INLET OR OUTLET CONC. PIPE SIZE - 90 (INCHES)	DIMENSION	
						C (INCHES)	H (INCHES)
60	6	8	72	36	24	2.5	8
72	7	9	86	48	30	3.0	8

- REV. 12-18-96: REMOVED 0.5" PREMOLDED FIBER EXPANSION JOINT FROM SECTION "B-B". REMOVED OLD GENERAL NOTE (D). CHANGED LABEL OF LAST FOUR GENERAL NOTES.
- REV. 4-15-97: CHANGED CATCH BASIN DIMENSION TABLE.
- REV. 7-29-97: CHANGED HEIGHT OF CATCH BASIN.
- REV. 1-19-99: CHANGED MINIMUM DEPTH TABLE AND DRAWING IN GENERAL TO REFLECT REDUCTION IN INVERT DROP ACROSS CATCH BASIN.
- REV. 4-15-00: MOVED 84" AND 96" DIAMETER CATCH BASINS TO NEW STANDARD DRAWING D-CB-12RC. RENAMED SHEET.
- REV. 5-27-01: CHANGED PAY ITEMS IN GENERAL NOTE (J). ADDED CATCH BASIN MAXIMUM DEPTH NOTE.

MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

STATE OF TENNESSEE
 DEPARTMENT OF TRANSPORTATION
 STANDARD PRECAST
 60" AND 72"
 CIRCULAR NO. 12
 CATCH BASIN
 (FOR USE WITH 6"
 NONMOUNTABLE CURB)