TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2015	NH/HSIP-55(23)	2A

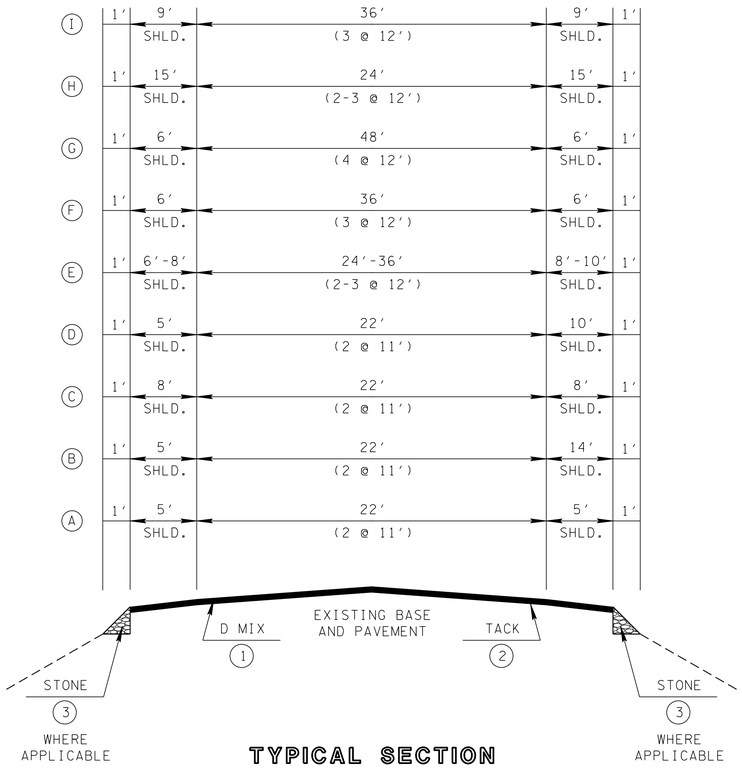

TYPICAL SECTION

A — LM. 0.000 TO LM. 0.294
LM. 0.798 TO LM. 0.839
LM. 1.859 TO LM. 1.956
LM. 2.017 TO LM. 3.688
LM. 3.998 TO LM. 4.158
LM. 4.335 TO LM. 4.462
LM. 4.526 TO LM. 8.658
LM. 9.188 TO LM. 11.160

B — LM. 0.322 TO LM. 0.798
C — LM. 0.839 TO LM. 1.110
D — LM. 1.956 TO LM. 2.017
E — LM. 3.688 TO LM. 3.844
LM. 3.888 TO LM. 3.998

F — LM. 8.658 TO LM. 8.838
G — LM. 8.838 TO LM. 8.900
H — LM. 8.900 TO LM. 9.021
LM. 9.091 TO LM. 9.188
I — LM. 9.021 TO LM. 9.091

PROPOSED PAVEMENT SCHEDULE

1 THIN LIFT"D" @ 85 LBS/SY

PERFORMANCE GRADE PG64-22

411-03.12 ACS MIX (PG64-22) THIN LIFT "D" ASPHALT

2 TACK COAT @ 0.07 GAL/SY

403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)

3 STONE @ 2.00" THICK

303-01 MINERAL AGGREGATE, TYPE A BASE, GRADING "D"

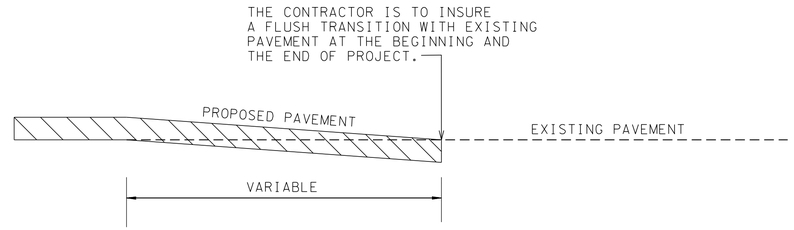

PAVEMENT DETAIL

(COST TO BE INCLUDED IN THE PRICE BID FOR THE PROPOSED SURFACE MIX)

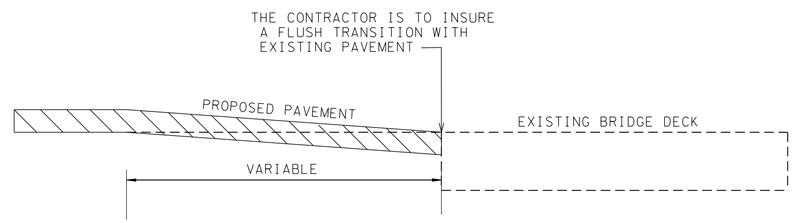

END OF BRIDGE DETAIL

(COST TO BE INCLUDED IN THE PRICE BID FOR THE PROPOSED SURFACE MIX)

@ BRIDGE NO.: 64-SR55-0.31

@ BRIDGE NO.: 64-SR55-3.88

@ BRIDGE NO.: 64-SR55-4.25

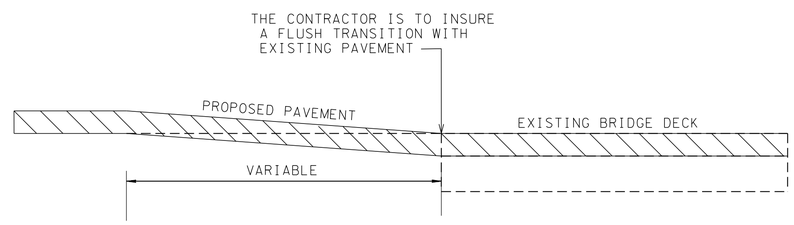

END OF BRIDGE DETAIL

(COST TO BE INCLUDED IN THE PRICE BID FOR THE PROPOSED SURFACE MIX)

@ BRIDGE NO.: 64-SR55-2.77

@ BRIDGE NO.: 64-SR55-5.95

* SPECIAL PAVING NOTE *

ALL SHOULDERS WILL BE DEGRASSED / CLIPPED AND CLEANED OF ALL VEGETATION, GRASS, AND DEBRIS. SEE SPECIAL NOTES. ALL COST TO BE INCLUDED IN OTHER ITEMS OF WORK.

SEALED BY



STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS AND PAVEMENT SCHEDULE

03-MAR-2015 16:20
\\JJ03WF01.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2015\05-May Letting\MooreSR55 JB\002A_TypicalSectionAndPavementSchedule.dgn