


TYPE 2
RAMP OUTSIDE RADIUS (WITH GRASS STRIP)

- * DIMENSION VARIES RELATIVE TO LONGITUDINAL ROADWAY GRADE 10.0% MAX. (8.33% DESIRABLE)
- ** 4'-0" MINIMUM REQUIRED

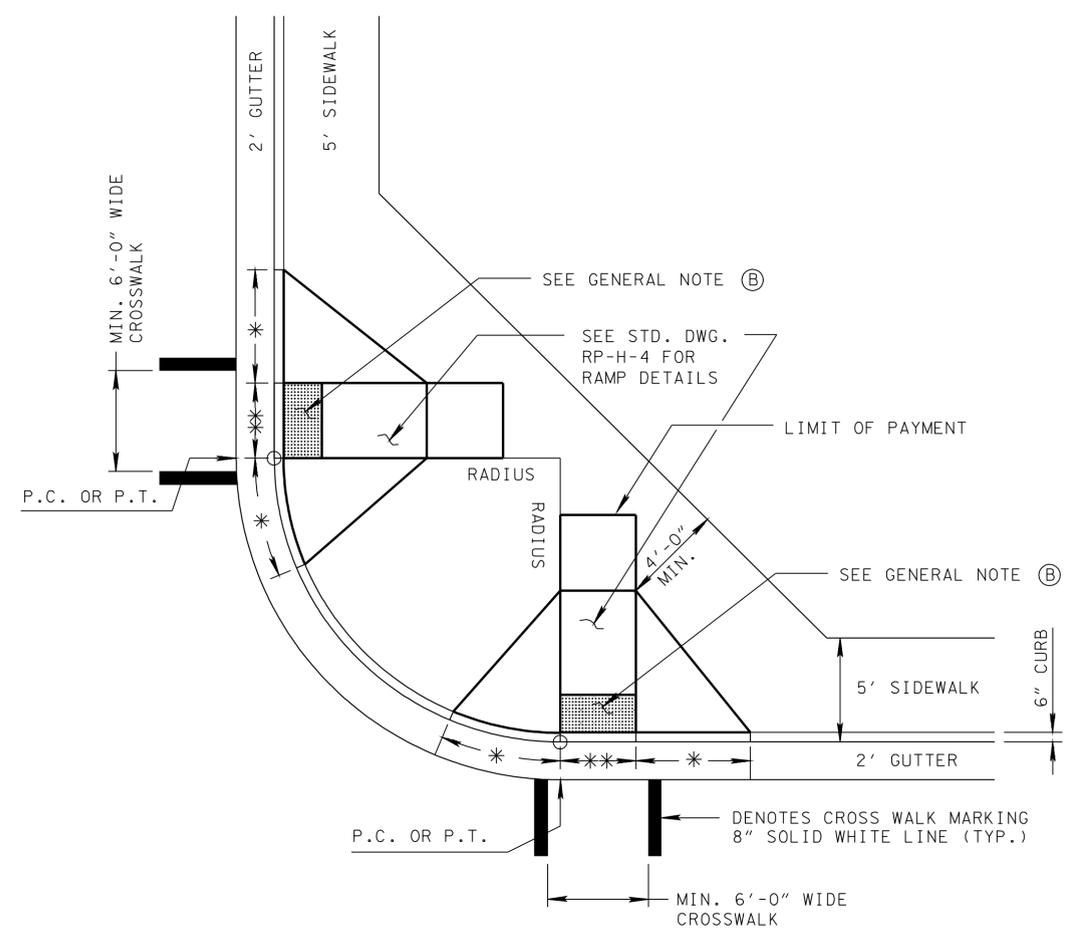

TYPE 2 ALTERNATE
RAMP OUTSIDE RADIUS (SIDEWALK ADJACENT TO CURB & GUTTER)

- * DIMENSION VARIES RELATIVE TO LONGITUDINAL ROADWAY GRADE 10.0% MAX. (8.33% DESIRABLE)
- ** 4'-0" MINIMUM REQUIRED

GENERAL NOTES	
(A)	FOR SIGNALIZED INTERSECTIONS THAT REQUIRE PEDESTRIAN SIGNAL PUSH BUTTONS, SEE TDOT TRAFFIC DESIGN MANUAL FOR PLACEMENT DETAILS.
(B)	SEE STANDARD DRAWING RP-H-3 FOR TRUNCATED DOMED SURFACE DETAILS.
(C)	5'-0" SIDEWALK WIDTH INCLUDES 6" CONCRETE CURB.
(D)	GRATES FOR STORM DRAINS SHALL NOT BE PLACED IN THE CROSSWALK OR IN FRONT OF THE HANDICAP RAMP.
(E)	DESIRABLE DIMENSIONS SHALL BE USED UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

PERPENDICULAR
HANDICAP RAMP
FOR 20' THRU 60'
RADIUS

22-FEB-2012 08:55 \\J009083\WF03.tdot.state.tn.us\35HARED\StandDr-aw\STANDARD DRAWINGS\2012-MARCH DISTRIBUTION\RP-H-8_041311.dgn