




VARIOUS EXAMPLES FOR USE OF PREMOLDED FIBER EXPANSION JOINTS IN SIDEWALKS

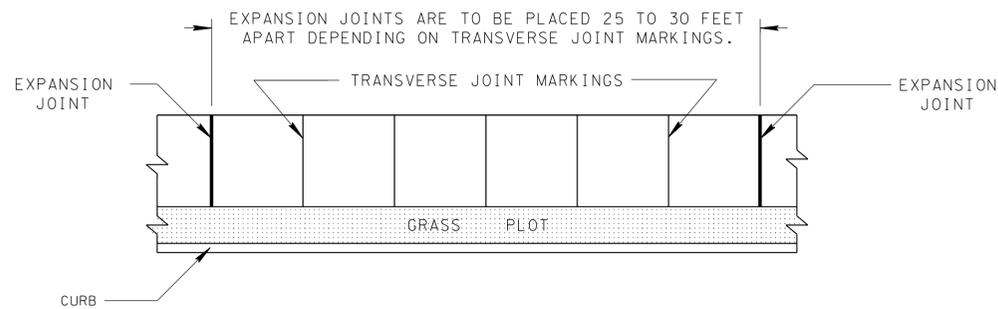

5 FOOT SIDEWALK WITH GRASS PLOT

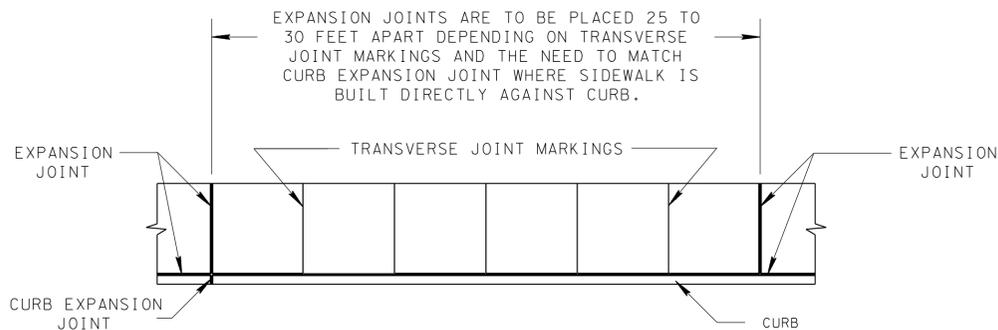


5 FOOT SIDEWALK BUILT TO CURB

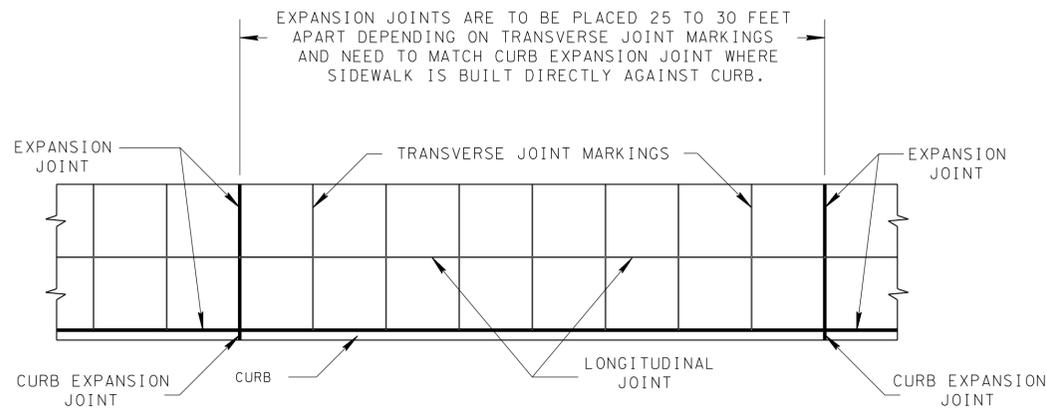

8 FOOT SIDEWALK BUILT TO CURB



CROSS-SECTION OF CONCRETE SIDEWALK

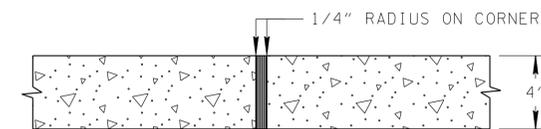

DETAIL OF EXPANSION JOINT

FOOTNOTE

① LEAVE SQUARE CUTOUT IN SIDEWALK. IT WILL BE DIAMETER OF POLE PLUS SIXTEEN INCHES. IT WILL BE BORDERED BY HALF INCH EXPANSION JOINT.

GENERAL NOTES

- (A) FOR SPECIFICATIONS SEE "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION" OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION.
- (B) WHERE IT BECOMES NECESSARY TO REMOVE PARTS OF EXISTING CONCRETE SIDEWALKS OR RAMPS, THE RESULTING EDGES SHALL BE CUT TO A NEAT LINE, AND ANY OFFSETS IN SUCH LINES SHALL BE MADE AT RIGHT ANGLES.
- (C) CONCRETE JOINT MATERIAL TO BE HALF INCH AND/OR ONE INCH PREMOLDED FIBER IN ACCORDANCE WITH SECTION 905 OF THE STANDARD SPECIFICATIONS.
- (D) EXPANSION JOINTS ARE TO BE PLACED AS SHOWN ON THIS DRAWING OR AS DIRECTED BY THE ENGINEER WHERE THE PROPOSED SIDEWALK IS IN CONTACT WITH THE STREET RETURNS, ON BUILDING LINES PRODUCED AT STREET INTERSECTIONS, WHERE WALKS LEAD TO HOUSE OR OTHER ENTRANCES AND ANY OTHER LOCATIONS WHERE STRESSES MAY DEVELOP. THE COST OF ALL EXPANSION JOINTS IS TO BE INCLUDED IN THE UNIT PRICE BID FOR THE PROPOSED SIDEWALK.
- (E) ONE INCH EXPANSION JOINTS ARE TO BE PLACED WHERE THE PROPOSED SIDEWALK IS IN CONTACT WITH CIRCULAR CURBS, BUILDINGS AND/OR RETAINING WALLS.
- (F) HALF INCH EXPANSION JOINTS ARE TO BE USED AT ALL OTHER LOCATIONS.
- (G) ALL SIDEWALK WIDTHS ARE TO INCLUDE SIX INCH WIDTH OF PROPOSED TOP OF CURB. MINIMUM SIDEWALK WIDTH OF FIVE FOOT SHALL CONSIST OF SIX INCH FOR TOP OF CURB WIDTH PLUS 4'-6" OF ACTUAL SIDEWALK WIDTH.
- (H) LONGITUDINAL JOINT MARKINGS WILL NOT BE REQUIRED ON SIDEWALKS 5 FEET OR LESS IN WIDTH.
- (I) ONE LONGITUDINAL JOINT MARKING WILL BE REQUIRED ON SIDEWALKS OVER 5 FEET BUT LESS THAN 9 FEET IN WIDTH.
- (J) TWO LONGITUDINAL JOINT MARKINGS WILL BE REQUIRED ON SIDEWALKS OVER 9 FEET BUT LESS THAN 12 FEET IN WIDTH.
- (K) TRANSVERSE JOINT MARKINGS ARE TO BE MADE TO FORM BLOCKS AS NEARLY TO SQUARE AS PRACTICAL.

REV. 7-1-72: CHANGED DEPARTMENT NAME.
 REV. 1-1-76: CHANGED DWG. NO. FROM P-5-7a(68) TO RP-S-7.
 REV. 5-14-87: ADDED EXPANSION JOINTS BETWEEN CURB AND SIDEWALK.
 REV. 4-15-91: REDREW, RENAMED AND REORGANIZED SHEET. MOVED INFORMATION REGARDING CONCRETE STEPS TO DWG. NO. RP-S-8.
 REV. 7-29-96: CHANGED GENERAL NOTE (C).

MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

STATE OF TENNESSEE
 DEPARTMENT OF TRANSPORTATION

DETAILS FOR
 STANDARD
 CONCRETE
 SIDEWALKS