




- REV. 11-1-95: CHANGED TO METRIC.
- REV. 5-27-01: CHANGED ITEM NOS. 303-15.01 TO 303-10.01 AND 714-08 TO 714-08.08.
- REV. 9-11-03: REDRAW AND REDESIGNED SHEET.

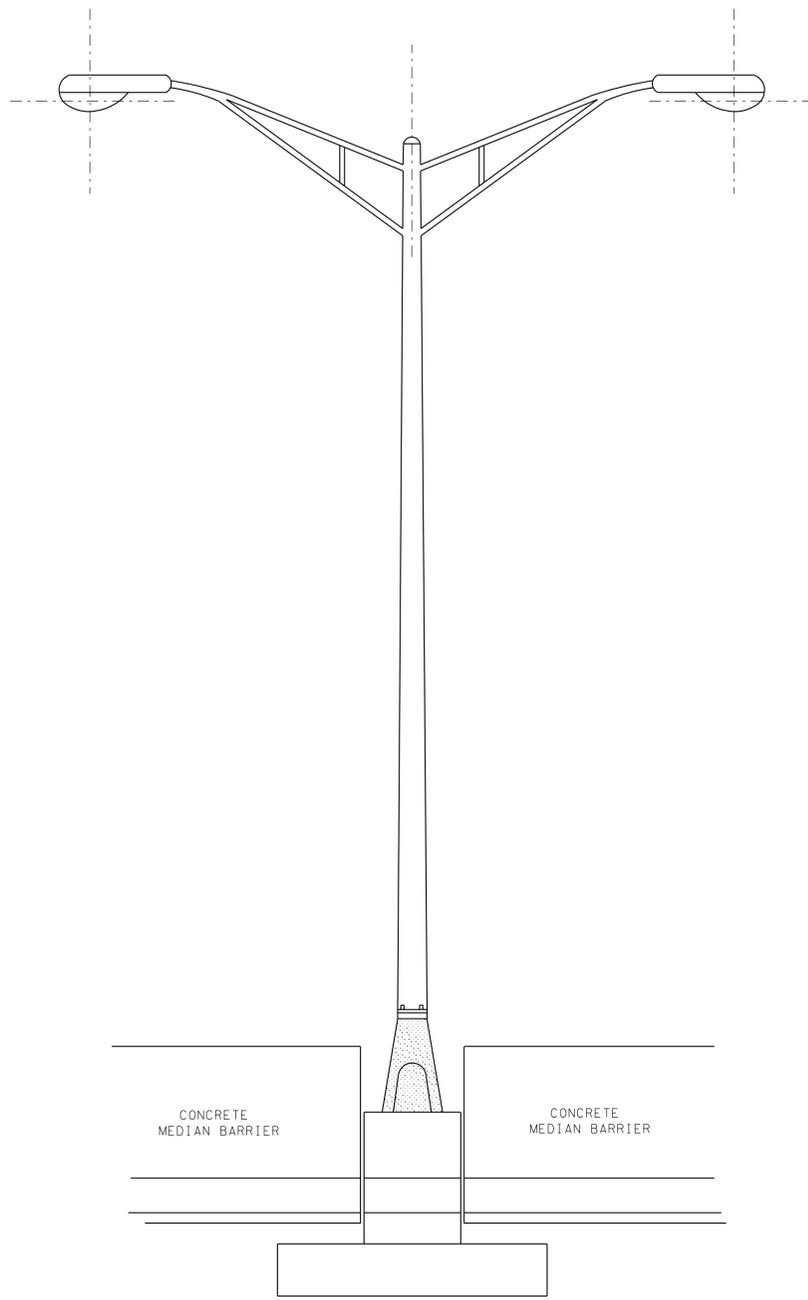


ELEVATION VIEW

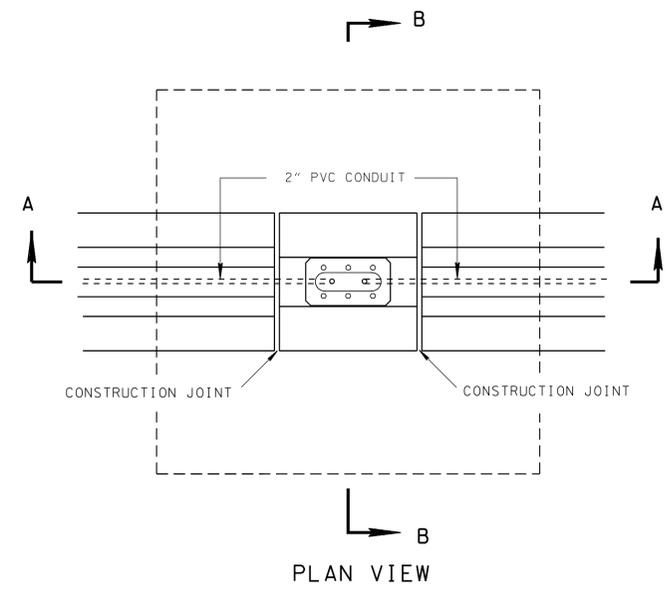


PLAN VIEW

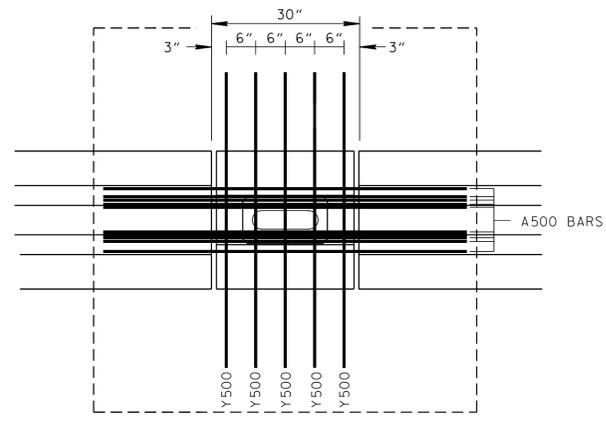


PLAN VIEW SHOWING REINFORCING

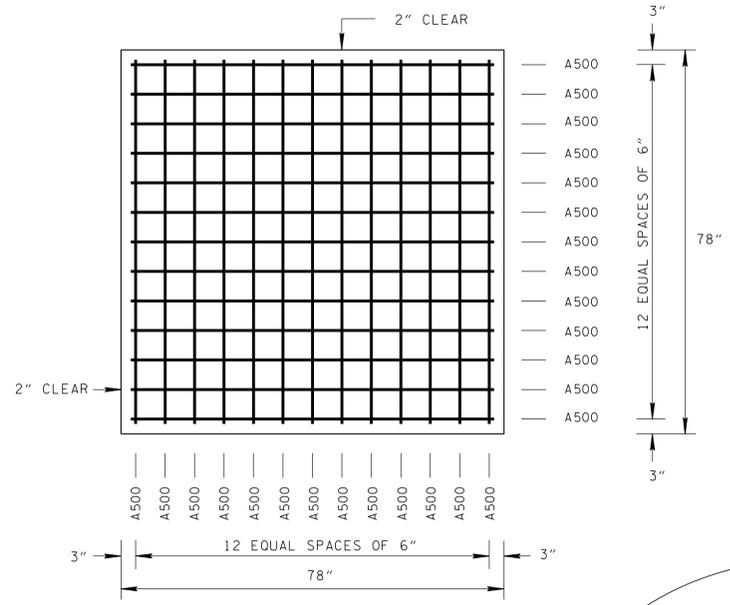


SECTION C-C

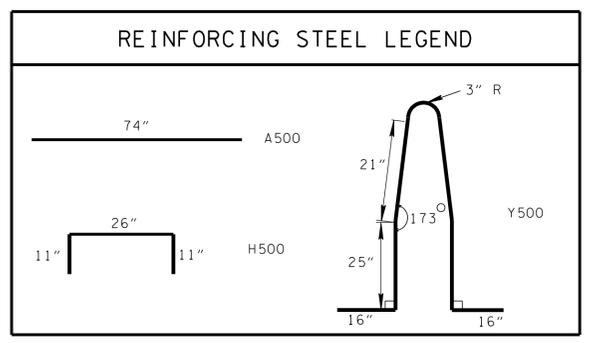


REINFORCING STEEL LEGEND

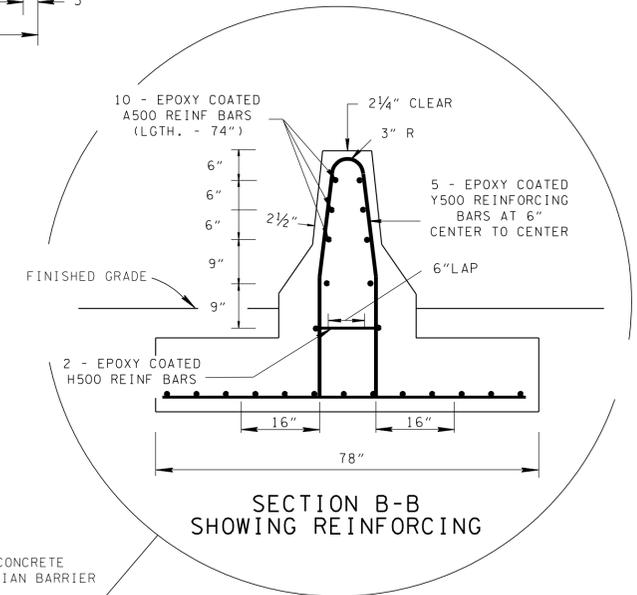

SECTION B-B SHOWING REINFORCING

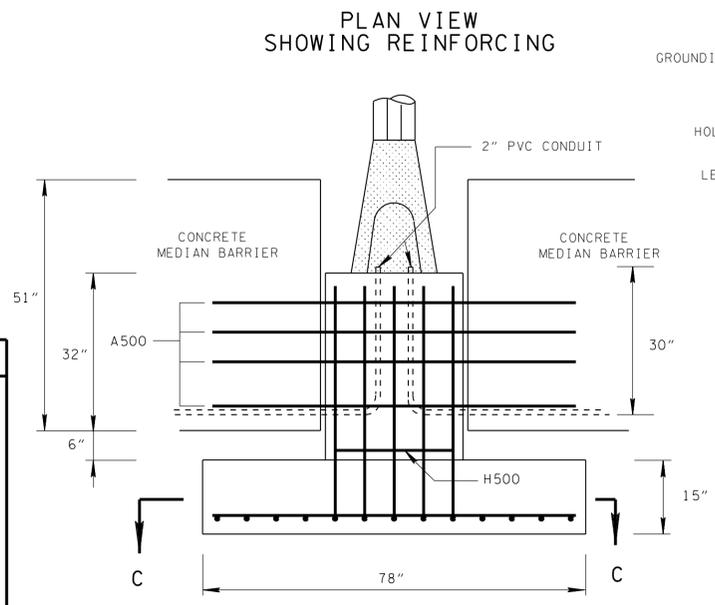

SECTION A-A

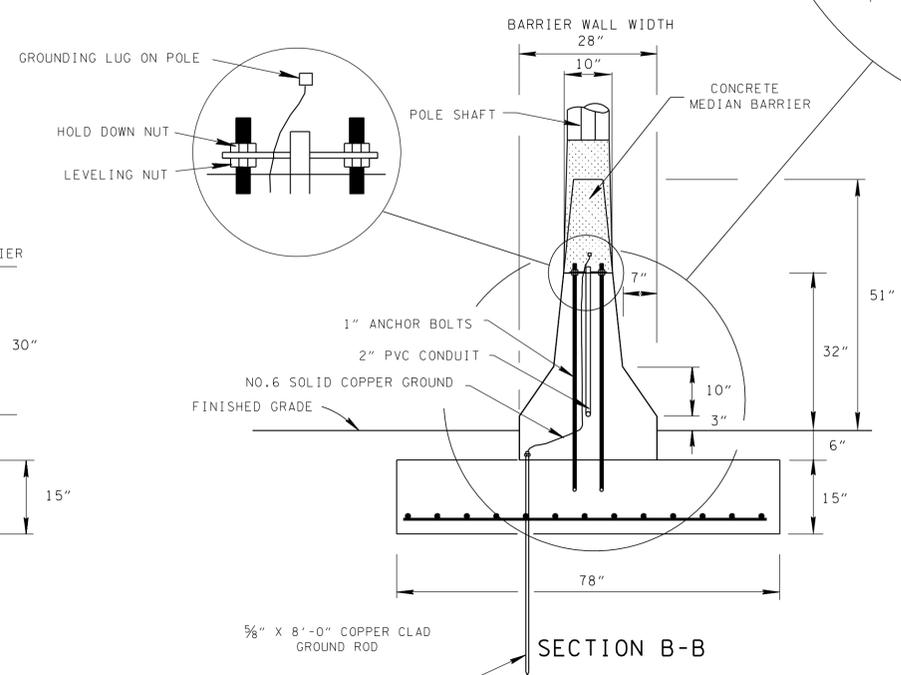

SECTION B-B

**GENERAL NOTES**

(A) MATERIALS IN CONCRETE MEDIAN BARRIER WALL AND FOOTINGS ARE TO MEET THE FOLLOWING SPECIFICATIONS:  
 CONCRETE:  $F_c = 4,000$  POUNDS PER SQUARE INCH AT 28 DAYS  
 REINFORCING STEEL: ASTM A615,  $F_y = 60,000$  POUNDS PER SQUARE INCH  
 ALL REINFORCING STEEL IS TO BE EPOXY COATED AND INSTALLED AS DETAILED ON THIS DRAWING.

(B) ESTIMATED QUANTITIES :  
 CLASS "A" CONCRETE= 2.40 CUBIC YARD  
 NO. 5 STEEL REINFORCING BARS= 298 POUNDS

(C) UNIT PRICE ITEM NO. 714-08.26, FOUNDATION FOR LIGHT STANDARDS (MEDIAN BARRIER) PER EACH SHALL INCLUDE ALL COSTS OF FURNISHING AND INSTALLING ALL MATERIALS AND LABOR NECESSARY TO CONSTRUCT THE PORTION OF THE MEDIAN BARRIER AND THE FOOTINGS SUPPORTING THE LIGHT STANDARDS.

□ MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

FOUNDATION DETAIL  
 FOR LUMINAIRE  
 MOUNTED ON  
 CONCRETE  
 MEDIAN BARRIER

9-11-03 T-L-2