TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2014	NH/HSIP-10(58)	3

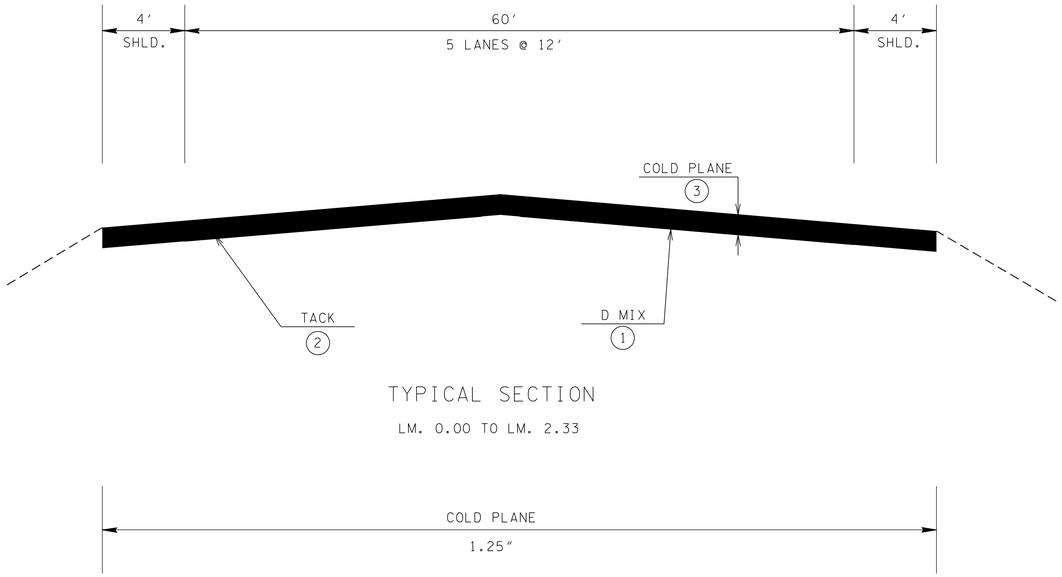

TYPICAL SECTION

LM. 0.00 TO LM. 2.33

* SPECIAL PAVING NOTE *

ALL SHOULDERS WILL BE DEGRASSED / CLIPPED AND CLEANED OF ALL VEGETATION, GRASS, AND DEBRIS. SEE SPECIAL NOTES. ALL COST TO BE INCLUDED IN OTHER ITEMS OF WORK.

PROPOSED PAVEMENT SCHEDULE

1. SURFACE @ 1.25" THICK (132.5 LB/S.Y.)
   411-02.10 ACS MIX (PG70-22) GRADING "D"
2. TACK COAT @ 0.1 GAL/SY
   403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)
3. COLD PLANING @ 1.25" THICK
   415-01.01 COLD PLANING BITUMINOUS PAVEMENT (TON)

Test Performed by TDOT Road Profiler									Average Roughness Pre-Constuction HC-IRI Number Per Mile
Test Limits Mile		Direction and Measured Roughness (HC-IRI Number Per Mile)							
From	To	NSEW	*Lane	Pre Ride Number	Payment Table	Max. # for Final Ride	Min. Required %Improvement	Percent Pay	65.6
0.00	1.00	N	1	55	Table 1	55.0		100	
1.00	2.00	N	1	47	Table 1	55.0		100	
2.00	2.33	N	1	57	Table 1	55.0		100	
0.00	1.00	N	2	67	Table 1	55.0		100	
1.00	2.00	N	2	75	Table 1	55.0		100	
2.00	2.34	N	2	90	Table 2	63.0	30	100	
									REMARKS
0.00	1.00	S	1	60	Table 1	55.0		100	
1.00	2.00	S	1	57	Table 1	55.0		100	FROM ALABAMA STATE
2.00	2.34	S	1	57	Table 1	55.0		100	LINE TO SR 275
0.00	1.00	S	2	69	Table 1	55.0		100	(LM 0.00 TO 2.33)
1.00	2.00	S	2	71	Table 1	55.0		100	
2.00	2.34	S	2	82	Table 2	57.4	30	100	

*Lanes to be Left to Right each Direction - 1,2,3,4, etc. with 1 being the Inside Lane

SEALED BY



01/17/2014

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS AND PAVEMENT SCHEDULE

21-JAN-2014 15:05
\\JJ03WF01.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2014\04-April-2014 Letting\Lincoln SR 10\003-Typical.SHT