
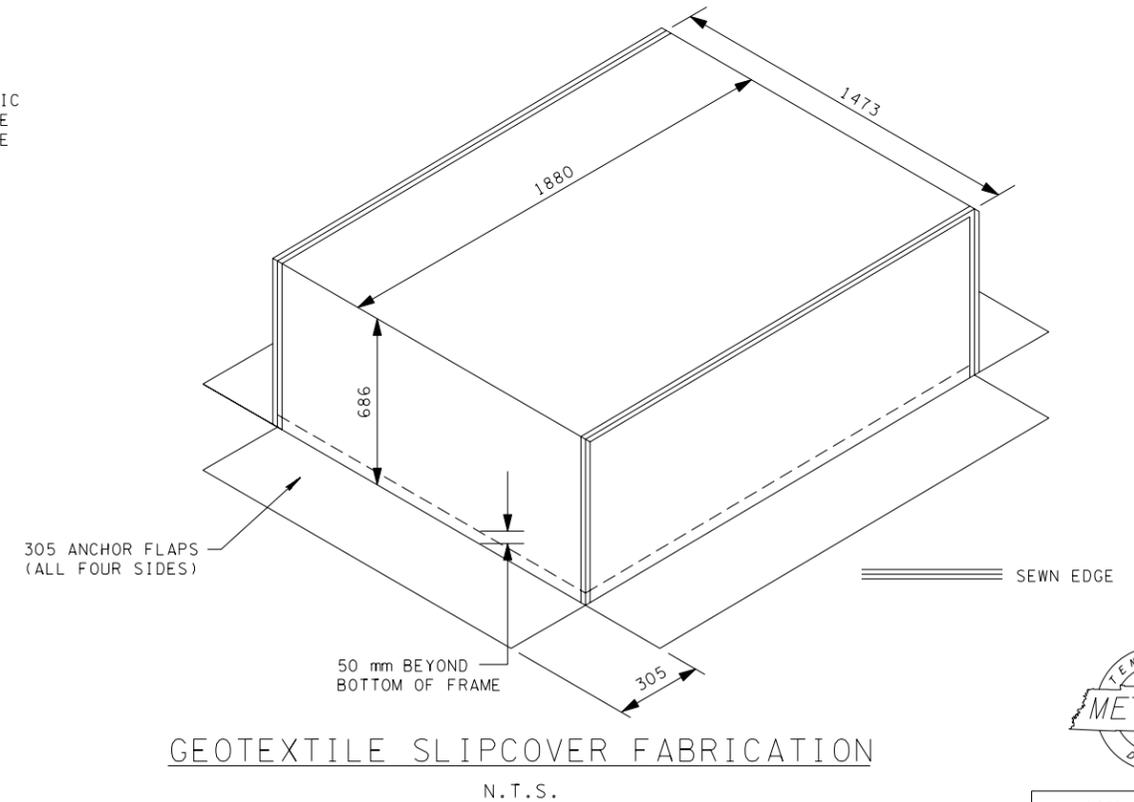


SLIPCOVER FILTER SPECIFICATIONS		
FABRIC TYPE : NON-WOVEN, NEEDLE-PUNCHED GEOTEXTILE		
FABRIC PROPERTY	ASTM TEST METHOD	MINIMUM AVERAGE ROLL VALUES (MARVS)
GRAB TENSILE STRENGTH	ASTM D4632	≥82 kg
GRAB ELONGATION	ASTM D4632	≥50%
MULLEN BURST	ASTM D3786	≥2275 kPa
PUNCTURE STRENGTH	ASTM D4833	≥48 kg
TRAPEZOIDAL TEAR	ASTM D4533	≥34 kg
APPARENT OPENING SIZE (AOS)	ASTM D4751	FINER THAN OR EQUAL TO 0.180 mm STANDARD SIEVE
PERMEABILITY	ASTM D4491	≥0.003 m/s
PERMITTIVITY	ASTM D4491	≥1.5 SEC ⁻¹
WATER FLUX	ASTM D4491	≥4480 L/MIN/m ²
UV RESISTANCE	ASTM D4355	≥70% AT 500 HOURS
WEIGHT	ASTM D3776	MINIMUM 0.203 kg/m ²
HARDWARE CLOTH SPECIFICATIONS		
STANDARD SPECIFICATION	ASTM A740	
OPENING SIZE	13 mm X 13 mm	
WIRE SIZE	19 GAUGE (1.06 mm)	
WIRE DIAMETER	1 mm	
WEIGHT	1.0 kg/m ²	
GRADE	LOW CARBON STEEL (C1008)	
TYPE	WELDED HOT GALVANIZED STEEL WIRE FABRIC	

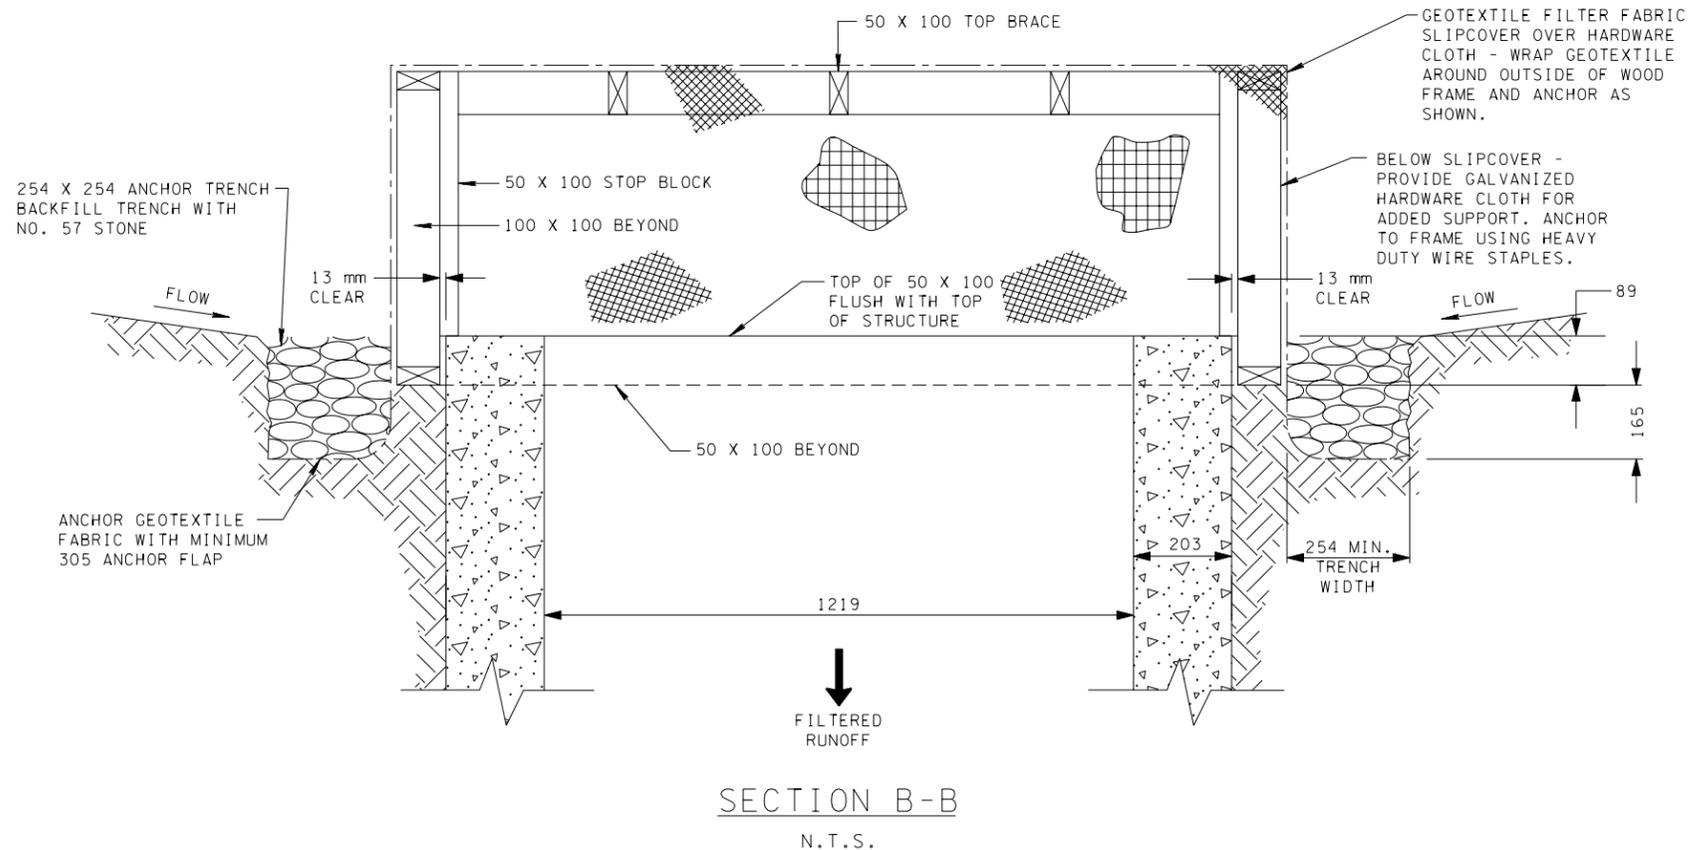

FABRICATION SPECIFICATIONS:

1. GEOTEXTILE SLIPCOVER FABRIC SHALL HAVE HEAT-CUT FUSING FABRIC EDGES FOR STRENGTH.
2. ALL SEAMS SHALL BE SEWN WITH TWO INDEPENDENT ROWS OF LOCK-TYPE STITCHING, USING UV-BONDED POLYESTER THREAD (MINIMUM OF 63 kg) WITH MINIMUM OF SIX STITCHES PER EVERY 25 MILLIMETERS.
3. THE INSIDE ROW OF STITCHING SHALL BE A MINIMUM OF 13 mm FROM HEAT-CUT FABRIC EDGES.

EROSION CONTROL PLAN LEGEND:



6

CATCH BASIN FILTER ASSEMBLY (TYPE 6)



ALL UNITS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

CATCH BASIN
FILTER ASSEMBLY
(TYPE 6)
SLIPCOVER DETAILS