TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2014	STP/HSIP-48(49)	2A
BRIDGE REPAIR	2014	41005-4240-04	2A

REV. 01-28-14: ADDED BRIDGE REPAIR PROJECT NUMBER TO PROJECT NO. BLOCK AND ADDED BRIDGE NOTES BLOCK.

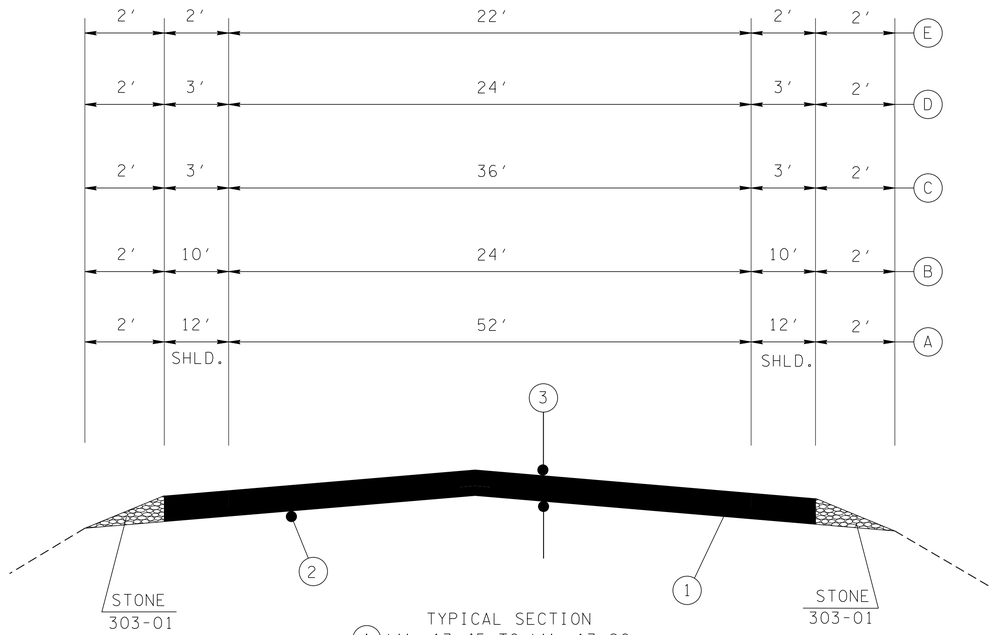

TYPICAL SECTION

(A) LM. 13.45 TO LM. 13.90

(B) LM. 13.01 TO LM. 13.10

(C) LM. 13.10 TO LM. 13.27
LM. 15.29 TO LM. 15.52
LM. 16.18 TO LM. 16.69
LM. 16.86 TO LM. 17.04
LM. 17.84 TO LM. 17.92

(D) LM. 13.27 TO LM. 13.45
LM. 13.90 TO LM. 15.29
LM. 15.52 TO LM. 16.18
LM. 16.69 TO LM. 16.86
LM. 17.04 TO LM. 17.84

(E) LM. 17.92 TO LM. 20.69

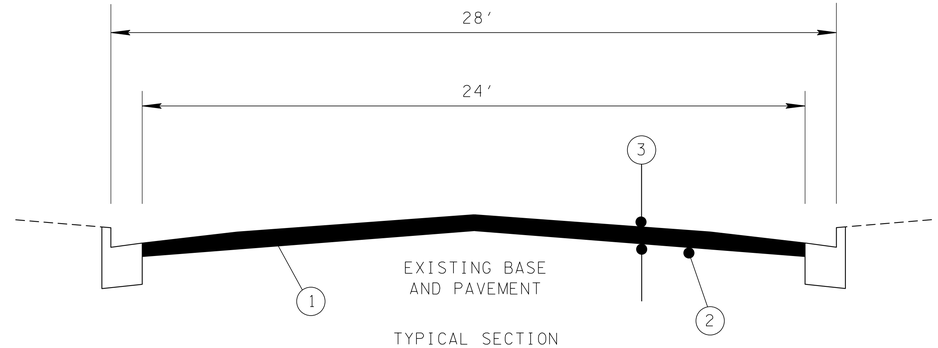

TYPICAL SECTION
LM. 12.97 TO LM. 13.01

BRIDGE NOTES

LOCATION	LENGTH (FT.)	CROSSING	RECOMMENDATION
L.M. 13.55	829'-0"	DUCK RIVER	SEAL WITH TYPE 1 EPOXY OVERLAY
L.M. 14.23	61'-2"	DEFEATED CAMP CREEK	PAVE WITH PLANS QUANTITIES

PROPOSED PAVEMENT SCHEDULE

(1) SURFACE @ 1.25"± THICK (APPROX. 132.5 LB/S.Y.)

411-02.10 ACS MIX (PG70-22) GRADING "D"

(2) TACK COAT @ 0.1 GAL/SY

403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)

(3) COLD PLANING @ 1.50" THICK

415-01.01 COLD PLANING BITUMINOUS PAVEMENT (TON)

SPECIAL NOTE:

THE CONTRACTOR WILL BE REQUIRED TO PERFORM THE FOLLOWING WORK AND INCLUDE ALL COSTS THEREOF IN THE PRICES BID FOR OTHER ITEMS OF CONSTRUCTION: REPAIR OF SHOULDERS AND DITCHES. SHOULDERS SHALL BE DEGRASSED, MATERIAL SHALL BE PICKED UP AND REMOVED. CLEANING AND STRAIGHTENING ENDS OF EXISTING SIDEDRAINS AND CROSSDRAINS WHERE DIRECTED BY THE ENGINEER.



COLD PLANING DETAIL
RAILROAD CROSSING #351085X (SCTR)

COLD PLANING AS CLOSE AS PRACTICAL TO THE FIELD SIDES OF THE RAILROAD CROSSING.

NOTE: TO CREATE A SMOOTH TRANSITION ACROSS THE RAILROAD'S CROSSING. THE SURFACE MIX SHALL BE CARRIED UP TO AND LEVEL WITH THE FIELD SIDES OF THE CROSSING.

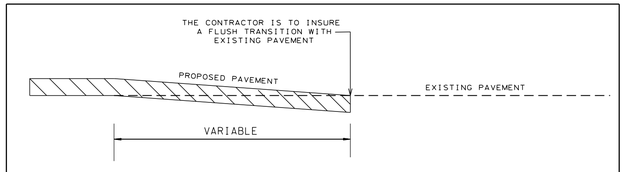

PAVEMENT DETAIL

THERE ARE NO UTILITY ADJUSTMENTS ON THIS PROJECT

SEALED BY



01/30/2014

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS AND PAVEMENT SCHEDULE

29-JAN-2014 07:25
\\JJO3WF01.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2014\04-April-2014 Letting\Hickman SR 48\002A TypicalSections and Pavement Schedule.dgn