

Index Of Sheets


SEE SHEET NO. 1A FOR INDEX

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION  
BUREAU OF ENGINEERING

TENN.	YEAR	SHEET NO.
	2015	1
FED. AID PROJ. NO.	HSIP-2(245)	
STATE PROJ. NOS.	53004-3246-94 53004-4246-04	

**LOUDON COUNTY**

S.R. 2: FROM MONROE COUNTY LINE TO EAST OF HATTLEY DRIVE

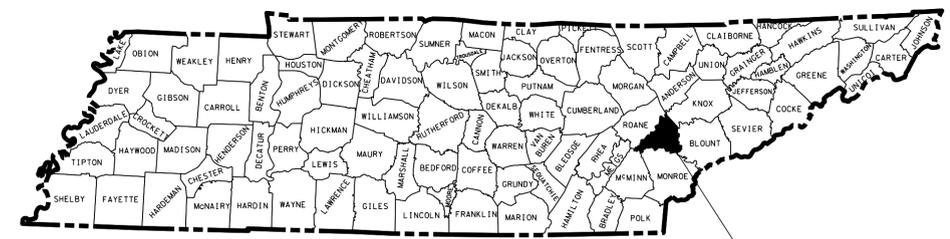

R/R AT-GRADE CROSSING  
NORFOLK SOUTHERN CORP. (NSC)  
ID# 731524E S.R. 2 AT L.M. 1.65±  
(SWEETWATER VALLEY FARMS ENTRANCE)

UPGRADING FOR PAVEMENT MARKINGS/SIGNS &  
RESURFACING UP TO THE CROSSING SURFACE TO  
BE DONE BY THE CONTRACTOR UNDER THIS PROJECT.

SEE SHEETS 2 AND 7 FOR MORE INFO.

EXCLUSION

**RESURFACE AND SAFETY**



STATE HIGHWAY NO. 2 F.A.H.S. NO. 11

END PROJECT

LOUDON CO.  
S.R. 2

EXCLUSION: L.M. 6.71 TO L.M. 7.27  
NO EQUATIONS

PROJECT LIMITS  
FROM: MONROE COUNTY LINE (L.M. 0.00)  
TO: APPROX. 925' EAST OF HATTLEY DR. (L.M. 10.10)

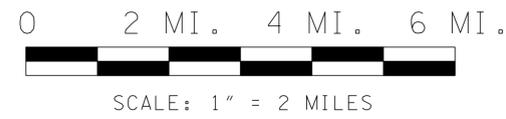

**SPECIAL NOTES**

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.


THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED JANUARY 1, 2015 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT TRANS. PROJ. SP. ERIC WILSON  
DESIGNER KENNY KERLEY CHECKED BY PAUL BEEBE  
P.E. NO. 98013-4203-04  
PIN 084366.01

PROJECT LENGTH **9.54 MILES**  
TOTAL LANE MILES RESURFACED **22.62 MILES**

TRAFFIC DATA	
ADT (2015)	13488
POSTED SPEED	30-45 MPH

**UNOFFICIAL SET**  
**NOT FOR BIDDING**

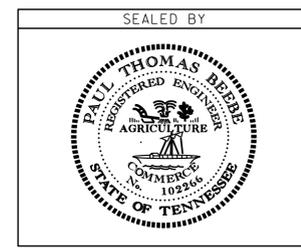

APPROVED: Paul D. Degges  
PAUL D. DEGGES, CHIEF ENGINEER

DATE: \_\_\_\_\_

APPROVED: [Signature]  
JOHN SCHROER, COMMISSIONER

U.S. DEPARTMENT OF TRANSPORTATION  
FEDERAL HIGHWAY ADMINISTRATION

APPROVED: \_\_\_\_\_  
DIVISION ADMINISTRATOR DATE

# INDEX

DESCRIPTION	SHT. NO.
TITLE SHEET	1
INDEX AND STANDARD ROADWAY DRAWINGS	1A
ESTIMATED ROADWAY QUANTITIES	2
TYPICAL SECTIONS	3
TYPICAL SECTIONS AND PROPOSED PAVEMENT SCHEDULE	4
GENERAL NOTES	5
SPECIAL NOTES	6,7

# STANDARD ROADWAY DRAWINGS

## ROADWAY DESIGN STANDARDS

DWG. NO.	REV.	DESCRIPTION
RD-A-1	12-18-99	STANDARD ABBREVIATIONS
RD-L-1	10-26-94	STANDARD LEGEND
RD01-SE-2	10-15-02	URBAN SUPERELEVATION DETAILS
RD01-SE-3	10-15-02	RURAL SUPERELEVATION DETAILS

## SAFETY DEVICES AND FENCE

DWG. NO.	REV.	DESCRIPTION
S-CZ-1		CLEAR ZONE CRITERIA
S-GR31-1	12-01-14	W-BEAM GUARDRAIL
S-GRA-3		GUARDRAIL ANCHOR FOR TYPE 21, 31 AND IN-LINE TERMINALS
S-GRT-2	11-03-14	TYPE 38 GUARDRAIL TERMINAL
S-GRT-4		TYPE 13 GUARDRAIL TERMINAL (TRAILING END)
S-PL-1	02-02-15	SAFETY PLAN AT ROADSIZING HAZARDS
S-PL-2		SAFETY PLAN AT SIDE ROADS OR PRIVATES
S-PL-3		SAFETY PLAN: MINIMUM INSTALLATION AT BRIDGE ENDS

## TRAFFIC CONTROL APPURTENANCES

DWG. NO.	REV.	DESCRIPTION
T-FAB-1	05-27-97	YELLOW FLASHING ARROW BOARD
T-M-1	07-24-14	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS AND MARKING ABBREVIATIONS
T-M-2	07-24-14	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS
T-M-3	07-24-14	MARKING STANDARDS FOR TRAFFIC ISLANDS, MEDIANS PAVED SHOULDERS ON COVENTIONAL ROADS
T-M-4	07-24-14	STANDARD INTERSECTION PAVEMENT MARKINGS
T-M-15A	01-30-15	ASPHALT SHOULDER RUMBLE STRIP INSTALLATION DETAILS FOR NON-ACCESSED CONTROLLED ROUTES
T-S-16	06-05-14	GROUND MOUNTED ROADSIDE SIGN AND DETAILS
T-S-17	07-19-13	STANDARD GROUND MOUNTED SIGN USING PERFORATED/KNOCKOUT SQUARE TUBE
T-S-19	07-19-13	STANDARD STEEL SIGN SUPPORTS
T-S-20	11-01-11	SIGN DETAILS
T-WZ-10	04-02-12	ADVANCE ROAD WORK SIGNING ON HIGHWAYS AND FREEWAYS

## EROSION PREVENTION AND SEDIMENT CONTROL


DWG. NO.	REV.	DESCRIPTION
EC-STR-3B	08-01-12	SILT FENCE
EC-STR-3E	04-01-08	SILT FENCE FABRIC JOINING DETAILS

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2015	HSIP-2(245)	1A

S.R. 2  
53004-4246-04  
53004-3246-94

LOUDON CO.

**UNOFFICIAL  
SET  
NOT FOR  
BIDDING**

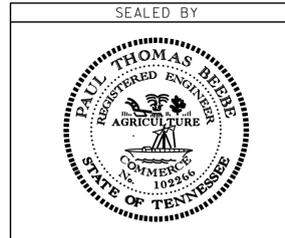

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

INDEX AND  
STANDARD  
ROADWAY  
DRAWINGS

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2015	HSIP-2(245)	2

S.R. 2  
53004-4246-04  
53004-3246-94  
LOUDON CO.

### ESTIMATED ROADWAY QUANTITIES

ITEM NO.	DESCRIPTION	UNIT	QUANTITY 53004-4246-04	QUANTITY 53004-3246-94
403-01	BITUMINOUS MATERIAL FOR TACK COAT (TC)	TON	97	
① 411-01.07	ACS MIX (PG64-22) GRADING E SHOULDER	TON	802	
② 411-02.10	ACS MIX(PG70-22) GRADING D	TON	9379	
③ 411-03.13	ACS MIX(PG70-22) THIN LIFT D ASPHALT	TON	3243	
④ 411-12.02	SCORING SHOULDERS (NON-CONTINUOUS) (16IN WIDTH)	L.M.		12.1
⑤ 415-01.02	COLD PLANING BITUMINOUS PAVEMENT	S.Y.	12308	
705-01.01	GUARDRAIL AT BRIDGE ENDS	L.F.		12
705-02.02	SINGLE GUARDRAIL (TYPE 2)	L.F.		38
⑥ 705-04.03	GUARDRAIL TERMINAL (TYPE 13)	EACH		1
705-04.05	GUARDRAIL TERMINAL (TYPE-IN-LINE)	EACH		1
705-04.07	TAN ENERGY ABSORBING TERM (NCHRP 350, TL3)	EACH		17
706-01	GUARDRAIL REMOVED	L.F.		375
712-01	TRAFFIC CONTROL	LS	1	
712-04.01	FLEXIBLE DRUMS (CHANNELIZING)	EACH	120	
712-05.01	WARNING LIGHTS (TYPE A)	EACH	60	
⑦ 712-06	SIGNS (CONSTRUCTION)	S.F.	1194	
712-08.03	ARROW BOARD (TYPE C)	EACH	2	
⑧ 713-16.20	SIGNS (R1-2)	EACH		1
⑨ 713-16.21	SIGNS (W1-7)	EACH		4
⑩ 716-01.21	Snwplwble Pvmt Mrks (Bi-Dir)(1 Color)	EACH		1178
716-01.22	Snwplwble Pvmt Mrks (Mono-Dir)(1 Color)	EACH		690
716-02.03	PLASTIC PAVEMENT MARKING (CROSS-WALK)	L.F.		300
⑪ 716-02.04	PLASTIC PAVEMENT MARKING (CHANNELIZATION STRIPING)	S.Y.		2306
⑫ 716-02.05	PLASTIC PAVEMENT MARKING (STOP LINE)	L.F.		1220
716-02.06	PLASTIC PAVEMENT MARKING (TURN LANE ARROW)	EACH		46
716-04.05	PLASTIC PAVEMENT MARKING (STRAIGHT ARROW)	EACH		2
⑬ 716-04.07	PLASTIC PAVEMENT MARKING (EXIT ONLY ARROW)	EACH		4
716-05.01	PAINTED PAVEMENT MARKING (4" LINE)	L.M.	42	
716-12.01	ENHANCED FLATLINE THERMO PVMT MRKNG (4IN LINE)	L.M.	42	
717-01	MOBILIZATION	LS	1	

#### FOOTNOTES

- ① INCLUDES 645 TONS FOR SPOT LEVELING. (SPOT LEVELING TO BE USED ONLY TO CORRECT DEFICIENCIES ON EXISTING PAVEMENT AND IS NOT TO BE COMBINED WITH OTHER COURSES.)
- ② INCLUDES 822 TONS FOR TURN LANES, 240 TONS FOR PRIVATE DRIVES, 235 TONS FOR BUSINESS ENTRANCES AND 320 TONS FOR COUNTY ROADS.
- ③ INCLUDES 255 TONS FOR TURN LANES AND 114 TONS FOR COUNTY ROADS. PRIVATE DRIVES AND BUSINESS ENTRANCES ARE TO BE TIED-IN AS NEEDED OR AS DIRECTED BY THE TDOT OPERATIONS DISTRICT ENGINEER.
- ④ TO BE USED FROM L.M. 0.00 TO L.M. 5.26 AND L.M. 7.27 TO L.M. 10.10 OR AS DIRECTED BY THE TDOT OPERATIONS DISTRICT ENGINEER.
- ⑤ INCLUDES 744 S.Y. FOR TURN LANES AND 1057 S.Y. FOR COUNTY ROADS.

⑥ TO BE USED IN THE FOLLOWING LOCATIONS OR DIRECTED BY TDOT OPERATIONS DISTRICT ENGINEER:

TABULATED GUARDRAIL QUANTITIES							
LOG MILE	LOCATION	GUARDRAIL AT BRIDGE END 705-01.01 (EACH)	SINGLE GUARDRAIL TYPE 2 705-02.02 (FT)	TYPE 13 TERMINAL 705-04.03 (EACH)	TYPE IN-LINE TERMINAL 705-04.05 (EACH)	TYPE 38 TERMINAL 705-04.03 (EACH)	GUARDRAIL REMOVED 706-01 (FT)
0.61	LT. & RT.	2				2	
0.64	LT. & RT.	2				2	
1.43	LT. & RT.	4				4	50
4.00-4.02	RT.					2	100
8.00	LT.					1	50
8.29	RT.					1	50
8.36	LT. & RT.	4				4	75
8.49-8.56	LT.		37.5	1	1	1	50
TOTALS		12	37.5	1	1	17	375

\*INCLUDES COST OF REMOVAL OF EXISTING END TERMINAL.


⑦ QUANTITY INCLUDES THE FOLLOWING SIGNS:

NO.	DESCRIPTION	CODE	SIZE	QUANTITY (SF)
57	ROAD WORK	W20-1	48"X48"	912
2	ONE LANE ROAD	W20-4	48"X48"	32
2	FLAGGER	W20-7	48"X48"	32
8	LANE CLOSED	W20-5	48"X48"	128
4	LANE ENDS	W4-2	48"X48"	64
2	ROAD WORK NEXT 11 MILES	G20-1	36"X18"	9
2	ADVISORY SPEED	W13-1P	24"X24"	8
2	END ROAD WORK	G20-2	36"X18"	9
TOTAL:				1194

NOTE: THIS CONSTRUCTION SIGNING IS TO BE A MINIMUM. OTHER SIGNS MAY BE REQUIRED AS DIRECTED BY THE TDOT SUPERVISOR.

- ⑧ TO BE LOCATED AT L.M. 4.63± (RT.) OR AS DIRECTED BY THE TDOT OPERATIONS DISTRICT ENGINEER.
- ⑨ TO BE LOCATED AT L.M. 8.47± (2) RT. AND L.M. 9.55± (2)RT. OR AS DIRECTED BY THE TDOT OPERATIONS DISTRICT ENGINEER.
- ⑩ TO BE USED FROM L.M. 0.00 TO L.M. 5.26 AND L.M. 7.27 TO L.M. 10.10 OR AS DIRECTED BY THE TDOT OPERATIONS DISTRICT ENGINEER. INCLUDES THE COST OF REMOVAL OF EXISTING PAVEMENT MARKERS.
- ⑪ INCLUDES 1355 S.Y. FOR 8" BARRIER LINE.
- ⑫ THE CONTRACTOR MAY ELECT TO SUBSTITUTE PREFORMED PLASTIC FOR THERMOPLASTIC. PREFORMED PLASTIC SHALL BE PAID FOR AT THE SAME UNIT PRICE AS BID FOR THERMOPLASTIC.
- ⑬ TO BE USED FOR TEMPORARY PAVEMENT MARKING ON INTERMEDIATE LAYERS.


**UNOFFICIAL SET  
NOT FOR BIDDING**

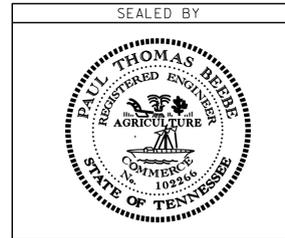

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION  
**ESTIMATED ROADWAY QUANTITIES**


TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2015	HSIP-2(245)	3

S.R. 2  
53004-4246-04  
53004-3246-94  
LOUDON CO.

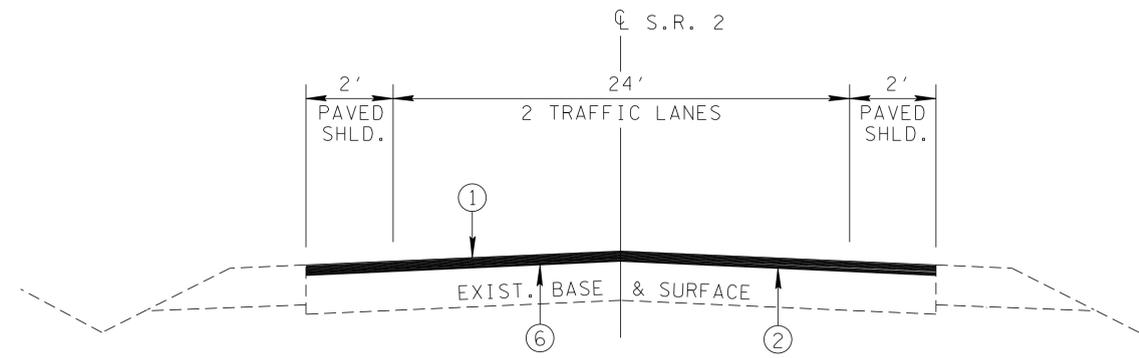


**TYPICAL CROSS-SECTION OF IMPROVEMENT**

LOG MILE 0.00 TO LOG MILE 4.54  
LOG MILE 4.80 TO LOG MILE 5.27

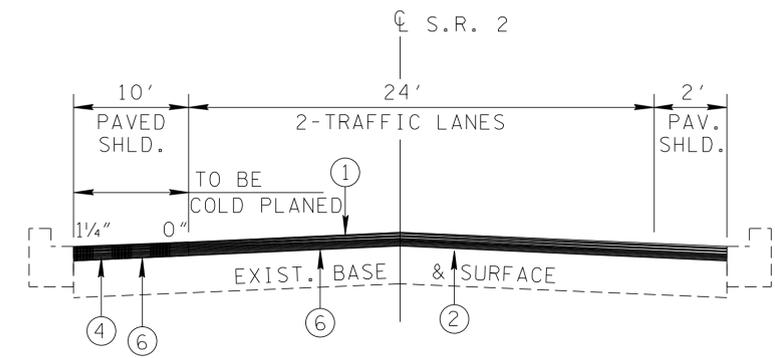


**TYPICAL CROSS-SECTION OF IMPROVEMENT**

LOG MILE 5.50 TO LOG MILE 5.95

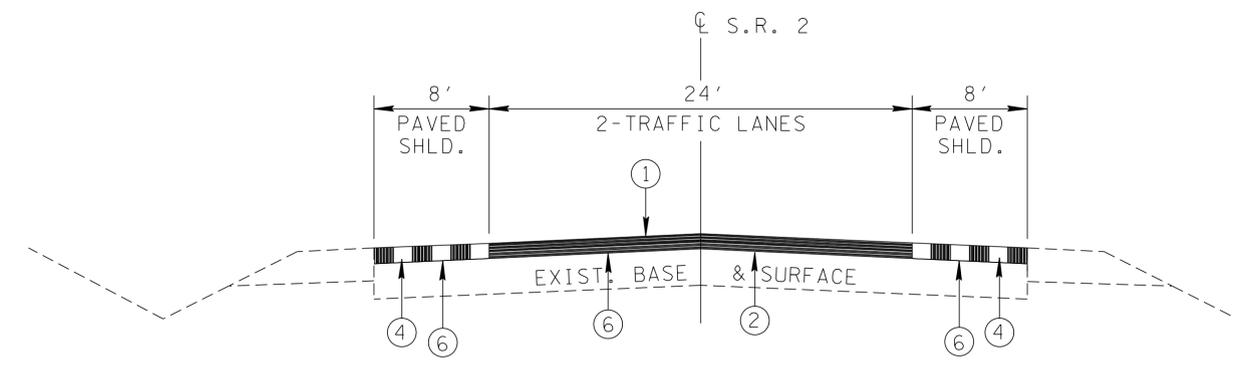


**TYPICAL CROSS-SECTION OF IMPROVEMENT**

LOG MILE 4.54 TO LOG MILE 4.80

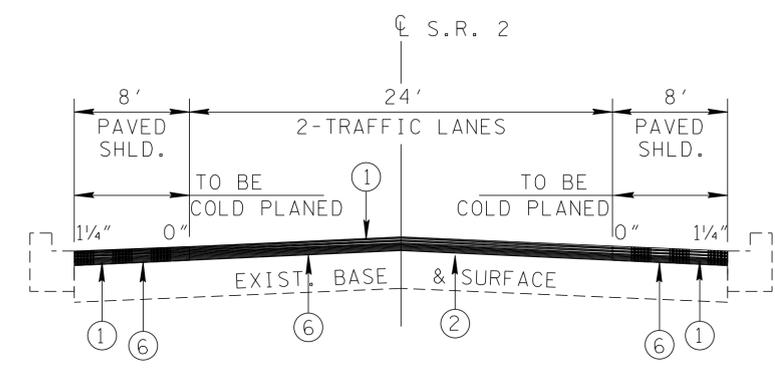


**TYPICAL CROSS-SECTION OF IMPROVEMENT**

LOG MILE 5.95 TO LOG MILE 6.10  
LOG MILE 6.30 TO LOG MILE 6.60

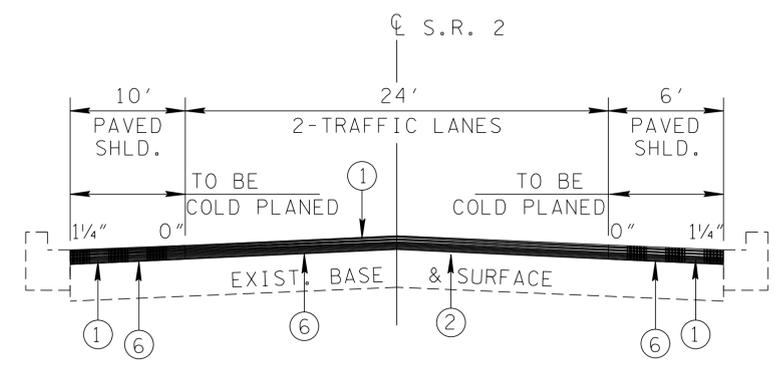

**TYPICAL CROSS-SECTION OF IMPROVEMENT**

LOG MILE 5.27 TO LOG MILE 5.50

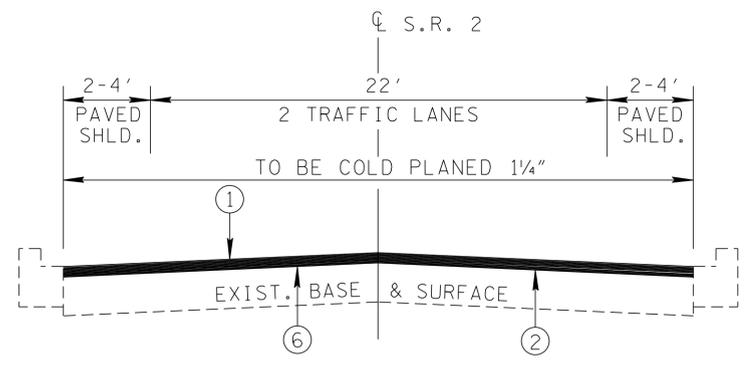


**TYPICAL CROSS-SECTION OF IMPROVEMENT**

LOG MILE 6.10 TO LOG MILE 6.30

FOR PROPOSED PAVEMENT SCHEDULE  
SEE SHEET NO. 4

**UNOFFICIAL  
SET  
NOT FOR  
BIDDING**

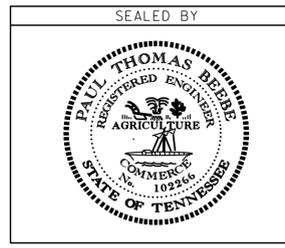


STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**TYPICAL  
SECTIONS**


D:\04-MAR-2015 13:19 \\J001WF01.tdot.state.tn.us\01Shared\SURFDES\DESIGN\PROJECTS\RESURF\2015\Loudon SR 2 (0.00 - 6.71)\Loudon SR2.dgn

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2015	HSIP-2(245)	4


S.R. 2  
53004-4246-04  
53004-3246-94  
LOUDON CO.

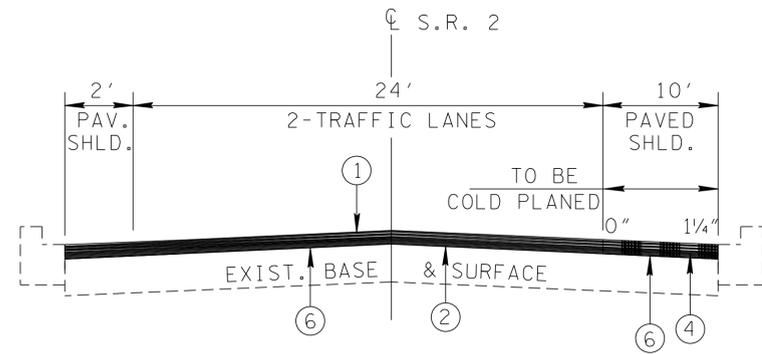


**TYPICAL CROSS-SECTION OF IMPROVEMENT**  
LOG MILE 6.60 TO LOG MILE 6.71  
LOG MILE 6.71 TO LOG MILE 7.27 (EXCLUSION)

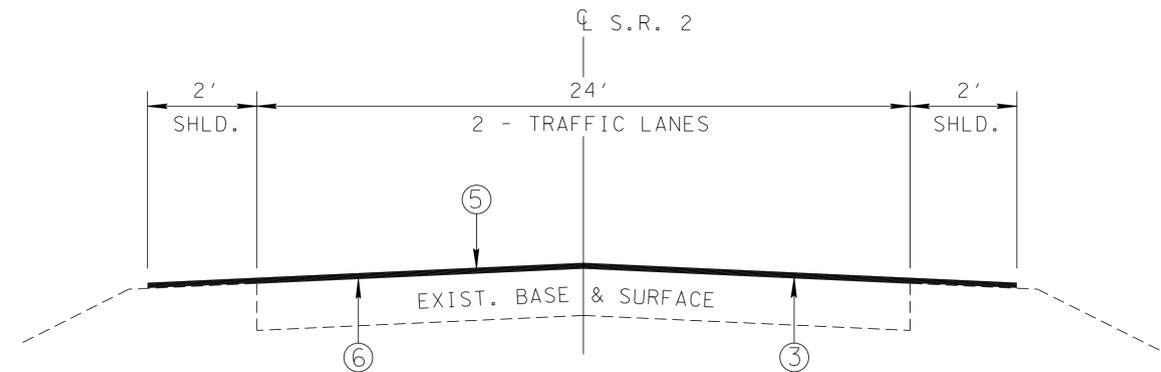

**TYPICAL CROSS-SECTION OF IMPROVEMENT**  
LOG MILE 8.48 TO LOG MILE 9.40

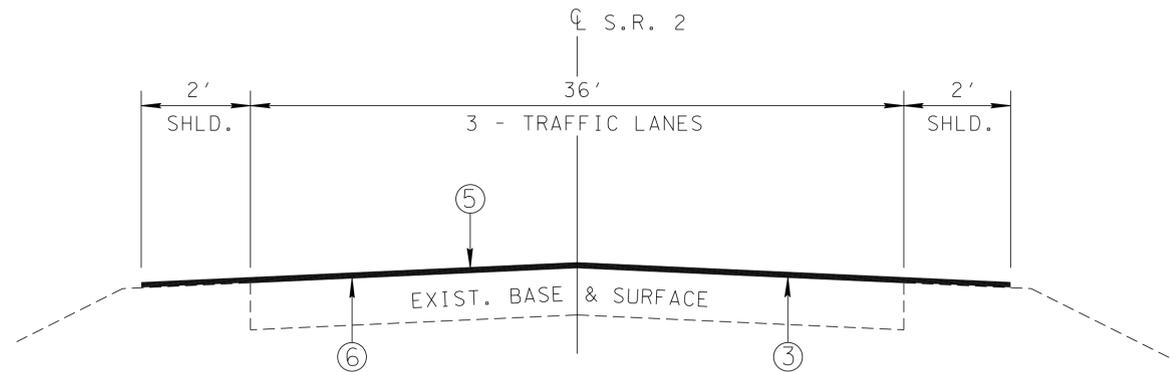

**TYPICAL CROSS-SECTION OF IMPROVEMENT**  
LOG MILE 7.27 TO LOG MILE 7.56  
LOG MILE 9.40 TO LOG MILE 10.10

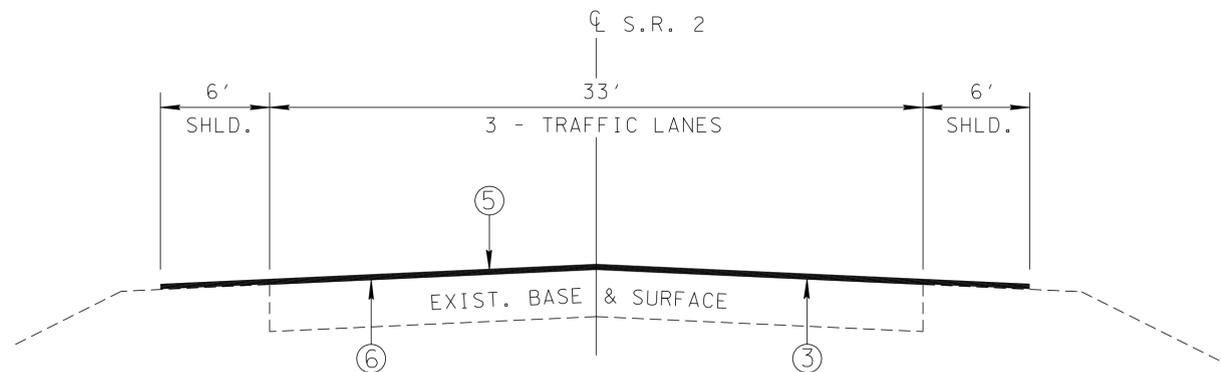


**TYPICAL CROSS-SECTION OF IMPROVEMENT**  
LOG MILE 7.56 TO LOG MILE 8.48

**PROPOSED PAVEMENT SCHEDULE**

- ① ASPHALTIC CONCRETE SURFACE (HM) 1/4" TH. (APPROX. 132.5 LBS./SQ.YD.)  
411-02.10 ACS MIX (PG70-22) GRADING D
- ② ASPHALTIC CONCRETE SURFACE (HM) (SPOT LEVELING) (APPROX. 75 TONS/MILE)  
411-01.07 ACS MIX (PG64-22) GRADING E SHOULDER
- ③ ASPHALTIC CONCRETE SURFACE (HM) (SPOT LEVELING) (APPROX. 50 TONS/MILE)  
411-01.07 ACS MIX (PG64-22) GRADING E SHOULDER
- ④ ASPHALTIC CONCRETE SURFACE (HM) 1/4" TH. (APPROX. 128.7 LBS./SQ.YD.)  
411-01.07 ACS MIX (PG64-22) GRADING E SHOULDER
- ⑤ THIN LIFT ASPHALT (APPROX. 85 LBS./SQ.YD.)  
411-03.13 ACS MIX (PG70-22) THIN LIFT D ASPHALT
- ⑥ TACK COAT (TC) (APPROX. 0.07-0.15 GAL./SQ.YD.)  
403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)

**UNOFFICIAL  
SET  
NOT FOR  
BIDDING**

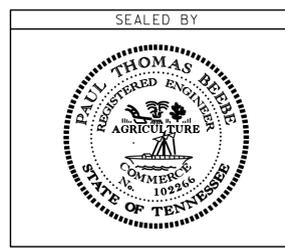

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**TYPICAL  
SECTIONS  
AND PROPOSED  
PAVEMENT  
SCHEDULE**

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2015	HS1P-2(245)	5

S.R. 2 LOUDON CO.  
53004-4246-04  
53004-3246-94

# GENERAL NOTES

## GRADING

- ANY AREA THAT IS DISTURBED OUTSIDE LIMITS OF CONSTRUCTION DURING THE LIFE OF THIS PROJECT SHALL BE REPAIRED BY THE CONTRACTOR AT HIS EXPENSE.
- THE CONTRACTOR SHALL NOT DISPOSE OF ANY MATERIAL EITHER ON OR OFF STATE-OWNED R.O.W. IN A REGULATORY FLOOD WAY AS DEFINED BY THE FEDERAL EMERGENCY MANAGEMENT AGENCY WITHOUT APPROVAL BY SAME. ALL MATERIAL SHALL BE DISPOSED OF IN UPLAND (NON-WETLAND) AREAS AND ABOVE ORDINARY HIGH WATER OF ANY ADJACENT WATERCOURSE. THIS DOES NOT ELIMINATE THE NEED TO OBTAIN ANY OTHER LICENSES OR PERMITS THAT MAY BE REQUIRED BY ANY OTHER FEDERAL, STATE OR LOCAL AGENCY.

## UTILITIES

- THE CONTRACTOR WILL PROVIDE ALL NECESSARY PROTECTIVE MEASURES TO SAFEGUARD EXISTING UTILITIES FROM DAMAGE DURING CONSTRUCTION OF THIS PROJECT. IN THE EVENT THAT SPECIAL EQUIPMENT IS REQUIRED TO WORK OVER AND AROUND THE UTILITIES, THE CONTRACTOR WILL BE REQUIRED TO FURNISH SUCH EQUIPMENT. THE COST OF PROTECTING UTILITIES FROM DAMAGE AND FURNISHING ANY NECESSARY SPECIAL EQUIPMENT WILL BE INCLUDED IN THE PRICE BID FOR OTHER ITEMS OF CONSTRUCTION.
- THE CONTRACTOR SHALL NOTIFY EACH INDIVIDUAL UTILITY OWNER OF HIS PLAN OF OPERATION IN THE AREA OF THE UTILITIES PRIOR TO COMMENCING WORK. THE CONTRACTOR SHALL CONTACT THE UTILITY OWNERS AND REQUEST THEM TO PROPERLY LOCATE THEIR RESPECTIVE UTILITY ON THE GROUND. THIS NOTIFICATION SHALL BE GIVEN AT LEAST THREE (3) BUSINESS DAYS PRIOR TO COMMENCEMENT OF OPERATIONS AROUND THE UTILITY IN ACCORDANCE WITH TCA 65-31-106.

## MISCELLANEOUS

- NOTHING IN THE GENERAL NOTES OR SPECIAL PROVISIONS SHALL RELIEVE THE CONTRACTOR FROM HIS RESPONSIBILITIES TOWARD THE SAFETY AND CONVENIENCE OF THE GENERAL PUBLIC AND THE RESIDENTS ALONG THE PROPOSED CONSTRUCTION AREA.

## PAVEMENT MARKINGS

- TEMPORARY PAVEMENT LINE MARKINGS ON INTERMEDIATE LAYERS OF PAVEMENT SHALL BE REFLECTIVE TAPE OR REFLECTORIZED PAINT INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK. SHORT, UNMARKED SECTIONS SHALL NOT BE ALLOWED. THESE MARKINGS WILL BE MEASURED AND PAID FOR UNDER ITEM NO. 716-05.01, PAINTED PAVEMENT MARKING (4" LINE), L.M.
- PERMANENT PAVEMENT LINE MARKINGS SHALL BE 4" ENHANCED FLATLINE THERMOPLASTIC INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK. SHORT UNMARKED SECTIONS SHALL NOT BE ALLOWED. PAVEMENT MARKINGS WILL BE MEASURED AND PAID FOR UNDER ITEM NO. 716-12.01, ENHANCED FLATLINE THERMO PVMT MRKNG (4IN LINE), L.M. THE CONTRACTOR SHALL HAVE THE OPTION OF USING REFLECTORIZED PAINT INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK AND THEN INSTALLING THE PERMANENT MARKINGS AFTER THE PAVING OPERATION IS COMPLETED. THE TEMPORARY MARKINGS FOR THE FINAL SURFACE WILL NOT BE MEASURED AND PAID FOR DIRECTLY, BUT THE COSTS ARE TO BE INCLUDED IN THE PRICE BID FOR THE PERMANENT MARKINGS.

## PAVEMENT

### RESURFACING

- WHERE DIRECTED BY THE TDOT ENGINEER, THE CONTRACTOR SHALL BE REQUIRED TO SHAPE PUBLIC SIDE ROADS, BUSINESS ENTRANCES, AND PRIVATE DRIVES, AS WELL AS CLEANING OF EXISTING DRAINS BEFORE PLACING MATERIALS. ALL COSTS ARE TO BE INCLUDED IN THE PRICE BID FOR OTHER ITEMS OF CONSTRUCTION.
- ALL PUBLIC SIDE ROADS SHALL BE PAVED ONE PAVER WIDTH THROUGH THE INTERSECTION AS A MINIMUM. A SATISFACTORY TRANSITION FROM THE NEW PAVEMENT TO THE EXISTING GRADE OF THE INTERSECTING PUBLIC ROAD OR BUSINESS ENTRANCE SHALL BE PROVIDED. SHOULD THE PAVEMENT OF THE INTERSECTING PUBLIC ROAD BE DISTRESSED, THE RESURFACING WIDTH MAY BE INCREASED TO THE NORMAL RIGHT OF WAY LINE.
- PRIVATE DRIVEWAYS, FIELD ENTRANCES AND BUSINESS ENTRANCES WILL BE RESURFACED A PAVER WIDTH (LANE WIDTH) AS A MINIMUM. A PAVEMENT TAPER TO TRANSITION THE NEW PAVEMENT SHALL BE

REQUIRED, IT SHALL BE BASED ON AN ADDITIONAL ONE FOOT OF WIDTH PER ONE INCH DEPTH OF PAVEMENT. IF THE SHOULDER IS NARROW ENOUGH THAT THE SUM OF THE SHOULDER AND THE TRANSITION ARE LESS THAN A PAVER WIDTH, THE TRANSITION SHALL OCCUR WITHIN THE PAVER WIDTH. IF THE SUM OF THE SHOULDER AND THE TRANSITION IS GREATER THAN A PAVER WIDTH (LANE WIDTH), THE TRANSITION SHALL OCCUR OUTSIDE THE PAVER WIDTH.

- ON CURB AND GUTTER SECTIONS, PUBLIC ROAD INTERSECTIONS SHALL BE RESURFACED TO THE END OF THE RADIUS. A SATISFACTORY TRANSITION FROM THE NEW PAVEMENT TO THE EXISTING GRADE OF THE INTERSECTING PUBLIC ROAD SHALL BE PROVIDED.
- ON URBAN TYPICAL SECTIONS, (CURB AND GUTTER), RESIDENTIAL DRIVEWAYS AND BUSINESS ENTRANCES SHALL HAVE MINIMUM WIDTH OF MATERIAL NOT LESS THAN ONE FOOT USED IN THE TRANSITION TO FEATHER THE PAVEMENT EDGE.
- IN ALL CASES, THE LENGTH OF THE PAVEMENT TRANSITION, THE THICKNESS AND WIDTH OF THE RESURFACING AND ANY ADDITIONAL PAVEMENT MATERIALS SHALL BE AS DIRECTED BY THE TDOT ENGINEER.

## CONSTRUCTION WORK ZONE & TRAFFIC CONTROL


- ADVANCED WARNING SIGNS SHALL NOT BE DISPLAYED MORE THAN FORTY-EIGHT (48) HOURS BEFORE PHYSICAL CONSTRUCTION BEGINS. SIGNS MAY BE ERECTED UP TO ONE WEEK BEFORE NEEDED, IF THE SIGN FACE IS FULLY COVERED.
- IF THE CONTRACTOR MOVES OFF THE PROJECT, HE SHALL COVER OR REMOVE ALL UNNEEDED SIGNS AS DIRECTED BY THE ENGINEER. COSTS OF REMOVAL, COVERING, AND REINSTALLING SIGNS SHALL NOT BE MEASURED AND PAID FOR SEPARATELY, BUT ALL COSTS SHALL BE INCLUDED IN THE ORIGINAL UNIT PRICE BID FOR ITEM NO 712-06, SIGNS (CONSTRUCTION) PER SQUARE FOOT.
- A LONG TERM BUT SPORADIC USE WARNING SIGN, SUCH AS A FLAGGER SIGN, MAY REMAIN IN PLACE WHEN NOT REQUIRED PROVIDED THE SIGN FACE IS FULLY COVERED.
- TRAFFIC CONTROL DEVICES SHALL NOT BE DISPLAYED OR ERECTED UNLESS RELATED CONDITIONS ARE PRESENT NECESSITATING WARNING.
- USE OF BARRICADES, PORTABLE BARRIER RAILS, VERTICAL PANELS, AND DRUMS SHALL BE LIMITED TO THE IMMEDIATE AREAS OF CONSTRUCTION WHERE A HAZARD IS PRESENT. THESE DEVICES SHALL NOT BE STORED ALONG THE ROADWAY WITHIN THIRTY (30) FEET OF THE EDGE OF THE TRAVELED WAY BEFORE OR AFTER USE UNLESS PROTECTED BY GUARDRAIL, BRIDGE RAIL, AND/OR BARRIERS INSTALLED FOR OTHER PURPOSES FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL INCREASE TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. THESE DEVICES SHALL BE REMOVED FROM THE CONSTRUCTION WORK ZONE WHEN THE ENGINEER DETERMINES THEY ARE NO LONGER NEEDED. WHERE THERE IS INSUFFICIENT RIGHT-OF-WAY TO PROVIDE FOR THIS REQUIRED SETBACK, THE CONTRACTOR SHALL DETERMINE THE ALTERNATE LOCATIONS AND REQUEST THE ENGINEER'S APPROVAL TO USE THEM.
- THE CONTRACTOR SHALL NOT BE PERMITTED TO PARK ANY VEHICLES OR CONSTRUCTION EQUIPMENT DURING PERIODS OF INACTIVITY, WITHIN THIRTY (30) FEET OF THE EDGE OF PAVEMENT WHEN THE LANE IS OPEN TO TRAFFIC UNLESS PROTECTED BY GUARDRAIL, BRIDGE RAIL, AND/OR BARRIERS INSTALLED FOR OTHER PURPOSES FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL BE INCREASED TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. PRIVATELY OWNED VEHICLES SHALL NOT BE ALLOWED TO PARK WITHIN THIRTY (30) FEET OF A OPEN TRAFFIC LANE AT ANY TIME UNLESS PROTECTED AS DESCRIBED ABOVE FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL BE INCREASED TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE.. WHERE THERE IS INSUFFICIENT RIGHT-OF-WAY TO PROVIDE FOR THIS REQUIRED SETBACK, THE CONTRACTOR SHALL DETERMINE THE ALTERNATE LOCATIONS AND REQUEST THE ENGINEER'S APPROVAL TO USE THEM.
- ALL DETOUR AND CONSTRUCTION SIGNING SHALL BE IN STRICT ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

## EROSION PREVENTION AND SEDIMENT CONTROL

### LITTER, DEBRIS, WASTE, PETROLEUM

- THE CONTRACTOR SHALL ESTABLISH AND MAINTAIN A PROACTIVE METHOD TO PREVENT LITTER, CONSTRUCTION DEBRIS, AND CONSTRUCTION WASTES FROM ENTERING WATERS OF THE STATE/U.S. THESE MATERIALS WILL BE PICKED UP AND REMOVED FROM STORMWATER EXPOSURE PRIOR TO ANTICIPATED STORM EVENTS. AFTER USE, MATERIALS USED FOR EPSC WILL BE REMOVED FROM THE SITE.
- THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS TO ENSURE THAT PETROLEUM PRODUCTS OR OTHER CHEMICAL POLLUTANTS ARE PREVENTED FROM ENTERING WATERS OF THE STATE/U.S. ALL EQUIPMENT REFUELING, SERVICING, AND STAGING AREAS SHALL COMPLY WITH ALL LOCAL, STATE, AND FEDERAL LAWS, RULES, REGULATIONS, AND ORDINANCES, INCLUDING THOSE OF THE NATIONAL FIRE PROTECTION ASSOCIATION (NFPA). APPROPRIATE CONTAINMENT MEASURES FOR THESE AREAS SHALL BE USED. ALL SPILLS MUST BE REPORTED TO THE APPROPRIATE AGENCY, AND MEASURES SHALL BE TAKEN IMMEDIATELY TO PREVENT THE POLLUTION OF WATERS OF THE STATE/U.S., INCLUDING GROUNDWATER, SHOULD A SPILL OCCUR.

**UNOFFICIAL  
SET  
NOT FOR  
BIDDING**

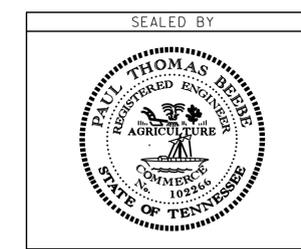

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**GENERAL  
NOTES**

# SPECIAL NOTES

## GUARDRAIL

- THE CONTRACTOR SHALL NOT REMOVE ANY EXISTING GUARDRAIL AND/OR END TERMINAL UNTIL THE T.D.O.T. SUPERVISOR CONCURS IN THE NECESSITY OF REMOVAL DUE TO CONSTRUCTION REQUIREMENTS AND THE APPROPRIATE WARNING DEVICES ARE INSTALLED. THE PROPOSED GUARDRAIL AND/OR END TERMINAL SHALL BE INSTALLED QUICKLY TO MINIMIZE TRAFFIC EXPOSURE TO ANY HAZARD. NO PAYMENT WILL BE MADE FOR ANY GUARDRAIL AND/OR END TERMINAL UNTIL IT IS COMPLETELY IN PLACE.
- IF ANY GUARDRAIL AND/OR END TERMINAL MUST TEMPORARILY BE LEFT INCOMPLETE AND EXPOSED TO TRAFFIC, THE CONTRACTOR SHALL USE TWO (2) TEMPORARY BARRICADES OR DRUMS WITH TYPE 'A' LIGHTS AND ROUNDED END ELEMENTS AS MINIMUM MEASURES TO PROTECT TRAFFIC FROM THE HAZARD OF AN EXPOSED END. ALL COST OF FURNISHING AND INSTALLING TEMPORARY MEASURES (BARRICADES, DRUMS, LIGHTS AND ROUNDED END ELEMENTS) SHALL BE INCLUDED IN THE COST OF THE GUARDRAIL AND/OR END TERMINAL.

## UTILITIES

- UNLESS OTHERWISE NOTED, ALL UTILITY ADJUSTMENTS WILL BE PERFORMED BY THE UTILITY OR IT'S REPRESENTATIVE. THE CONTRACTOR AND UTILITY OWNERS WILL BE REQUIRED TO COOPERATE WITH EACH OTHER IN ORDER TO EXPEDITE THE WORK REQUIRED BY THIS CONTRACT.
- THE CONTRACTOR WILL PROVIDE ALL NECESSARY PROTECTIVE MEASURES TO SAFEGUARD EXISTING UTILITES FROM DAMAGE DURING CONSTRUCTION OF THE PROJECT. THE COST OF PROTECTING UTILITIES FROM DAMAGE AND FURNISHING ANY NECESSARY SPECIAL EQUIPMENT WILL BE INCLUDED IN THE PRICE BID FOR OTHER CONSTRUCTION ITEMS.
- PRIOR TO SUBMITTING HIS BID, THE CONTRACTOR WILL BE SOLELY RESPONSIBLE FOR CONTACTING OWNERS OF ALL AFFECTED UTILITIES IN ORDER TO DETERMINE THE EXTENT TO WHICH UTILITY RELOCATIONS AND/OR ADJUSTMENTS WILL HAVE UPON THE SCHEDULE OF WORK FOR THE PROJECT. WHILE SOME WORK MAY BE REQUIRED 'AROUND' UTILITY FACILITIES THAT WILL REMAIN IN PLACE. OTHER UTILITY FACILITIES MAY NEED TO BE ADJUSTED CONCURRENTLY WITH THE CONTACTOR'S OPERATIONS.
- THE CONTRACTOR SHALL NOTIFY EACH INDIVIDUAL UTILITY OWNER OF HIS PLAN OF OPERATION IN THE AREA OF THE UTILITIES. PRIOR TO COMMENCING WORK, THE CONTRACTOR SHALL CONTACT THE UTILITY OWNERS AND REQUEST THEM TO PROPERLY LOCATE THEIR RESPECTIVE UTILITY ON THE GROUND. THIS NOTIFICATION SHALL BE GIVEN AT LEAST THREE (3) BUSINESS DAYS PRIOR TO COMMENCEMENT OF OPERATIONS AROUND THE UTILITY IN ACCORDANCE WITH TCA 65-31-106. NOTIFICATION BY CALLING THE TENNESSEE ONE CALL SYSTEM, INC AT 1-800-331-1111 WILL BE REQUIRED.
- UTILITY OWNERS  
  
ELECTRIC: TVA AND/OR LOUDON UTILITIES BOARD AND/OR LENIOR CITY UTILITY  
  
WATER: TVA AND/OR LOUDON UTILITIES BOARD AND/OR LENIOR CITY UTILITY  
  
GAS: TVA AND/OR LOUDON UTILITIES BOARD AND/OR LENIOR CITY UTILITY  
  
CABLE: CHARTER COMMUNICATIONS  
  
TELEPHONE: AT&T

## MISCELLANEOUS

- THE CONTRACTOR WILL BE REQUIRED TO REMOVE AND RESET MAILBOXES AND POSTS WHERE NECESSARY. COST TO BE INCLUDED IN PRICE BID FOR OTHER CONSTRUCTION ITEMS.
- ALL GUARDRAIL, GUARDRAIL POSTS AND SIGNS WHICH INTERFERE WITH CONSTRUCTION WILL BE REMOVED AND STORED BY STATE FORCES.
- ALL SIGNING AND PAVEMENT MARKINGS ARE TO BE IN ACCORDANCE WITH THE CURRENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
- PAVED SHOULDERS SHALL BE BROOMED, AGGREGATE SHOULDERS SHALL BE CLIPPED, AND DITCHES SHALL BE CLEANED BY THE CONTRACTOR. ALL COST ASSOCIATED WITH THIS WORK SHALL BE INCLUDED IN COST OF OTHER ITEMS.

## PAVEMENT MARKINGS

- THE CONTRACTOR WILL BE REQUIRED TO ESTABLISH AND LOCATE ALL "NO PASSING ZONES" IN ACCORDANCE WITH THE CURRENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES AS WELL AS TO PROVIDE THE LAYOUT OF ALL PAVEMENT MARKING REQUIRED ON THE PROJECT. THE METHOD OF DETERMINING THE "NO PASSING ZONES" IS TO BE APPROVED BY THE T.D.O.T. SUPERVISOR, WITH ADVICE FROM THE REGIONAL TRAFFIC OFFICE, BEFORE PAVING OPERATIONS BEGIN.

## PAVEMENT

### RESURFACING

- SURFACE IS TO BE CROWNED AS DIRECTED BY THE T.D.O.T. SUPERVISOR.
- THE CONTRACTOR WILL PLACE THE SPOT LEVELING WHERE AND AS DIRECTED BY THE T.D.O.T. SUPERVISOR.
- ALL SURPLUS PATCHING, JOINT MATERIAL AND CRACK SEALANT IS TO BE REMOVED BEFORE PLACING THE FIRST LAYER OF ASPHALT.
- STATE FORCES WILL REMOVE ALL RAISED PAVEMENT MARKERS, IF ANY, BEFORE RESURFACING IS BEGUN.
- COLD PLANING IS TO BE DONE IMMEDIATELY PRIOR TO THE COMMENCEMENT OF PAVING OPERATIONS. COLD PLANED SURFACES ARE NOT TO BE LEFT EXPOSED FOR MORE THAN FIVE (5) CALENDAR DAYS BEFORE BEING OVERLAYED BY THE FIRST COURSE OF ASPHALT. IF NECESSARY, COLD PLANING OPERATIONS ARE TO BE SUSPENDED TO ALLOW PAVING OPERATIONS TO CATCH UP. AFTER COLD PLANING AND PRIOR TO ALLOWING USE BY TRAFFIC, THE CONTRACTOR WILL RAMP ASPHALT AROUND EXISTING UTILITIES TO ELIMINATE HAZARD TO VEHICLES. ALL COLD PLANING REQUIRED ON CITY STREETS OR SIDE ROADS WILL BE PAID FOR AT THE UNIT PRICE BID FOR ITEM NO. 415-01.01.
- ALL DEPTHS FOR COLD PLANING TO BE ±½" TOLERANCE.
- ON ALL SUPERELEVATED CURVES, THE CONTRACTOR SHALL INSURE THAT THE SHOULDER ROLL-OVER RATES SHOWN IN THE T.D.O.T. STANDARD ROADWAY DRAWINGS ARE ACHIEVED.
- A MATERIAL TRANSFER DEVICE IS TO BE USED ON ALL MIXES. COST TO BE INCLUDED IN THE UNIT PRICE BID FOR ASPHALT ITEMS.
- THIS PROJECT IS EXCLUDED FOR RIDEABILITY AS PER SPECIAL PROVISION NO. 411C.

### CONSTRUCTION WORK ZONE & TRAFFIC CONTROL

- THE CONTRACTOR SHALL COMPLY WITH SECTION 712 OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION REGARDING TEMPORARY TRAFFIC CONTROL AND THE CURRENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
- ANY WORK REQUIRING LANE CLOSURES INCLUDING PAVEMENT MARKING OPERATIONS SHALL BE AT NON-PEAK HOURS (9:00 A.M. TO 3:00 P.M.) UNLESS OTHERWISE DIRECTED BY THE TDOT OPERATIONS DISTRICT ENGINEER.

### PAVEMENT EDGE DROP-OFF TRAFFIC CONTROL

- A. DIFFERENCES IN ELEVATION BETWEEN ADJACENT TRAFFIC LANES OR TRAFFIC LANE AND SHOULDER WHERE THE TRAFFIC LANE IS BEING USED BY TRAFFIC, CAUSED BY BASE, PAVING OR RESURFACING:
  - DIFFERENCES IN ELEVATION BETWEEN ADJACENT ROADWAY ELEMENTS GREATER THAN 0.75 INCH AND NOT EXCEEDING 2 INCHES:
    - WARNING SIGNS, UNEVEN LANES (W8-11) AND/OR SHOULDER DROP-OFF WITH PLAQUE (W8-17 AND W8-17P), SHALL BE PLACED IN ADVANCE OF AND THROUGHOUT THE EXPOSED AREA. MAXIMUM SPACING BETWEEN SIGNS SHALL BE 2,000 FEET WITH A MINIMUM OF 2 SIGNS PER EXPOSED AREA. WHERE UNEVEN PAVEMENT IS ENCOUNTERED, SIGNS SHALL BE PLACED ON EACH SIDE OF THE ROADWAY.
    - DIFFERENCES IN ELEVATION BETWEEN ADJACENT TRAFFIC LANES BEING UTILIZED BY TRAFFIC CAUSED BY ADDED PAVEMENT SHALL BE ELIMINATED WITHIN THREE WORKDAYS.
    - DIFFERENCES IN ELEVATION BETWEEN ADJACENT TRAFFIC LANES BEING UTILIZED BY TRAFFIC CAUSED BY COLD PLANING SHALL BE ELIMINATED WITHIN THREE WORKDAYS.
    - WHEN THE DIFFERENCE IN ELEVATION IS BETWEEN THE TRAFFIC LANE BEING UTILIZED BY TRAFFIC AND SHOULDER, THE DIFFERENCE IN ELEVATION SHALL BE ELIMINATED WITHIN SEVEN WORKDAYS AFTER THE CONDITION IS CREATED.

### EROSION PREVENTION AND SEDIMENT CONTROL

#### DISTURBED AREA

- ALL DISTURBED AREAS SHALL BE PROPERLY STABILIZED AS SOON AS PRACTICABLE.

## SEDIMENT CONTROL

- THE CONTRACTOR SHALL ESTABLISH AND MAINTAIN A PROACTIVE METHOD TO PREVENT THE OFF-SITE MIGRATION OR DEPOSIT OF SEDIMENT ON ROADWAYS USED BY THE GENERAL PUBLIC. OFFSITE VEHICLE TRACKING OF SEDIMENTS AND THE GENERATION OF DUST SHALL BE MINIMIZED.

## STREAM/WETLAND

- WETLANDS SHALL NOT BE USED AS EQUIPMENT STORAGE, STAGING OR TRANSPORTATION AREAS.

## NPDES

- DUE TO THE TYPE OF WORK IT IS OUR UNDERSTANDING THAT THE PROJECT WILL NOT DISTURB MORE THAN ONE ACRE. IF THE DISTURBED AREA IS MORE THAN ONE ACRE, PLEASE CONTACT THE TDOT ENVIRONMENTAL DIVISION, PERMITS SECTION BECAUSE A NPDES PERMIT WILL BE REQUIRED.
- THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS, BEFORE CLEANING OUT OR REMOVAL/REPLACEMENT OF DITCHES, SIDE DRAINS, AND CROSS DRAINS, TO ENSURE THAT THE DRAINAGE FEATURES / WATERCOURSES ARE NOT STREAMS OR WETLANDS. IF THE CONTRACTOR / TDOT INSPECTOR IS UNSURE WHETHER THE DRAINAGE FEATURES ARE STREAMS OR WETLANDS, THE INSPECTOR SHALL CONTACT THE TDOT ENVIRONMENTAL DIVISION, PERMITS SECTION TO OBTAIN THE APPROPRIATE PERMITS.


## ECOLOGY

- THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS BEFORE CONSTRUCTING EARTH PADS FOR THE TYPE 38 TERMINALS TO ENSURE THAT ENVIRONMENTAL FEATURES (STREAMS, WETLANDS, OR SPRINGS) ARE NOT IMPACTED DURING CONSTRUCTION. IF THE CONTRACTOR/ TDOT INSPECTOR IS UNSURE WHETHER THE ENVIRONMENTAL FEATURES ARE STREAMS, SPRINGS OR WETLANDS, THE INSPECTOR SHALL CONTACT THE TDOT ENVIRONMENTAL DIVISION ECOLOGY OR PERMITS SECTION SO AN ACCURATE DETERMINATION CAN BE ASSESSED.
- DURING CONSTRUCTION OF THE EARTH PADS FOR THE TYPE 38 GUARDRAIL TERMINALS, EXISTING VEGETATION WILL BE REQUIRED TO BE REMOVED FOR THE PROPOSED PAD AND SLOPES. IF DURING THE VEGETATION REMOVAL, ANY TREES GREATER THAN 5 INCHES IN DIAMETER ARE REQUIRED TO BE REMOVED, CONTACT THE T.D.O.T. ENVIRONMENTAL DIVISION ECOLOGY SECTION IMMEDIATELY. DUE TO THE RECENT MODIFICATION OF THE USFWS STANCE REGARDING THE INDIANA BAT NO TREES >5" DBH SHOULD BE CUT WITHOUT CLEARANCE FROM THE TDOT ENVIRONMENTAL DIVISION ECOLOGY SECTION.

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2015	HS1P-2(245)	6

S.R. 2 LOUDON CO.  
53004-4246-04  
53004-3246-94

**UNOFFICIAL  
SET  
NOT FOR  
BIDDING**

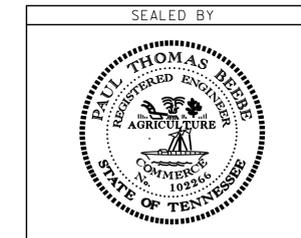

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**SPECIAL  
NOTES**

# SPECIAL NOTES (CONT.)

## RAILROAD


- (1) THE CONTRACTOR SHALL CONDUCT HIS WORK SO AS TO PROTECT THE *NORFOLK SOUTHERN* TRACK FACILITIES AND PROPERTIES FROM ANY DAMAGE. THE WORK SHALL BE DONE IN ACCORDANCE WITH REGULATIONS STIPULATED BY *NORFOLK SOUTHERN* SO AS TO MAINTAIN CLEARANCE AND NOT INTERRUPT TRAIN TRAFFIC IN ANY MANNER.
  
- (2) THE CONTRACTOR SHALL NOTIFY AND COORDINATE HIS WORK AT THE RAILROAD CROSSING WITH THE FOLLOWING REPRESENTATIVE OF THE RAILROAD:  
  
 MR. DON SUTHERLAND-DIVISION ENGINEER  
 NORFOLK SOUTHERN CORPORATION  
 CENTRAL DIVISION OFFICE  
 7208 OLD RUTLEDGE PIKE  
 KNOXVILLE, TN 37914  
 PHONE: (865) 521-1409  
 EMAIL: [donald.sutherland@nscorp.com](mailto:donald.sutherland@nscorp.com)  
  
 AND  
  
 MR. ELLIS MAYS, ENGINEER- PUBLIC IMPROVEMENTS  
 NORFOLK SOUTHERN CORPORATION  
 1200 PEACHTREE ST., NE  
 ATLANTA, GA 30309-3579  
 PHONE: (404)938-3160  
 FAX: (404)526-1641  
 EMAIL: [ellis.mays@nscorp.com](mailto:ellis.mays@nscorp.com)
  
- (3) ANY PAVEMENT MARKING PREPARATION OR INSTALLATION, RAILROAD ADVANCE WARNING SIGN PREPARATION OR REPLACEMENT/NEW INSTALLATION OR PAVEMENT PREPARATION OR INSTALLATION WITHIN 25 FT. OF THE *NORFOLK SOUTHERN* TRACK UTILIZING CONTRACTOR EQUIPMENT OR PERSONNEL WILL REQUIRE FULL TIME RAILROAD FLAGGING SERVICES AND/OR WATCHMAN SERVICES AS PER THE DISCRETION OF THE *NORFOLK SOUTHERN* SUPERINTENDENT FOR THE RAIL LINE BEING IMPACTED.
  
- (4) THE CONTRACTOR SHALL NOT, FOR ANY REASON, STORE CONSTRUCTION EQUIPMENT UPON NOR STORE OR DUMP WASTE CONSTRUCTION MATERIALS UPON THE RAILROAD'S RIGHT-OF-WAY.
  
- (5) THE CONTRACTOR IS PROHIBITED FROM INSTALLING ANY CONSTRUCTION SIGNS, MESSAGE BOARDS, ARROW BOARDS AND/OR OTHER TEMPORARY TRAFFIC CONTROL SIGNS OR DEVICES WITHIN THE RAILROAD'S RIGHT-OF-WAY, AND IN ALL CASES, THESE SIGNS MUST NEVER BE PLACED IN A POSITION SO AS TO OBSTRUCT THE VIEW OF ANY ADVANCE RAILROAD WARNING SIGNS OR ANY OTHER RAILROAD GRADE CROSSING WARNING DEVICES SUCH AS CROSSBUCK SIGNS, CROSSING SIGNALS, ETC.

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2015	HSIP-2(245)	7

S.R. 2 LOUDON CO.  
53004-4246-04  
53004-3246-94

D:\04-MAR-2015 13:22 \\J00WF01.tdot.state.tn.us\01Shared\SURVDES\DESIGN\PROJECTS\RESURF\2015\LOUDON SR 2 (0.00 - 6.71)\LOUDON SR2.dgn

**UNOFFICIAL  
SET  
NOT FOR  
BIDDING**

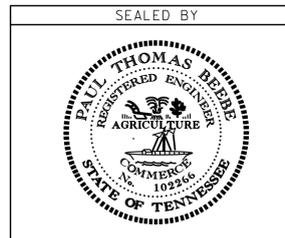

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**SPECIAL  
NOTES**