

Index Of Sheets  
RESURFACING

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	ESTIMATED ROADWAY QUANTITIES
2A	TYPICAL SECTIONS AND PAVEMENT SCHEDULE
2B	GENERAL NOTES
2C	SPECIAL NOTES

"NO PROJECT COMMITMENTS INCLUDED IN THIS SET OF PLANS"  
"NO UTILITY SHEETS"

**STANDARD ROADWAY DRAWINGS**

DWG. NO. REV. DESCRIPTION

**ROADWAY DESIGN STANDARDS**

RD-A-1	12-18-99	STANDARD ABBREVIATIONS
RD-L-1	10-26-94	STANDARD LEGEND

**PIPE CULVERTS AND ENDWALLS**

D-PG-3	04-15-97	FERROUS AND ALUMINUM CORRUGATED METAL PIPE
--------	----------	--

**TRAFFIC CONTROL APPURTENANCES**


T-FAB-1	5-27-97	FLASHING YELLOW ARROW BOARD
T-M-1	07-24-14	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS AND MARKING ABBREVIATIONS
T-M-2	07-24-14	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS
T-M-3	07-24-14	MARKING STANDARDS FOR TRAFFIC ISLANDS, MEDIANS & PAVED SHOULDERS ON CONVENTIONAL ROADS
T-M-4	07-24-14	STANDARD INTERSECTION PAVEMENT MARKINGS
T-SG-2	07-29-04	LOOP LEAD-INS, CONDUIT AND PULL BOXES
T-SG-3	11-11-04	STANDARD NOTES AND DETAILS OF INDUCTIVE LOOPS
T-WZ-10	04-02-12	ADVANCE ROAD WORK SIGNING ON HIGHWAYS AND FREEWAYS

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION  
BUREAU OF ENGINEERING

**MAURY COUNTY**

STATE ROUTE NO. 99  
FROM RAMP TO STATE ROUTE 6 (L.M. 16.93)  
TO EAST OF HALIFAX DRIVE (L.M. 24.00)  
**RESURFACING**

TENN.	YEAR	SHEET NO.
	2015	1
FED. AID PROJ. NO.	STP-NH/HSIP-99(50)	
STATE PROJ. NO.	60011-8219-14	
STATE PROJ. NO.	60011-3219-94	

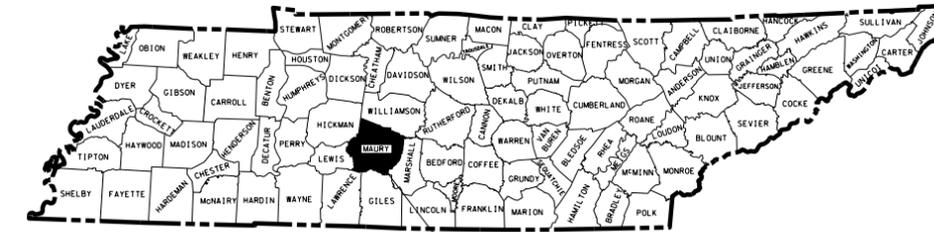

PROJECT LOCATION


STATE HIGHWAY NO. 99 F.A.H.S. NO. 412



SCALE: 1" = 1 MILE

60011-8219-14  
60011-3219-94  
END PROJ. NO. STP-NH/HSIP-99(50)  
(L.M. 24.00)

NO EXCLUSIONS

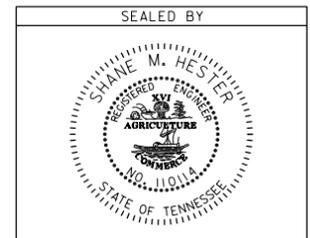

APPROVED: *Paul D. Degges*  
PAUL D. DEGGES, CHIEF ENGINEER

DATE: \_\_\_\_\_

APPROVED: *John Schroer*  
JOHN SCHROER, COMMISSIONER

**UNOFFICIAL  
SET  
NOT FOR  
BIDDING**

TRAFFIC DATA	
ADT (2015)	7030
V	45-55 MPH

U.S. DEPARTMENT OF TRANSPORTATION  
FEDERAL HIGHWAY ADMINISTRATION

APPROVED: \_\_\_\_\_  
DIVISION ADMINISTRATOR DATE

BEGIN PROJ. NO. STP-NH/HSIP-99(50)  
(L.M. 16.93)

60011-8219-14  
60011-3219-94

**SPECIAL NOTES**

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED JANUARY 1, 2015 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT PROJ. SP. SV. 2 BILLY BINION  
DESIGNER JESSE HOOVER CHECKED BY SCOTT JOHNSON  
P.E. NO. 98034-4299-04  
PIN NO. 109400.01

PROJECT LENGTH **7.07 MILES**  
TOTAL LANE MILES RESURFACED **17.5 MILES**

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2015	STP-NH/HSIP-99(50)	2

ESTIMATED ROADWAY QUANTITIES					
ITEM NO.	DESCRIPTION	UNIT	60011-8219-14 QUANTITY	60011-3219-94 SAFETY	TOTAL QUANTITY
(1) 303-01	MINERAL AGGREGATE, TYPE A BASE, GRADING D	TON	1871		1871
(2) 307-02.08	ASPHALT CONCRETE MIX (PG70-22) (BPMB-HM) GRADING B-M2	TON	1375		1375
403-01	BITUMINOUS MATERIAL FOR TACK COAT (TC)	TON	68		68
(3) 411-03.13	ACS MIX(PG70-22) THIN LIFT D ASPHALT	TON	9555		9555
411-12.02	SCORING SHOULDERS (NON-CONTINUOUS) (16IN WIDTH)	L.M.		10.6	10.6
411-12.03	SCORING FOR RUMBLE STRIPE (NON-CONTINUOUS) (8IN WIDTH)	L.M.		4.4	4.4
(7) 415-01.01	COLD PLANING BITUMINOUS PAVEMENT	TON	1255		1255
607-39.02	18" PIPE CULVERT (SIDE DRAIN)	L.F.	20		20
607-39.03	24" PIPE CULVERT (SIDE DRAIN)	L.F.	20		20
(4) 712-01	TRAFFIC CONTROL	LS	1		1
712-04.01	FLEXIBLE DRUMS (CHANNELIZING)	EACH	25		25
712-05.01	WARNING LIGHTS (TYPE A)	EACH	4		4
(5) 712-06	SIGNS (CONSTRUCTION)	S.F.	708		708
712-08.03	ARROW BOARD (TYPE C)	EACH	1		1
716-01.21	SNWPLWBLE PVMT MRKRS (BI-DIR)(1 COLOR)	EACH		550	550
716-01.22	SNWPLWBLE PVMT MRKRS (MONO-DIR)(1 COLOR)	EACH		215	215
(6) 716-02.04	PLASTIC PAVEMENT MARKING(CHANNELIZATION STRIPING)	S.Y.	220		220
(6) 716-02.05	PLASTIC PAVEMENT MARKING (STOP LINE)	L.F.	44		44
(6) 716-02.06	PLASTIC PAVEMENT MARKING (TURN LANE ARROW)	EACH	20		20
(6) 716-03.01	PLASTIC WORD PAVEMENT MARKING (ONLY)	EACH	1		1
(6) 716-04.05	PLASTIC PAVEMENT MARKING (STRAIGHT ARROW)	EACH	2		2
716-12.02	ENHANCED FLATLINE THERMO PVMT MRKNG (6IN LINE)	L.M.	32		32
716-12.03	ENHANCED FLATLINE THERMO PVMT MRKNG (8IN BARRIER LINE)	L.F.	175		175
717-01	MOBILIZATION	LS	1		1
730-14.02	SAW SLOT	L.F.	980		980
730-14.03	LOOP WIRE	L.F.	2030		2030

**FOOTNOTES**

1. TO BE USED AS DIRECTED BY THE ENGINEER.
2. TO BE USED TO REPLACE THE COLD PLANING FROM LM 21.66 TO LM 22.63.
3. INCLUDES 195 TONS FOR PRIVATE DRIVES, BUSINESS ENTRANCES AND COUNTY ROADS.
4. THE CONTRACTOR SHALL COMPLY WITH SECTION 712 OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION REGARDING TEMPORARY TRAFFIC CONTROL AND THE CURRENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
5. IN THE EVENT THAT A CONSTRUCTION AND/OR REGULATORY SIGN IS TEMPORARILY DESIGNATED NOT IN USE DURING THE CONSTRUCTION PHASE OF A PROJECT, THE CONTRACTOR SHALL CHOOSE A SIGN COVERING METHOD FROM A DESIGNATED LIST OF METHODS ACCEPTED BY THE DEPARTMENT. SAID SIGN COVERING METHOD SHALL BE SELECTED FROM QUALIFIED PRODUCTS LIST 10, SECTION D OR APPROVED BY THE DIVISION OF MATERIALS AND TEST AND SHALL BE USED TO COVER THESE SIGNS. NO OTHER METHOD FOR SIGN COVERING WILL BE ALLOWED. TEMPORARY SIGN COVERINGS SHALL NOT BE PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE PRICE BID FOR ITEM NO. 712-06 SIGNS (CONSTRUCTION).
6. THE CONTRACTOR MAY ELECT TO SUBSTITUTE PREFORMED PLASTIC FOR THERMOPLASTIC. PREFORMED PLASTIC SHALL BE PAID FOR AT THE SAME UNIT PRICE AS BID FOR THERMOPLASTIC.
7. TO BE USED FOR LM 21.66 TO LM 22.63 FOR TRUCK CLIMBING LANE ONLY.

SIGNS (CONSTRUCTION) 712-06				
QUANTITY	M.U.T.C.D. NO.	DESCRIPTION	SIZE	712-06 S.F.
2	G20-1	ROAD WORK NEXT 7.0 MILES	48 x 24	16
2	G20-2	END ROAD WORK	48 x 24	16
2	W20-1	ROAD WORK 1500'	48 x 48	32
2	W20-1	ROAD WORK 1000'	48 x 48	32
2	W20-1	ROAD WORK 500'	48 x 48	32
20	W20-1	ROAD WORK AHEAD	48 x 48	320
2	W4-2R	LANE CLOSED MERGE RIGHT	48 x 48	32
2	W4-2L	LANE CLOSED MERGE LEFT	48 x 48	32
2	W20-5R	RIGHT LANE CLOSED AHEAD	48 x 48	32
2	W20-5L	LEFT LANE CLOSED AHEAD	48 x 48	32
2	W20-7a	FLAGGER SYMBOL - PORTABLE	36 x 36	18
2	W16-2	SUPPLEMENTAL PLATE	24 x 18	6
2	W21-2	FRESH OIL - PORTABLE	36 x 36	18
2	W21-5	SHOULDER WORK - PORTABLE	36 x 36	18
2	W8-9a	SHOULDER DROP-OFF - PORTABLE	36 x 36	18
6	W8-11	UNEVEN LANES - PORTABLE	36 x 36	54
<b>TOTAL S.F.</b>				<b>708</b>

OTHER SIGNS, AS DIRECTED BY THE ENGINEER MAY BE REQUIRED DURING VARIOUS PHASES OF CONSTRUCTION AND WILL BE MEASURED AND PAID FOR AT THE UNIT BID PRICE. SEE CURRENT M.U.T.C.D. FOR STANDARDS AND TYPICAL APPLICATIONS.

COLD PLANE				
LOCATION	LENGTH (MI)	WIDTH (FT)	DEPTH (IN)	TOTAL (TON)
LM 21.66 - LM 22.63 TRUCK CLIMBING LANES ONLY	0.97	12	3.5	1255
<b>TOTAL</b>				<b>1255</b>

UTILITY ADJUSTMENTS		
TYPE	OWNER	NUMBER
WATER VALVE	COLUMBIA POWER AND WATER SYSTEMS	3

**UNOFFICIAL  
SET  
NOT FOR  
BIDDING**


SEALED BY



STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**ESTIMATED  
ROADWAY  
QUANTITIES**

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2015	STP-NH/HSIP-99(50)	2A

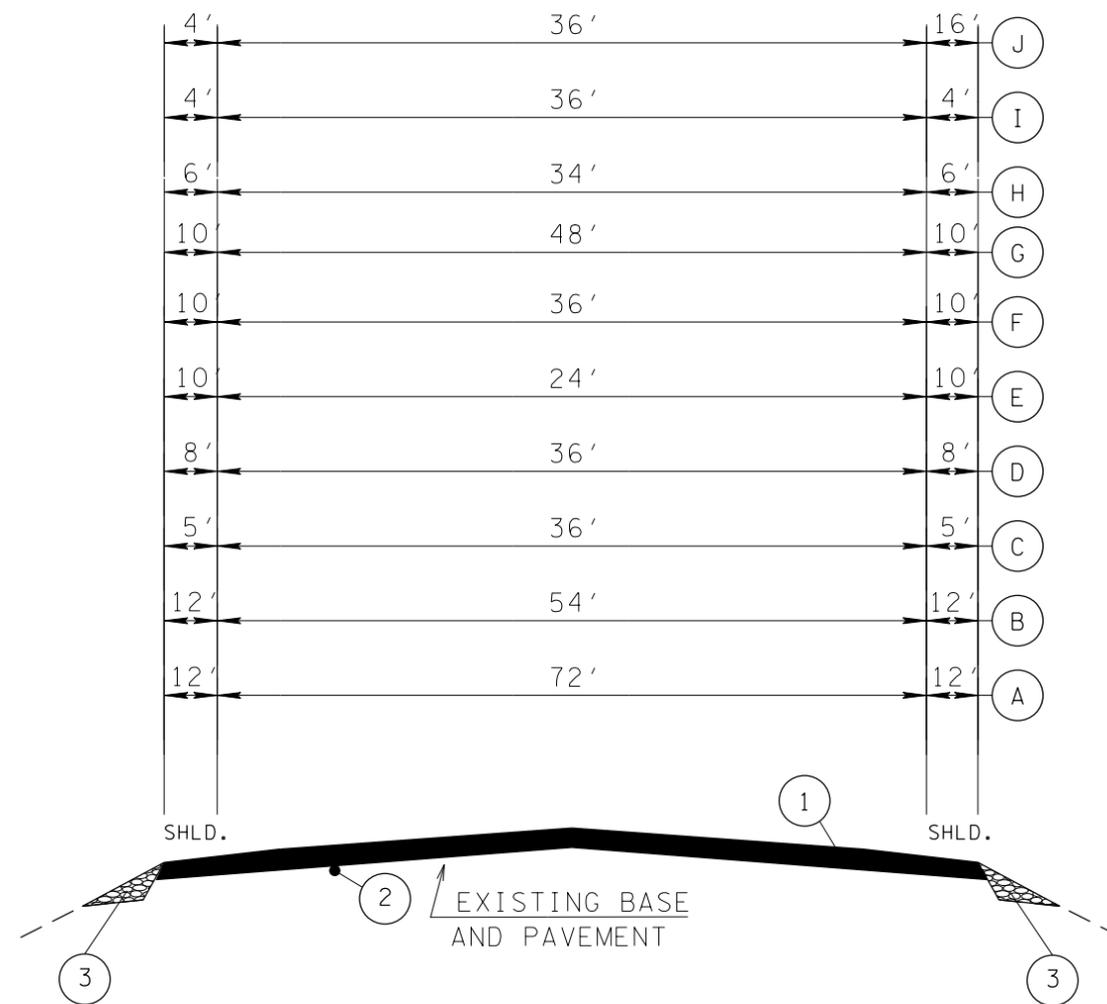


TYPICAL SECTION

- |  |                              |
|--|------------------------------|
| (A) L.M. 16.93 TO L.M. 16.97   | (G) L.M. 22.22 TO L.M. 22.34 |
| (B) L.M. 16.97 TO L.M. 17.03   | (H) L.M. 23.22 TO L.M. 23.26 |
| (C) L.M. 17.03 TO L.M. 17.20<br>L.M. 17.42 TO L.M. 17.88                               | (I) L.M. 23.26 TO L.M. 23.91 |
| (D) L.M. 17.20 TO L.M. 17.42   | (J) L.M. 23.91 TO L.M. 24.00 |
| (E) L.M. 17.88 TO L.M. 19.32<br>L.M. 19.61 TO L.M. 21.66<br>L.M. 22.63 TO L.M. 23.22   |                              |
| * (F) L.M. 19.32 TO L.M. 19.61<br>L.M. 21.66 TO L.M. 22.22<br>L.M. 22.34 TO L.M. 22.63 |                              |


PROPOSED PAVEMENT SCHEDULE	
①	SURFACE @ 0.75" THICK (APPROX 85 LB/S.Y.) 411-03.13 ACS MIX(PG70-22) THIN LIFT D ASPHALT
②	TACK COAT @ 0.07 GAL/SY 403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)
③	BASE STONE @ 2' X 2" 303-01 MINERAL AGGREGATE, TYPE A BASE, GRADING D

BRIDGE NOTES			
LOCATION	BRIDGE NO.	LENGTH (FT.)	RECOMMENDATION
L.M. 20.57	60-SR99-20.57	33.3	PAVE WITH PLANS QUANTITY

**SPECIAL NOTE:**  
ALL SHOULDERS WILL BE DEGRADED/CLIPPED AND CLEANED OF ALL VEGETATION, GRASS AND DEBRIS. SEE SPECIAL NOTES. ALL COST TO BE INCLUDED IN OTHER ITEMS OF WORK.

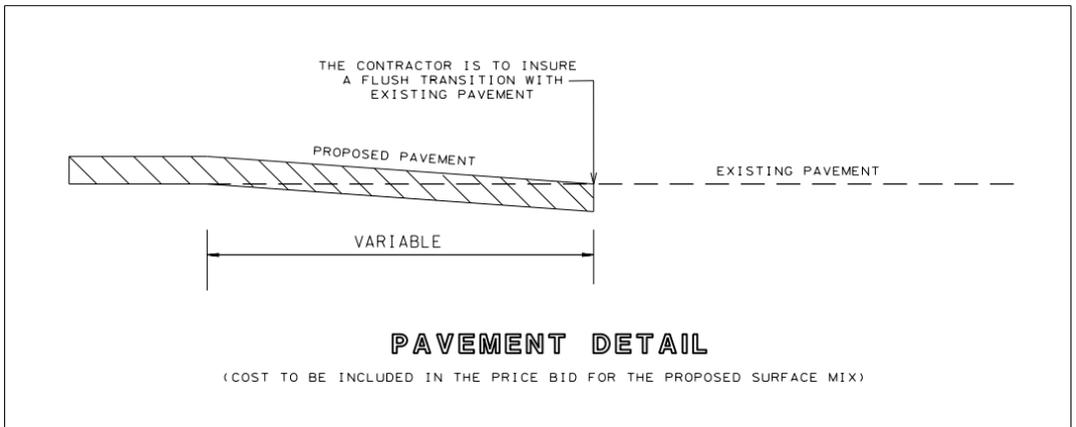

**UNOFFICIAL SET NOT FOR BIDDING**

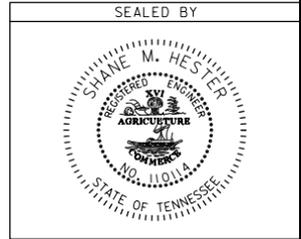

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS AND PAVEMENT SCHEDULE

\* SEE COLD PLANING TABULATION & FOOTNOTE 7 ON SHEET 2

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2015	STP-NH/HSJP-99(50)	2B

# GENERAL NOTES

## DRAINAGE

- (1) EXCAVATION FOR SIDE DRAINS WILL NOT BE MEASURED AND PAID FOR DIRECTLY, BUT WILL BE INCLUDED IN THE PRICE BID PER LINEAR FOOT OF PIPE.

## MISCELLANEOUS

- (2) NOTHING IN THE GENERAL NOTES OR SPECIAL PROVISIONS SHALL RELIEVE THE CONTRACTOR FROM HIS RESPONSIBILITIES TOWARD THE SAFETY AND CONVENIENCE OF THE GENERAL PUBLIC AND THE RESIDENTS ALONG THE PROPOSED CONSTRUCTION AREA

## PAVEMENT MARKINGS

### FINAL PAVEMENT MARKING IF 6" ENHANCED FLATLINE THERMOPLASTIC IS USED

- (3) PERMANENT PAVEMENT LINE MARKINGS SHALL BE 6" ENHANCED FLATLINE THERMOPLASTIC INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK. SHORT UNMARKED SECTIONS SHALL NOT BE ALLOWED. PAVEMENT MARKINGS WILL BE MEASURED AND PAID FOR UNDER ITEM NO. 716-12.02, ENHANCED FLATLINE THERMO PVMT MRKNG (6IN LINE), L.M. THE CONTRACTOR SHALL HAVE THE OPTION OF USING REFLECTORIZED PAINT INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK AND THEN INSTALLING THE PERMANENT MARKINGS AFTER THE PAVING OPERATION IS COMPLETED. THE TEMPORARY MARKINGS FOR THE FINAL SURFACE WILL NOT BE MEASURED AND PAID FOR DIRECTLY, BUT THE COSTS ARE TO BE INCLUDED IN THE PRICE BID FOR THE PERMANENT MARKINGS.

## PAVEMENT

### PAVING

- (4) THE CONTRACTOR SHALL BE REQUIRED TO PAVE IN THE DIRECTION OF TRAFFIC.

### RESURFACING

- (5) WHERE DIRECTED BY THE TDOT ENGINEER, THE CONTRACTOR SHALL BE REQUIRED TO SHAPE PUBLIC SIDE ROADS, BUSINESS ENTRANCES, AND PRIVATE DRIVES, AS WELL AS CLEANING OF EXISTING DRAINS BEFORE PLACING MATERIALS. ALL COSTS ARE TO BE INCLUDED IN THE PRICE BID FOR OTHER ITEMS OF CONSTRUCTION.
- (6) ALL PUBLIC SIDE ROADS SHALL BE PAVED ONE PAVER WIDTH THROUGH THE INTERSECTION AS A MINIMUM. A SATISFACTORY TRANSITION FROM THE NEW PAVEMENT TO THE EXISTING GRADE OF THE INTERSECTING PUBLIC ROAD OR BUSINESS ENTRANCE SHALL BE PROVIDED. SHOULD THE PAVEMENT OF THE INTERSECTING PUBLIC ROAD BE DISTRESSED, THE RESURFACING WIDTH MAY BE INCREASED TO THE NORMAL RIGHT OF WAY LINE.
- (7) PRIVATE DRIVEWAYS, FIELD ENTRANCES, AND BUSINESS ENTRANCES WILL BE RESURFACED A PAVER WIDTH (LANE WIDTH) AS A MINIMUM. A PAVEMENT TAPER TO TRANSITION THE NEW PAVEMENT SHALL BE REQUIRED, IT SHALL BE BASED ON AN ADDITIONAL ONE FOOT OF WIDTH PER ONE INCH DEPTH OF PAVEMENT. IF THE SHOULDER IS NARROW ENOUGH THAT THE SUM OF THE SHOULDER AND THE TRANSITION ARE LESS THAN A PAVER WIDTH, THE TRANSITION SHALL OCCUR WITHIN THE PAVER WIDTH. IF THE SUM OF THE SHOULDER AND THE TRANSITION IS GREATER THAN A PAVER WIDTH (LANE WIDTH), THE TRANSITION SHALL OCCUR OUTSIDE OF THE PAVER WIDTH.
- (8) IN ALL CASES, THE LENGTH OF THE PAVEMENT TRANSITION, THE THICKNESS AND WIDTH OF THE RESURFACING AND ANY ADDITIONAL PAVEMENT MATERIALS SHALL BE AS DIRECTED BY THE TDOT ENGINEER.

### SIGNALIZATION

- (9) IF RESURFACING IS INCLUDED IN THE PROJECT, SIGNAL DETECTION LOOPS SHALL BE INSTALLED BEFORE THE FINAL SURFACE IS APPLIED.

- (10) THE PROJECT ENGINEER SHALL NOTIFY THE LOCAL GOVERNMENTAL AGENCY RESPONSIBLE FOR TRAFFIC CONTROL MAINTENANCE AT LEAST ONE DAY IN ADVANCE OF THE COLD PLANING ACTIVITY AT SIGNALIZED INTERSECTIONS WHERE DETECTOR LOOPS ARE ON THE PAVEMENT. THE MAINTAINING AGENCY WILL THEN BE RESPONSIBLE FOR DISCONNECTING THE LOOP DETECTORS AND MAKING ANY NECESSARY TIMING ADJUSTMENTS IN THE SIGNAL CONTROLLER PRIOR TO THE CONSTRUCTION.
- (11) LOOPS SHALL BE INSTALLED IN THE LEVELING COURSE IF A LEVELING COURSE IS PROVIDED.
- (12) LOOP REPLACEMENT SHALL BE IN ACCORDANCE WITH SECTION 730 OF THE STANDARD SPECIFICATIONS.

### CONSTRUCTION WORK ZONE & TRAFFIC CONTROL

- (13) ADVANCED WARNING SIGNS SHALL NOT BE DISPLAYED MORE THAN FORTY-EIGHT (48) HOURS BEFORE PHYSICAL CONSTRUCTION BEGINS. SIGNS MAY BE ERECTED UP TO ONE WEEK BEFORE NEEDED, IF THE SIGN FACE IS FULLY COVERED.
- (14) IF THE CONTRACTOR MOVES OFF THE PROJECT, HE SHALL COVER OR REMOVE ALL UNNEEDED SIGNS AS DIRECTED BY THE ENGINEER. COSTS OF REMOVAL, COVERING, AND REINSTALLING SIGNS SHALL NOT BE MEASURED AND PAID FOR SEPARATELY, BUT ALL COSTS SHALL BE INCLUDED IN THE ORIGINAL UNIT PRICE BID FOR ITEM NO 712-06, SIGNS (CONSTRUCTION) PER SQUARE FOOT.
- (15) A LONG TERM BUT SPORADIC USE WARNING SIGN, SUCH AS A FLAGGER SIGN, MAY REMAIN IN PLACE WHEN NOT REQUIRED PROVIDED THE SIGN FACE IS FULLY COVERED.
- (16) TRAFFIC CONTROL DEVICES SHALL NOT BE DISPLAYED OR ERECTED UNLESS RELATED CONDITIONS ARE PRESENT NECESSITATING WARNING.
- (17) USE OF BARRICADES, PORTABLE BARRIER RAILS, VERTICAL PANELS, AND DRUMS SHALL BE LIMITED TO THE IMMEDIATE AREAS OF CONSTRUCTION WHERE A HAZARD IS PRESENT. THESE DEVICES SHALL NOT BE STORED ALONG THE ROADWAY WITHIN THIRTY (30) FEET OF THE EDGE OF THE TRAVELED WAY BEFORE OR AFTER USE UNLESS PROTECTED BY GUARDRAIL, BRIDGE RAIL, AND/OR BARRIERS INSTALLED FOR OTHER PURPOSES FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL INCREASE TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. THESE DEVICES SHALL BE REMOVED FROM THE CONSTRUCTION WORK ZONE WHEN THE ENGINEER DETERMINES THEY ARE NO LONGER NEEDED. WHERE THERE IS INSUFFICIENT RIGHT-OF-WAY TO PROVIDE FOR THIS REQUIRED SETBACK, THE CONTRACTOR SHALL DETERMINE THE ALTERNATE LOCATIONS AND REQUEST THE ENGINEER'S APPROVAL TO USE THEM.
- (18) THE CONTRACTOR SHALL NOT BE PERMITTED TO PARK ANY VEHICLES OR CONSTRUCTION EQUIPMENT DURING PERIODS OF INACTIVITY, WITHIN THIRTY (30) FEET OF THE EDGE OF PAVEMENT WHEN THE LANE IS OPEN TO TRAFFIC UNLESS PROTECTED BY GUARDRAIL, BRIDGE RAIL, AND/OR BARRIERS INSTALLED FOR OTHER PURPOSES FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL BE INCREASED TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. PRIVATELY OWNED VEHICLES SHALL NOT BE ALLOWED TO PARK WITHIN THIRTY (30) FEET OF A OPEN TRAFFIC LANE AT ANY TIME UNLESS PROTECTED AS DESCRIBED ABOVE FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL BE INCREASED TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE.. WHERE THERE IS INSUFFICIENT RIGHT-OF-WAY TO PROVIDE FOR THIS REQUIRED SETBACK, THE CONTRACTOR SHALL DETERMINE THE ALTERNATE LOCATIONS AND REQUEST THE ENGINEER'S APPROVAL TO USE THEM.
- (19) ALL DETOUR AND CONSTRUCTION SIGNING SHALL BE IN STRICT ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.


## EROSION PREVENTION AND SEDIMENT CONTROL

### LITTER, DEBRIS, WASTE, PETROLEUM

- (20) THE CONTRACTOR SHALL ESTABLISH AND MAINTAIN A PROACTIVE METHOD TO PREVENT LITTER, CONSTRUCTION DEBRIS, AND CONSTRUCTION WASTES FROM ENTERING WATERS OF THE STATE/U.S. THESE MATERIALS WILL BE PICKED UP AND REMOVED FROM STORMWATER EXPOSURE PRIOR TO ANTICIPATED STORM EVENTS. AFTER USE, MATERIALS USED FOR EPSC WILL BE REMOVED FROM THE SITE.
- (21) THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS TO ENSURE THAT PETROLEUM PRODUCTS OR OTHER CHEMICAL POLLUTANTS ARE PREVENTED FROM ENTERING WATERS OF THE STATE/U.S. ALL EQUIPMENT REFUELING, SERVICING, AND STAGING AREAS SHALL COMPLY WITH ALL LOCAL, STATE, AND FEDERAL LAWS, RULES, REGULATIONS, AND ORDINANCES, INCLUDING THOSE OF THE NATIONAL FIRE PROTECTION ASSOCIATION (NFPA). APPROPRIATE CONTAINMENT MEASURES FOR THESE AREAS SHALL BE USED. ALL SPILLS MUST BE REPORTED TO THE APPROPRIATE AGENCY, AND MEASURES SHALL BE TAKEN IMMEDIATELY TO PREVENT THE POLLUTION OF WATERS OF THE STATE/U.S., INCLUDING GROUNDWATER, SHOULD A SPILL OCCUR.

09-MAR-2015 11:03  
 \\J03WF01\dot.state.tn.us\035Shared\SURVEY\DESIGN\Resurfacing Plans\2015.05-May Letting\Maur\SR99\IN\09400-01\Info Set\01-09400-01-Construction-0002B.dgn

**UNOFFICIAL  
SET  
NOT FOR  
BIDDING**

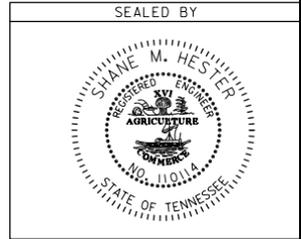

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

**GENERAL  
NOTES**

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2015	STP-NH/HSJP-99(50)	2C

# SPECIAL NOTES

## MISCELLANEOUS

- (1) THE CONTRACTOR WILL BE REQUIRED TO PERFORM THE FOLLOWING WORK AND INCLUDE ALL COSTS THEREOF IN THE PRICES BID FOR OTHER ITEMS OF CONSTRUCTION: REPAIR OF SHOULDERS AND DITCHES. SHOULDERS SHALL BE DEGRASSED, MATERIAL SHALL BE PICKED UP AND REMOVED. CLEANING AND STRAIGHTENING ENDS OF EXISTING SIDEDRAINS AND CROSSDRAINS WHERE DIRECTED BY THE ENGINEER.
- (2) THE CONTRACTOR SHALL TAKE EXTREME CARE WHEN WORKING AROUND EXISTING GUARDRAIL, HIGHWAY SIGNS, OR ANY DEPARTMENT OF TRANSPORTATION STRUCTURE TO AVOID DAMAGE DURING THE COURSE OF CONSTRUCTION. ANY DAMAGE WILL BE REPLACED OR REPAIRED AT HIS OWN EXPENSE.

## PAVEMENT MARKINGS

- (3) THE CONTRACTOR WILL BE REQUIRED TO ESTABLISH AND LOCATE ALL NO-PASSING ZONES. THE ESTABLISHMENT OF NO-PASSING ZONES IS TO BE IN ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, 2009, PART III, MARKING. ALL NO-PASSING ZONES WILL BE APPROVED BY THE ENGINEER WITH ADVICE FROM THE REGIONAL TRAFFIC ENGINEER PRIOR TO THE MARKING APPLICATION.
- (4) THE CONTRACTOR IS TO PROVIDE THE LAYOUT OF ALL EXISTING PAVEMENT MARKINGS BEFORE BEGINNING THE RESURFACING PROJECT. EXISTING MARKINGS SHALL BE REFERENCED AS NEEDED TO ENSURE THAT ALL NEW MARKINGS ARE REPLACED IN THEIR CORRESPONDING LOCATIONS UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

## PAVEMENT

### PAVING

- (5) SURFACE TO BE CROWNED AS DIRECTED BY THE ENGINEER.
- (6) ALL STRUCTURES (DRAINAGE STRUCTURES, MANHOLES, UTILITY BOXES, ETC.) SHALL HAVE A FINISHED GRADE COMPATIBLE WITH THE FINISHED GRADE OF THE ROADWAY.

### RESURFACING

- (7) AFTER ANY COLD PLANING OPERATION, TEMPORARY STRIPING WILL BE REQUIRED BEFORE RETURNING TRAFFIC ONTO EXCAVATED ROADWAY.

### CONSTRUCTION WORK ZONE & TRAFFIC CONTROL

- (8) THE CONSTRUCTION SIGNS, FLAGMEN AND OTHER TRAFFIC CONTROL DEVICES WILL BE IN ACCORDANCE WITH THE CURRENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
- (9) ONE ADVANCE ROAD CONSTRUCTION AHEAD SIGN IS TO BE PLACED ON ALL SIDE ROADS PRIOR TO THEIR INTERSECTION WITH THE PROPOSED PROJECT. LOCATION TO BE DETERMINED IN THE FIELD BY THE ENGINEER OR CONTRACTORS SUPERINTENDENT.

### EROSION PREVENTION AND SEDIMENT CONTROL

#### NPDES


- (10) THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS, BEFORE CLEANING OUT OR REMOVAL/REPLACEMENT OF DITCHES, SIDE DRAINS, AND CROSS DRAINS, TO ENSURE THAT THE DRAINAGE FEATURES / WATERCOURSES ARE NOT STREAMS OR WETLANDS. IF THE CONTRACTOR / TDOT INSPECTOR IS UNSURE WHETHER THE DRAINAGE FEATURES ARE STREAMS OR WETLANDS, THE INSPECTOR SHALL CONTACT THE TDOT ENVIRONMENTAL DIVISION, PERMITS SECTION TO OBTAIN THE APPROPRIATE PERMITS.
- (11) DUE TO THE TYPE OF WORK IT IS OUR UNDERSTANDING THAT THE PROJECT WILL NOT DISTURB MORE THAN ONE ACRE. IF THE DISTURBED AREA IS MORE THAN ONE ACRE, PLEASE CONTACT THE TDOT ENVIRONMENTAL DIVISION, PERMITS SECTION BECAUSE A NPDES PERMIT WILL BE REQUIRED.

## PAVEMENT EDGE DROP-OFF TRAFFIC CONTROL NOTES

- (12) DIFFERENCES IN ELEVATION BETWEEN ADJACENT TRAFFIC LANES OR TRAFFIC LANE AND SHOULDER WHERE THE TRAFFIC LANE IS BEING USED BY TRAFFIC, CAUSED BY BASE, PAVING OR RESURFACING:
  1. DIFFERENCES IN ELEVATION BETWEEN ADJACENT ROADWAY ELEMENTS GREATER THAN 0.75 INCH AND NOT EXCEEDING 2 INCHES:
    - a. WARNING SIGNS, UNEVEN PAVEMENT (W8-11) AND/OR SHOULDER DROP-OFF (W8-9A), SHALL BE PLACED IN ADVANCE OF AND THROUGHOUT THE EXPOSED AREA. MAXIMUM SPACING BETWEEN SIGNS SHALL BE 2,000 FEET WITH A MINIMUM OF 2 SIGNS PER EXPOSED AREA. WHERE UNEVEN PAVEMENT IS ENCOUNTERED, SIGNS SHALL BE PLACED ON EACH SIDE OF THE ROADWAY.
    - b. DIFFERENCES IN ELEVATION BETWEEN ADJACENT TRAFFIC LANES BEING UTILIZED BY TRAFFIC CAUSED BY ADDED PAVEMENT SHALL BE ELIMINATED WITHIN THREE WORKDAYS.
    - c. DIFFERENCES IN ELEVATION BETWEEN ADJACENT TRAFFIC LANES BEING UTILIZED BY TRAFFIC CAUSED BY COLD PLANING SHALL BE ELIMINATED WITHIN THREE WORKDAYS.
    - d. WHEN THE DIFFERENCE IN ELEVATION IS BETWEEN THE TRAFFIC LANE BEING UTILIZED BY TRAFFIC AND SHOULDER THE DIFFERENCE IN ELEVATION SHALL BE ELIMINATED WITHIN SEVEN WORKDAYS AFTER THE CONDITION IS CREATED.

09-MAR-2015 11:03  
 \\J03WF01\dot.state.tn.us\035shared\SURVEY\DESIGN\Resurfacing Plans\2015.05-May Letting\MaurYSR99\IN\09400.01\H\Info Set\01-09400-01-Construction-0002C.dgn

**UNOFFICIAL  
SET  
NOT FOR  
BIDDING**

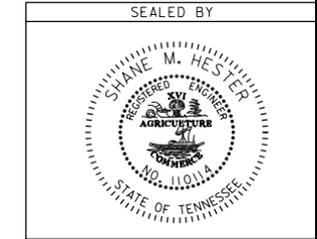

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

**SPECIAL  
NOTES**