TENNESSEE D.O.T.
DESIGN DIVISION
FILE NO.

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2014	STP/HSIP-1(321)	3

GRAINGER CO. S.R. 1
29001-3230-94
29001-8230-14
29001-4230-04

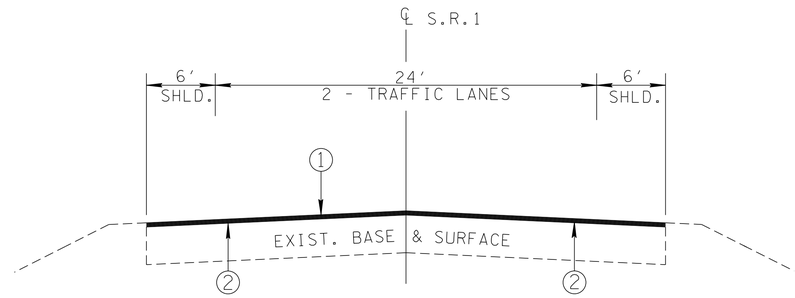

TYPICAL CROSS-SECTION OF IMPROVEMENT

L.M. 16.10 TO L.M. 26.71

PAVEMENT SCHEDULE

(1) THIN LIFT ASPHALT @ 85 LBS/SQ.YD. 411-03.12 ACS MIX (PG64-22) THIN LIFT D ASPHALT
(2) TACK COAT @ 0.15 GAL./SQ. YD. 403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)
(3) ASPHALTIC CONCRETE SURFACE (HM) (SPOT LEVELING) (APPROX. 30 TONS/MILE) 411-01.07 ACS MIX (PG64-22) GRADING E SHOULDER

NOTE: DRIVEWAYS AND BUSINESS ENTRANCES TO BE TIED-IN AS NECESSARY OR AS DIRECTED BY THE T.D.O.T. OPERATIONS DISTRICT ENGINEER.

NOTE: PAVING TO BE OMITTED OVER THE FOLLOWING BRIDGES: L.M.16.28 (BRIDGE OVER RICHLAND CREEK), L.M. 17.07 (BRIDGE OVER RICHLAND CREEK), L.M.22.81 (BRIDGE OVER SHIELDS CREEK). THE FOLLOWING BRIDGES ARE TO BE REPAIRED: L.M.24.47 (BRIDGE OVER GAP CREEK), AND L.M.25.26 (BUCK HOLLOW BRIDGE). SEE SHEETS B1 AND B2 FOR DETAILS.

SEALED BY



01/22/2014

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTION AND PAVEMENT SCHEDULE

22-JAN-2014 09:55
\\JOIWF01.tdot.state.tn.us\Shared\SURVDES\DESIGN\PROJECTS\RESURF\2014\Grainger SR 1\Grainger County SR 1- SHEET 3.dgn