TENNESSEE D.O.T.
DESIGN DIVISION
FILE NO.

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2014	NH/HSIP-1(308)	3

SULLIVAN CO. S.R. 1
82002-3281-94
82002-8281-14

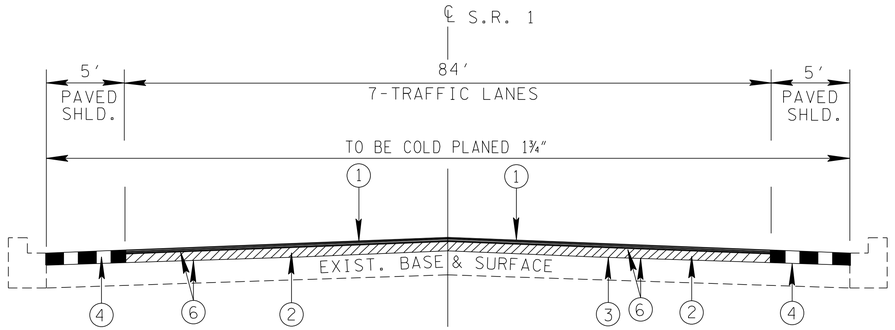

TYPICAL CROSS-SECTION OF IMPROVEMENT

LOG MILE 2.46 TO LOG MILE 2.83
LOG MILE 3.50 TO LOG MILE 3.75

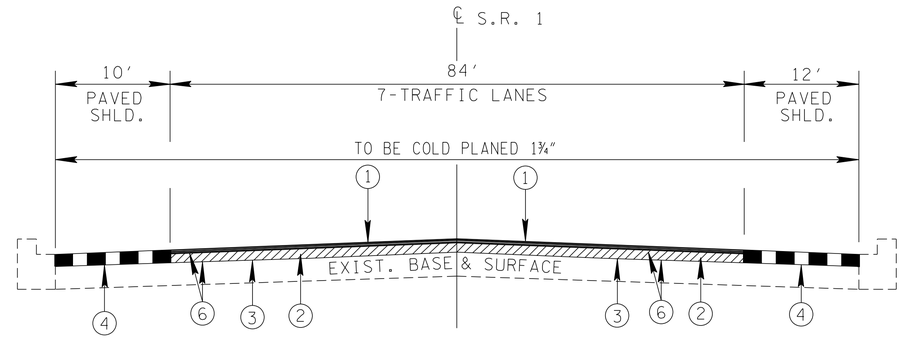

TYPICAL CROSS-SECTION OF IMPROVEMENT

LOG MILE 4.80 TO LOG MILE 5.60

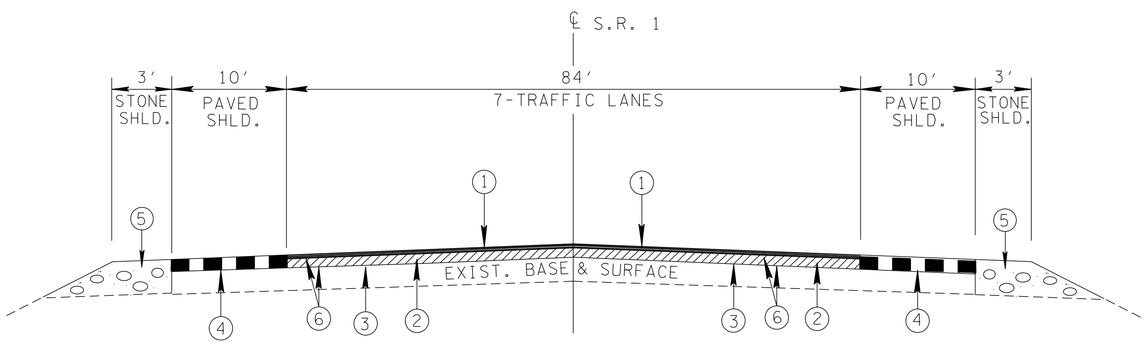

TYPICAL CROSS-SECTION OF IMPROVEMENT

LOG MILE 2.83 TO LOG MILE 3.50
LOG MILE 3.75 TO LOG MILE 4.80

PAVEMENT SCHEDULE

1	ASPHALTIC CONCRETE SURFACE (HM) 1¼″ TH. (APPROX. 132.5 LBS./SQ.YD.) 411-02.10 ACS MIX (PG70-22) GRADING D
2	BITUMINOUS PLANT MIX BASE (HM) (APPROX. 50 LBS./SQ.YD.) 307-01.15 ACS MIX (PG64-22) (BPMB-HM) GRADING CS
3	ASPHALTIC CONCRETE SURFACE (HM) (SPOT LEVELING) (APPROX. 80 TONS/MILE) 411-01.07 ACS MIX (PG64-22) GRADING E SHOULDER
4	ASPHALTIC CONCRETE SURFACE (HM) 1½″ TH. (APPROX. 154.5 LBS./SQ.YD.) 411-01.07 ACS MIX (PG64-22) GRADING E SHOULDER
5	MINERAL AGGREGATE BASE (SHOULDERS) 2″ TH. 303-01 MINERAL AGGREGATE, TYPE A BASE, GRADING D
6	TACK COAT (TC) (APPROX. 0.07-0.10 GAL./SQ.YD.) 403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)

NOTE:
BRIDGE OVER S.R. 36 (L.M. 2.63) TO BE LEFT AS IS. NO PAVING REQUIRED.

SEALED BY



02/11/2014

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS AND PAVEMENT SCHEDULE

10-FEB-2014 16:11
\\JUOWF01.tdot.state.tnus\01Shared\SURVDES\DESIGN\PROJECTS\RESURF\2014\SullivanSR1\SullivanSR1.dgn