TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2014	NH/HSIP-255(13)	2A

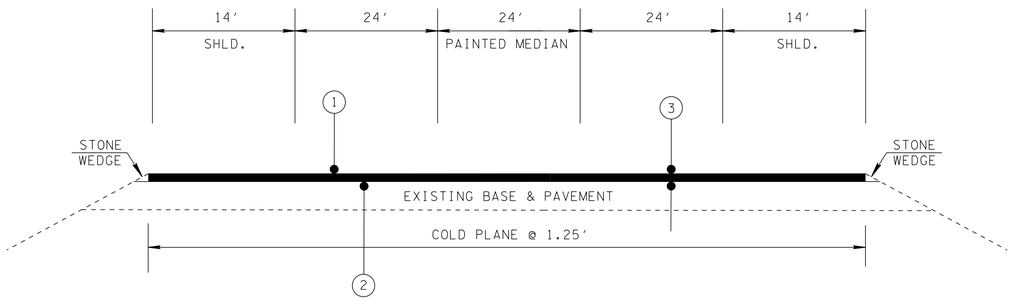

TYPICAL SECTIONS

L.M. 4.30 TO L.M. 4.44

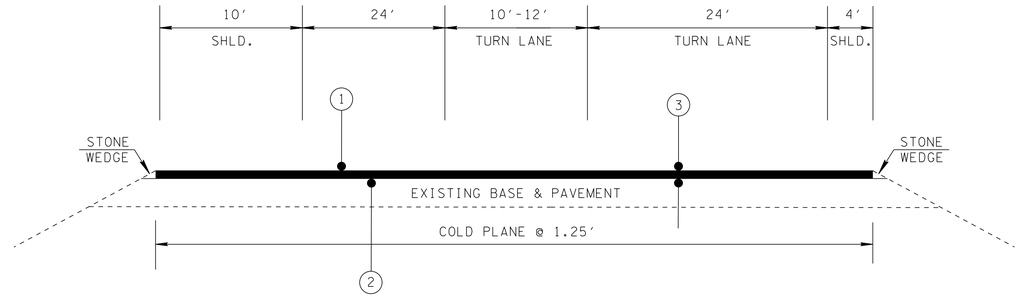

TYPICAL SECTIONS

L.M. 4.57 TO L.M. 4.70
L.M. 5.04 TO L.M. 5.46

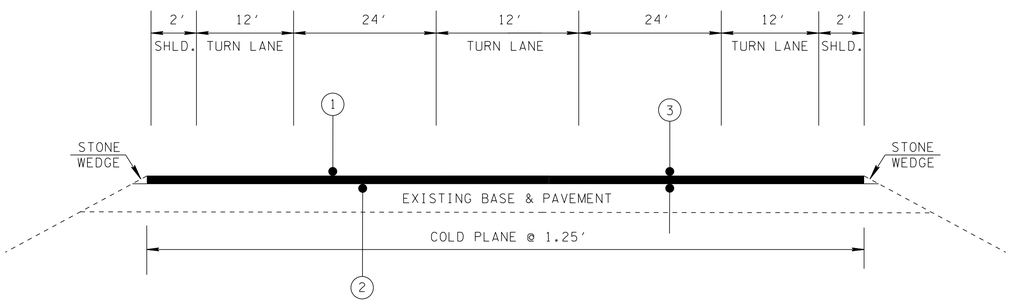

TYPICAL SECTIONS

L.M. 4.44 TO L.M. 4.57

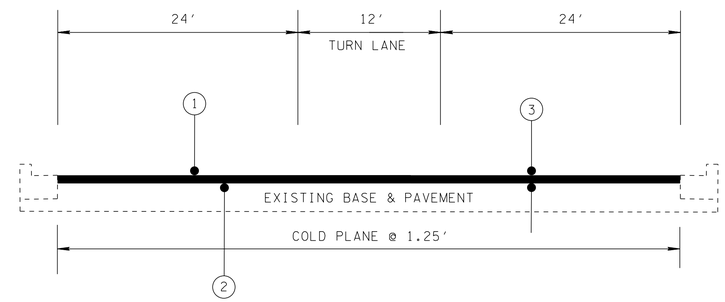

TYPICAL SECTIONS

L.M. 4.70 TO L.M. 5.04
L.M. 5.66 TO L.M. 6.56

PROPOSED PAVEMENT SCHEDULE

(1) SURFACE @ (1.25" THICK)

411-02.10 ACS MIX (PG70-22) GRADING "D"

(2) TACK COAT @ 0.1 GAL/SY

403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)

(3) COLD PLANING @ 1.25" THICK

415-01.01 COLD PLANING BITUMINOUS PAVEMENT (TON)

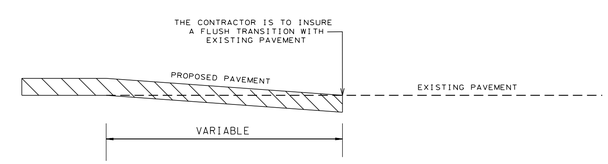

PAVEMENT DETAIL

SPECIAL NOTES

THE CONTRACTOR WILL BE REQUIRED TO PERFORM THE FOLLOWING WORK AND INCLUDE ALL COSTS THEREOF IN THE PRICES BID FOR OTHER ITEMS OF CONSTRUCTION:

(1) REPAIR OF SHOULDERS AND DITCHES. SHOULDERS SHALL BE DEGRASSED, MATERIAL SHALL BE PICKED UP AND REMOVED NOT LEFT IN DITCHES.

(2) CONTRACTOR WILL BE RESPONSIBLE FOR STAKING HIS CONSTRUCTION SIGNS.

SEALED BY



STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS AND PAVEMENT SCHEDULE

6-JAN-2014 15:13
\\JJO3WF01.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2014\04-April-2014 Letting\Davidson SR 255\002A TypicalSections and Pavement Schedule.dgn