TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2014	HSIP-46(24)	3

REV. 4-15-14: ADDED STONE SIZE TO CHIP SEAL IN PAVEMENT SCHEDULE.

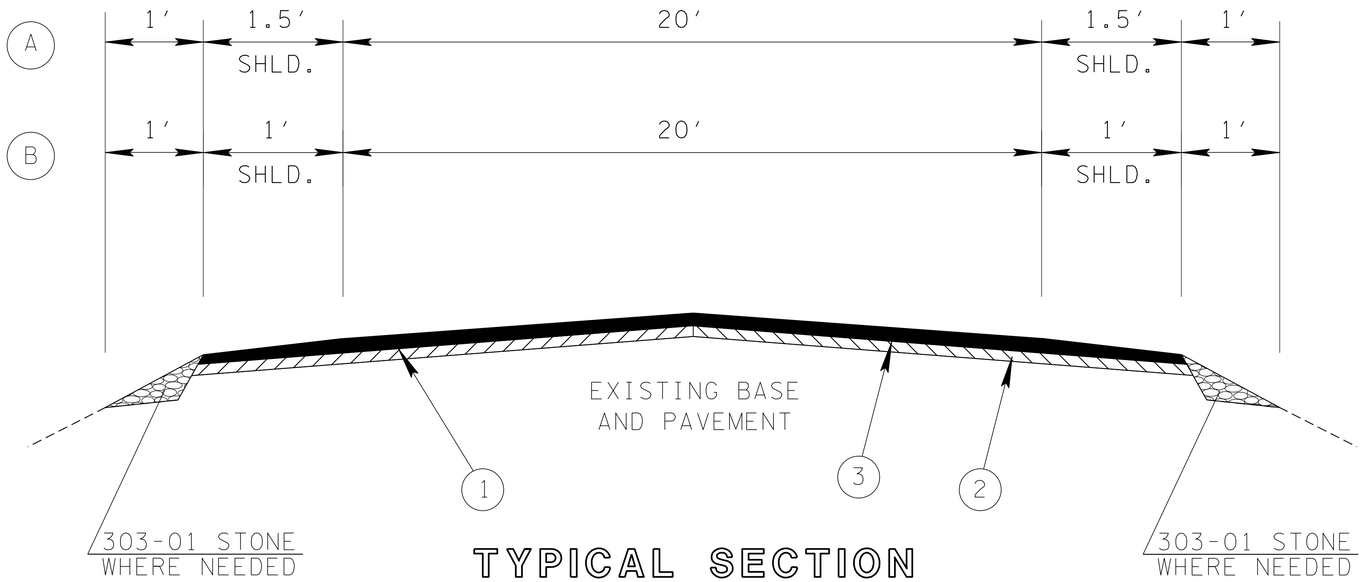

TYPICAL SECTION

Ⓐ L.M. 2.29 TO L.M. 5.29

Ⓑ L.M. 5.29 TO L.M. 8.06

BRIDGE NOTES

LOCATION	LENGTH (FT.)	RECOMMENDATION
L.M. 5.03	94'	LEAVE AS IS
L.M. 6.71	83'	LEAVE AS IS

PROPOSED PAVEMENT SCHEDULE

(1) SURFACE @ (85 LB/S.Y.)

411-03.12 ACS MIX (PG64-22) THIN LIFT D ASPHALT

(2) CHIP SEAL "CRS2P"

405-01.01 BITUMINOUS MAT'L FOR BITUMINOUS SEAL COAT (BSC)
AT A RATE OF 0.30 GAL./S.Y.
405-01.02 MINERAL AGGREGATE FOR BITUMINOUS SEAL COAT (BSC)
AT A RATE OF 24 LBS./S.Y. (#7 STONE)

(3) TACK COAT @ 0.07 GAL/SY

403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)

THERE ARE NO UTILITY ADJUSTMENTS ON THIS PROJECT

SEALED BY



04/16/2014

SPECIAL NOTE:

ALL SHOULDERS WILL BE DEGRASSED/CLIPPED AND CLEANED OF ALL VEGETATION, GRASS AND DEBRIS. SEE SPECIAL NOTES. ALL COST TO BE INCLUDED IN OTHER ITEMS OF WORK.

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS AND PAVEMENT SCHEDULE

15-APR-2014 13:29
\\JJ03WF01.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2014\05-May-2014 Letting\Houston SR 46\17734-00- 003TypicalSections.sht