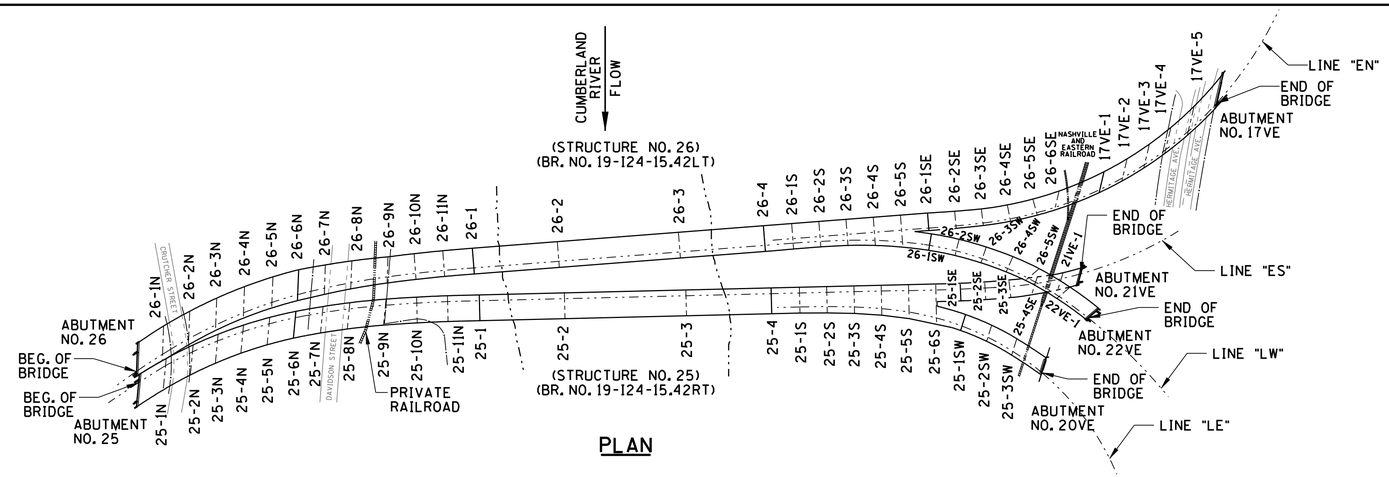

PLAN

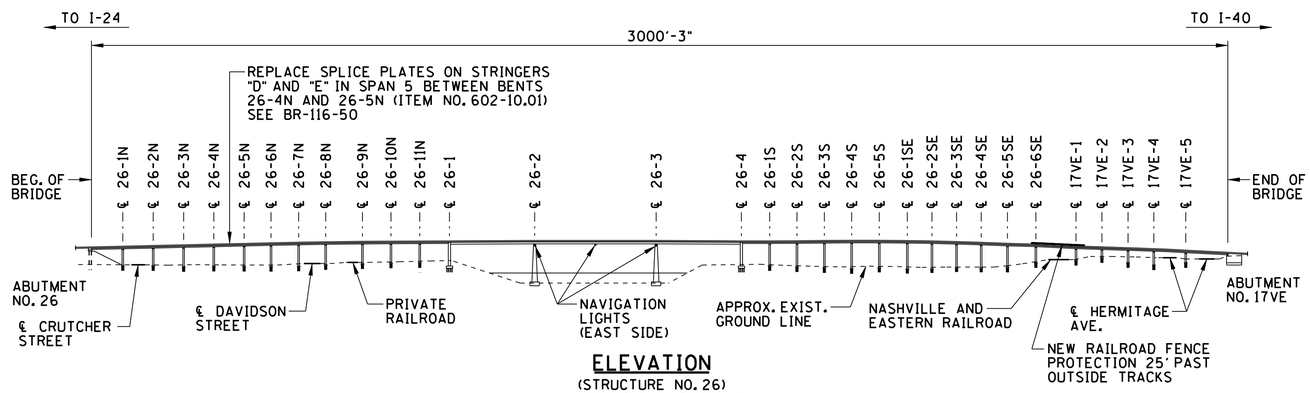

ELEVATION
(STRUCTURE NO. 26)
(BR. NO. 19-124-15.42LT)

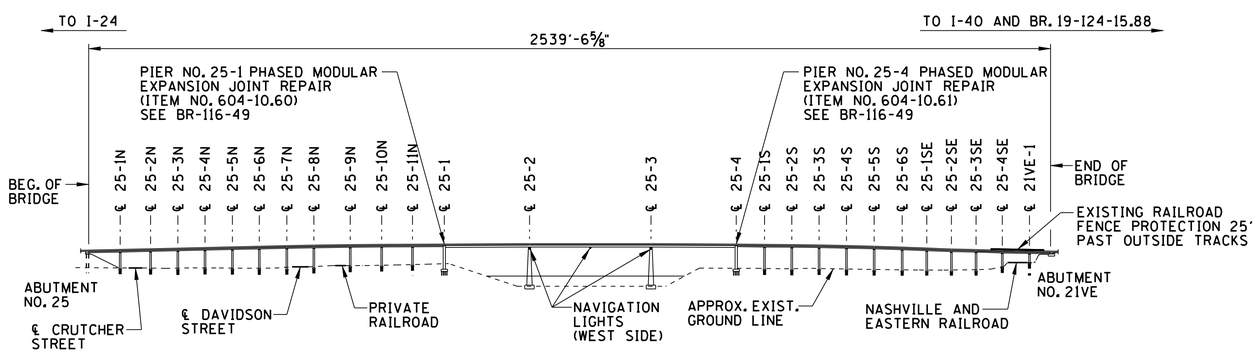

ELEVATION
(STRUCTURE NO. 25)
(BR. NO. 19-124-15.42RT)

SCOPE OF WORK

1. PRIOR TO BEGINNING CONSTRUCTION, SUBMIT TO TDOT BRIDGE INSPECTION OFFICE DETAILS SHOWING ANY NECESSARY BRACING FOR BRIDGE DECK SLAB AND SHOWING ALL FORMWORK OR NETTING TO KEEP DEBRIS FROM FALLING.
2. ESTABLISH TRAFFIC CONTROL TO PROVIDE TWO LANES OF TRAFFIC ON BR. NO. 19-124-15.42RT DURING CONSTRUCTION PHASES USING TEMPORARY SIGNAGE AND TRAFFIC BARRIERS.
3. PHASED REPLACEMENT OF MODULAR EXPANSION JOINTS AT PIER NO. 25-1 AND PIER NO. 25-4.
4. RECONSTRUCT ASPHALT OVERLAY WITH MEMBRANE.
5. RESTRIPE ROADWAY TO MATCH EXISTING.
6. REPAIR THE SPLICES IN SPAN 5 STRINGERS ON BR. NO. 19-124-15.42LT.

CONST. NO. _____

PROJECT NO.	YEAR	SHEET NO.
19010-4164-04	2014	

REVISIONS

NO.	DATE	BY	BRIEF DESCRIPTION
1	05-05-14	DWT	ADDED LIST OF SPEICAL PROVISIONS AND ADDED REVISION DATE
2	08-15-14	DWT	ADDED REVISION DATE

LIST OF DRAWINGS

	DWG. NO.	LAST REV. DATE (1) (2)
LAYOUT OF BRIDGES TO BE REPAIRED	BR-116-46	08-15-14
ESTIMATED BRIDGE QUANTITIES	BR-116-47	05-05-14
BRIDGE GENERAL AND SPECIAL NOTES	BR-116-48	
EXPANSION JOINT REPLACEMENT	BR-116-49	08-15-14
SPLICE REPAIR DETAILS	BR-116-50	

LIST OF REFERENCE DRAWINGS

	DWG. NO.
EXISTING BRIDGE AND WIDENING PLANS (BRIDGE NO. 19-I-24-15.42)	BR-65-1 THRU BR-65-3, BR-65-5, BR-65-7, BR-95-89, BR-95-91, AND BR-95-93

(1) LIST OF SPECIAL PROVISIONS

DWG. NO.	LAST REVISION DATE	DESCRIPTION
202ACM	**	REMOVAL OF ASBESTOS CONTAINING MATERIALS

** DENOTES: CURRENT REVISION DATE AS PER CONTRACT DRAWINGS.

08/15/2014

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

LAYOUT OF BRIDGES TO BE REPAIRED

BRIDGE NO. 19-I24-15.42LT
BRIDGE NO. 19-I24-15.42RT
INTERSTATE 24 OVER
CUMBERLAND RIVER
DAVIDSON COUNTY
2014

N

0 200 400 600
SCALE (FT)

DESIGNED BY D. THOMPSON/L. HORN DATE
DRAWN BY ANGELA MOORE DATE
SUPERVISED BY DARRELL JAMES DATE
CHECKED BY JAMIE GILLESPIE DATE

JAMIE & ASSOCIATES, INC.

BR-116-46