


- REV. 9-11-02: CHANGED GENERAL NOTE ①.
- REV. 4-15-03: CHANGED DRAWING NAME.
- REV. 7-29-04: CHANGED GENERAL NOTE ①.

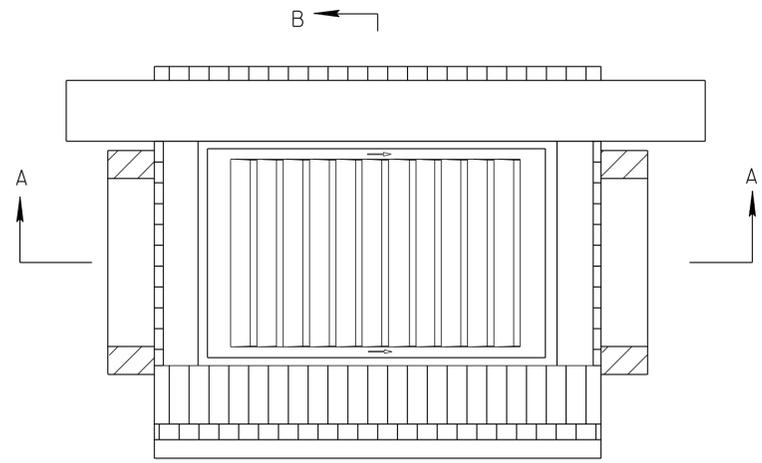


PLAN VIEW

REINFORCING STEEL LEGEND			
42"	A500	28" x 28" x 39"	H500
VARIABLE	A501	29" x 34" x 29"	H501
		28" x 28" x 33"	H502

CATCH BASIN MAXIMUM DEPTH NOTE

MAXIMUM DEPTH FOR THIS STRUCTURE IS 5.00'. WHEN DEPTH REQUIREMENTS EXCEED THIS DEPTH THE CONTRACTOR IS TO USE OTHER VERSIONS OF THE NO.10 CATCH BASIN.

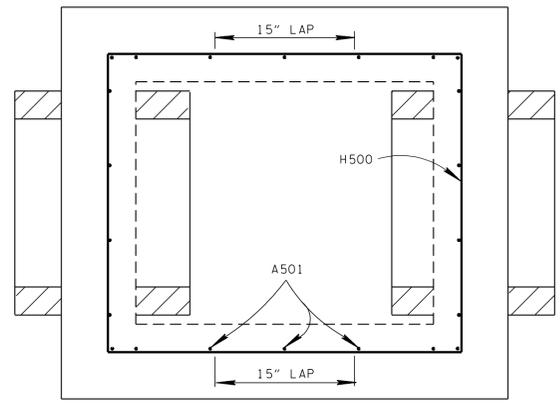

SECTION E-E

CATCH BASIN PIPE SIZE TABLE	
MAX INLET OR OUTLET CONC. PIPE SIZE-STR. (INCHES)	MAX INLET OR OUTLET CONC. PIPE SIZE-90° (INCHES)
ⓧ 24	18

ⓧ TO BE USED IN FRONT AND BACK WALLS ONLY.


- GENERAL NOTES**
- ① DRAWING TO BE USED FOR ALL CAST-IN-PLACE NO. 10LPC CONCRETE CATCH BASINS AND ALL PRECAST NO. 10LPC CONCRETE CATCH BASINS THAT ARE INSTALLED IN AREA WITH A LOWERED CURB SUCH AS A DRIVEWAY ENTRANCE.
 - ② CAST-IN-PLACE CONCRETE CATCH BASINS SHALL BE CONSTRUCTED IN ACCORDANCE WITH STANDARD SPECIFICATIONS, SECTION 611 AND/OR SPECIAL PROVISIONS.
 - ③ THE CONTRACTOR MAY WITH PERMISSION FROM THE ENGINEER SUBSTITUTE PRECAST CATCH BASINS FOR CAST-IN-PLACE CATCH BASINS PROVIDED THAT ALL PRECAST ELEMENTS MEET ASTM M913 (CURRENT EDITION) UNLESS SUPERSEDED BY THIS DRAWING.
CONCRETE: $F_c = 4,000$ POUNDS PER SQUARE INCH AT 28 DAYS
REINFORCING STEEL: ASTM A615, $F_y = 60,000$ POUNDS PER SQUARE INCH
ALL REINFORCING IS TO BE INSTALLED AS DETAILED ON THIS DRAWING.
 - ④ PRECAST CATCH BASIN UNITS WHICH ARE DAMAGED DURING SHIPMENT OR INSTALLATION WILL BE REJECTED. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO REPLACE DAMAGED CATCH BASIN UNITS AT HIS OWN EXPENSE.
 - ⑤ ADDITIONAL REINFORCING STEEL NECESSARY ABOVE THE CORED OR FORMED CUT-OUT HOLES TO MAINTAIN THE INTEGRITY OF THE STRUCTURE DURING HANDLING AND PLACEMENT SHALL BE THE RESPONSIBILITY OF THE FABRICATOR.
 - ⑥ APPROPRIATE SIZING AND LOCATION OF LIFTING DEVICES SHALL BE THE RESPONSIBILITY OF THE FABRICATOR TO ASSURE BALANCED HANDLING DURING INSTALLATION OF THE CATCH BASIN.
 - ⑦ THE CONTRACTOR IS TO PATCH ALL LIFTING DEVICE HOLES AND PLACE A MINIMUM OF ONE(1) INCH OF COVER OVER THE HARDWARE OF THESE DEVICES ON BOTH TOP AND BOTTOM SURFACES.
 - ⑧ INVERT ELEVATIONS ARE TO BE ADJUSTED AS DIRECTED BY THE ENGINEER IN ORDER TO ACCOMMODATE INLET AND OUTLET PIPES.
 - ⑨ SEE STANDARD DRAWING D-CBB-12A FOR DETAILS REGARDING CAST IRON GRATES, FRAMES AND CURB INLETS.
 - ⑩ PAYMENT FOR CATCH BASIN WILL BE MADE UNDER ITEM NUMBERS 611-10.01 CATCH BASINS, TYPE 10, 0'-4' TO 611-10.02 CATCH BASIN, TYPE 10, > 4'-8' PER EACH.

INSIDE DIAMETER (X) OF PIPE (INCHES)	MINIMUM DEPTH - (FEET)		
	CONCRETE PIPE	CORRUGATED METAL PIPE	POLYETHYLENE PIPE
15	3.11	2.94	3.03
18	3.40	3.19	3.32
24	3.90	3.69	3.86


- ① DEPTH MEASUREMENT MADE FROM TOP OF GRATE TO OUTLET FLOW ELEVATION BASED ON INLET AND OUTLET PIPES BEING THE SAME DIAMETER, IF OUTLET PIPE IS GREATER ADJUSTMENT IN DEPTHS MUST BE MADE TO ACCOMMODATE THIS SITUATION.
- ② MINIMUM DEPTH TO BE REDUCED BY 0.12' WHERE ONLY OUTLET PIPE EXIST.
- ③ TO DETERMINE FLOOR OF CATCH BASIN ELEVATION, WHEN INLET AND OUTLET PIPES ARE THE SAME SIZE, ADD PIPE WALL THICKNESS PLUS 1.5" TO THE ABOVE MINIMUM DEPTHS.

INSIDE DIAMETER (X) OF PIPE (INCHES)	DIAMETER OF CUT-OUT HOLES F & G - (INCHES)		
	CONCRETE PIPE	CORRUGATED METAL PIPE	POLYETHYLENE PIPE
15	22	18	20
18	26	21	24
24	32	27	31

CUT-OUT HOLES FOR PRECAST STRUCTURES TO BE CORED OR FORMED IN ORDER TO OBTAIN A SMOOTH EGED HOLE. SCORED OR ETCHED HOLES WITH REINFORCING STEEL LEFT UN CUT WILL NOT BE PERMITTED.

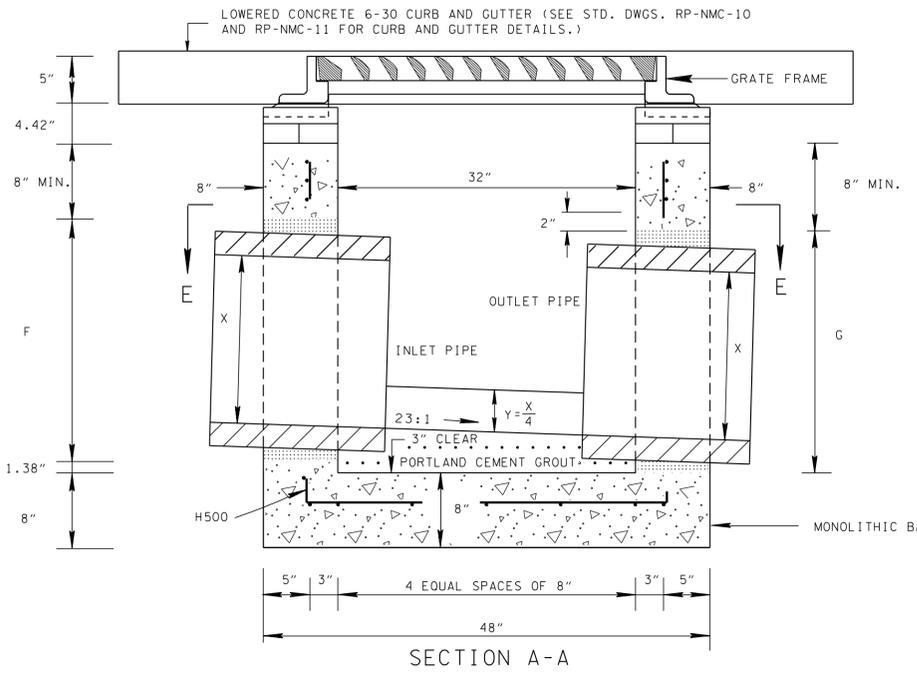

SECTION A-A

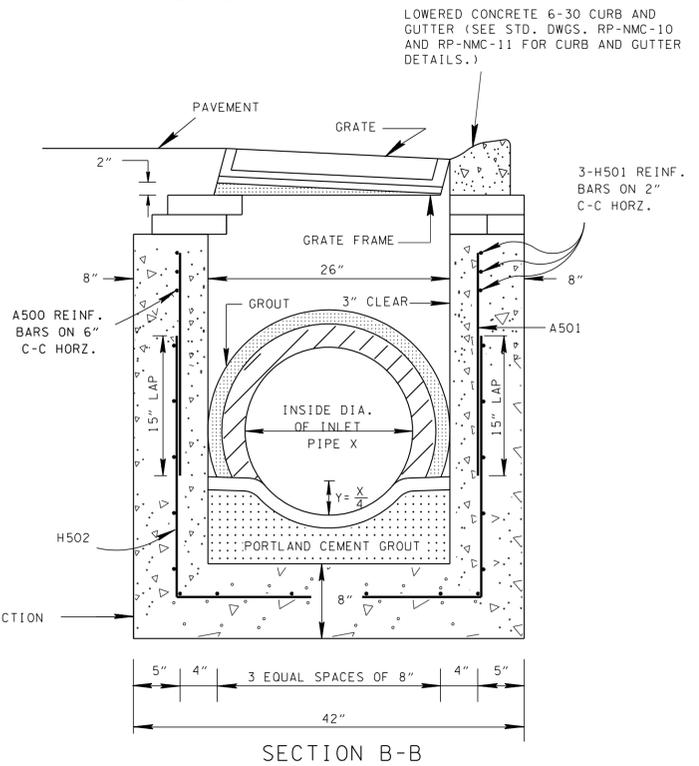

SECTION B-B

MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.