CONST. NO.	19005-3161-44	
PROJECT NO.	YEAR	SHEET NO.
BH-I-40-4(86)	2015	

REVISIONS

NO.	DATE	BY	BRIEF DESCRIPTION
1	2-19-15	GSP	UPDATED ITEM NUMBER

ESTIMATED BRIDGE QUANTITIES

FOOTNOTE	ITEM NO.	ITEM DESCRIPTION	UNIT	TOTALS	SUPERSTRUCTURE	ABUTMENT NO. 1	ABUTMENT NO. 2
(1)	202-04.02	REMOVAL OF STRUCTURES (PARTIAL, BRIDGE NO. 19-I0040-16.75)	LS.	0.5			
(2)	602-02.10	STRUCTURAL STEEL (SHIMS - CSXT BRIDGE NO. 19-I0040-16.75)	LS.	1			
(3)	604-03.04	PAVEMENT @ BRIDGE ENDS	S.Y.	437		218	219
(4)	604-03.09	CLASS D CONCRETE (BRIDGE DECK)	C.Y.	46	46		
(5)	604-04.02	APPLIED TEXTURE FINISH (EXISTING STRUCTURES)	S.Y.	1788	1624	82	82
(6)	604-04.41	THREE STAR STATE EMBLEM	EACH	4	2		
(7)	604-05.32	BRIDGE DECK GRINDING AND GROOVING	S.Y.	1679	1679		
(8)	604-07.01	RETAINING WALL NO. 1 (@ ABUTMENT NO. 1)	S.F.	6708		6708	
(9)	604-07.02	RETAINING WALL NO. 2 (@ ABUTMENT NO. 2)	S.F.	4360			4360
(10)	604-10.42	CONCRETE	C.F.	120		60	60
(11)	604-10.14	REMOVE EXISTING WEARING SURFACE	LS.	1			
(12)	604-10.18	REINFORCING STEEL (REPAIRS)	LB.	13509	13509		
(13)	604-10.54	CONCRETE REPAIRS	S.F.	10		5	5
(14)	615-02.17	PRESTRESSED CONCRETE BOX BEAM (36" X 36")	L.F.	1375	1375		
(15)	615-04.01	FULL DEPTH PRCST/PRSTRSSD TYPE I DECK PANELS	S.Y.	897	897		
(16)	615-04.10	NON-SHRINK GROUT	C.F.	1805	1805		
(17)	615-04.30	PRECAST BRIDGE ABUTMENT WALL	C.Y.	88		44	44
(18)	617-01	BRIDGE DECK SEALANT	S.Y.	1679	1679		
(19)	617-02	BRIDGE DECK CRACK SEALING	L.F.	11599	11599		
(20)	617-05	SEALANT (HMWM)	GAL	58	58		
(21)	620-05.01	CONC PARAPET SINGLE SLOPE (STD-1-1SS)	L.F.	168	168		
(22)	707-07.01	CHAIN-LINK FENCE (BRIDGES)	S.F.	835	835		
(23)	710-09.01	6" PERFORATED PIPE WITH VERTICAL DRAIN SYSTEM	L.F.	652			
(24)	711-02.06	REINFORCED CONCRETE MEDIAN BARRIER (STD-1-3SS)	L.F.	84	84		
(25)	714-01.02	STRUCTURAL LIGHTING (BRIDGE NO. 19I0040-16.75)	LS.	1			

FOOTNOTES

(1) ITEM INCLUDES REMOVAL OF EXISTING BRIDGE SUPERSTRUCTURE, PARTIAL REMOVAL OF ABUTMENTS AND WINGWALLS AND OTHER AREAS DESIGNATED IN THE PLANS. ALSO INCLUDES REMOVAL AND DISPOSAL OF WASTE FROM EXISTING BEAMS PRODUCED DUE TO ANY CUTTING REQUIRED FOR CHOSEN DEMOLITION METHOD. ITEM ALSO INCLUDES ANY BRACING THAT MAY BE REQUIRED TO SUPPORT PORTIONS OF THE SUPERSTRUCTURE AND SUBSTRUCTURE DURING THE EXECUTION OF THE PROJECT AND ALSO INCLUDES ALL FORMWORK REQUIRED SO THAT NO DEBRIS IS ALLOWED TO FALL ONTO THE RAILROAD BELOW. SEE GENERAL NOTES FOR ADDITIONAL INFORMATION AND REQUIREMENTS.

(2) ITEM INCLUDES STRUCTURAL STEEL FOR SHIM STACK PLATES BETWEEN RISER BLOCK AND ½" BEARINGS PADS. APPROX. WEIGHT OF STRUCTURAL STEEL IS 44,450 LBS.

(3) PAVEMENT AT BRIDGE ENDS SHALL BE PRECAST AND REINFORCED AS SHOWN IN THE PLANS. CLOSURE POUR JOINT MATERIAL SHALL BE PATCHING MORTAR SIMILAR TO SYSTEM USED ON SUPERSTRUCTURE UNITS AND IS INCLUDED IN UNIT PRICE FOR PAVEMENT @ BRIDGE ENDS. ALSO INCLUDED IS 2900 SY BIAXIAL GEOTEXTILE FOR REPLACEMENT OF SLEEPER SLAB.

(4) CLASS "D" CONCRETE IS TO BE USED FOR FOR CAST-IN-PLACE CANTILEVER AND MEDIAN PORTIONS OF SUPERSTRUCTURE.

(5) FOR NOTES AND LIMITS OF TEXTURE COATING, SEE DETAIL THIS SHEET.

(6) COST INCLUDES ALL INCIDENTALS, LABOR AND MATERIALS FOR THE COMPLETE INSTALLATION AND FINISHING OF THIS ITEM. LOCATION TO BE ON THE BACK OF THE BRIDGERAIL WITH THE EXACT LOCATION DESIGNATED BY THE ENGINEER IN THE FIELD.

(7) ITEM INCLUDES DIAMOND GRINDING OF THE DECK SURFACE TO REMOVE UNEVEN AREAS BETWEEN DECK PANELS AND AREAS OF EXCESSIVE NON-SHRINK GROUT SPILLAGE. GRINDING SHOULD BE LIMITED TO REMOVAL OF IDENTIFIED AREAS AND NOT OF EXCESSIVE AMOUNTS OF THE DECK. ANY DAMAGE TO THE DECK CAUSED BY GRINDING ACTIVITIES SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE. GROOVING OF THE DECK IS **NOT** REQUIRED.

(8) SEE RETAINING WALL 1 (ROADWAY SHEET 2P) FOR ADDITIONAL NOTES AND DETAILS.

(9) SEE RETAINING WALL 2 (ROADWAY SHEET 2Q) FOR ADDITIONAL NOTES AND DETAILS.

(10) THIS ITEM IS DESIGNATED FOR MODIFICATIONS TO THE RISER BLOCKS ON THE SUBSTRUCTURES. COST INCLUDES REMOVAL OF EXISTING BENT CAP TO A DEPTH OF 6" BELOW THE TOP SURFACE, 4X4 W2.9/W2.9 WWF AND CLASS A CONCRETE. SEE DRAWING BR-119-81 FOR RELATED DETAILS.

(11) AVERAGE DEPTH OF EXISTING ASPHALT IS 3½" ON SBL AND 4" ON NBL.

(12) MECHANICAL BAR SPLICERS: MUST BE ON THE APPROVED LIST MAINTAINED BY THE DIVISION OF MATERIALS AND TESTS. THE BAR SPLICER SHALL MEET AASHTO STANDARD SPECIFICATIONS FOR MECHANICAL CONNECTION. WHEN EPOXY COATING IS REQUIRED, THE EXPOSED THREADS SHALL BE REPAIRED AFTER SPLICING ACCORDING TO THE STANDARD SPECIFICATIONS, SECTION 907. THE COST OF FURNISHING THE BAR SPLICERS, EPOXY COATING INCLUDING ALL LABOR AND MATERIALS NECESSARY FOR COMPLETE INSTALLATION, SHALL BE INCLUDED IN THE UNIT PRICE BID FOR ITEM NO. 604-10.18, LBS.

(13) THIS ITEM IS DESIGNATED FOR ANY SURFACE SPALL OR CRACK REPAIRS ON THE EXISTING SUBSTRUCTURE UNITS. IT MAY BE INCREASED, DECREASED OR ELIMINATED BY THE ENGINEER. SEE DRAWING BR-119-81 FOR DETAILS.

(14) COST OF ELASTOMERIC PADS AND RUBBER BONDING CEMENT TO BE INCLUDED IN THE UNIT PRICE BID FOR ITEM NO. 615-02.17. FOR PAD DETAILS SEE DETAILS ON ABUTMENT END-BLOCK DETAIL SHEETS.

(15) INCLUDES ALL COSTS FOR SUPPLYING AND INSTALLING FULL DEPTH PRECAST PRESTRESSED CONCRETE DECK PANELS INCLUDING CONCRETE, STEEL BAR REINFORCING, PRESTRESSING STRANDS, SPLICE BARS, BACKER RODS, BITUMINOUS FIBERBOARD, HAUNCH FORMS, SPACERS, SHIMS & ADHESIVE AND LIFTING HARDWARE. QUANTITIES BASED ON PANEL CONCRETE SURFACE AREAS AND DIMENSIONS SHOWN IN DECK PANEL DRAWINGS. AVERAGE PANEL CONSIST OF 10 LB/SY PRESTRESSING STRAND AND 50 LB/SY REBAR.

(16) ITEM TO BE USED FOR CLOSURE POURS, FILLING VOIDS UNDER PRECAST END-BLOCKS AND OTHER GROUTING APPLICATIONS AS DESIGNATED IN THE PLANS. SEE GENERAL NOTES FOR ADDITIONAL INFORMATION.

(17) INCLUDES ALL COSTS FOR SUPPLYING AND INSTALLING PRECAST ABUTMENT WALL ELEMENTS INCLUDING CLASS "A" CONCRETE, STEEL BAR REINFORCING, BACKER RODS, BITUMINOUS FIBERBOARD, FORMS, SPACERS, SHIMS & ADHESIVE AND LIFTING HARDWARE. QUANTITIES ARE BASED ON PRECAST DIMENSIONS SHOWN IN THE CONTRACT DRAWINGS. AVERAGE REINFORCEMENT IS ESTIMATED AT 300 LBS/CY.

(18) BRIDGE DECK SEALANT TO BE APPLIED TO MANUFACTURE'S SPECIFICATIONS. SEE GENERAL NOTES FOR ADDITIONAL INFORMATION.

(19) INCLUDES ALL COSTS FOR INSTALLING BRIDGE DECK CRACK SEALER (HMWM) INCLUDING CRACK PREPARATION, CLEANING LABOR AND MISCELLANEOUS MATERIALS TO SEAL ALL TRANSVERSE AND LONGITUDINAL CONSTRUCTION JOINTS.

(20) INCLUDES ALL COSTS FOR FURNISHING THE SEALER (HMWM) FOR SEALING CRACKS. QUANTITY BASED ON APPLICATION RATE OF 200 L.F. PER GALLON. SEALER SHALL BE IN ACCORDANCE WITH SPECIAL PROVISION 604CR.

(21) ITEM INCLUDES LABOR AND MATERIALS TO CONSTRUCT BRIDGERAIL PER STANDARD STD-1-1SS AND TO FORM AND CAST ONE (1) LIGHT STANDARD AS SHOWN ON STD-8-2SS AND LOCATED ON DRAWING BR-119-44

(22) QUANTITIES BASED ON A 5' TALL FENCE MOUNTED ON TOP OF THE OUTSIDE BARRIER WALLS EXTENDING THE FULL LENGTH OF THE BRIDGE. SEE BRIDGE SHEET BR-119-47 FOR ADDITIONAL NOTES AND DETAILS.

(23) COST OF POLYETHYLENE SHEETING, WIRE FILTER BLOCKS FOR WEEP HOLES, AND OTHER MATERIALS NEEDED FOR INSTALLATION SHALL BE INCLUDED IN ITEM BID. ALSO SEE STD-10-1 FOR RELATED DETAILS.

(24) COST OF TEXTURE COATING MEDIAN BARRIER IS INCLUDED IN THE COST OF THE MEDIAN BARRIER RAIL. SEE GENERAL NOTES FOR ADDITIONAL INFORMATION

(25) SEE STD-8-2SS FOR LIGHT SUPPORT DETAILS (ONE REQUIRED) AND ITEMS INCLUDED IN PAY ITEM. SEE LIGHTING PLANS FOR ADDITIONAL DETAILS AND REQUIREMENTS.

(26) COST OF CORRUGATED METAL PIPES, DRILLING AND EPOXY GROUTING DOWEL BARS AND ANCHOR BOLTS FOR PAVEMENT AT BRIDGE ENDS AND SUPERSTRUCTURE UNITS AND OTHER INCIDENTAL ITEMS SHALL BE INCLUDED IN OTHER ITEMS BID ON.

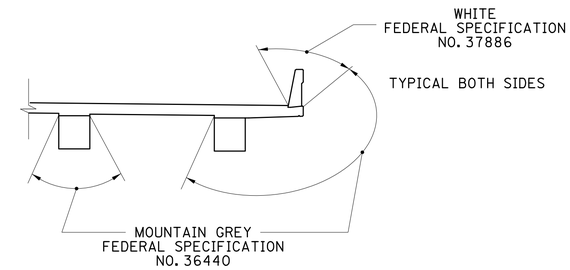

LIMITS OF TEXTURE FINISH

NOTE: IN ADDITION TO PORTIONS SHOWN IN THE TEXTURE FINISH SKETCH, THE ABUTMENTS / BENTS ARE TO RECEIVE AN APPLIED TEXTURE FINISH.

NOTE: BEFORE APPLYING ANY TEXTURE FINISH, ALL SURFACES SHALL BE COMPLETELY CLEANED OF ALL DEBRIS AND FOREIGN MATERIALS.

NOTE: THE CONTRACTOR SHALL USE CONTAINMENT SCREENS OR OTHER MEASURES TO PREVENT ANY TEXTURE COATING FROM ENTERING THE ENVIRONMENT. CONTAINMENT MEASURES SHALL BE APPROVED BY THE ENGINEER AND COST SHALL BE INCLUDED IN ITEMS BID NO.

NOTE: CONCRETE FINISHING SHALL BE IN ACCORDANCE WITH SECTION 604.22 OF THE TENNESSEE STANDARD SPECIFICATION. A CLASS I FINISH FOLLOWED BY AN APPLIED TEXTURE FINISH SHALL BE USED IN LIEU OF A CLASS II FINISH. THE COLOR OF THE FINISH SHALL BE SIMILAR TO MOUNTAIN GRAY, FEDERAL SPECIFICATION NO. 36440, FEDERAL COLOR STANDARD NO. 595A, EXCEPT THAT THE INSIDE FACE AND TOP OF THE PARAPET SHALL BE WHITE, FEDERAL SPECIFICATION NO. 37886. A COLOR SAMPLE SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL. THE APPLIED TEXTURE FINISH SHALL BE MEASURED AND PAID FOR UNDER ITEM 604-04.02.



BRIDGE NO. 2
STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
ESTIMATED
BRIDGE QUANTITIES
I-40
OVER
CSX RAILROAD
BR. NO. 19-I0040-16.75
DAVIDSON COUNTY
2015

BR-119-45

DESIGNED BY GRESHAM SMITH & PARTNERS DATE 2/09/2015
DRAWN BY R. PALMER DATE 1/2015
SUPERVISED BY T. KNIAZEWYCZ DATE 1/2015
CHECKED BY T. KNIAZEWYCZ DATE 2/2015

GS&P GRESHAM SMITH AND PARTNERS

knizet
Q:\2807115\b\Bridge B Clinton\bridge 1\8071b15b1BQ.sht
2/19/2015
PRF