TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2015	HSIP-250(7)	2A

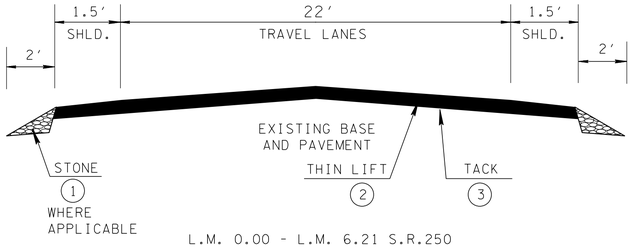

PAVING SCHEDULE

1	MINERAL AGGREGATE BASE 303-01 MINERAL AGGREGATE, TYPE A BASE, GRADING D
2	ASPHALT FOR THIN LIFT @ 85 LBS/S.Y. 411-03.12 ACS MIX (PG64-22) THIN LIFT D ASPHALT
3	TACK COAT @ 0.07 GAL./S.Y. 403-01 BITUMINOUS MATERIAL FOR TACK COAT (MICRO-SURFACING)

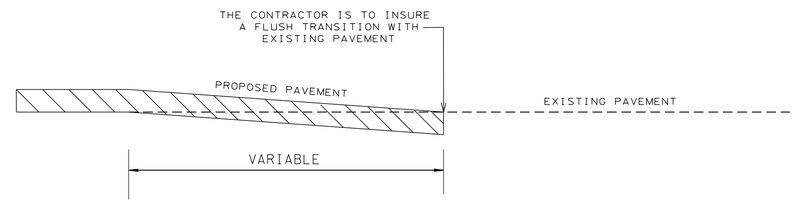

PAVEMENT DETAIL

(COST TO BE INCLUDED IN THE PRICE BID FOR THE PROPOSED SURFACE MIX)

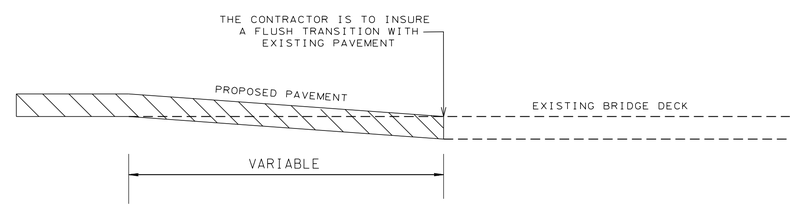

END OF BRIDGE DETAIL

(COST TO BE INCLUDED IN THE PRICE BID FOR THE PROPOSED SURFACE MIX)

GUARDRAIL

LOCATION LOG MILE TO LOG MILE	SIDE		ANCHOR TYPE 38 705-04.07 (EACH)	GUARDRAIL REMOVED 706-01 (L.F.)	REMARKS
	LT	RT			
3.096 TO 3.165	X	X	4	200	
4.050 TO 4.082		X	2	100	
4.185 TO 4.227	X		2	100	
4.195 TO 4.264		X	1	50	
4.911 TO 4.959	X		2	100	
4.911 TO 4.959		X	1	50	
			12	**600**	

THERE ARE NO UTILITY ADJUSTMENTS ON THIS PROJECT

BRIDGE NOTES

LOCATION	LENGTH (FT.)	RECOMMENDATION
L.M. 5.01	25'	PAVE WITH PLANS QUANTITY
L.M. 6.14	608'	LEAVE AS IS (EXCLUDE)

* SPECIAL PAVING NOTE *

ALL SHOULDERS WILL BE DEGRASSED / CLIPPED AND CLEANED OF ALL VEGETATION, GRASS, AND DEBRIS. SEE SPECIAL NOTES. ALL COST TO BE INCLUDED IN OTHER ITEMS OF WORK.

SEALED BY

02/27/2015

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTION

27-FEB-2015 09:08
\\JJ03WF01.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2015\DicksonSR250 RB\084958-01- 002A -TypicalSection.dgn