STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
BUREAU OF ENGINEERING

TENN.	YEAR	SHEET NO.
	2016	1
FED. AID PROJ. NO.	NH-I-75-1(139)	
STATE PROJ. NO.	06001-8180-44 54001-8182-44	
BRIDGE	06001-4180-04	

BRADLEY COUNTY

INTERSTATE 75

FROM NORTH OF HOOVER GAP RD OVERHEAD BRIDGES (LM 15.35)(MM 30.94)
TO McMINN COUNTY LINE (LM 19.31)(MM 34.90)

McMINN COUNTY

INTERSTATE 75

FROM BRADLEY COUNTY LINE (LM 0.00)(MM 34.90)
TO SOUTH OF BRIDGE OVER CR-50 (LM 4.03)(MM 38.93)

NIGHT WORK, BRIDGE DECK REPAIR, COLD PLANE, RESURFACING & PAVEMENT MARKINGS

STATE HIGHWAY NO. I-75 F.A.H.S. NO.

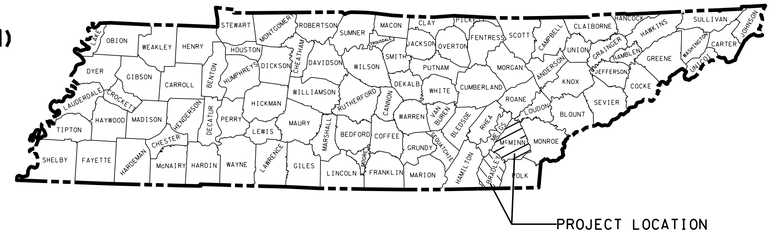

INDEX

DESCRIPTION	SHT.
TITLE SHEET	1
ESTIMATED QUANTITIES & TYPICAL SECTIONS	2 - 3
DETAILS & DROP OFF NOTES	4
GENERAL & SPECIAL NOTES	5
SPECIAL NOTES	6
BRIDGE DETAILS	B-1

STANDARD ROADWAY DRAWINGS

DWG. NO.	REV.	DESCRIPTION
ROADWAY DESIGN STANDARDS		
RD-A-1	12-18-99	STANDARD ABBREVIATIONS
RD-L-1	10-26-94	STANDARD LEGEND
TRAFFIC CONTROL APPURTENANCES		
T-FAB-1	05-27-97	FLASHING YELLOW ARROW BOARD
T-M-1	07-24-14	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS AND MARKING ABBREVIATIONS
T-M-3	07-24-14	MARKING STANDARDS FOR TRAFFIC ISLANDS, MEDIANS & PAVED SHOULDERS ON CONVENTIONAL ROADS
T-M-5	04-23-13	MARKING DETAILS FOR EXPRESSWAYS & FREEWAYS
T-M-6	06-22-12	MARKING DETAIL FOR EXPRESSWAY & FREEWAY INTERCHANGES
T-M-7	01-12-12	GORE MARKING DETAILS FOR EXPRESSWAY & FREEWAY INTERCHANGES
T-M-8	01-12-12	MARKING DETAILS FOR EXPRESSWAYS & FREEWAYS
T-M-15		ASPHALT SHOULDER RUMBLE STRIP INSTALLATION DETAILS FOR INTERSTATE AND ACCESS CONTROLLED ROUTES
T-PBR-1	06-30-09	INTERCONNECTED PORTABLE BARRIER RAI
T-PBR-2	11-01-11	DETAIL FOR VERTICAL PANELS AND FLEXIBLE DELINEATORS
T-WZ-10	04-02-12	ADVANCE ROAD WORK SIGNING ON HIGHWAYS AND FREEWAYS
T-WZ-21	03-15-11	LANE CLOSURE WITH LEFT HAND MERGE AND LANE SHIFT

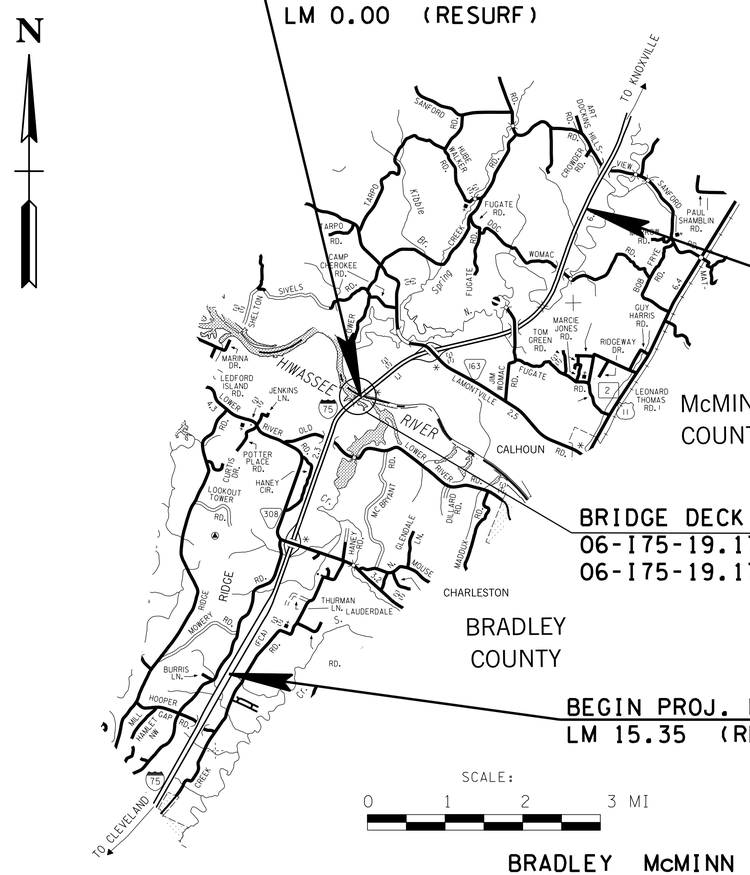

END PROJ. NO. 06001-8180-44
LM 19.35 (RESURF)

BEGIN PROJ. NO. 54001-8182-44
LM 0.00 (RESURF)

54001-8182-44
END PROJ. NO. NH-I-75-1(139)
LM 4.03 (RESURF)

BRIDGE DECK REPAIR PROJ. NO. 06001-4180-04
06-I75-19.17 NBL/HIWASSEE RIVER
06-I75-19.17 SBL/HIWASSEE RIVER

06001-8180-44
BEGIN PROJ. NO. NH-I-75-1(139)
LM 15.35 (RESURF)

	BRADLEY COUNTY	McMINN COUNTY	TOTALS	
PROJECT LENGTH	3.96	4.03	8.03	MILES
TOTAL LANE MILES RESURFACED	15.84	16.12	31.96	MILES

SEALED BY

GREGORY JACKSON TAYLOR
REGISTERED ENGINEER
No. 00105515
STATE OF TENNESSEE

APPROVED: Paul D. Degges
PAUL D. DEGGES, CHIEF ENGINEER

DATE:

APPROVED:
JOHN SCHROER, COMMISSIONER

NO EXCLUSIONS
NO EQUATIONS

BRADLEY TRAFFIC DATA	
AADT (2016)	43,360
ADL (FLEX)	4,075
ADL (RIGID)	6,178

McMINN TRAFFIC DATA	
AADT (2016)	41,210
ADL (FLEX)	4,122
ADL (RIGID)	6,249

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED:

DIVISION ADMINISTRATOR DATE

SPECIAL NOTES

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED JANUARY 1, 2015 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT ROAD MANAGER 1 GREG TAYLOR

DESIGNER DIANE EVITT CHECKED BY KEVIN CRISP

P.E. NO. 98023-4113-04

PIN NO. 104532.01

04-AUG-2015 06:13
\\JJ02WF01.tdot.state.tn.us\02Shared\Design County Folders\Design Resurfacing Folders\Resurf 2016\Interstates\2 Bradley-McMinn I-75_15.35-19.35_0.00-4.03\001_Bra-McM-I-75-Title.dgn