TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2016	NH-I-75-3(173)	3

I-75 ANDERSON CO.
01011-8158-44

(7) INCLUDES THE INSTALLATION AND MAINTENANCE OF A NEW SIGN PANEL, SHEETING AND SUPPORTS. QUANTITY INCLUDES THE FOLLOWING SIGNS AND OTHER SIGNS MAY BE REQUIRED AS DIRECTED BY THE TDOT OPERATIONS DISTRICT ENGINEER.

Signs (Construction) 712-06

No.	Description	Sign Code	Sign Size	Sq. Ft.
20	Advance Road Work	W20-1	4 x 4	320
12	Right Lane Closed	W20-5R	4 x 4	192
12	Left Lane Closed	W20-5L	4 x 4	192
4	Road Work Next 7 Miles	G20-1	4 x 2	32
12	Speed Limit	R2-1	4 x 5	240
80	Shoulder Drop Off	W8-9A	4 x 4	1280
4	Reduced Speed Ahead	R2-5A	4 x 5	80
4	Lane Reduction	W4-2	4 x 4	64
72	Uneven Lanes	W8-11	4 x 4	1152
8	Yield Ahead	W3-2	3 x 3	72
8	Be Prepared to Stop	W3-4	3 x 3	72
4	Exit	E5-1	2 x 1.5	12
8	Yield	R1-2	5 x 5 x 5	86.4
8	End Road Work	G20-2	4 x 2	64
4	Right Shift Arrow	W1-4BR	4 x 4	64
4	Left Shift Arrow	W1-4BL	4 x 4	64
2	Merge Now	SPECIAL SIGN	4 x 4	32
2	Record A Comment	TN-55A*	8 x 4	64
8	Grooved Pavement	TN-64**	4 x 4	128
			TOTAL:	**4210.4**

* LOCATE APPROX. 1000' BEYOND END OF ROAD WORK SIGNS. TO BE 96" X 48" (BLUE BACKGROUND WITH WHITE COPY) 0.100" SHEET ALUMINUM.

** LOCATE IN ADVANCE OF COLD PLANED SECTIONS AND ON ENTRANCE RAMP WITHIN THE COLD PLANING LIMITS. TO BE 48" X 48" ORANGE BACKGROUND WITH BLACK COPY.

(8) ITEM TO BE USED ONLY WHEN THE CONTRACTOR ESTABLISHES A REDUCED SPEED LIMIT WITHIN THE PROJECT CONSTRUCTION WORK ZONE LIMITS. ITEM INCLUDES SIGN FACE, SUPPORTS AND TWO (2) TYPE "B" FLASHERS PER THE STANDARD SPECIFICATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR TURNING ON THE TYPE "B" FLASHERS WHEN WORKERS ARE IN THE CONSTRUCTION WORK ZONE AND TURNING THEM OFF WHEN WORKERS ARE NO LONGER IN THE CONSTRUCTION WORK ZONE.

(9) INCLUDES REMOVAL OF EXISTING DELINEATORS.

(10) TO BE LOCATED AT END OF EXIT RAMP 128 LEFT SIDE, OR AS DIRECTED BY THE TDOT OPERATIONS DISTRICT ENGINEER.

(11) THE CONTRACTOR MAY ELECT TO SUBSTITUTE PREFORMED PLASTIC FOR THERMOPLASTIC. PREFORMED PLASTIC SHALL BE PAID FOR AT THE SAME UNIT PRICE AS BID FOR THERMOPLASTIC.

(12) TO BE USED FOR TEMPORARY PAVEMENT MARKING ON INTERMEDIATE LAYERS.

(13) FOR BRIDGE REPAIR DETAILS SEE SHEETS B1 AND B2.

(14) TO BE PLACED ON ALL EXIT RAMPS APPROX. 200' INTERSECTION. SEE STANDARD DRAWING T-M-9 AND DETAIL BELOW.

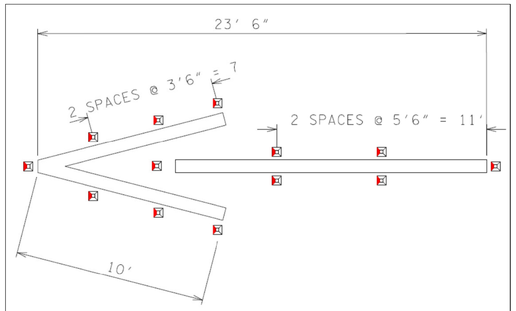

13 BI-DIRECTIONAL RED AND WHITE SPMS

WRONG WAY PAVEMENT ARROW WITH SNOWPLOWABLE PAVEMENT MARKERS TO BE USED ON SINGLE-LANE RAMPS ONLY

EXIT RAMPS NO. 128 (L.M. 10.61)
EXIT RAMPS NO. 129 (L.M. 11.10)

SEALED BY

08/07/2015

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

FOOTNOTES