


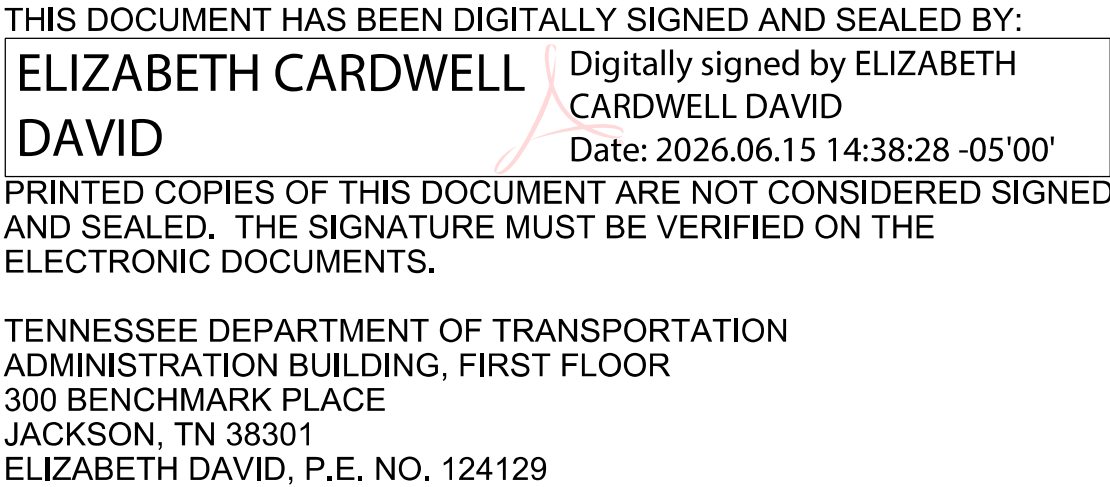

SHEET NAME	SHEET NO.
SIGNATURE SHEET	ROADWAY-SIGN4
ROADWAY INDEX, STANDARD ROADWAY DRAWINGS AND	
STANDARD TRAFFIC DESIGN DRAWINGS	1A
ESTIMATED ROADWAY QUANTITIES	2

YEAR	PROJECT NO.	SHEET NO.
2026	NH/HSIP-43(50)	ROADWAY-SIGN4

REV. 06/15/26: ADDED SHEET

**STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION**

**SIGNATURE
SHEET**

15-JUN-2026 13:33
\\TDOT04NAS002.tdot.state.tn.us\04Shared\Design\DESIGN\RESURF REG4 PROJ\GIBSON\SR43\LM14-25\LM24-26 (132954-00)\SHEETS\SHEET 1A - ROADWAY INDEX.dgn

ROADWAY INDEX

SHEET NAME	SHEET NO.
SIGNATURE SHEET	ROADWAY-SIGN1
SIGNATURE SHEET	ROADWAY-SIGN2
SIGNATURE SHEET	ROADWAY-SIGN3
SIGNATURE SHEET	ROADWAY-SIGN4
TITLE SHEET	1
ROADWAY INDEX, STANDARD ROADWAY DRAWINGS AND STANDARD TRAFFIC DESIGN DRAWINGS	1A
ESTIMATED ROADWAY QUANTITIES	2
TYPICAL SECTIONS AND PAVEMENT SCHEDULE	2B – 2B1
GENERAL NOTES.....	2C
SPECIAL NOTES.....	2D
ENVIRONMENTAL NOTES.....	2E – 2E1
TABULATED QUANTITIES	2F – 2F1
UTILITIES NOTES AND UTILITY OWNERS	3
PAVEMENT EDGE DROP-OFF NOTES FOR TRAFFIC CONTROL.....	T1

NOTES:

NO UTILITY SHEETS INCLUDED IN THIS PROJECT.
NO PROJECT COMMITMENTS INCLUDED IN THIS SET OF PLANS.

STANDARD ROADWAY DRAWINGS

DWG.	REV.	DESCRIPTION
10-100.00 STANDARD ROADWAY TITLE SHEET, ABBREVIATIONS AND LEGENDS		
RD-A-1	02-20-20	STANDARD ABBREVIATIONS A THROUGH L
RD-A-2		STANDARD ABBREVIATIONS M THROUGH Z
RD-L-1	01-30-26	STANDARD LEGEND
RD-L-1A		STANDARD LEGEND
10-108.00 SAFETY DESIGN AND GUARDRAILS		
S-GRS-4	05-04-22	SPECIAL CASE GUARDRAIL HEIGHT TRANSITION DETAIL
S-GRT-2	06-28-19	TYPE 38 GUARDRAIL END TERMINAL

STANDARD TRAFFIC DESIGN DRAWINGS

DWG.	REV.	DESCRIPTION
10-200.00 SIGN		
T-S-19	07-30-25	STANDARD STEEL SIGN SUPPORTS
T-S-20	07-30-25	SIGN DETAILS
T-S-23A	07-30-25	MULTI-DIRECTIONAL SLIP BASE BREAKAWAY P-POST SIGN SUPPORT
T-S-26	07-30-25	SIGNING PLAN FOR RESTRICTED CROSSING & J-TURN INTERSECTIONS
10-204.00 DESIGN – TRAFFIC CONTROL		
T-M-1	01-24-25	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS AND MARKING ABBREVIATIONS
T-M-2	01-24-25	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS
T-M-3	01-24-25	MARKING STANDARDS FOR TRAFFIC ISLANDS, PAVED SHOULDERS AND MEDIANS FOR CONVENTIONAL ROADS
T-M-4	01-24-25	STANDARD INTERSECTION PAVEMENT MARKINGS
T-M-19	01-24-25	PAVEMENT MARKING DETAILS FOR RESTRICTED CROSSING & J-TURN INTERSECTION
T-WZ-10	03-26-25	ADVANCE ROAD WORK SIGNING ON HIGHWAYS AND FREEWAYS
T-WZ-11	03-26-25	ONE LANE CLOSURE DETAIL ON DIVIDED HIGHWAYS
T-WZ-40	03-26-25	RIGHT LANE CLOSURES AT NEAR SIDE OF INTERSECTIONS
T-WZ-41	03-26-25	LEFT LANE CLOSURES AT NEAR SIDE OF INTERSECTIONS
T-WZ-FAB1	03-26-25	FLASHING YELLOW ARROW BOARD

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2026	NH/HSIP-43(50)	1A

REV. 03/27/26: ADDED ROADWAY-SIGN2 TO ROADWAY INDEX

REV. 06/02/26: ADDED ROADWAY-SIGN3. REVISED QUANTITY OF TYPICAL SHEETS. ADDED SECTION NUMBERS TO STANDARD SUBHEADINGS. REORDERED THE PVMT. MARKINGS AND WORK ZONES SECTIONS

REV. 06/15/26: ADDED ROADWAY-SIGN4 TO ROADWAY INDEX

SEALED BY

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

ROADWAY INDEX, STANDARD
ROADWAY DRAWINGS AND
STANDARD TRAFFIC
DESIGN DRAWINGS

(1)
(2)
(3)
(3)
(4)
(5)
(6)
(7)
(5)(8)(9)(10)
(11)
(12)
(12)
(12)
(13)
(14)(15)
(16)
(16)(17)
(16)(17)
(16)(17)
(16)(17)
(18)
(19)(20)
(19)(20)(21)
(19)(20)
(19)(20)(22)
(19)(20)(23)(24)
(19)(20)
(19)(20)(24)
(25)
(19)

ESTIMATED ROADWAY QUANTITIES					
ITEM NO.	DESCRIPTION	UNIT	QUANTITY 27S043-F8-002	QUANTITY 27S043-F3-002	TOTAL QUANTITY
202-03.01	REMOVAL OF ASPHALT PAVEMENT	S.Y.	707		707
203-06	WATER	M.G.	1		1
208-01.05	BROOMING & DEGRASSING SHOULDERS	L.M.	37.8		37.8
303-02	MINERAL AGGREGATE, TYPE B BASE, GRADING (C OR D)	TON	99		99
307-01.01	ASPHALT CONCRETE MIX (PG64-22) (BPMB-HM) GRADING A	TON	66		66
307-01.08	ASPHALT CONCRETE MIX (PG64-22) (BPMB-HM) GRADING B-M2	TON	127		127
403-01.10	HIGH PERFORMANCE FOG SEALS	S.Y.	113046		113046
403-02.01	TRACKLESS TACK COAT	TON	150		150
411-01.10	ACS MIX(PG64-22) GRADING D	TON	22868		22868
411-04	CRACK SEALANT	LB.	8564		8564
415-01.01	COLD PLANING BITUMINOUS PAVEMENT	TON	22652		22652
705-02.10	GUARDRAIL TRANSITION 27IN TO 31IN	EACH		31	31
705-06.20	TANGENT ENERGY ABSORBING TERM MASH TL-3	EACH		31	31
706-01	GUARDRAIL REMOVED	L.F.		1550	1550
712-01	TRAFFIC CONTROL	LS	1		1
712-04.01	FLEXIBLE DRUMS (CHANNELIZING)	EACH	60		60
712-06	SIGNS (CONSTRUCTION)	S.F.	6172		6172
712-08.03	ARROW BOARD (TYPE C)	EACH	4		4
713-15.01	REMOVAL OF EXISTING SIGN POST	EACH		4	4
713-16.20	SIGNS (STOP R1-1)	EACH		2	2
713-16.21	SIGNS (DO NOT ENTER R5-1)	EACH		2	2
713-16.22	SIGNS (DO NOT ENTER R5-1, ONE WAY R6-1L)	EACH		2	2
713-16.23	SIGNS (YIELD R1-2, NO RIGHT TURN R3-1)	EACH		2	2
716-01.21	SNOWPLOWABLE RAISED PAVEMENT MARKERS (BI-DIR) (1 COLOR)	EACH	222		222
716-01.22	SNOWPLOWABLE RAISED PAVMENT MARKERS (MONO-DIR)(1 COLOR)	EACH	195		195
716-01.23	SNOWPLOWABLE RAISED PAVEMENT MARKERS (BI-DIR)(2 COLOR)	EACH	1223		1223
716-01.30	REMOVAL OF SNOWPLOWABLE REFLECTIVE MARKER	EACH	1490		1490
716-02.04	PLASTIC PAVEMENT MARKING(CHANNELIZATION STRIPING)	S.Y.	117		117
716-02.05	PLASTIC PAVEMENT MARKING (STOP LINE)	L.F.	550	50	600
716-02.06	PLASTIC PAVEMENT MARKING (TURN LANE ARROW)	EACH	24		24
716-02.08	PLASTIC PAVEMENT MARKING (8" DOTTED LINE)	L.F.		1497	1497
716-02.11	PLASTIC PAVEMENT MARKING (6" DOTTED LINE)	L.F.	95	466	561
716-02.12	PLASTIC PAVEMENT MARKING (8IN LINE)	L.M.	0.5		0.5
716-02.15	PLASTIC PAVEMENT MARKING (U TURN ARROW)	EACH	4		4
716-05.20	PAINTED PAVEMENT MARKING (6" LINE)	L.M.	44		44
716-12.02	ENHANCED FLATLINE THERMO PVMT MRKNG (6IN LINE)	L.M.	44		44
717-01	MOBILIZATION	LS	1		1

FOOTNOTES	
(1)	INCLUDES 147 S.Y. FOR FULL-DEPTH ASPHALT REPAIR AND 560 S.Y. FOR PARTIAL-DEPTH ASPHALT REPAIR.
(2)	INCLUDES THE COST OF REMOVING DEBRIS AND SWEEPING SHOULDERS PRIOR TO WORK. SEE SHEET 2C, FINAL PAVEMENT MARKING NOTE 6 FOR MORE INFORMATION.
(3)	ITEM TO BE USED FOR FULL-DEPTH ASPHALT REPAIR AREAS ONLY.
(4)	ITEM TO BE USED FOR PARTIAL-DEPTH ASPHALT REPAIR AREAS ONLY.
(5)	ITEM TO BE USED FOR TREATMENT OF OUTSIDE SHOULDERS ONLY.
(6)	INCLUDES 12 TONS FOR USE AT BULBOUTS, MEDIAN CROSSTOVERS, SIDE ROADS AND ASPHALT REPAIR.
(7)	INCLUDES 1840 TONS FOR USE AT BULBOUTS, MEDIAN CROSSTOVERS AND SIDE ROADS.
(8)	THE CONTRACTOR SHALL BE REQUIRED TO CLEAN THE AREA TO RECEIVE TREATMENT PRIOR TO THE APPLICATION OF THE PRODUCT. THIS SHALL BE ACCOMPLISHED BY A METHOD APPROVED BY THE TDOT PROJECT ENGINEER. THE COST OF CLEANING THE TREATMENT AREA SHALL NOT BE PAID FOR DIRECTLY BUT WILL BE INCLUDED IN THE COST OF OTHER ITEMS BID.
(9)	QUANTITIES SHOWN ARE FOR BID PURPOSES ONLY AND ACTUAL FIELD QUANTITIES SHALL BE USED FOR BASIS OF PAYMENT.
(10)	DO NOT APPLY TO FATIGUE CRACKING OF ANY SEGMENT.
(11)	INCLUDES 1822 TONS FOR ADDITIONAL MILLING AT BULBOUTS, MEDIAN CROSSTOVERS & SIDE ROADS.
(12)	SEE PROPOSED GUARDRAIL (RESURFACING) BLOCK ON SHEET 2F FOR DETAILS.
(13)	TO BE USED FOR TRAFFIC CONTROL TRANSITION TAPERS ONLY.
(14)	SEE TRAFFIC CONTROL SIGN TABULATION (RESURFACING) BLOCK ON SHEET 2F1 FOR DETAILS.
(15)	ALL SIGNING SHALL BE IN ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD).
(16)	SEE PROPOSED SIGNS AND REMOVAL OF SIGNS BLOCK ON SHEET 2F FOR DETAILS.
(17)	SIGN FACE, SUPPORT, INSTALLATION AND HARDWARE ARE TO BE INCLUDED IN THIS ITEM.
(18)	TO BE USED AS DIRECTED BY THE TDOT ENGINEER.
(19)	FOR FINAL PAVEMENT MARKING ONLY.
(20)	THE CONTRACTOR MAY ELECT TO SUBSTITUTE PREFORMED PLASTIC FOR THERMOPLASTIC. PREFORMED PLASTIC SHALL BE PAID FOR AT THE SAME UNIT PRICE AS BID FOR THERMOPLASTIC.
(21)	ALL STOP BARS ON SIDE STREETS WILL BE RETRACED AS DIRECTED BY THE ENGINEER.
(22)	INCLUDES 125 L.F. FOR USE AT THE J-TURN LOCATION. SEE STD. DRAWING T-M-19 FOR DETAILS.
(23)	TO BE USED AS EDGE LINE MARKINGS AT MEDIAN CROSSTOVER LOCATIONS.
(24)	TO BE USED AT THE J-TURN LOCATION. SEE STD. DRAWING T-M-19 FOR DETAILS.
(25)	FOR TEMPORARY PAVEMENT MARKING ONLY.

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2026	NH/HSIP-43(50)	2

REV. 03/27/26 : REMOVED ITEMS 415-01.01 & 712-06 FROM GENERAL. UPDATED ITEMS 415-01.01 & 712-06 WITHIN ALT AA1. ADDED ITEM 712-06 AND UPDATED ITEM 415-01.01 IN ALT AA2. REMOVED CRACK SEAL FOOTNOTE AND RENUMBERED

REV. 06/02/26: REMOVED ALTERNATIVE SECTIONS AA1 AND AA2. REMOVED ITEMS 414-04.03, 414-04.04, 716-08.04, 716-08.06, 716-08.19 AND 716-08.20. ADDED ITEMS 202-03.01, 203-06, 303-02, 307-01.01, 307-01.08 AND 411-01.10. REVISED ITEMS 403-01.10 AND 411-04. UPDATED AND REORDERED FOOTNOTES.

REV. 06/15/26: REVISED QUANTITY AND UPDATED FOOTNOTE FOR ITEM 415-01.01

SEALED BY



STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

ESTIMATED
ROADWAY
QUANTITIES