


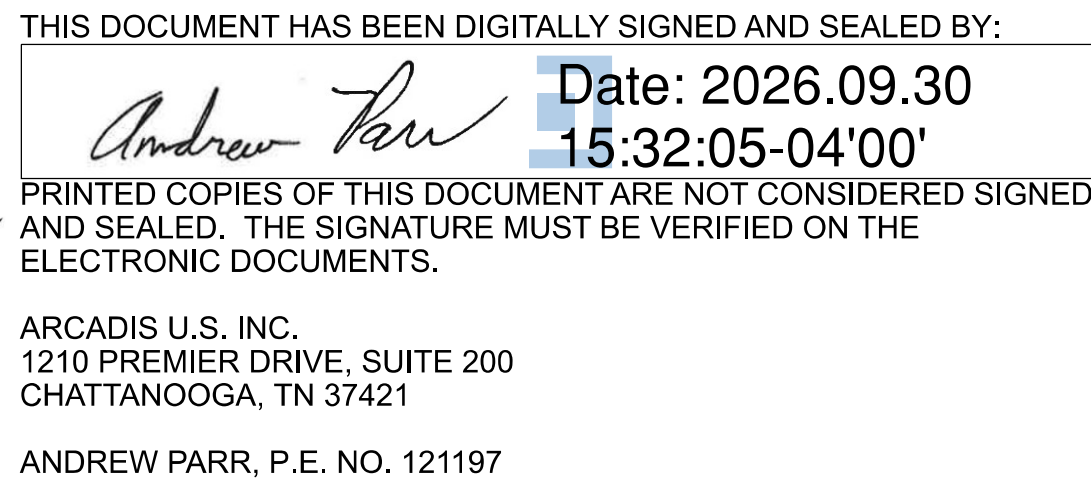

SHEET NAME	SHEET NO.
SIGNATURE SHEET	ROADWAY-SIGN2
ROADWAY INDEX, STANDARD ROADWAY DRAWINGS, AND STANDARD TRAFFIC DESIGN DRAWINGS	1A
ESTIMATED ROADWAY QUANTITIES	2

RESURFACING INDEX OF SHEETS

SHEET NAME	SHEET NO.
SIGNATURE SHEET	ROADWAY-SIGN1
SIGNATURE SHEET	ROADWAY-SIGN2
TITLE SHEET	1
ROADWAY INDEX, STANDARD ROADWAY DRAWINGS, AND	
STANDARD TRAFFIC DESIGN DRAWINGS	1A
ESTIMATED ROADWAY QUANTITIES	2
TYPICAL SECTIONS AND PAVEMENT SCHEDULE	2B
GENERAL NOTES	2C
SPECIAL NOTES	2D
ENVIRONMENTAL NOTES	2E
EROSION PREVENTION AND SEDIMENT CONTROL NOTES	2E1
TABULATED QUANTITIES	2F
UTILITY NOTES AND UTILITY OWNERS	3
TRAFFIC CONTROL PLANS	T1 – T6G
NO UTILITY SHEETS ARE INCLUDED IN THIS SET OF PLANS.	
NO PROJECT COMMITMENTS SHEET INCLUDED IN THIS PLAN SET.	

STANDARD ROADWAY DRAWINGS

DWG.	REV.	DESCRIPTION
STANDARD ROADWAY TITLE SHEET, ABBREVIATIONS, AND LEGENDS		
RD-A-1	02-20-20	STANDARD ABBREVIATIONS A THROUGH L
RD-A-2		STANDARD ABBREVIATIONS M THROUGH Z
RD-L-1	01-30-26	STANDARD LEGEND
RD-L-1A		STANDARD LEGEND
ROADWAY, PAVEMENT APPURTENANCES, AND FENCES		
RP-J-1	05-01-20	PORTLAND CEMENT CONCRETE PAVEMENT JOINT TYPES AND SPACING
RP-J-3	05-01-20	PORTLAND CEMENT CONCRETE PAVEMENT JOINT TYPES AND SPACING
RP-J-9	05-01-20	CONTRACTION AND CONSTRUCTION JOINTS FOR CONCRETE PAVEMENT
RP-J-15	05-01-20	LONGITUDINAL CONTRACTION AND CONSTRUCTION JOINTS
RP-J-17	05-01-20	DOWEL ASSEMBLY DEVICES
RP-J-18	01-28-22	DOWEL ASSEMBLY DEVICES
RP-J-19	05-01-20	DOWELL ASSEMBLY DEVICES
RP-J-23	01-28-22	CONCRETE PAVEMENT REPAIR DETAILS
RP-J-25	05-01-20	CONCRETE PAVEMENT JOINT REPAIR DETAILS
SAFETY DESIGN AND GUARDRAILS		
S-CC-1	10-01-24	CRASH CUSHION

STANDARD TRAFFIC DESIGN DRAWINGS

DWG.	REV.	DESCRIPTION
DESIGN - TRAFFIC CONTROL		
T-M-5	01-24-25	MARKING DETAIL FOR FREEWAYS
T-M-6	01-24-25	MARKING DETAIL FOR EXPRESSWAY AND FREEWAY INTERCHANGES
T-M-7	01-24-25	GORE MARKING DETAILS FOR EXPRESSWAY & FREEWAY INTERCHANGES
T-M-8	01-24-25	MARKING DETAILS FOR EXPRESSWAYS & FREEWAYS
T-WZ-10	03-26-25	ADVANCE ROAD WORK SIGNING ON HIGHWAYS AND FREEWAYS
T-WZ-11	03-26-25	ONE LANE CLOSURE DETAIL ON DIVIDED HIGHWAYS
T-WZ-16	03-26-25	LANE SHIFT FOR DIVIDED HIGHWAYS AND FREEWAYS
T-WZ-18	03-26-25	SHOULDER CLOSURE DETAIL FOR FREEWAYS AND DIVIDED HIGHWAYS
T-WZ-60	03-26-25	FREEWAY RESURFACING SIGNING LAYOUT
T-WZ-64	03-26-25	WORK ZONE IN THE VICINITY OF AN EXIT
T-WZ-FAB1	03-26-25	FLASHING YELLOW ARROW BOARD
T-WZ-PBR1	03-26-25	INTERCONNECTED PORTABLE BARRIER RAIL
T-WZ-PBR2	03-26-25	DETAILS FOR WORK ZONE CHANNELIZATION DEVICES
T-WZ-PCB1	03-26-25	10 FOOT PORTABLE CONCRETE BARRIER RAIL
T-WZ-PCB2	03-26-25	20 FOOT PORTABLE CONCRETE BARRIER RAIL
T-WZ-PCB2A	03-26-25	20 FOOT PORTABLE CONCRETE BARRIER RAIL STIFFENER TUBE
T-WZ-PCB3	03-26-25	PORTABLE CONCRETE BARRIER RAIL DETAILS
T-WZ-PCB4	07-22-25	PORTABLE CONCRETE BARRIER RAIL ANCHOR PIN DETAILS

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2026	471075-S3-003	1A

REV. 09/30/26 : ADDED SHEET ROADWAY-SIGN2 TO ROADWAY INDEX.

SEALED BY



STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

ROADWAY INDEX,
STANDARD ROADWAY
DRAWINGS, AND
STANDARD TRAFFIC
DESIGN DRAWINGS


TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF	2026	471075-S3-003	2

REV. 09/30/26 : REMOVED ITEM NO. 716-05.20.
REVISED QUANTITY FOR ITEM NO. 716-12.02.
REPLACED ITEM NO. 716-05.02 WITH ITEM
NO. 712-09.02. REVISED FOOTNOTE NO. (5).

ESTIMATED ROADWAY QUANTITIES			
ITEM NO.	DESCRIPTION	UNIT	QUANTITY
			471075-S3-003
(1)	208-01.05 BROOMING & DEGRASSING SHOULDERS	L.M.	1
	403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)	TON	2
	411-03.10 ACS MIX(PG76-22) GRADING D	TON	164
	415-01.01 COLD PLANING BITUMINOUS PAVEMENT	TON	162
(2)(3)(4)(5)	502-03.25 FULL DEPTH PCC PAVEMENT REPAIR HIGH EARLY	C.Y.	130
(4)	502-04.01 SAWING CONCRETE PAVEMENT (FULL DEPTH)	L.F.	1114
(4)	502-04.02 LOAD TRANSFER DOWELS	EACH	402
(4)	502-04.03 TRANSVERSE TIE-BARS	EACH	242
(6)(7)	502-08.02 RESEALING JOINTS (SILICONE SEALANT)	L.F.	875
(6)(7)	502-08.03 SEALING SHOULDER JOINTS	L.F.	285
(6)	502-25 SAWING CONCRETE JOINTS	L.F.	120
(8)(9)	503-01 GRINDING CONCRETE PAVEMENT	S.Y.	4224
	712-01 TRAFFIC CONTROL	LS	1
(10)(11)	712-02.02 INTERCONNECTED PORTABLE BARRIER RAIL	L.F.	3488
(10)(11)	712-02.36 REMOVE AND RELOCATE PORTABLE BARRIER RAIL	L.F.	3488
(11)(12)	712-02.60 TEMPORARY WORK ZONE CRASH CUSHION (MASH TL-3)	EACH	2
(10)	712-04.01 FLEXIBLE DRUMS (CHANNELIZING)	EACH	488
(10)(11)	712-04.50 Barrier Rail Delineator	EACH	31
(10)	712-05.01 WARNING LIGHTS (TYPE A)	EACH	244
(13)	712-06 SIGNS (CONSTRUCTION)	S.F.	1465
	712-08.03 ARROW BOARD (TYPE C)	EACH	2
(14)	712-09.02 Removable Pavement Marking (8" Barrier Line)	L.F.	6281
	713-16.01 CHANGEABLE MESSAGE SIGN UNIT	EACH	2
(15)	716-12.02 ENHANCED FLATLINE THERMO PVMT MRKNG (6IN LINE)	L.M.	1
	717-01 MOBILIZATION	LS	1

FOOTNOTES	
(1)	INCLUDES THE COST OF REMOVING DEBRIS AND SWEEPING SHOULDERS PRIOR TO WORK. SEE SHEET NO. 2C, NOTE (6) FOR MORE INFORMATION.
(2)	INCLUDES ALL COST ASSOCIATED WITH REMOVAL AND PROPER DISPOSAL OF EXISTING CONCRETE PAVEMENT, PLACEMENT OF NEW PAVEMENT, AND SAWING NEW JOINTS.
(3)	QUANTITY CALCULATED USING A 10" CONCRETE SLAB THICKNESS.
(4)	SEE SHEET 2F FOR CONCRETE SLAB REPAIR TABULATION.
(5)	NO ADDITIONAL BASE MATERIAL SHALL BE ADDED AND ALL LOOSE BASE MATERIAL NOT RECOMPACTABLE SHALL BE REMOVED PRIOR TO PLACEMENT OF THE NEW CONCRETE SLAB. THE CONCRETE SLAB SHALL BE PLACED TO THE FULL DEPTH OF THE MATERIAL REMOVED.
(6)	SEE SHEET 2F FOR TABULATION.
(7)	INCLUDES THE COST OF ALL CLEANING AND PREPARATION OF JOINTS PRIOR TO SEALANT APPLICATION
(8)	DEBRIS RESULTING FROM GRINDING SHALL BECOME PROPERTY OF THE CONTRACTOR AND SHALL BE PROPERLY REMOVED FROM PROJECT SITE. ITEM INCLUDES ALL COST ASSOCIATED WITH REMOVAL AND PROPER DISPOSAL OF DEBRIS.
(9)	INCLUDES THE COST OF REMOVAL OF EXISTING AND TEMPORARY PAVEMENT MARKINGS WITHIN THE LIMITS OF APPLICATION.
(10)	QUANTITIES MAY BE INCREASED OR DECREASED BY THE TDOT OPERATIONS DISTRICT ENGINEER.
(11)	TO BE USED AT LANE CLOSURES FOR FULL DEPTH PCC REPAIR. SEE TRAFFIC CONTROL PLANS, T-SERIES SHEETS, FOR MORE INFORMATION.
(12)	THIS ITEM SHALL BE A PORTABLE ENERGY ABSORBING TERMINAL MEETING THE REQUIREMENTS OF AASHTO MASH FOR TEST LEVEL 3. THE PAY ITEM WILL INCLUDE FURNISHING AND INSTALLING ALL COMPONENTS AS SHOWN ON THE MANUFACTURER'S DRAWING.
(13)	SEE SHEET 2F FOR SIGN TABULATED QUANTITIES. THE CONSTRUCTION SIGNING IS TO BE A MINIMUM. OTHER SIGNS MAY BE REQUIRED AS DIRECTED BY THE TDOT OPERATIONS DISTRICT ENGINEER
(14)	TO BE USED FOR CONCRETE REPAIR AREAS ONLY. NO PAYMENT WILL BE MADE FOR TEMPORARY STRIPING ON FINAL GRINDED SURFACE DUE THE CONTRACTOR'S METHODS OF CONSTRUCTION.
(15)	THE CONTRACTOR SHALL USE THE EXTRUDED OR RIBBON METHOD FOR APPLICATION.

THERE ARE NO GUARDRAIL ADJUSTMENTS WITHIN THE PROJECT LIMITS.
THERE ARE NO UTILITY ADJUSTMENTS ON THIS PROJECT.

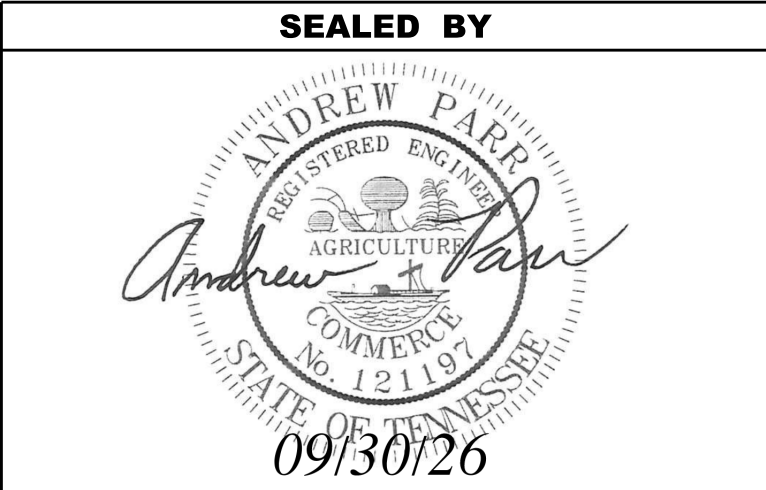

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

ESTIMATED
ROADWAY
QUANTITIES