
TEMPORARY SEDIMENT TRAP WITH TEMPORARY SILT SCREEN CHECK DAM

(ITEM NOS. 209M05 & 209M10.20 TO 740M10.03)

- ☐ REV. 11-1-95: CHANGED TO METRIC. REV. 5-27-01: CHANGED ITEM NOS. 209M10.01 THROUGH 209M10.19 TO 209M10.20.
 - REV. 9-5-01: CORRECTED NOTE REGARDING GEOTEXTILE FABRIC IN SECTION B-R.
 - REV. 12-18-02: CHANGED GENERAL NOTE ().
 - REV. 1-22-03: CORRECTED GENERAL NOTE (B). ADDED ADDITIONAL GEOTEXTILE FABRIC TO PROFILE VIEW.

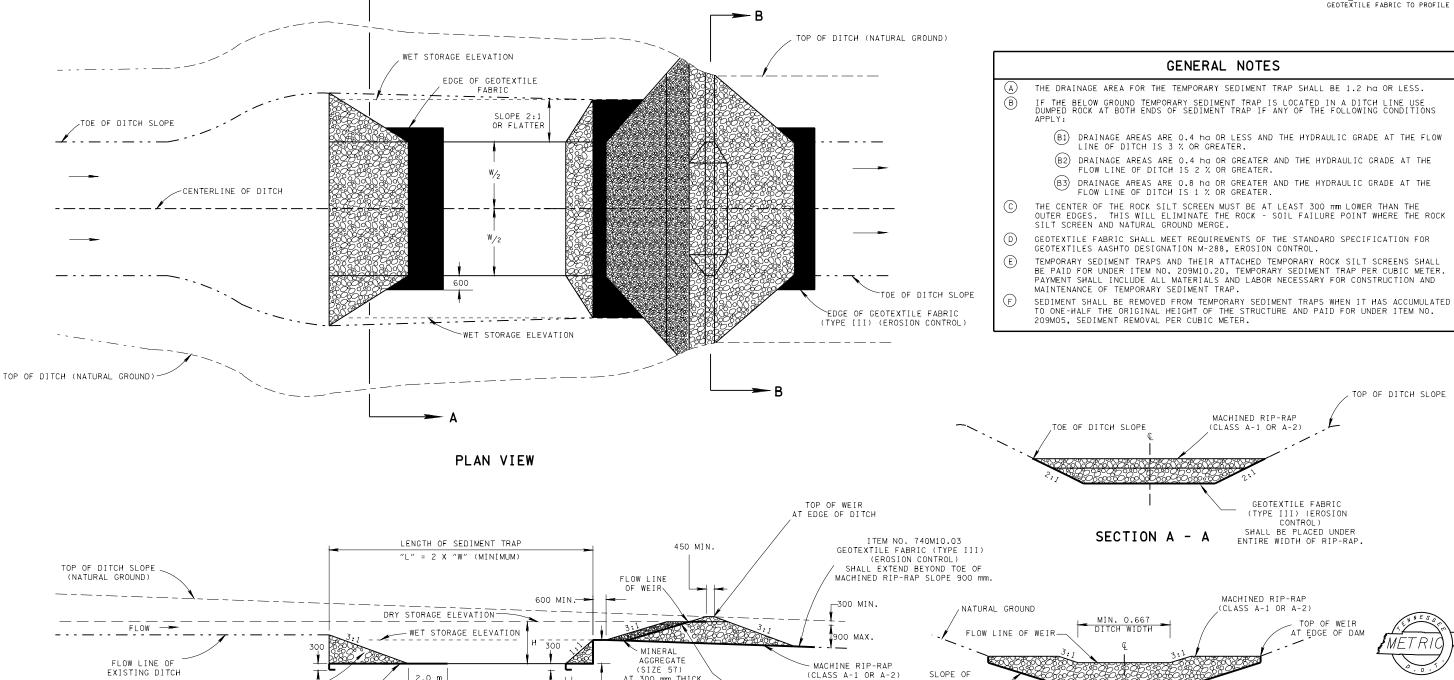

EROSION CONTROL PLAN LEGEND:

300

MACHINED RIP-RAP

(SEE GENERAL NOTE (B) .)

GEOTEXTILE FABRIC (TYPE III)

(EROSION CONTROL) SHALL BE EXTEND BEYOND TOE OF

MACHINED RIP-RAP 2.0 m.



PROFILE VIEW

TEMPORARY SEDIMENT TRAP WITH TEMPORARY SILT SCREEN CHECK DAM

ITEM NO. 740M10.03

GEOTEXTILE FABRIC (TYPE III) (EROSION CONTROL)
SHALL BE PLACED BETWEEN MINERAL AGGREGATE LAYER

AND RIP-RAP LAYER AND BETWEEN MINERAL AGGREGATE

AND NATURAL GROUND, THERE SHOULD BE TWO LAYERS OF FABRICATE IN THIS AREA.

PROPOSED DITCH

AT 300 mm THICK

600 MIN.

300

SHALL BE PLACED UNDER MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

GEOTEXTILE FABRIC

(TYPE III) (EROSION

CONTROL)

ENTIRE WIDTH OF

RIP-RAP

DITCH WIDTH AT BASE OF CHECK DAM

SECTION B - B

STATE OF TENNESSEE

ALL UNITS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.

DEPARTMENT OF TRANSPORTATION TEMPORARY SEDIMENT

TRAP WITH TEMPORARY SILT SCREEN CHECK DAM

11-1-95 | ECM-STR-7