



TYPE	YEAR	PROJECT NO.	SHEET NO.
			2

- ① ADTS OVER 400 AND DESIGN SPEEDS OF 50 MILES PER HOUR AND GREATER SHALL REQUIRE 6:1 SLOPES.
6:1 Slope Require A 21' Ditch Width And A Depth of 3'-6".
4:1 Slope Require A 12' Ditch Width And A Depth of 3'-0".

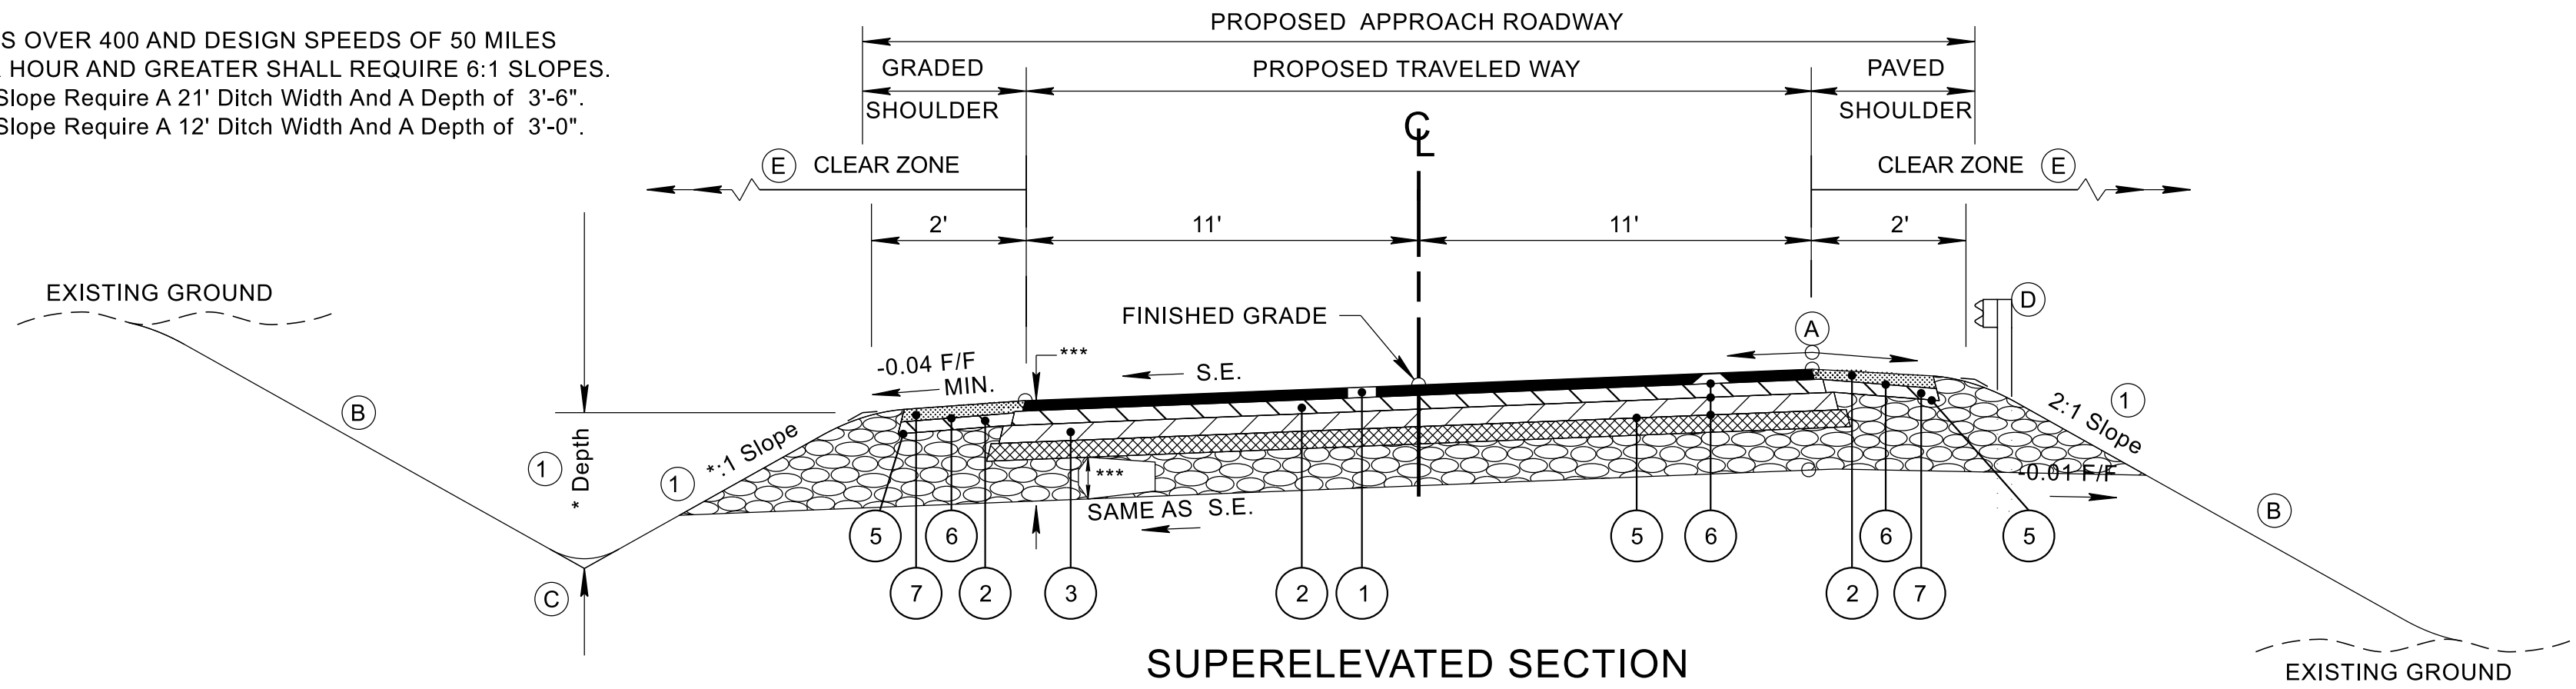

**SUPERELEVATED SECTION
(ROADWAY NAME)**

(BASED ON STD. DWG. RD11-TS-2)
FROM STA. 102+00.00 TO STA. 109+30.00
FROM STA. 110+20.00 TO STA. 118+10.00

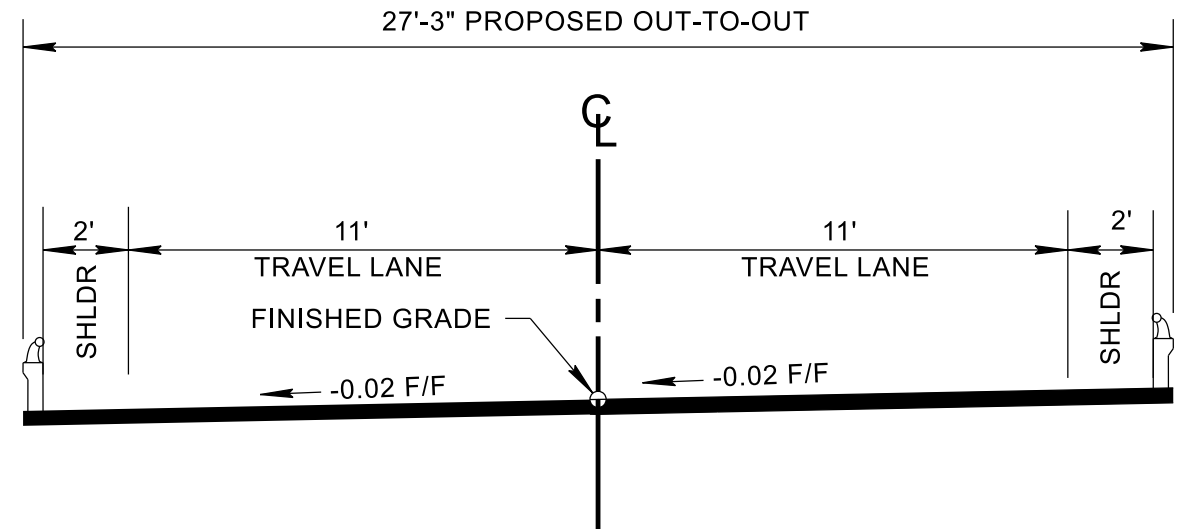

**BRIDGE SECTION
(S.R.87)**

BRIDGE 47: FROM STA. 109+30.00 TO STA. 110+20.00

- (A) THE SLOPE OF THE SHOULDER AND THE ROADWAY PAVEMENT SHALL NOT EXCEED AN ALGEBRAIC DIFFERENCE OF 7%.
- (B) SEE STANDARD DRAWINGS RD11-S-11 AND RD11-S-11B FOR FILL AND CUT SLOPE TABLES, ROUNDING ON TOP OF CUT SLOPES AND TOE OF FILL SLOPES, SPECIAL ROCK TREATMENT AND SUB GRADE ROUNDING IF APPLICABLE.
- (C) SEE STANDARD DRAWING RD11-S-11A FOR ROUNDING OF ROADSIDE DITCH SLOPES.
- (D) SEE STANDARD DRAWING S-PL-6 FOR TYPICAL GUARDRAIL PLACEMENT.
- (E) SEE STANDARD DRAWING S-CZ-1 FOR CLEAR ZONE CRITERIA. SEE THE "ROADSIDE DESIGN GUIDE", AASHTO, 2011, FOR FURTHER INFORMATION REGARDING CLEAR ZONES.

PROPOSED PAVEMENT SCHEDULE

① ASPHALTIC CONCRETE SURFACE (HOT MIX) PGXX-XX GRADING "D" SURFACE @ X.XX" THICK (APPROX. 132.5 LB./S.Y.) 411-XX.XX ACS MIX (PGXX-XX) GRADING "D"	⑤ PRIME COAT 402-01 BITUMINOUS MATERIAL FOR PRIME COAT (PC) AT 0.30-0.35 GALLONS/S.Y. 402-02 AGGREGATE FOR COVER MATERIAL (PC) AT 8-12 LB./S.Y.
② BITUMINOUS PLANT MIX BASE (HOT MIX) PGXX-XX GRADING "B-M2" @ 2.00" THICK (APPROX. 226 LB./S.Y.) 307-XX.XX ASPHALT CONCRETE MIX (PGXX-XX) (BPMB-HM) GRADING "B-M2"	⑥ TACK COAT 403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC) AT 0.07 GALLONS/S.Y. SEE 403.05 FOR DETERMINING APPLICATION RATE IN THE FIELD
③ BITUMINOUS PLANT MIX BASE (HOT MIX) PGXX-XX GRADING "A" @ X.XX" THICK (APPROX. 345 LB./S.Y.) 307-XX.XX XXXXASPHALT CONCRETE MIX (PGXX-XX) (BPMB-HM) GRADING "A"	⑦ ASPHALTIC CONCRETE SURFACE (HOT MIX) PGXX-XX GRADING "E" SURFACE @ X.XX" THICK (APPROX. LB./S.Y.) 411-XX.XX ACS MIX (PGXX-XX) GRADING "E" SHOULDER
④ MINERAL AGGREGATE XX" THICK 303-01 MINERAL AGGREGATE, TYPE "A" BASE, GRADING "D"	

SEALED BY

COORDINATES ARE NAD 83(), ARE DATUM ADJUSTED BY THE FACTOR OF AND TIED TO THE TGRN. ALL ELEVATIONS ARE REFERENCED TO THE NAVD 1988 WITH GEOID .

**STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION**

**TYPICAL
SECTIONS**

TYPE	YEAR	PROJECT NO.	SHEET NO.
			3A

DISTURBED AREA	
IN BETWEEN SLOPE LINES	2.339 (AC)
15 FOOT WIDE STRIP (OUT SIDE SLOPE LINES)	0.617 (AC)
TOTAL DISTURBED AREA	2.956 (AC)
TOTAL PROJECT AREA	3.157 (AC)

SEALED BY

STATE OF TENNESSEE DEPARTMENT OF TRANSPORTATION
RIGHT-OF-WAY ACQUISITION TABLE

