

02-SEP-2025 09:21
\\tdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\00- Signature Sheet.sht



THIS DOCUMENT HAS BEEN DIGITALLY SIGNED AND SEALED BY:

Nicholas Kniazewycz
2025.09.10 14:06:43 -05'00'

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED. THE SIGNATURE MUST BE VERIFIED ON THE ELECTRONIC DOCUMENTS.

TENNESSEE DEPARTMENT OF TRANSPORTATION
6601 CENTENNIAL BLVD.
BUILDING A, 2ND FLOOR
NASHVILLE, TN 37243
NICK KNIIZEWYCZ, P.E. NO. 126392

THE ABOVE NAMED PROFESSIONAL ENGINEER SHALL BE RESPONSIBLE FOR THE FOLLOWING SHEETS IN ACCORDANCE OF TENN. CODE ANN. §62-2-306.

ROADWAY INDEX

SHEET NAME	SHEET NO.
SIGNATURE SHEETS	ROADWAY-SIGN1
TITLE SHEET	1
ROADWAY INDEX AND STANDARD DRAWINGS	1A
ESTIMATED ROADWAY AND TABULATED QUANTITIES.....	2
TYPICAL SECTIONS AND PAVEMENT SCHEDULE.....	2A
GENERAL NOTES	2B
SPECIAL NOTES	2C
UTILITY NOTES AND OWNERS.....	2C1
ENVIRONMENTAL NOTES	2D, 2D1
PAVEMENT MARKING IMPROVEMENTS.....	2E-2E3
PROPERTY MAP AND RIGHT-OF-WAY ACQUISITION TABLE.....	3A
PRESENT LAYOUT.....	4
RIGHT-OF-WAY DETAILS.....	4A

YEAR	PROJECT NO.	SHEET NO.
2025	NH/HSIP-1(432)	ROADWAY-SIGN1

STATE OF TENNESSEE DEPARTMENT OF TRANSPORTATION
SIGNATURE SHEET

27-AUG-2025 11:07 \\tdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\001 TitleSheet.dgn

INDEX OF SHEETS
SEE SHEET 1A

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
BUREAU OF ENGINEERING

DAVIDSON COUNTY


STATE ROUTE 1
FROM 15TH AVENUE NORTH (L.M. 17.00)
TO NEAR TRANSIT AVENUE (L.M. 20.30)

RESURFACE & SAFETY
COLD PLANING, 411D RESURFACING, AND PAVEMENT MARKINGS

STATE HIGHWAY NO. 1 F.A.H.S. NO. 70S

DOES THIS PROJECT QUALIFY FOR UTILITY CHAPTER 86	YES	NO X
WORK ZONE SIGNIFICANCE DETERMINATION		
SIGNIFICANT	YES X	NO

TENN.	YEAR	SHEET NO.
	2025	1
FED. AID PROJ. NO.	NH/HSIP-1(432)	
STATE PROJ. NO.	19021-2254-04 19021-3254-94 19021-8254-14	

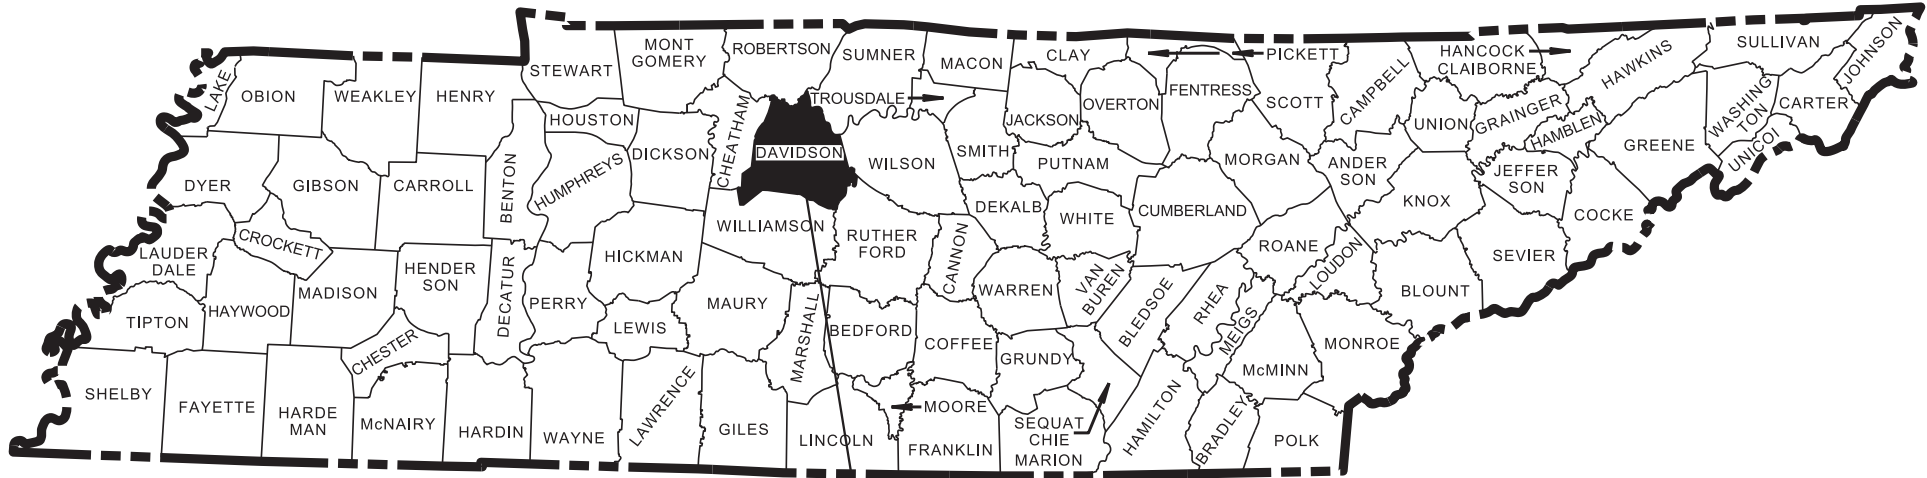

PROJECT LOCATION

BRIDGE ID: 19100400071
19SR0010019
19100400312
19100400089A
19100400311
19SR0010025

19021-2254-04
19021-3254-94
19021-8254-14
BEGIN PROJECT NO. NH/HSIP-1(432) RESURFACE & SAFETY
L.M. 17.00


R.J. CORMAN RAILROAD COMPANY / NASHVILLE & EASTERN
[348625M] AT GRADE CROSSING
L.M. 19.33

19021-2254-04
19021-3254-94
19021-8254-14
END PROJECT NO. NH/HSIP-1(432) RESURFACE & SAFETY
L.M. 20.30



EXCLUSIONS

LM: 20.00 TO LM:20.30

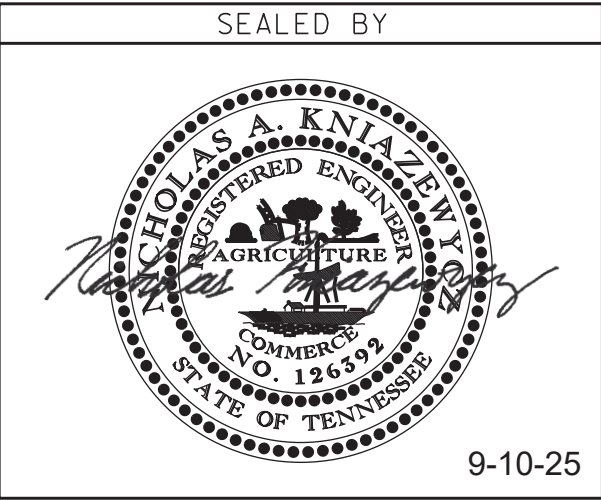

APPROVED: 
SHANE HESTER, CHIEF ENGINEER

DATE:

APPROVED: 
WILL REID, COMMISSIONER

SPECIAL NOTES


PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED JANUARY 1, 2021 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT PROJECT MANAGER: KONNER SPRADLIN, P.E.
DESIGNER : ZHIWAR RASHID, P.E. CHECKED BY : ARAM TORABIAN
P.E. NO. 98034-4299-04 (DESIGN)
PIN NO. 127317.00

PROJECT LENGTH 3.30 MILES
TOTAL LANE MILES RESURFACED 16.51 MILES

SCALE: 1"= 1 MILE



TRAFFIC DATA

ADT (2025)	19150
LOG MILES	POSTED SPEED
17.00 - 19.38	30 MPH
19.38 - 20.30	40 MPH

02-SEP-2025 09:21
\\tdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\001A Index & STD Drawings.dgn

ROADWAY INDEX

SHEET NAME	SHEET NO.
SIGNATURE SHEETS.....	ROADWAY-SIGN1
TITLE SHEET	1
ROADWAY INDEX AND STANDARD DRAWINGS	1A
ESTIMATED ROADWAY AND TABULATED QUANTITIES.....	2
TYPICAL SECTIONS AND PAVEMENT SCHEDULE.....	2A
GENERAL NOTES	2B
SPECIAL NOTES	2C
UTILITY NOTES AND OWNERS.....	2C1
ENVIRONMENTAL NOTES.....	2D, 2D1
PAVEMENT MARKING IMPROVEMENTS.....	2E-2E3
PROPERTY MAP AND RIGHT-OF-WAY ACQUISITION TABLE.....	3A
PRESENT LAYOUT.....	4
RIGHT-OF-WAY DETAILS.....	4A

NOTES:

THE ALPHABETICAL LETTERS “I”, “O” & “Q” ARE NOT USED IN THE NUMBERING OF SHEETS.

NO PROJECT COMMITMENT SHEET INCLUDED IN THIS SET OF PLANS.

NO UTILITY SHEETS.

STANDARD ROADWAY DRAWINGS

DWG.	REV.	DESCRIPTION
10-100.00 STANDARD ROADWAY TITLE SHEET, ABBREVIATIONS, AND LEGENDS		
RD-A-1	02-20-20	STANDARD ABBREVIATIONS A THROUGH L
RD-A-2		STANDARD ABBREVIATIONS M THROUGH Z
RD-L-1	02-20-20	STANDARD LEGEND
RD-L-1A		STANDARD LEGEND

10-103.00 CATCH BASINS AND MANHOLES

D-CBB-12D	07-07-23	TYPE "B" CAST IRON FRAME, GRATE & CURB HOOD DETAILS FOR NOS. 12, 14, 16 & 17 TYPE CATCH BASINS
-----------	----------	---

STANDARD TRAFFIC DESIGN DRAWINGS

DWG.	REV.	DESCRIPTION
10-201.00 SIGNALS		
T-SG-2	06-27-16	LOOP LEAD-INS, CONDUIT AND PULL BOXES
T-SG-3	07-11-17	STANDARD NOTES AND DETAILS OF INDUCTIVE LOOPS
10-204.00 DESIGN - TRAFFIC CONTROL		
T-M-1	01-24-25	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS AND MARKING ABBREVIATIONS
T-M-2	01-24-25	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS
T-M-3	01-24-25	MARKING STANDARDS FOR TRAFFIC ISLANDS, PAVED SHOULDERS AND MEDIANS FOR CONVENTIONAL ROADS
T-M-4	01-24-25	STANDARD INTERSECTION PAVEMENT MARKINGS
T-M-17	01-24-25	PAVEMENT MARKING DETAILS FOR ROUNDABOUTS
T-WZ-10	03-26-25	ADVANCE ROAD WORK SIGNING ON HIGHWAYS AND FREEWAYS
T-WZ-40	03-26-25	RIGHT LANE CLOSURES AT NEAR SIDE OF INTERSECTIONS
T-WZ-41	03-26-25	LEFT LANE CLOSURES AT NEAR SIDE OF INTERSECTIONS
T-WZ-42	03-26-25	CENTER LANE CLOSURES AT NEAR SIDE OF INTERSECTIONS
T-WZ-FAB1	03-26-25	FLASHING YELLOW ARROW BOARD

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	1A

SEALED BY



9-10-25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

ROADWAY INDEX
AND
STANDARD
DRAWINGS

10-SEP-2025 13:30
\\tdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\002 Estimated quantities .dgn

ESTIMATED ROADWAY QUANTITIES					
ITEM NO.	DESCRIPTION	UNIT	QUANTITY 19021-8254-14	QUANTITY 19021-3254-94	TOTAL QUANTITY
(1)	208-01.05	BROOMING & DEGRASSING SHOULDERS	L.M.	2.7	2.7
(2)	307-02.08	ASPHALT CONCRETE MIX (PG70-22) (BPMB-HM) GRADING B-M2	TON	300	300
(3)	307-03.10	ASPHALT CONC MIX (PG76-22)(BPMB-HM) GR CS	TON	200	200
(4)	403-01	BITUMINOUS MATERIAL FOR TACK COAT (TC)	TON	46	46
(5)	411-02.10	ACS MIX(PG70-22) GRADING D	TON	6913	6913
(6)	415-01.01	COLD PLANING BITUMINOUS PAVEMENT	TON	7150	7150
(19)	611-01.20	ADJUSTMENT OF EXISTING MANHOLE	EACH	2	2
(7)	611-03.04	GRAY IRON CASTINGS (CATCHBASIN)	LB.	661	661
(18)	611-09.01	ADJUSTMENT OF EXISTING CATCHBASIN	EACH	34	34
(8)	712-01	TRAFFIC CONTROL	LS	1	1
	712-04.01	FLEXIBLE DRUMS (CHANNELIZING)	EACH	100	100
(9)(10)	712-06	SIGNS (CONSTRUCTION)	S.F.	2029	2029
(17)	713-02.34	DELINEATORS (ALL)	EACH	18	18
	716-01.21	SNOWPLOWABLE RAISED PAVEMENT MARKERS (BI-DIR) (1 COLOR)	EACH		525
	716-01.22	SNOWPLOWABLE RAISED PAVMENT MARKERS (MONO-DIR)(1 COLOR)	EACH		715
	716-01.30	REMOVAL OF SNOWPLOWABLE REFLECTIVE MARKER	EACH	150	150
(11)	716-02.04	PLASTIC PAVEMENT MARKING(CHANNELIZATION STRIPING)	S.Y.	112	112
(11)	716-02.05	PLASTIC PAVEMENT MARKING (STOP LINE)	L.F.	1750	1750
(11)	716-02.06	PLASTIC PAVEMENT MARKING (TURN LANE ARROW)	EACH	60	60
(11)	716-02.08	PLASTIC PAVEMENT MARKING (8" DOTTED LINE)	L.F.	2000	2000
(11)	716-02.09	PLASTIC PAVEMENT MARKING (LONGITUDINAL CROSS-WALK)	L.F.	4200	4200
(11)	716-02.11	PLASTIC PAVEMENT MARKING (6" DOTTED LINE)	L.F.	1500	1500
(11)	716-02.12	PLASTIC PAVEMENT MARKING (8IN LINE)	L.M.	0.8	0.8
(11)	716-03.01	PLASTIC WORD PAVEMENT MARKING (ONLY)	EACH	9	9
(11)	716-03.02	PLASTIC WORD PAVEMENT MARKING (RXR)	EACH	6	6
(11)	716-04.01	PLASTIC PAVEMENT MARKING (STRAIGHT-TURN ARROW)	EACH	4	4
(11)(12)	716-04.04	PLASTIC PAVEMENT MARKING (TRANSVERSE SHOULDER)	L.F.	300	300
(11)	716-04.05	PLASTIC PAVEMENT MARKING (STRAIGHT ARROW)	EACH	3	3
(11)	716-04.12	PLASTIC PAVEMENT MARKING (YIELD LINE)	S.F.	120	120
(11)	716-04.17	PLASTIC PAVEMENT MARKING (YIELD SYMBOL)	EACH	8	8
(11)	716-04.24	PLASTIC PAVEMENT MARKING (FISH-HOOKS WITH 2 ARROWS)	EACH	6	6
(13)	716-05.20	PAINTED PAVEMENT MARKING (6" LINE)	L.M.	13.5	13.5
(14)	716-12.02	ENHANCED FLATLINE THERMO PVMT MRKNG (6IN LINE)	L.M.	13.5	13.5
	717-01	MOBILIZATION	LS	1	1
(15)	730-14.02	SAW SLOT	L.F.	15557	15557
(15)	730-14.03	LOOP WIRE	L.F.	33914	33914

BRIDGE DECK RECOMMENDATIONS (RESURFACING)				
BRIDGE NUMBER	LOCATION LOG MILE	CROSSES OVER/UNDER	BRIDGE LENGTH	BRIDGE DECK RECOMMENDATIONS
19I00400071	17.09	I-40	206'	LEAVE AS IS.
19SR0010019	17.29	11TH AVE. S. CSX RR	697'	LEAVE AS IS.
19I00400312	18.49	UNDERPASS VERTICAL CLEARANCE: 14'-11" I-40 EXIST RAMP	NA	TO MAINTAIN MINIMUM VERTICAL CLEARANCE OF THE UNDERPASS COLD PLANE TO MATCH THE THICKNESS OF TREATMENT.
19I00400089A	18.50	UNDERPASS VERTICAL CLEARANCE: 16'-6" I-40 OVER SR-1	NA	TO MAINTAIN MINIMUM VERTICAL CLEARANCE OF THE UNDERPASS COLD PLANE TO MATCH THE THICKNESS OF TREATMENT.
19I00400311	18.53	UNDERPASS VERTICAL CLEARANCE: 14'-11" I-40 EXIST RAMP	NA	TO MAINTAIN MINIMUM VERTICAL CLEARANCE OF THE UNDERPASS COLD PLANE TO MATCH THE THICKNESS OF TREATMENT.
19SR0010025	19.26	BROWNS CREEK	62'	COLD PLANE 1-1/4" OF THE EXISTING ASPHALT AND REPLACE WITH 1-1/4" OF NEW ASPHALT.

NO GUARDRAIL ADJUSTMENTS ON THIS PROJECT


FOOTNOTES	
(1)	NO DIRT OR DEBRIS WILL BE LEFT ON THE SHOULDERS INCLUDING UNDER AND AROUND GUARDRAIL. SHOULDERS SHOULD BE CLIPPED AS DIRECTED BY THE ENGINEER TO ALLOW FOR PROPER DRAINAGE. THIS WORK TO BE PERFORMEND BEFORE ALL OTHER OPERATIONS. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING COLD PLANNING AND ASPHALT DEBRIS DOES NOT ENTER THE DRAINS AND WILL BE RESPONSIBLE FOR CLEAN OUTS.
(2)	TO BE USED AS DIRECTED BY THE ENGINEER FOR SPOT REPAIR.
(3)	TO BE USED AS DIRECTED BY THE ENGINEER FOR SPOT LEVELING.
(4)	INCLUDES 44 TONS FOR MAINLINE AND 2 TONS FOR CITY STREETS, COUNTY ROADS, BUSINESS ENTRANCES, AND PRIVATE AND FIELD ENTRANCES.
(5)	INCLUDES 6638 TONS FOR MAINLINE AND 275 TONS FOR CITY STREETS, COUNTY ROADS, BUSINESS ENTRANCES, AND PRIVATE AND FIELD DRIVES.
(6)	INCLUDES 6575 TONS FOR MAININE, 300 TONS FOR SPOT REPAIR, AND 275 TONS FOR CITY STREETS, COUNTY ROADS BUSINESS ENTRANCES, AND PRIVATE AND FIELD DRIVES.
(7)	ITEM TO BE USED TO UPGRADE THE CATCH BASIN GRATE AT LM 17.048 EB TO BICYCLE FRIENDLY AND ADA COMPLIANT GRATES.ALSO INCLUDES VERTICAL ADJUSTMENTS OF EXISTING CATCH BASINS TO MEET ROADWAY GRADE. SEE STANDARD DRAWING D-CBB-12D.
(8)	THE CONTRACTOR SHALL COMPLY WITH SECTION 712 OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION REGARDING TEMPORARY TRAFFIC CONTROL AND THE CURRENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
(9)	THE CONTRACTOR IS RESPONSIBLE FOR THE STAKING OF THE CONSTRUCTION SIGNS.
(10)	IN THE EVENT THAT A CONSTRUCTION AND/OR REGULATORY SIGN IS TEMPORARILY DESIGNATED NOT IN USE DURING THE CONSTRUCTION PHASE OF A PROJECT, THE CONTRACTOR SHALL CHOOSE A SIGN COVERING METHOD APPROVED BY THE ENGINEER. TEMPORARY SIGN COVERINGS SHALL NOT BE PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE PRICE BID FOR ITEM NO. 712-06 SIGNS (CONSTRUCTION).
(11)	THE CONTRACTOR MAY ELECT TO SUBSTITUTE PREFORMED PLASTIC FOR THERMOPLASTIC PREFORMED PLASTIC SHALL BE PAID FOR AT THE SAME UNIT PRICE AS BID FOR THERMOPLASTIC.
(12)	ITEM TO BE USED AT L.M. 18.42.
(13)	FOR TEMPORARY PAVEMENT MARKINGS ON INTERMEDIATE LAYERS AND COLD PLANED SURFACES
(14)	TO BE USED FOR CENTERLINE AND EDGELINE PAVEMENT MARKINGS ON THE FINAL SURFACE.
(15)	ITEM TO BE USED AT SIGNALIZED INTERSECTIONS THROUGHOUT THE PROJECT.
(17)	ITEM TO BE USED TO REPLACE EXISTING DELINEATORS.
(18)	ITEM INCLUDES 22 CATCHBASINS AND 12 AREA DRAINS.
(19)	ITEM TO BE USED TO ADJUST STATE STORM DRAIN MANHOLE.

TRAFFIC CONTROL SIGN TABULATION (RESURFACING)					
M.U.T.C.D. SIGN NO.	LEGEND \ DESCRIPTION	SIZE IN INCHES		S.F.	TOTAL NUMBER REQUIRED
		L	x W		ITEM NO. 712-06 S.F.
G20-1	ROAD WORK NEXT 3 MILES	48"	x 24"	8	2
G20-2	END ROAD WORK	48"	x 24"	8	54
W4-2L	LEFT LANE ENDS SYMBOL	48"	x 48"	16	2
W4-2R	RIGHT LANE ENDS SYMBOL	48"	x 48"	16	2
W8-11	UNEVEN LANES	48"	x 48"	16	6
W8-15	GROOVED PAVEMENT	48"	x 48"	16	6
W8-15P	MOTORCYCLE WARNING PLAQUE	36"	x 30"	8	6
W12-1	DOUBLE ARROW	48"	x 48"	16	2
W20-1	ROAD WORK 1 MILE	48"	x 48"	16	2
W20-1	ROAD WORK 1000 FT	48"	x 48"	16	2
W20-1	ROAD WORK 500 FT	48"	x 48"	16	2
W20-1	ROAD WORK AHEAD	48"	x 48"	16	54
W20-5	CENTER LANE CLOSED 1500 FEET	48"	x 48"	16	2
W20-5	CENTER LANE CLOSED 1000 FEET	48"	x 48"	16	2
W20-5R	RIGHT LANE CLOSED 1500 FEET	48"	x 48"	16	2
W20-5R	RIGHT LANE CLOSED 1000 FEET	48"	x 48"	16	2
W20-5L	LEFT LANE CLOSED 1500 FEET	48"	x 48"	16	2
W20-5L	LEFT LANE CLOSED 1000 FEET	48"	x 48"	16	2
W21-2	FRESH OIL	48"	x 48"	16	6
TOTAL					2029

UTILITY ADJUSTMENTS (RESURFACING)		
TYPE	OWNER	NUMBER
SEWER MANHOLE	NASHVILLE METRO	12
TELEPHONE MANHOLE	BELL	19
GAS VALVES	PIEDMONT	1
WATER VALVES	NASHVILLE METRO	30

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	2

SEALED BY

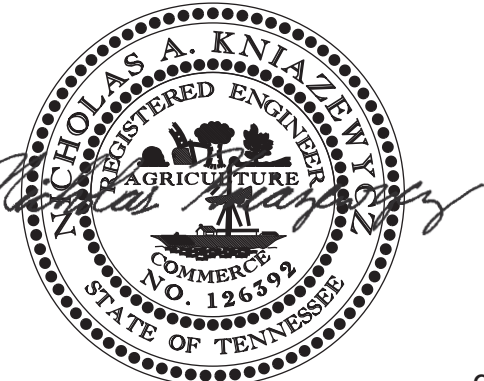

9-10-25



STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

ESTIMATED
ROADWAY AND
TABULATED
QUANTITIES

27-AUG-2025 11:10
\\tdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\002A Typical Section.dgn

PROPOSED PAVEMENT SCHEDULE	
①	TACK COAT 403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC) SEE 403.05 FOR DETERMINING APPLICATION RATE IN THE FIELD
②	SURFACE @ 1.25" THICK (APPROX. 132.5 LB./S.Y.) 411-02.10 ACS MIX (PG70-22) GRADING D SURFACE
③	COLD PLANING @ 1.25" THICK (131.25 LB./S.Y.) 415-01.01 COLD PLANING BITUMINOUS PAVEMENT (TON)





TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	2A

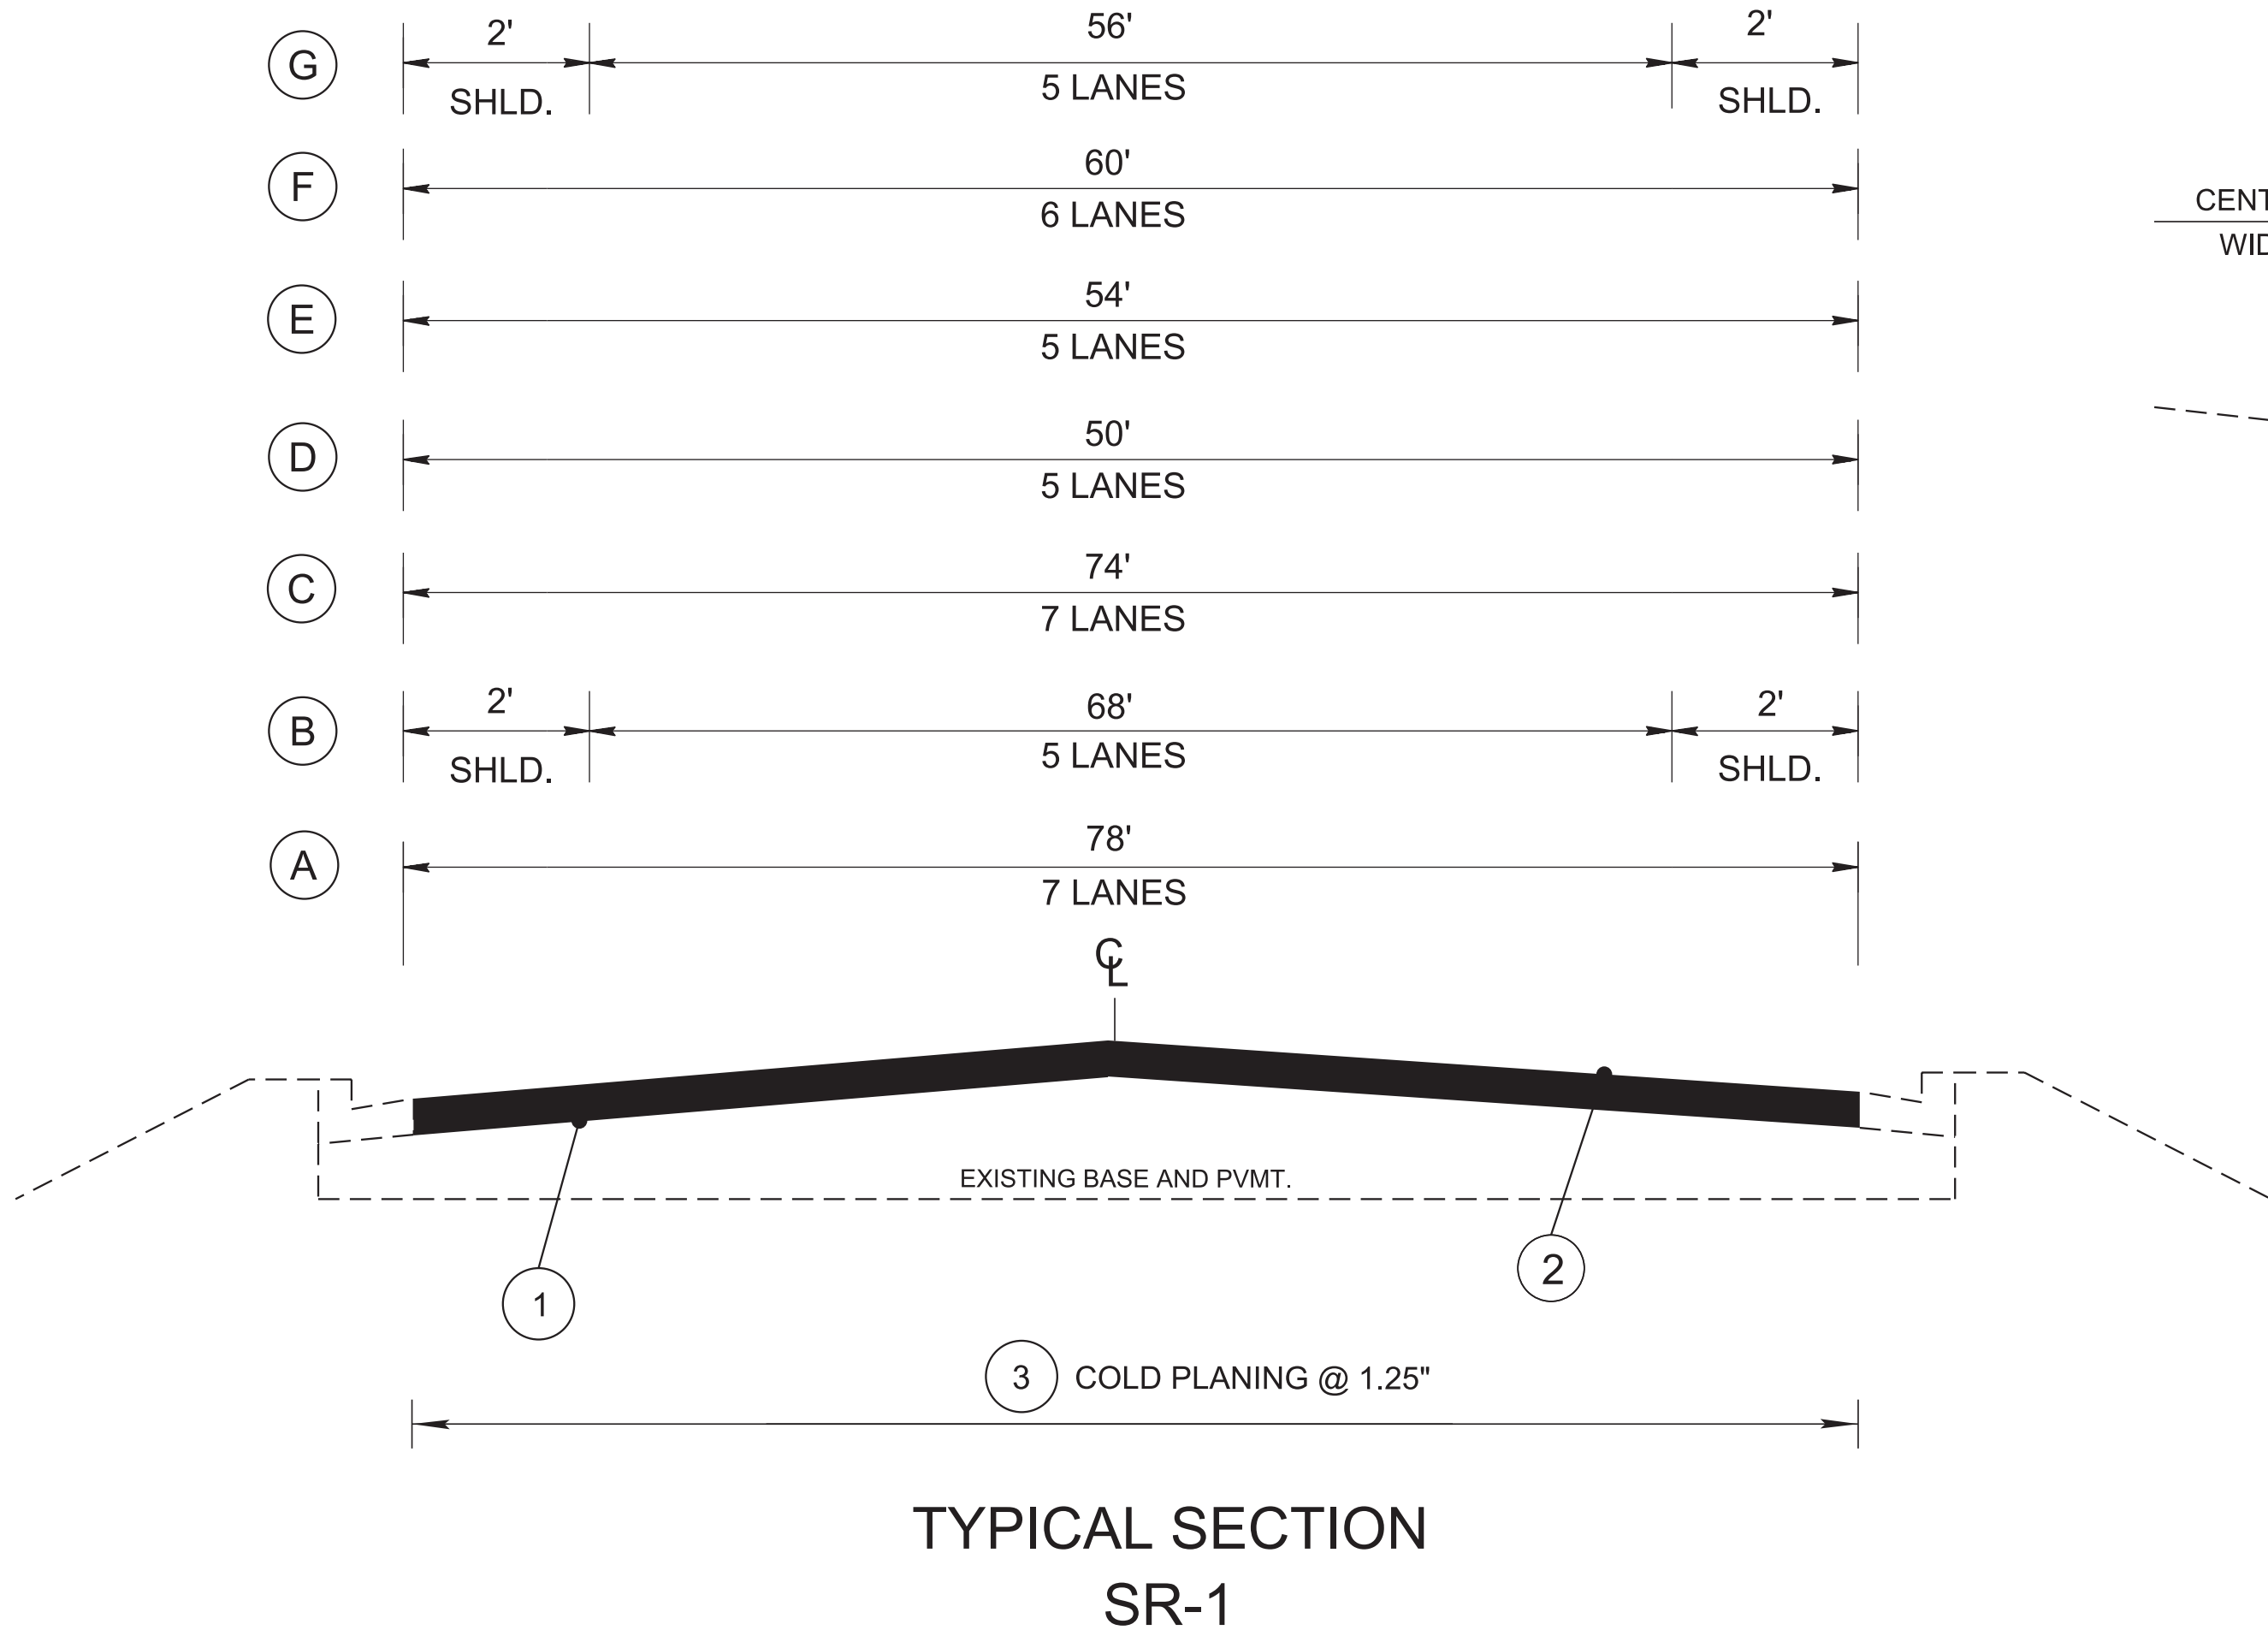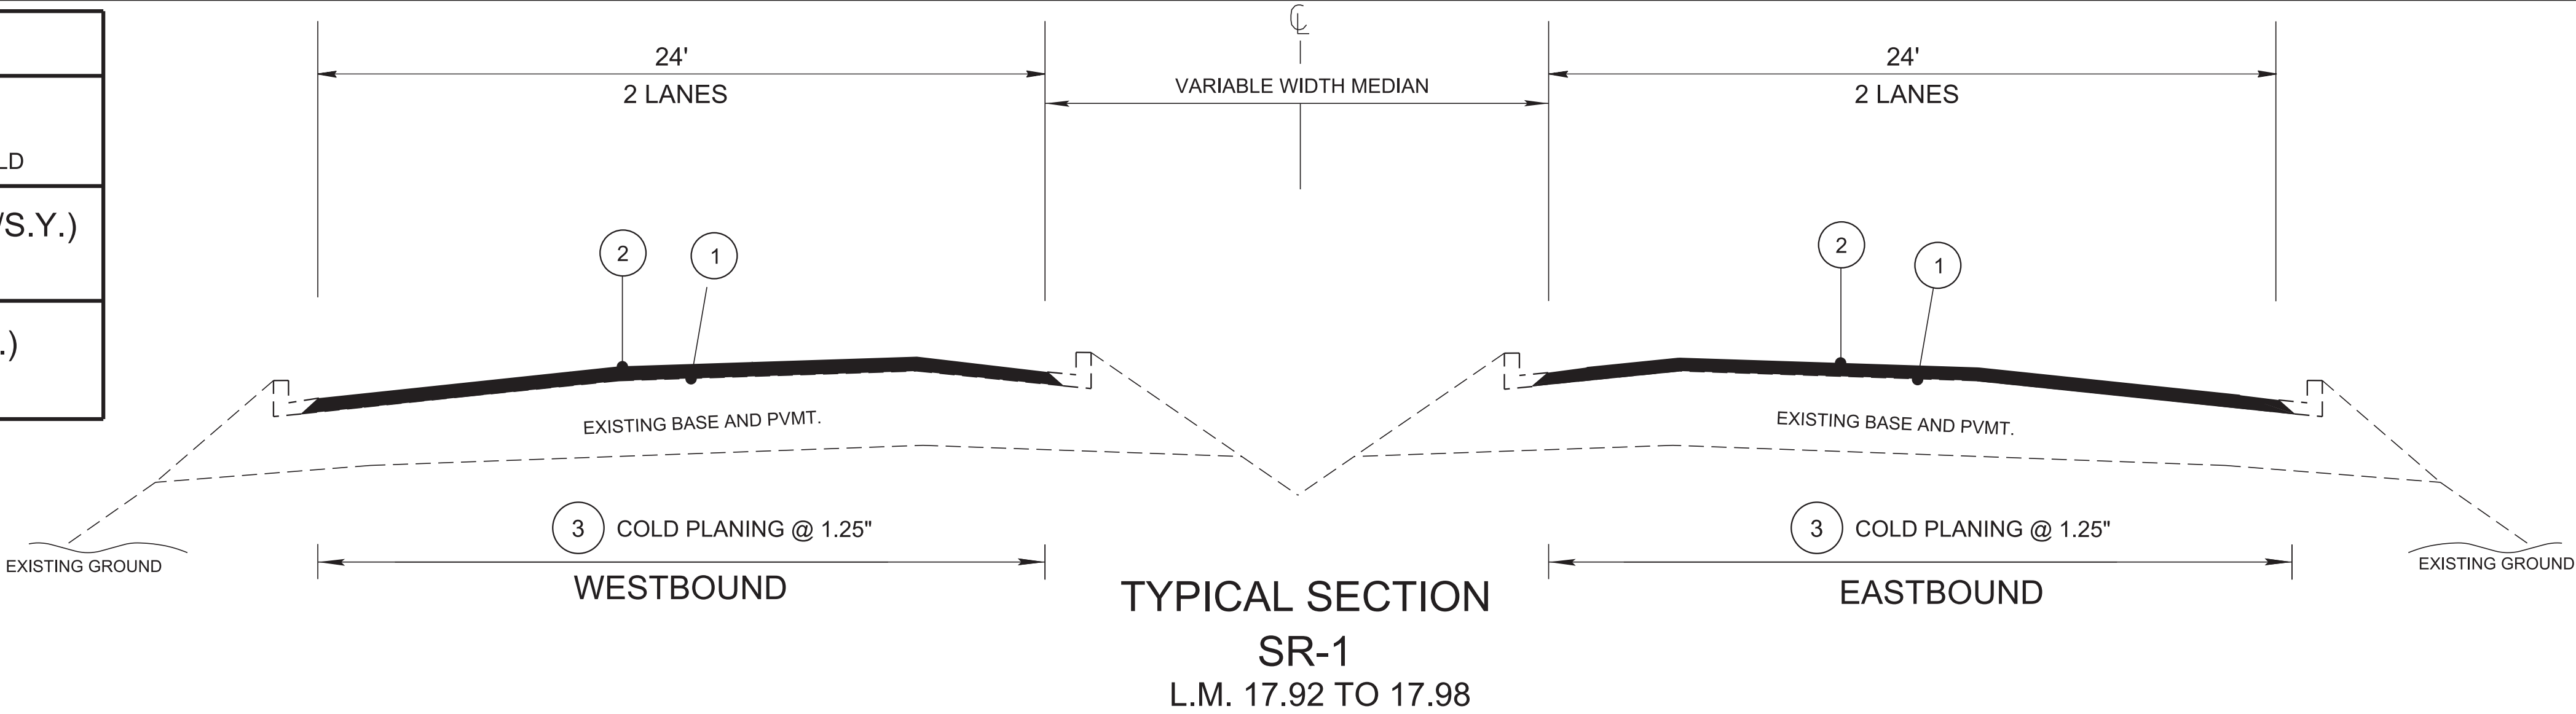

- | | |
|----------------------------|----------------------------|
| ① L.M. 17.00 TO L.M. 17.11 | ⑤ L.M. 17.98 TO L.M. 18.03 |
| ② L.M. 17.11 TO L.M. 17.13 | ⑥ L.M. 18.03 TO L.M. 18.70 |
| ③ L.M. 17.13 TO L.M. 17.56 | ⑦ L.M. 18.70 TO L.M. 20.00 |
| ④ L.M. 17.56 TO L.M. 17.86 | |

NOTE: PUBLIC ROAD INTERSECTIONS WILL BE RESURFACED TO THE END OF THE RADIUS OR AS DIRECTED BY THE TDOT ENGINEER.

NOTE: THE CONTRACTOR SHOULD TAKE EXTREME CARE WHEN COLD PLANING THE EXISTING ASPHALT OFF BRIDGE DECK, SO AS NOT TO DAMAGE THE EXISTING DECK SEALANT AND/OR EXPANSION JOINT MEMBERS (STEEL PLATES, BARS, AND/OR HEADERS). IF DAMAGE DOES OCCUR, THE CONTRACTOR SHALL BE RESPONSIBLE FOR NECESSARY REPAIRS ON ALL DAMAGED MEMBERS TO THE SATISFACTION OF THE PROJECT ENGINEER AT NO ADDITIONAL COST.

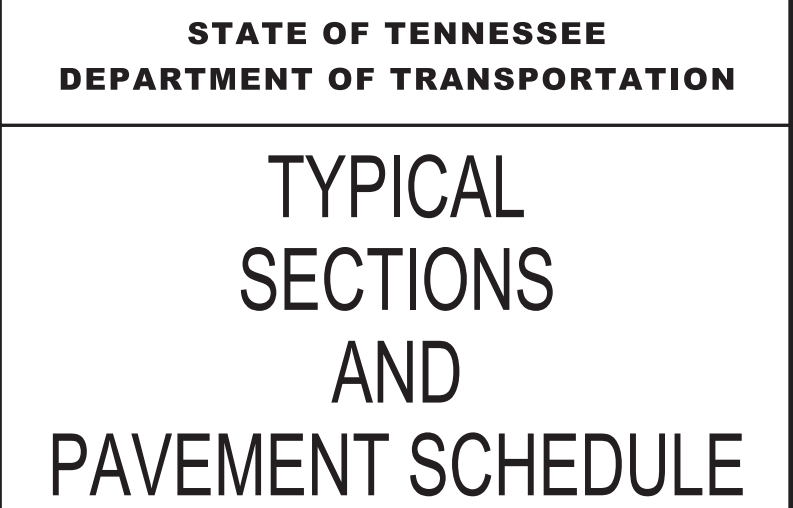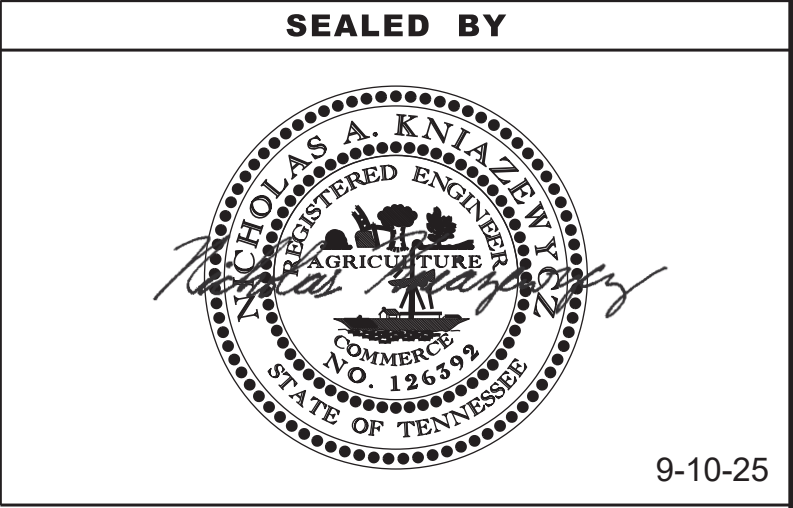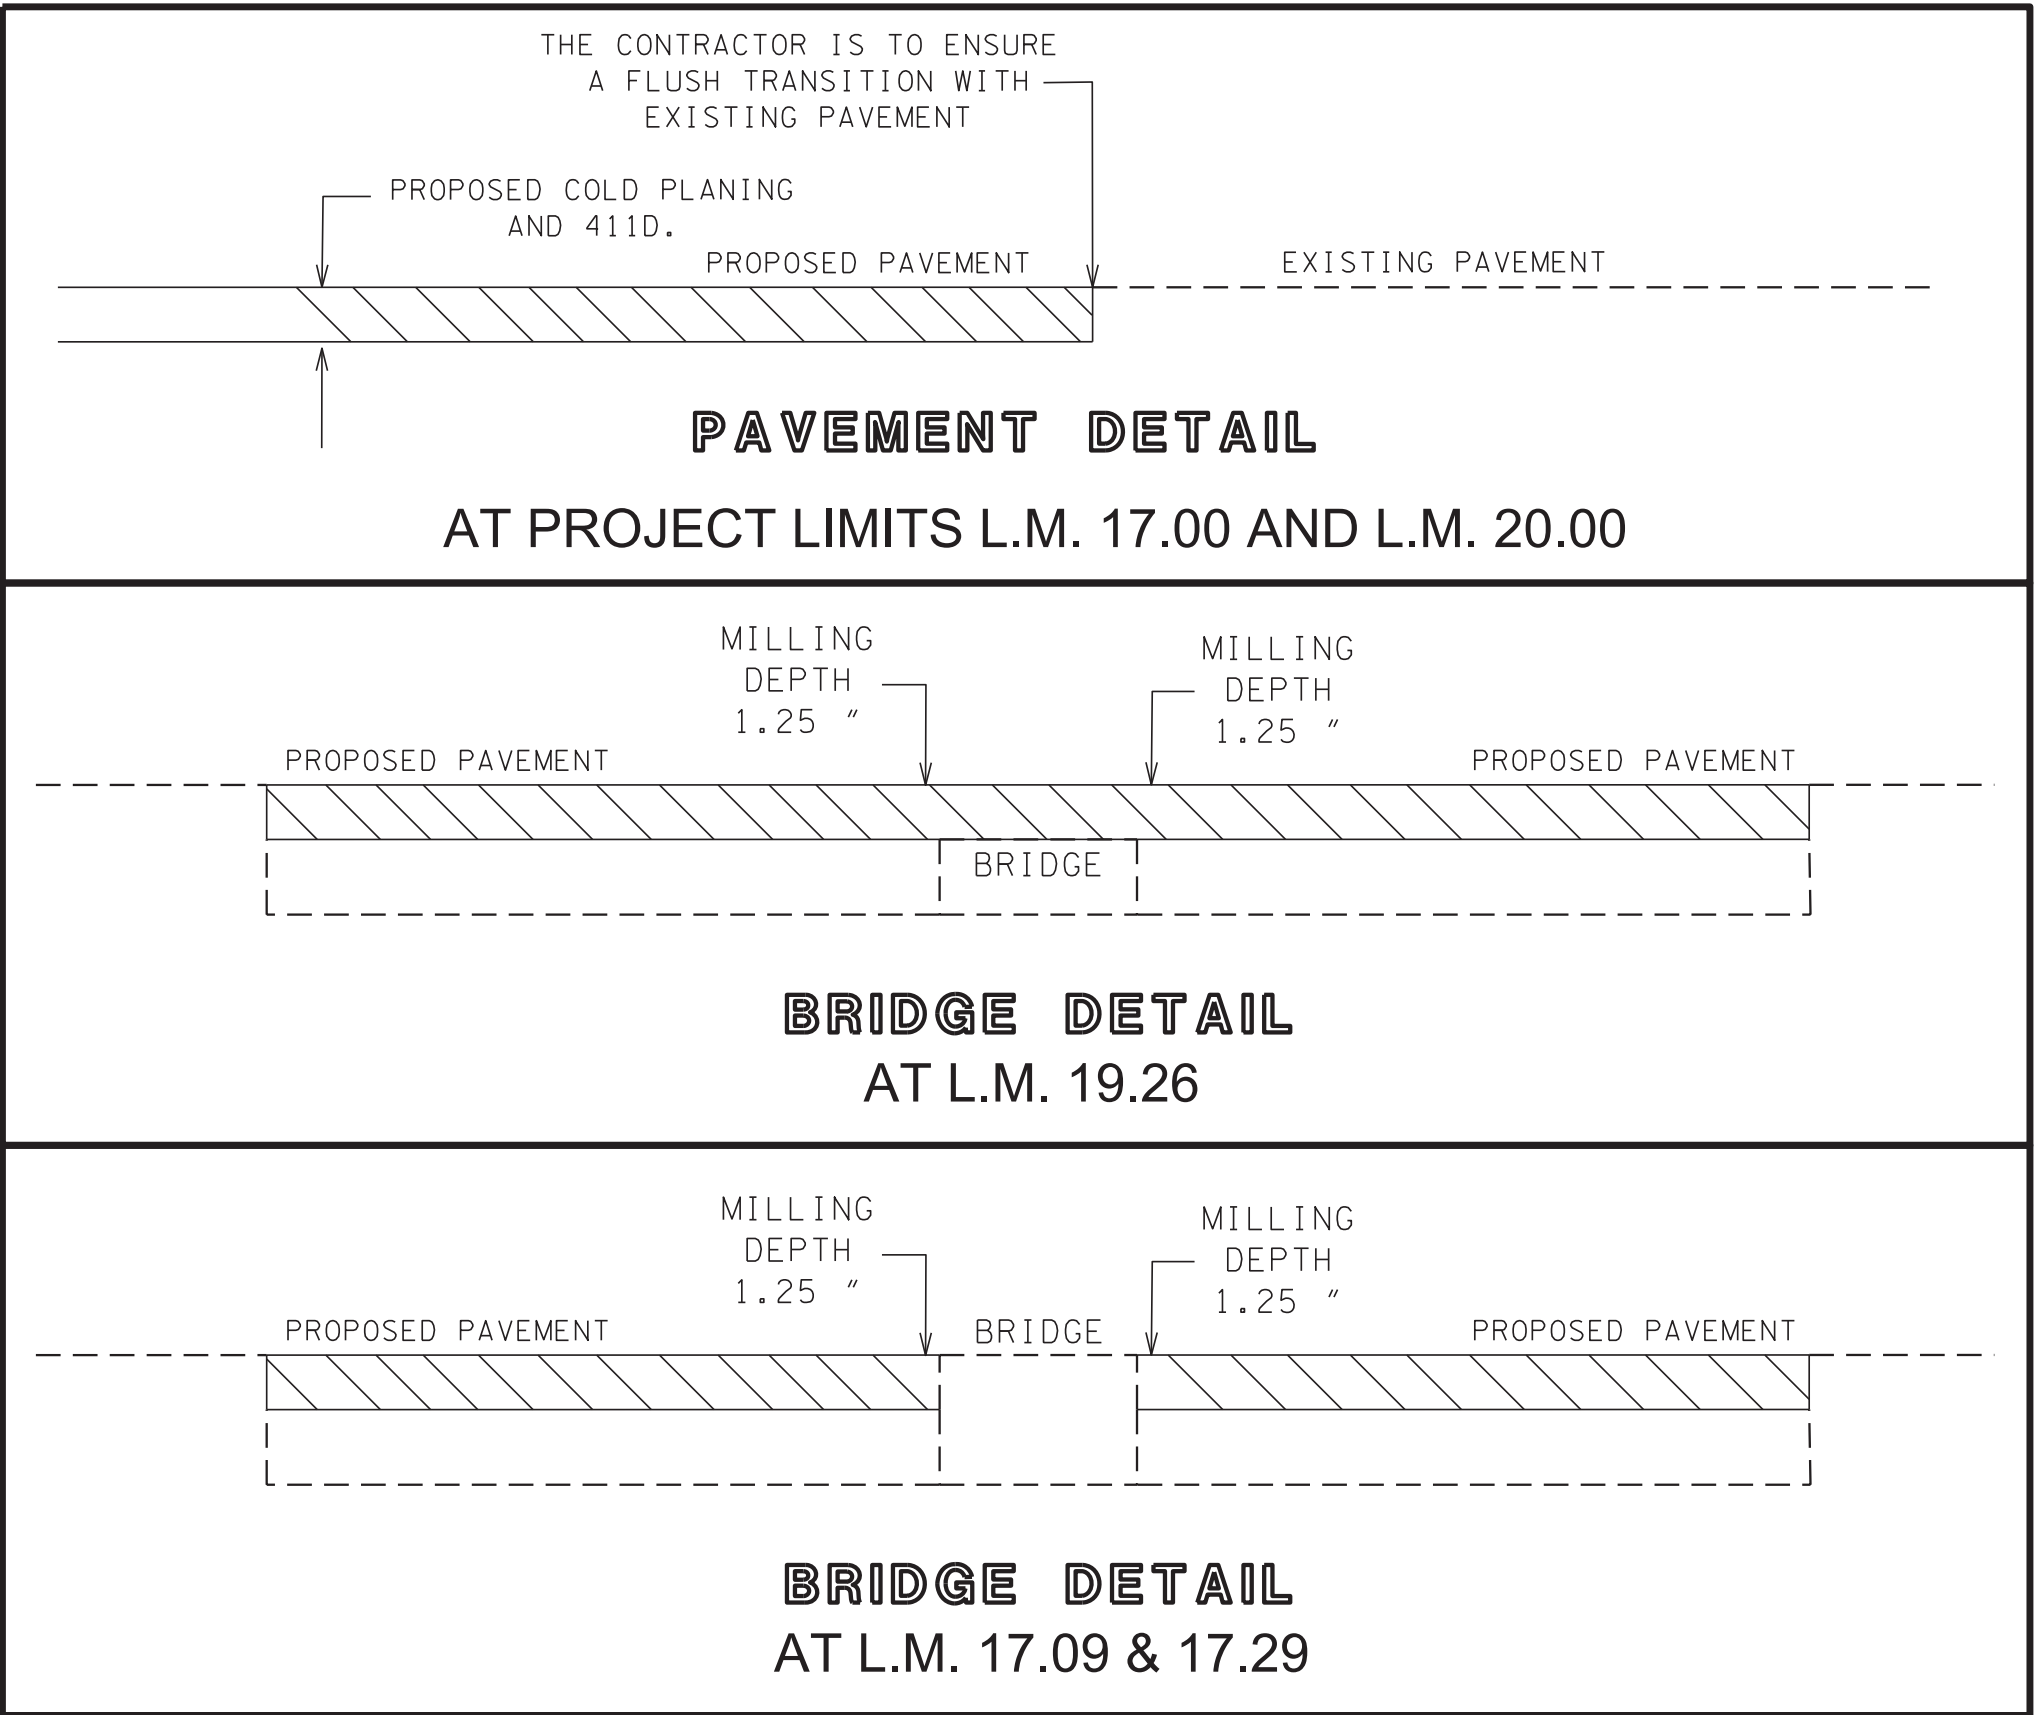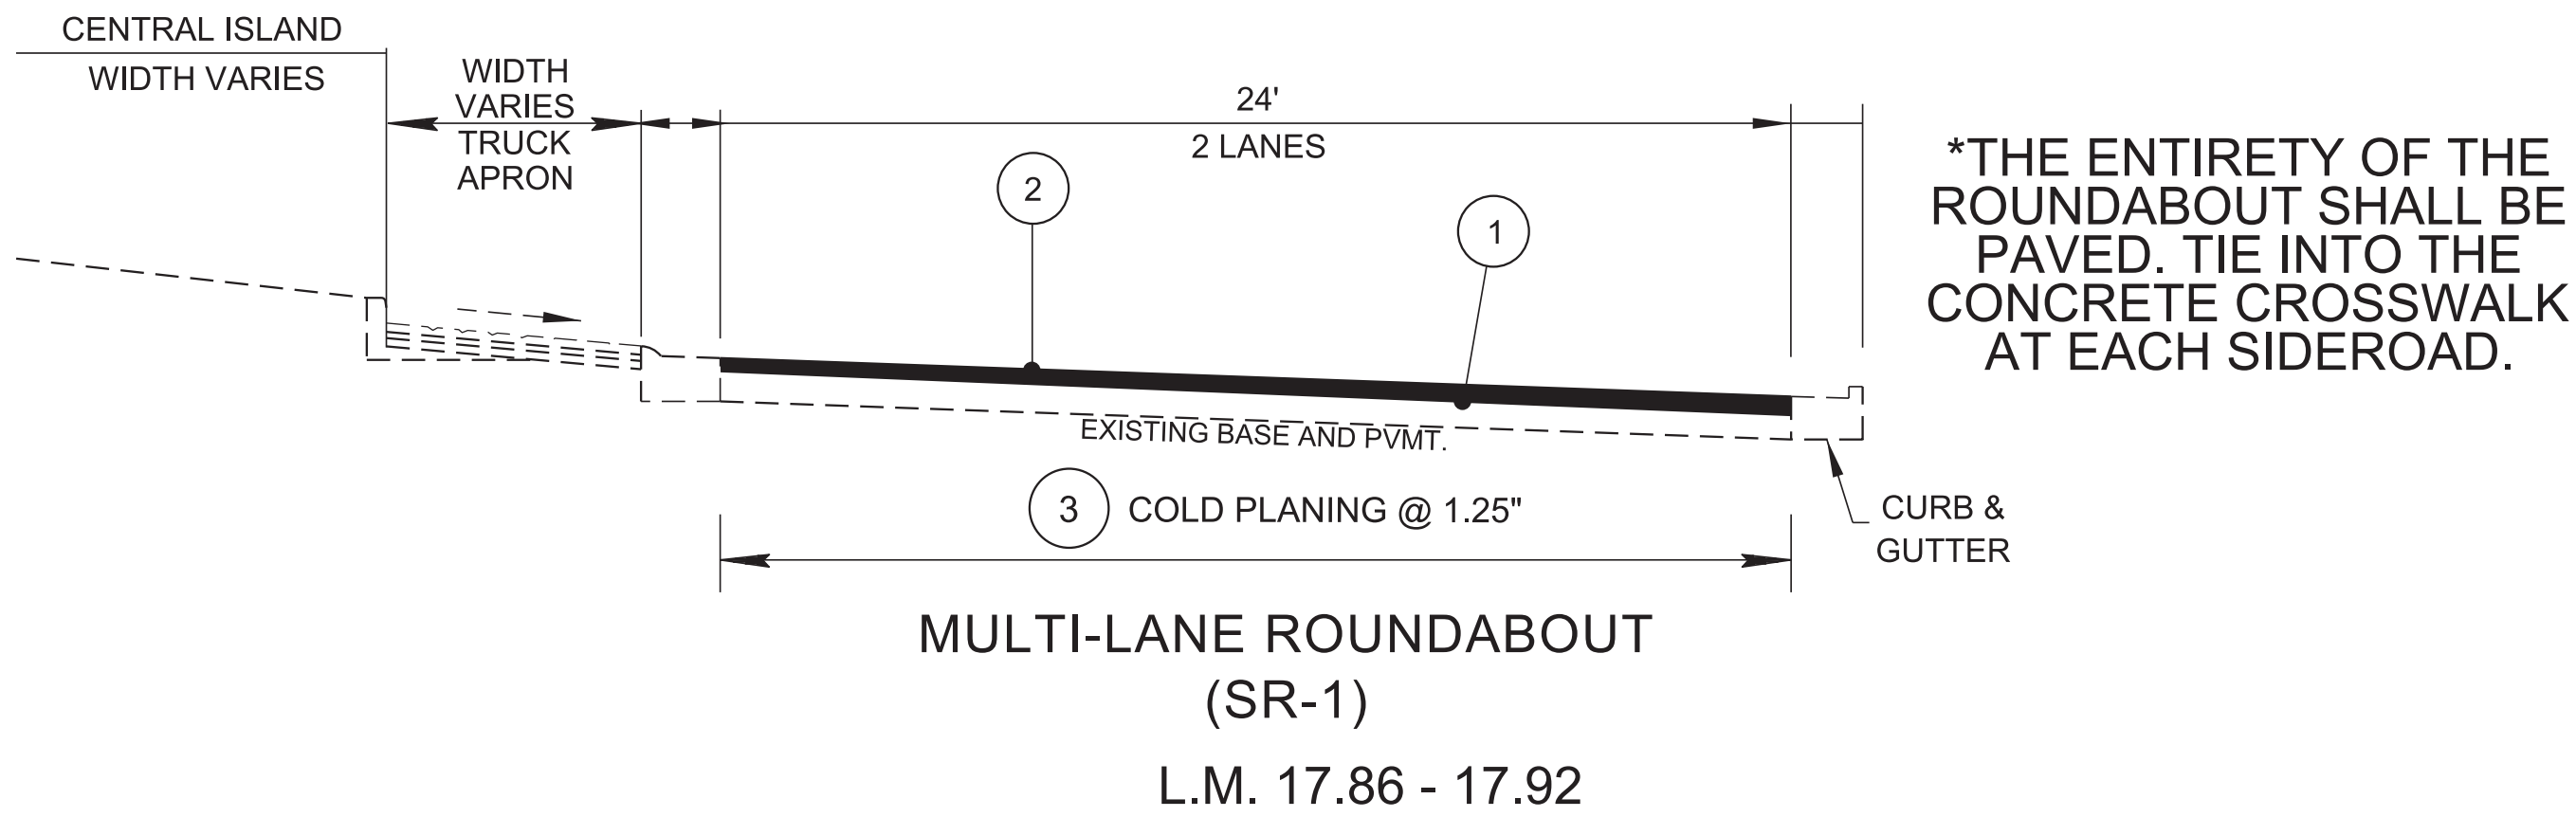

27-AUG-2025 11:10
\\tdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\002B General Notes.dgn

GENERAL NOTES

MISCELLANEOUS

- (3) NOTHING IN THE GENERAL NOTES OR SPECIAL PROVISIONS SHALL RELIEVE THE CONTRACTOR FROM HIS RESPONSIBILITIES TOWARD THE SAFETY AND CONVENIENCE OF THE GENERAL PUBLIC AND THE RESIDENTS ALONG THE PROPOSED CONSTRUCTION AREA.

PAVEMENT MARKINGS

TEMPORARY PAVEMENT MARKINGS ON INTERMEDIATE LAYERS

- (2) TEMPORARY PAVEMENT LINE MARKINGS ON INTERMEDIATE LAYERS OF PAVEMENT SHALL BE REFLECTIVE TAPE OR REFLECTORIZED PAINT INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK. SHORT, UNMARKED SECTIONS SHALL NOT BE ALLOWED. THESE MARKINGS WILL BE MEASURED AND PAID FOR UNDER ITEM NO. 716-05.20, PAINTED PAVEMENT MARKING (6" LINE), L.M.

FINAL PAVEMENT MARKING

- (6) THE CONTRACTOR WILL BE REQUIRED TO PERFORM THE FOLLOWING WORK:

a. BROOMING & DE-GRASSING SHOULDERS SHALL INCLUDE CLIPPING OF MATERIAL INTERFERING WITH PROPER DRAINAGE OF ROADWAY (INCLUDING PAVED AND GRAVEL SHOULDERS), AS DIRECTED BY THE ENGINEER.

b. ALL MATERIAL FROM CLIPPING, BROOMING AND DE-GRASSING SHOULDERS SHALL BE PICKED UP, REMOVED AND PROPERLY DISPOSED AS DIRECTED BY THE ENGINEER.

c. ALL COSTS ASSOCIATED WITH PICKING UP, REMOVAL AND PROPER DISPOSAL SHALL BE PAID FOR UNDER ITEM NO. 208-01.05.

d. REMOVE ALL GARBAGE AND CONSTRUCTION DEBRIS FROM PROJECT. THE COST FOR THIS WILL BE INCLUDED IN THE PRICE BID FOR OTHER ITEMS OF CONSTRUCTION.
- (8) PERMANENT PAVEMENT LINE MARKINGS SHALL BE 6" ENHANCED FLATLINE THERMOPLASTIC INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK. SHORT UNMARKED SECTIONS SHALL NOT BE ALLOWED. PAVEMENT MARKINGS WILL BE MEASURED AND PAID FOR UNDER ITEM NO. 716-12.02, ENHANCED FLATLINE THERMO PVMT MRKNG (6IN LINE), L.M. THE CONTRACTOR SHALL HAVE THE OPTION OF USING REFLECTORIZED PAINT INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK AND THEN INSTALLING THE PERMANENT MARKINGS AFTER THE PAVING OPERATION IS COMPLETED. THE TEMPORARY MARKINGS FOR THE FINAL SURFACE WILL NOT BE MEASURED AND PAID FOR DIRECTLY, BUT THE COSTS ARE TO BE INCLUDED IN THE PRICE BID FOR THE PERMANENT MARKINGS.

SNOWPLOWABLE REFLECTIVE PAVEMENT MARKERS

- (19) REMOVE EXISTING SNOWPLOWABLE MARKERS PRIOR TO PAVING AND/OR COLD PLANING. REMOVE ALL ADHESIVES PRIOR TO PAVING. PATCH ANY HOLES OR DIVOTS RESULTING FROM THE REMOVAL OF A MARKER IN A MANNER WHICH ENSURES A UNIFORM PAVED SURFACE. PATCH WORK SHALL BE INCLUDED WITH COST OF OTHER ITEMS OF CONSTRUCTION.

PAVEMENT

PAVING

- (2) THE CONTRACTOR SHALL BE REQUIRED TO COLD PLANE AND PAVE IN THE DIRECTION OF TRAFFIC.

RESURFACING

- (4) WHERE DIRECTED BY THE TDOT ENGINEER, THE CONTRACTOR SHALL BE REQUIRED TO SHAPE PUBLIC SIDE ROADS, BUSINESS ENTRANCES, AND PRIVATE DRIVES, AS WELL AS CLEANING OF EXISTING DRAINS BEFORE PLACING MATERIALS. ALL COSTS ARE TO BE INCLUDED IN THE PRICE BID FOR OTHER ITEMS OF CONSTRUCTION.
- (5) ALL PUBLIC SIDE ROADS SHALL BE PAVED ONE PAVER WIDTH THROUGH THE INTERSECTION AS A MINIMUM. A SATISFACTORY TRANSITION FROM THE NEW PAVEMENT TO THE EXISTING GRADE OF THE INTERSECTING PUBLIC ROAD OR BUSINESS ENTRANCE SHALL BE PROVIDED. SHOULD THE PAVEMENT OF THE INTERSECTING PUBLIC ROAD BE DISTRESSED, THE RESURFACING WIDTH MAY BE INCREASED TO THE NORMAL RIGHT OF WAY LINE.

- (6) PRIVATE DRIVEWAYS, FIELD ENTRANCES, AND BUSINESS ENTRANCES WILL BE RESURFACED A PAVER WIDTH (LANE WIDTH) AS A MINIMUM. A PAVEMENT TAPER TO TRANSITION THE NEW PAVEMENT SHALL BE REQUIRED, IT SHALL BE BASED ON AN ADDITIONAL ONE FOOT OF WIDTH PER ONE INCH DEPTH OF PAVEMENT. IF THE SHOULDER IS NARROW ENOUGH THAT THE SUM OF THE SHOULDER AND THE TRANSITION ARE LESS THAN A PAVER WIDTH, THE TRANSITION SHALL OCCUR WITHIN THE PAVER WIDTH. IF THE SUM OF THE SHOULDER AND THE TRANSITION IS GREATER THAN A PAVER WIDTH (LANE WIDTH), THE TRANSITION SHALL OCCUR OUTSIDE OF THE PAVER WIDTH.
- (7) ON CURB AND GUTTER SECTIONS, PUBLIC ROAD INTERSECTIONS SHALL BE RESURFACED TO THE END OF RADIUS. A SATISFACTORY TRANSITION FROM THE NEW PAVEMENT TO THE EXISTING GRADE OF THE INTERSECTING PUBLIC ROAD SHALL BE PROVIDED.
- (8) ON URBAN TYPICAL SECTIONS, (CURB AND GUTTER), RESIDENTIAL DRIVEWAYS AND BUSINESS ENTRANCES SHALL HAVE A MINIMUM WIDTH OF MATERIAL NOT LESS THAN ONE FOOT USED IN THE TRANSITION TO FEATHER THE PAVEMENT EDGE.
- (9) IN ALL CASES, THE LENGTH OF THE PAVEMENT TRANSITION, THE THICKNESS AND WIDTH OF THE RESURFACING AND ANY ADDITIONAL PAVEMENT MATERIALS SHALL BE AS DIRECTED BY THE TDOT ENGINEER.

SIGNING

- (12) ALL SIGNS WHICH INTERFERE WITH CONSTRUCTION WILL BE RELOCATED OUTSIDE LIMITS OF CONSTRUCTION BY THE CONTRACTOR. UPON COMPLETION OF CONSTRUCTION, THE CONTRACTOR WILL RESTORE THE SIGNS TO ORIGINAL LOCATION. THE CONTRACTOR SHALL CHECK WITH THE REGIONAL TRAFFIC ENGINEER PRIOR TO MOVING ANY PERMANENT SIGNS.

SIGNALIZATION


- (7) IF RESURFACING IS INCLUDED IN THE PROJECT, SIGNAL DETECTION LOOPS SHALL BE INSTALLED BEFORE THE FINAL SURFACE IS APPLIED.
- (11) THE PROJECT ENGINEER SHALL NOTIFY THE LOCAL GOVERNMENTAL AGENCY RESPONSIBLE FOR TRAFFIC CONTROL MAINTENANCE AT LEAST ONE DAY IN ADVANCE OF THE COLD PLANING ACTIVITY AT SIGNALIZED INTERSECTIONS WHERE DETECTOR LOOPS ARE ON THE PAVEMENT. THE MAINTAINING AGENCY WILL THEN BE RESPONSIBLE FOR DISCONNECTING THE LOOP DETECTORS AND MAKING ANY NECESSARY TIMING ADJUSTMENTS IN THE SIGNAL CONTROLLER PRIOR TO THE CONSTRUCTION.
- (12) THE PROJECT ENGINEER SHALL BE RESPONSIBLE FOR SUPPLYING THE CONTRACTOR WITH AS BUILT SIGNAL PLANS AT THE PRE-CONSTRUCTION CONFERENCE. THESE PLANS WILL PROVIDE THE CONTRACTOR WITH THE DESIRED LOCATION FOR DETECTOR LOOP REPLACEMENT.
- (13) LOOPS SHALL BE INSTALLED IN THE LEVELING COURSE IF A LEVELING COURSE IS PROVIDED.
- (14) LOOP REPLACEMENT SHALL BE IN ACCORDANCE WITH SECTION 730 OF THE STANDARD SPECIFICATIONS.

CONSTRUCTION WORK ZONE & TRAFFIC CONTROL

- (1) ADVANCED WARNING SIGNS SHALL NOT BE DISPLAYED MORE THAN FORTY-EIGHT (48) HOURS BEFORE PHYSICAL CONSTRUCTION BEGINS. SIGNS MAY BE ERECTED UP TO ONE WEEK BEFORE NEEDED, IF THE SIGN FACE IS FULLY COVERED.
- (2) IF THE CONTRACTOR MOVES OFF THE PROJECT, HE SHALL COVER OR REMOVE ALL UNNEEDED SIGNS AS DIRECTED BY THE ENGINEER. COSTS OF REMOVAL, COVERING, AND REINSTALLING SIGNS SHALL NOT BE MEASURED AND PAID FOR SEPARATELY, BUT ALL COSTS SHALL BE INCLUDED IN THE ORIGINAL UNIT PRICE BID FOR ITEM NO. 712-06, SIGNS (CONSTRUCTION) PER SQUARE FOOT.
- (3) A LONG TERM BUT SPORADIC USE WARNING SIGN, SUCH AS A FLAGGER SIGN, MAY REMAIN IN PLACE WHEN NOT REQUIRED PROVIDED THE SIGN FACE IS FULLY COVERED.
- (4) TRAFFIC CONTROL DEVICES SHALL NOT BE DISPLAYED OR ERECTED UNLESS RELATED CONDITIONS ARE PRESENT NECESSITATING WARNING.
- (5) USE OF BARRICADES, PORTABLE BARRIER RAILS, AND DRUMS SHALL BE LIMITED TO THE IMMEDIATE AREAS OF CONSTRUCTION WHERE A HAZARD IS PRESENT. THESE DEVICES SHALL NOT BE STORED ALONG THE ROADWAY WITHIN THIRTY (30) FEET OF THE EDGE OF THE TRAVELED WAY BEFORE OR AFTER USE UNLESS PROTECTED BY GUARDRAIL, BRIDGE RAIL, AND/OR BARRIERS INSTALLED FOR OTHER PURPOSES FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL INCREASE TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. THESE DEVICES SHALL BE REMOVED FROM THE CONSTRUCTION WORK ZONE WHEN THE ENGINEER DETERMINES THEY ARE NO LONGER NEEDED. WHERE THERE IS INSUFFICIENT RIGHT-OF-WAY TO PROVIDE FOR THIS REQUIRED SETBACK, THE CONTRACTOR SHALL DETERMINE THE ALTERNATE LOCATIONS AND REQUEST THE ENGINEER'S APPROVAL TO USE THEM.
- (6) THE CONTRACTOR SHALL NOT BE PERMITTED TO PARK ANY VEHICLES OR CONSTRUCTION EQUIPMENT DURING PERIODS OF INACTIVITY, WITHIN THIRTY (30) FEET OF THE EDGE OF PAVEMENT WHEN THE LANE IS OPEN TO TRAFFIC UNLESS PROTECTED BY GUARDRAIL, BRIDGE RAIL, AND/OR BARRIERS INSTALLED FOR OTHER PURPOSES FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL BE INCREASED TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. PRIVATELY OWNED VEHICLES SHALL NOT BE ALLOWED TO PARK WITHIN THIRTY (30) FEET OF AN OPEN TRAFFIC LANE AT ANY TIME UNLESS PROTECTED AS DESCRIBED ABOVE FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL BE INCREASED TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. WHERE THERE IS INSUFFICIENT RIGHT-OF-WAY TO PROVIDE FOR THIS REQUIRED SETBACK, THE CONTRACTOR SHALL DETERMINE THE ALTERNATE LOCATIONS AND REQUEST THE ENGINEER'S APPROVAL TO USE THEM.
- (7) ALL DETOUR AND CONSTRUCTION SIGNING SHALL BE IN STRICT ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
- (9) THE CONTRACTOR SHALL BE RESPONSIBLE FOR STAKING CONSTRUCTION SIGNS. THE COST OF THIS WORK SHALL BE INCLUDED IN ITEM NO. 712-06, SIGNS (CONSTRUCTION), S.F.

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	2B

SEALED BY

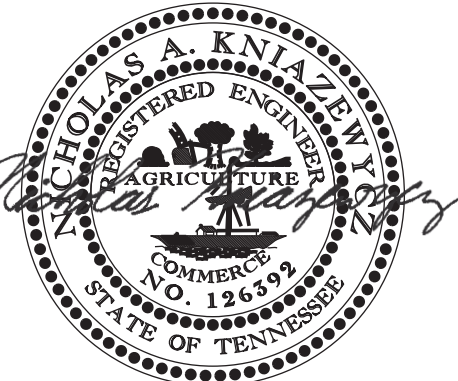

9-10-25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

GENERAL
NOTES

SPECIAL NOTES

MISCELLANEOUS

- (1)

THE CONTRACTOR SHALL TAKE EXTREME CARE WHEN WORKING AROUND EXISTING GUARDRAIL, HIGHWAY SIGNS, OR ANY DEPARTMENT OF TRANSPORTATION STRUCTURE TO AVOID DAMAGE DURING THE COURSE OF CONSTRUCTION. ANY DAMAGE WILL BE REPLACED OR REPAIRED AT HIS OWN EXPENSE.
- (2)

THE CONTARCTOR SHOULD TAKE EXTREME CARE WHEN COLD PLANING THE EXISTING ASPHALT OFF BRIDGE DECK, SO AS TO NOT DAMAGE THE EXISTING DECK, SEALANT, AND/OR EXPANSION JOINT MEMBERS (STEEL PLATES, BARS, AND/OR HEADERS). IF DAMAGE DOES OCCUR, THE CONTRACTOR SHALL BE RESPONSIBLE FOR NECESSARY REPAIRS ON ALL DAMAGED MEMBERS TO THE SATISFACTION OF THE PROJECT ENGINEER AT NO ADDITIONAL COST.

PAVEMENT MARKINGS

- (3)

THE CONTRACTOR IS TO PROVIDE THE LAYOUT OF ALL EXISTING PAVEMENT MARKINGS BEFORE BEGINNING THE RESURFACING PROJECT. EXISTING MARKINGS SHALL BE REFERENCED AS NEEDED TO ENSURE THAT ALL NEW MARKINGS ARE REPLACED IN THEIR CORRESPONDING LOCATIONS UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

PAVEMENT

PAVING

- (4)

SURFACE TO BE CROWNED AS DIRECTED BY THE ENGINEER.
- (5)

ALL STRUCTURES (DRAINAGE STRUCTURES, MANHOLES, UTILITY BOXES, ETC.) SHALL HAVE A FINISHED GRADE COMPATIBLE WITH THE FINISHED GRADE OF THE ROADWAY.

RESURFACING

- (6)

DURING COLD PLANING OPERATION, A MINIMUM OF ONE LANE OF TRAFFIC IN EACH DIRECTION WILL REMAIN OPEN.
- (7)

AFTER ANY COLD PLANING OPERATION, TEMPORARY STRIPING WILL BE REQUIRED BEFORE RETURNING TRAFFIC ONTO EXCAVATED ROADWAY.

CONSTRUCTION WORK ZONE & TRAFFIC CONTROL

- (8)

THE CONSTRUCTION SIGNS, FLAGMEN AND OTHER TRAFFIC CONTROL DEVICES WILL BE IN ACCORDANCE WITH THE CURRENT EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
- (9)

ONE ADVANCE ROAD CONSTRUCTION AHEAD SIGN IS TO BE PLACED ON ALL SIDE ROADS PRIOR TO THEIR INTERSECTION WITH THE PROPOSED PROJECT. LOCATION TO BE DETERMINED IN THE FIELD BY THE ENGINEER OR CONTRACTORS SUPERINTENDENT.

PAVEMENT EDGE DROP-OFF TRAFFIC CONTROL NOTES

- (10)

DIFFERENCES IN ELEVATION BETWEEN ADJACENT TRAFFIC LANES OR TRAFFIC LANE AND SHOULDER WHERE THE TRAFFIC LANE IS BEING USED BY TRAFFIC, CAUSED BY BASE, PAVING OR RESURFACING:
1.

DIFFERENCES IN ELEVATION BETWEEN ADJACENT ROADWAY ELEMENTS GREATER THAN 0.75 INCH AND NOT EXCEEDING 1.75 INCHES:
- A.

WARNING SIGNS, UNEVEN LANES (W8-11) AND/OR SHOULDER DROP OFF WITH PLAQUE (W8-17 AND W8-17P), SHALL BE PLACED IN ADVANCE OF AND THROUGHOUT THE EXPOSED AREA. MAXIMUM SPACING BETWEEN SIGNS SHALL BE 2,000 FEET WITH A MINIMUM OF 2 SIGNS PER EXPOSED AREA. WHERE UNEVEN PAVEMENT IS ENCOUNTERED, SIGNS SHALL BE PLACED ON EACH SIDE OF THE ROADWAY.
- B.

DIFFERENCES IN ELEVATION BETWEEN ADJACENT TRAFFIC LANES BEING UTILIZED BY TRAFFIC CAUSED BY ADDED PAVEMENT SHALL BE ELIMINATED WITHIN THREE WORKDAYS.
- C.

DIFFERENCES IN ELEVATION BETWEEN ADJACENT TRAFFIC LANES BEING UTILIZED BY TRAFFIC CAUSED BY COLD PLANING SHALL BE ELIMINATED WITHIN THREE WORKDAYS.
- D.

WHEN THE DIFFERENCE IN ELEVATION IS BETWEEN THE TRAFFIC LANE BEING UTILIZED BY TRAFFIC AND SHOULDER THE DIFFERENCE IN ELEVATION SHALL BE ELIMINATED WITHIN SEVEN WORKDAYS AFTER THE CONDITION IS CREATED.

WORK RESTRICTIONS

- (11)

CONSTRUCTION ACTIVITIES SHALL NOT INTERFERE WITH SCHOOL OR WORK TRAFFIC EITHER AM OR PM OR AS DIRECTED BY THE ENGINEER.

NASHVILLE & EASTERN COMPANY RAILROAD CROSSING NOTES

- (1)

ANY PAVEMENT PREPARATION, PAVEMENT INSTALLATION, PAVEMENT MARKINGS AND/OR RAILROAD WARNING SIGN INSTALLATION WITHIN 25- FEET OF THE NEAREST NERR TRACK UTILIZING CONTRACTOR EQUIPMENT OR PERSONNEL WILL REQUIRE FULL TIME RAILROAD FLAGGING SERVICES OR AS OTHERWISE DETERMINED BY THE RAILROAD ONLY.
- (2)

SEE AGREEMENT/STATE CONTRACT SPECIAL PROVISION 105C FOR WORK UP TO AND NEAR THE NERR CROSSING REGARDING FLAGGING RULES AND INSURANCE REQUIREMENTS.
- (3)

THE CONTRACTOR SHALL CONDUCT HIS WORK SO AS TO PROTECT NERR'S TRACK FACILITIES AND PROPERTIES FROM ANY DAMAGE. THE WORK SHALL BE DONE IN ACCORDANCE WITH REGULATIONS STIPULATED BY NERR RAILROAD SO AS TO MAINTAIN CLEARANCE AND NOT INTERRUPT TRAIN TRAFFIC IN ANY MANNER. THE CONTRACTOR SHALL NOT STORE ANY OF HIS CONSTRUCTION EQUIPMENT ON THE RAILROAD'S RIGHT-OF- WAY. THE CONTRACTOR SHALL NOTIFY AND COORDINATE HIS WORK AT THE RAILROAD CROSSING WITH THE FOLLOWING REPRESENTATIVE OF THE RAILROAD:

MR. JIMMY HORTON
TRACK SUPERVISOR
R.J. CORMAN RAILROAD COMPANY/NASHVILLE & EASTERN
PO BOX 788, 101 RJ CORMAN DRIVE
PHONE: 615-445-5357
E-MAIL: JIMMY.HORTON@RJCORMAN.COM

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	2C

SEALED BY



9-10-25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

SPECIAL NOTES

UTILITY NOTES AND OWNERS

UTILITIES

- (1) UNLESS OTHERWISE NOTED, ALL UTILITY ADJUSTMENTS WILL BE PERFORMED BY THE UTILITY OR ITS REPRESENTATIVE. THE CONTRACTOR AND UTILITY OWNERS WILL BE REQUIRED TO COOPERATE WITH EACH OTHER IN ORDER TO EXPEDITE THE WORK REQUIRED BY THIS CONTRACT. ON CONTRACTS WHERE CONSTRUCTION STAKES, LINES, AND GRADES ARE CONTRACT ITEMS, THE CONTRACTOR WILL BE REQUIRED TO PROVIDE RIGHT-OF-WAY OR SLOPE STAKES, DITCH OR STREAM BED GRADES, OR OTHER ESSENTIAL SURVEY STAKING TO PREVENT CONFLICTS WITH THE HIGHWAY CONSTRUCTION. FREQUENTLY, THIS WILL BE REQUIRED AS THE FIRST ITEM OF WORK AND AT ANY LOCATION ON THE PROJECT DIRECTED BY THE ENGINEER.
- (2) THE CONTRACTOR WILL PROVIDE ALL NECESSARY PROTECTIVE MEASURES TO SAFEGUARD EXISTING UTILITIES FROM DAMAGE DURING CONSTRUCTION OF THIS PROJECT. IN THE EVENT THAT SPECIAL EQUIPMENT IS REQUIRED TO WORK OVER AND AROUND THE UTILITIES, THE CONTRACTOR WILL BE REQUIRED TO FURNISH SUCH EQUIPMENT. THE COST OF PROTECTING UTILITIES FROM DAMAGE AND FURNISHING SPECIAL EQUIPMENT WILL BE INCLUDED IN THE PRICE BID FOR OTHER ITEMS OF CONSTRUCTION.
- (3) PRIOR TO SUBMITTING HIS BID, THE CONTRACTOR WILL BE SOLELY RESPONSIBLE FOR CONTACTING OWNERS OF ALL AFFECTED UTILITIES IN ORDER TO DETERMINE THE EXTENT TO WHICH UTILITY RELOCATIONS AND/OR ADJUSTMENTS WILL HAVE UPON THE SCHEDULE OF WORK FOR THE PROJECT. WHILE SOME WORK MAY BE REQUIRED 'AROUND' UTILITY FACILITIES THAT WILL REMAIN IN PLACE, OTHER UTILITY FACILITIES MAY NEED TO BE ADJUSTED CONCURRENTLY WITH THE CONTRACTOR'S OPERATIONS. ADVANCE CLEAR CUTTING MAY BE REQUIRED BY THE ENGINEER AT ANY LOCATION WHERE CLEARING IS CALLED FOR IN THE SPECIFICATIONS AND CLEAR CUTTING IS NECESSARY FOR A UTILITY RELOCATION. ANY ADDITIONAL COST WILL BE INCLUDED IN THE UNIT PRICE BID FOR THE CLEARING ITEM SPECIFIED IN THE PLANS.
- (4) THE CONTRACTOR SHALL NOTIFY EACH INDIVIDUAL UTILITY OWNER OF HIS PLAN OF OPERATION IN THE AREA OF THE UTILITIES. PRIOR TO COMMENCING WORK, THE CONTRACTOR SHALL CONTACT THE UTILITY OWNERS AND REQUEST THEM TO PROPERLY LOCATE THEIR RESPECTIVE UTILITY ON THE GROUND. THIS NOTIFICATION SHALL BE GIVEN AT LEAST THREE (3) BUSINESS DAYS PRIOR TO COMMENCEMENT OF OPERATIONS AROUND THE UTILITY IN ACCORDANCE WITH TCA 65-31-106. NOTIFICATION BY CALLING THE TENNESSEE ONE CALL SYSTEM, INC AT 1-800-351-1111 WILL BE REQUIRED.

UTILITY OWNERS UPDATED (07/24/2025)

TELEPHONE & FIBER:

AT&T
116 South Cannon Ave
Murfreesboro, TN 37129
Lee Kornegay
Kk4096@att.com
O: 615-848-2082
C: 615-631-7221

CABLE:
COMCAST
660 Mainstream Dr
Nashville, TN 37228
Katelyn Gross
Katelyn_gross@comcast.com
Nas-nashvilleconstructionbetterments@comcast.com
C: 615-961-2453

WATER & SEWER:
METRO WATER & SEWER
1600 Second Ave North
Nashville, TN 37208
Paisley Marotta-Mathews
Paisley.marotta@nashville.gov
O: 615-862-4142

Kecia Cain
Kecia.cain@nashville.gov
O: 615-862-4801
C: 615-796-9595

ELECTRIC:
NASHVILLE ELECTRIC SERVICE
1214 Church Street, Room 363
Nashville, TN 37246
Jon Sipes
jsipes@nespower.com
O: 615-747-3529

TENNESSEE VALLEY AUTHORITY (TVA)
1101 Market Street MR-4G
Chattanooga, TN 37402
Stephen Williams
sewilliams@tva.gov
O: 662-255-6272

GAS:
PIEDMONT GAS
83 Century Boulevard
Nashville, TN 37214
Scott Hazzard
Scotty.Hazzard@duke-energy.com
C: 615-714-2389

Nate Miller
nathaniel.miller2@duke-energy.com
O: 615-872-2457
C: 615-598-4789

FIBER OPTIC:
LUMEN (FORMERLY CENTURYLINK & LEVEL 3 COMMUNICATIONS)
520 Whaley St
Columbia, SC 29201
John Boedeker
John.boedeker@lumen.com
C: 512-334-8351

2530 Perimeter Place Dr
Nashville, TN 37214
Jeffrey Cannon
jeffrey.cannon@lumen.com
O: 615-263-1128
C: 615-419-6617

AT&T FIBER OPTIC CABLE
360 Gees Mill Business Pkwy
Conyers, GA 30013
Trina Ivey
ki2863@att.com
C: 678-641-5522

XO COMMUNICATIONS (VERIZON)
575 Hickory Hills Blvd
Whites Creek, TN 37189
Derek Dee
Derek.r.dee@verizon.com
O: 615-777-7727
C: 615-207-1297

Michael Weaver
Michael.weaver@verizon.com
C: 615-218-0656

GOOGLE NETWORK
1101 McGavock St, Suite 200
Nashville, TN 37203
Rick Bolton
boltonr@google.com
O: 629-888-2258

Joshua Day
joshuaday@google.com
O: 615-962-4402

ZAYO GROUP
4701 W Hillsborough Ave
Tampa, FL 33614
Jake Sansom
jake.sansom@zayo.com
zayo.relo.tennessee@zayo.com
C: 813-763-5999

2030 Powers Ferry Rd SE, Suite 306
Atlanta, GA 30339
Jamy Debardeleben
jamy.debardeleben@zayo.com
C: 678-755-7281

CROWN CASTLE
6325 Ardrey Kell Rd, Suite 600
Charlotte, NC 28277
Joe Baluha
Joe.Baluha@crowncastle.com
O: 336-562-7304
C: 585-255-0008

370 Mallory Station Rd, Suite 505
Franklin, TN 37067
Drew Parker
Drew.Parker@crowncastle.com
O: 630-480-5177
C: 847-212-9842

WINDSTREAM COMMUNICATIONS
658 Tree Farm Road
Linden, TN 37096
Tommy Rayfield
tommy.rayfield@windstream.com
O: 812-253-1587
C: 931-994-1249

Cogent Communications (Sprint/T-Mobile)
5050 Conference Way, Suite 100
Boca Raton, FL 33431
Cameron Jernigan
cjernigan@cogentco.com
C: 448-234-3503

STREETLIGHTS & FIBER:
NASHVILLE DEPT. OF TRANSPORTATION (NDOT)
720 South Fifth Street
Nashville, TN 37206
Mike Hirtzer
michael.hirtzer@nashville.gov
O: 615-880-3261

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	2C1

SEALED BY



9-10-25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

UTILITY NOTES
AND OWNERS

ENVIRONMENTAL NOTES

ENVIRONMENTAL GENERAL NOTES

NATURAL RESOURCES

- (4) THE OPERATION OF EQUIPMENT IN WATERS OF THE STATE/U.S., INCLUDING WETLANDS AND EPHEMERAL, INTERMITTENT, AND PERENNIAL STREAMS, IS NOT ALLOWED.
- (9) THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS PRIOR TO ANY CONSTRUCTION AND MAINTENANCE ACTIVITIES TO ENSURE THAT ENVIRONMENTAL FEATURES (E.G., STREAMS, WETLANDS, SPRINGS, ETC.) ARE NOT IMPACTED BEYOND PERMITTED LOCATIONS. IF THE CONTRACTOR OR TDOT INSPECTOR IS UNSURE OF THE IDENTITY OF AN ENVIRONMENTAL FEATURE, THE INSPECTOR SHALL CONTACT THE TDOT REGION ENVIRONMENTAL TECH GROUP IMMEDIATELY.

SPECIES

- (11) SHOULD CLIFF SWALLOW OR BARN SWALLOW NESTS, EGGS, OR BIRDS (YOUNG AND ADULTS) BE PRESENT, THE CONTRACTOR SHALL CONTACT THE REGIONAL ECOLOGY OFFICE TO DETERMINE IF SEASONAL RESTRICTIONS WILL BE NECESSARY. GENERALLY, BIRDS, NESTS, AND EGGS MAY NOT BE DISTURBED BETWEEN APRIL 15 AND JULY 31. FROM AUGUST 1 TO APRIL 14, NESTS CAN BE REMOVED OR DESTROYED SO LONG AS BIRDS OR EGGS ARE NOT PRESENT, AND MEASURES IMPLEMENTED TO PREVENT FUTURE NEST BUILDING AT THE SITE (I.E., CLOSING OFF AREA USING NETTING).
- (12) IF THE REMOVAL OF ANY TREES WITH A DIAMETER AT BREAST HEIGHT (DBH) GREATER THAN 3 INCHES IS DEEMED NECESSARY THE TDOT SUPERVISOR SHALL CONTACT THE TDOT ENVIRONMENTAL DIVISION, ECOLOGY SECTION IMMEDIATELY.

PERMITS, PLANS & RECORDS

- (15) IF A CHANGE IN PROJECT SCOPE OCCURS DURING CONSTRUCTION, INCLUDING VALUE ENGINEERING, THE TDOT PERMIT SECTION SHALL BE CONTACTED TO DETERMINE WHETHER PERMIT REVISIONS ARE NEEDED. THE ROADWAY DESIGN DIVISION SHALL BE CONTACTED TO DETERMINE IF ANY PLAN REVISIONS ARE NEEDED.

ENVIRONMENTAL SPECIAL NOTES

ENVIRONMENTAL

- (1) STAFF FROM THE TDOT ENVIRONMENTAL DIVISION COMPLIANCE AND FIELD SERVICES OFFICE SHALL BE INVITED TO ALL PRE-CONSTRUCTION MEETINGS.

ECOLOGY

- (2) STAFF FROM THE TDOT ENVIRONMENTAL DIVISION OR A DESIGNEE SHALL ADVISE THE CONTRACTOR DURING THE PRE-CONSTRUCTION MEETING WHEN ENVIRONMENTAL DIVISION PERSONNEL OR A DESIGNATED CONSULTANT WILL NEED TO BE ONSITE FOR WORK BEING DONE WHICH COULD AFFECT WATERS OF THE STATE/U.S. OR SPECIES.
- (3) STAFF FROM THE TDOT ENVIRONMENTAL DIVISION OR A DESIGNEE SHALL ATTEND THE PRE-CONSTRUCTION MEETING FOR ALL PROJECTS WHICH HAVE THREATENED OR ENDANGERED SPECIES OR CRITICAL HABITAT PROXIMAL TO SCHEDULED WORK. THIS WILL PROVIDE THE OPPORTUNITY TO ENSURE THAT PERSONNEL INCLUDING THE CONTRACTOR'S PERSONNEL AND SUBCONTRACTORS ARE MADE AWARE OF THE NECESSARY PRECAUTIONS THAT MUST BE FOLLOWED.
- (4) ALL PROJECTS WITH LEGALLY PROTECTED SPECIES OR CRITICAL HABITAT IDENTIFIED SHALL HAVE MEASURES IN PLACE TO CONTAIN CONCRETE DUST, CEMENT DUST AND ALL OTHER MATERIALS. THESE MATERIALS ARE NOT ALLOWED TO ENTER WATERS OF THE STATE/U.S.

SCOPE OF WORK

- (6) PROJECT INCLUDES COLD PLANING, 411D RESURFACING, PAVEMENT MARKING, TRAFFIC CONTROL, AND OTHER TASKS AS INDICATED IN THE PLANS OR AS DIRECTED BY THE TDOT ENGINEER.

EROSION PREVENTION AND SEDIMENT CONTROL GENERAL NOTES

DISTURBED AREA

- (1) IF DISTURBED ACREAGE IS EQUAL TO ONE ACRE OR MORE, PLEASE CONTACT TDOT ENVIRONMENTAL DIVISION, PERMITS SECTION AS SOON AS POSSIBLE BECAUSE AN NPDES PERMIT WILL BE REQUIRED.

SEDIMENT CONTROL

- (6) EPSC MEASURES SHALL BE INSTALLED AND FUNCTIONAL PRIOR TO ANY EARTH MOVING OPERATIONS AND SHALL BE MAINTAINED THROUGHOUT THE CONSTRUCTION PERIOD EXCEPT AS SUCH WORK MAY BE NECESSARY TO INSTALL EPSC MEASURES.
- (8) THE CONTRACTOR SHALL ESTABLISH AND MAINTAIN A PROACTIVE METHOD TO PREVENT THE OFFSITE MIGRATION OR DEPOSIT OF SEDIMENT OFF THE PROJECT LIMITS (E.G. R.O.W., EASEMENTS, ETC.), INTO WATERS OF THE STATE/U.S., OR ONTO ROADWAYS USED BY THE GENERAL PUBLIC. IF SEDIMENT ESCAPES THE CONSTRUCTION SITE, OFFSITE ACCUMULATIONS OF SEDIMENT THAT HAVE NOT REACHED A STREAM MUST BE REMOVED AT A FREQUENCY SUFFICIENT TO MINIMIZE OFFSITE IMPACTS (E.G., FUGITIVE SEDIMENT THAT HAS ESCAPED THE CONSTRUCTION SITE AND HAS COLLECTED IN A STREET MUST BE REMOVED SO THAT IT IS NOT SUBSEQUENTLY WASHED INTO STORM SEWERS AND STREAMS BY THE NEXT RAIN AND/OR SO THAT IT DOES NOT POSE A SAFETY HAZARD TO USERS OF PUBLIC STREETS). ARRANGEMENTS CONCERNING REMOVAL OF SEDIMENT ON ADJOINING PROPERTY MUST BE NEGOTIATED WITH THE ADJOINING PROPERTY OWNER BEFORE REMOVAL OF SEDIMENT.

GOOD HOUSEKEEPING MEASURES & WASTE DISPOSAL

- (29) THE CONTRACTOR SHALL ESTABLISH AND MAINTAIN A PROACTIVE METHOD TO PREVENT LITTER AND CONSTRUCTION WASTES FROM ENTERING WATERS OF THE STATE/U.S. THESE MATERIALS SHALL BE REMOVED FROM STORMWATER EXPOSURE PRIOR TO ANTICIPATED STORM EVENTS OR BEFORE BEING CARRIED OFFSITE BY WIND, OR OTHERWISE PREVENTED FROM BECOMING A POLLUTANT SOURCE FOR STORMWATER DISCHARGES. AFTER USE, MATERIALS USED FOR EPSC SHALL BE REMOVED FROM THE SITE.
- (30) THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS TO ENSURE THAT PETROLEUM PRODUCTS OR OTHER CHEMICAL POLLUTANTS ARE PREVENTED FROM ENTERING WATERS OF THE STATE/U.S. ALL EQUIPMENT REFUELING, SERVICING, AND STAGING AREAS SHALL COMPLY WITH ALL LOCAL, STATE, AND FEDERAL LAWS, RULES, REGULATIONS, AND ORDINANCES, INCLUDING THOSE OF THE NATIONAL FIRE PROTECTION ASSOCIATION. APPROPRIATE CONTAINMENT MEASURES FOR THESE AREAS SHALL BE USED.
- (31) CONTRACTORS SHALL PROVIDE DESIGNATED TRUCK WASHOUT AREAS ON THE SITE. THESE AREAS MUST BE SELF CONTAINED, NOT CONNECTED TO ANY STORMWATER OUTLET OF THE SITE, AND PROPERLY SIGNED. WASH DOWN OR WASTE DISCHARGE OF CONCRETE TRUCKS SHALL NOT BE PERMITTED ONSITE UNLESS PROPER SETTLEMENT AREAS HAVE BEEN PROVIDED IN ACCORDANCE WITH BOTH STATE AND FEDERAL REGULATIONS.
- (32) WHEEL WASH WATER SHALL BE COLLECTED AND ALLOWED TO SETTLE OUT SUSPENDED SOLIDS PRIOR TO DISCHARGE. WHEEL WASH WATER SHALL NOT BE DISCHARGED DIRECTLY INTO ANY STORMWATER SYSTEM OR STORMWATER TREATMENT SYSTEM.
- (33) IF PORTABLE SANITARY FACILITIES ARE PROVIDED ON CONSTRUCTION SITES, SANITARY WASTE SHALL BE COLLECTED FROM THE PORTABLE UNITS IN A TIMELY MANNER BY A LICENSED WASTE MANAGEMENT CONTRACTOR OR AS REQUIRED BY ANY REGULATIONS. THE CONTRACTOR SHALL OBTAIN ANY AND ALL NECESSARY PERMITS TO DISPOSE OF SANITARY WASTE.
- (34) ONLY CONSTRUCTION PRODUCTS NEEDED SHALL BE STORED ONSITE BY THE CONTRACTOR. THE CONTRACTOR SHALL STORE ALL MATERIALS UNDER COVER AND IN APPROPRIATE CONTAINERS. PRODUCTS MUST BE STORED IN ORIGINAL CONTAINERS AND LABELED. MATERIAL MIXING SHALL BE CONDUCTED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. THE CONTRACTOR'S RESPONSIBLE PARTY SHALL INSPECT MATERIALS STORAGE AREAS REGULARLY TO ENSURE PROPER USE AND DISPOSAL.

- (35) WHEN POSSIBLE, ALL PRODUCTS SHALL BE USED COMPLETELY BEFORE PROPERLY DISPOSING OF THE CONTAINER OFFSITE. THE MANUFACTURER'S DIRECTIONS FOR DISPOSAL OF MATERIALS AND CONTAINERS SHALL BE FOLLOWED.
- (36) ALL PAINT CONTAINERS SHALL BE TIGHTLY SEALED AND STORED WHEN NOT REQUIRED FOR USE. EXCESS PAINT SHALL BE DISPOSED OF ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS AND APPLICABLE STATE AND LOCAL REGULATIONS.
- (37) ALL HAZARDOUS WASTE MATERIALS SHALL BE DISPOSED OF IN A MANNER WHICH IS COMPLIANT WITH LOCAL OR STATE REGULATIONS. SITE PERSONNEL SHALL BE INSTRUCTED IN THESE PRACTICES, AND THE INDIVIDUAL DESIGNATED AS THE CONTRACTOR'S RESPONSIBLE PARTY SHALL BE RESPONSIBLE FOR SEEING THAT THESE PRACTICES ARE FOLLOWED. THE CONTRACTOR SHALL OBTAIN ANY AND ALL NECESSARY PERMITS TO DISPOSE OF HAZARDOUS MATERIAL.
- (38) OPEN BURNING IS PROHIBITED UNLESS IT IS SPECIFICALLY ALLOWED BY LAW. IF ALLOWED, NATURAL VEGETATION, TREES, AND UNTREATED LUMBER SHALL BE THE ONLY MATERIALS THAT CAN BE OPEN BURNED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL APPLICABLE STATE AND LOCAL PERMITS PRIOR TO ANY BURNING.
- (39) DISPOSAL OF ONSITE VEGETATION AND TREES BY CHIPPING THEM INTO MULCH IS PREFERABLE TO OPEN BURNING. THIS MULCH MAY BE USED AS AN ONSITE SOIL STABILIZATION MEASURE WHERE APPROPRIATE.
- (40) WASTE MATERIAL (EARTH, ROCK, ASPHALT, CONCRETE, ETC.) NOT REQUIRED FOR THE CONSTRUCTION OF THE PROJECT WILL BE DISPOSED OF BY THE CONTRACTOR. IMPACTS TO WATERS OF THE STATE/U.S. SHALL BE AVOIDED IF POSSIBLE. IF UNAVOIDABLE, THE CONTRACTOR WILL OBTAIN ANY AND ALL NECESSARY PERMITS INCLUDING, BUT NOT LIMITED TO NPDES, AQUATIC RESOURCES ALTERATION PERMIT(S), CORPS OF ENGINEERS SECTION 404 PERMITS, AND TVA SECTION 26A PERMITS TO DISPOSE OF WASTE MATERIALS.

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	2D

SEALED BY



9-10-25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

ENVIRONMENTAL
NOTES

ENVIRONMENTAL NOTES (CONTINUED)

SPILL PREVENTION, MANAGEMENT & NOTIFICATION

- (44) ALL ONSITE VEHICLES SHALL BE MONITORED FOR LEAKS AND RECEIVE REGULAR PREVENTIVE MAINTENANCE TO REDUCE THE CHANCE OF LEAKAGE AND SPILLS.
- (45) FOR ALL HAZARDOUS MATERIALS STORED ONSITE, THE MANUFACTURER'S RECOMMENDED METHODS FOR SPILL CLEAN UP SHALL BE CLEARLY POSTED. SITE PERSONNEL SHALL BE MADE AWARE OF THE PROCEDURES AND THE LOCATIONS OF THE INFORMATION AND CLEANUP SUPPLIES.
- (46) APPROPRIATE CLEANUP MATERIALS AND EQUIPMENT SHALL BE MAINTAINED BY THE CONTRACTOR IN THE MATERIALS STORAGE AREA ONSITE AND UNDER COVER. SPILL RESPONSE EQUIPMENT SHALL BE INSPECTED AND MAINTAINED BY THE CONTRACTOR AS NECESSARY TO REPLACE ANY MATERIALS USED IN SPILL RESPONSE ACTIVITIES.
- (47) ALL SPILLS SHALL BE CLEANED IMMEDIATELY AFTER DISCOVERY AND THE MATERIALS DISPOSED OF PROPERLY. THE SPILL AREA SHALL BE KEPT WELL VENTILATED AND PERSONNEL WILL WEAR APPROPRIATE PROTECTIVE CLOTHING TO PREVENT INJURY FROM CONTACT WITH A HAZARDOUS SUBSTANCE.
- (48) THE CONTRACTOR'S RESPONSIBLE PARTY SHALL BE THE SPILL PREVENTION AND CLEANUP COORDINATOR. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT THE SITE SUPERINTENDENT HAS HAD APPROPRIATE TRAINING FOR HAZARDOUS MATERIALS HANDLING, SPILL MANAGEMENT, AND CLEANUP.
- (49) IF AN OIL SHEEN IS OBSERVED ON SURFACE WATER (E.G. SETTLING PONDS, DETENTION PONDS, SWALES), ACTION SHALL BE TAKEN IMMEDIATELY TO REMOVE THE MATERIAL CAUSING THE SHEEN. THE CONTRACTOR SHALL USE APPROPRIATE MATERIALS TO CONTAIN AND ABSORB THE SPILL. THE SOURCE OF THE OIL SHEEN WILL ALSO BE IDENTIFIED AND REMOVED OR REPAIRED AS NECESSARY TO PREVENT FURTHER RELEASES.
- (50) FERTILIZERS SHALL BE APPLIED ONLY IN THE AMOUNTS SPECIFIED. ONCE APPLIED, FERTILIZERS SHALL BE WORKED INTO THE SOIL TO LIMIT THE EXPOSURE TO STORMWATER.
- (51) IF A SPILL OCCURS THE CONTRACTOR'S RESPONSIBLE PARTY SHALL BE RESPONSIBLE FOR COMPLETING THE SPILL REPORTING FORM AND FOR REPORTING THE SPILL TO THE TDOT PROJECT RESPONSIBLE PARTY. ALL SPILLS MUST BE REPORTED TO THE APPROPRIATE AGENCY, AND MEASURES SHALL BE TAKEN IMMEDIATELY TO PREVENT THE POLLUTION OF WATERS OF THE STATE/U.S., INCLUDING GROUNDWATER, SHOULD A SPILL OCCUR.
- (52) WHERE A RELEASE CONTAINING A HAZARDOUS SUBSTANCE IN AN AMOUNT EQUAL TO OR IN EXCESS OF A REPORTABLE QUANTITY ESTABLISHED UNDER EITHER 40 CFR 117 OR 40 CFR 302 OCCURS DURING A 24 HOUR PERIOD, SEE THE LATEST TENNESSEE GENERAL PERMIT NO. TNR100000 STORMWATER DISCHARGES FROM CONSTRUCTION ACTIVITIES SECTION 5.1 FOR REPORTING REQUIREMENTS.
- (53) CONTRACTOR'S BULK FUEL AND PETROLEUM PRODUCTS STORED ONSITE OR ADJACENT TO THE R.O.W. IN ABOVE GROUND STORAGE CONTAINERS WITH A COMBINED CAPACITY OF 1320 GALLONS OR MORE SHALL HAVE SECONDARY CONTAINMENT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PREPARING A SPILL PREVENTION CONTROL AND COUNTERMEASURE (SPCC) PLAN FOR THE BULK STORAGE AND BE SOLELY RESPONSIBLE FOR OBTAINING ANY NECESSARY LOCAL, STATE, AND FEDERAL PERMITS. THE SPCC PLAN AND/OR PERMITS SHALL BE KEPT ONSITE AND A COPY PROVIDED TO THE TDOT PROJECT RESPONSIBLE PARTY PRIOR TO STORING 1320 GALLONS ON SITE.

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	2D1

SEALED BY




9-10-25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

ENVIRONMENTAL
NOTES

9/10/2025 1:39:58 PM
\\tdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\Pavement Marking Improvements\MODIFIED\Davidson (127317.00), SR-1, 17.00-20.42.dgn

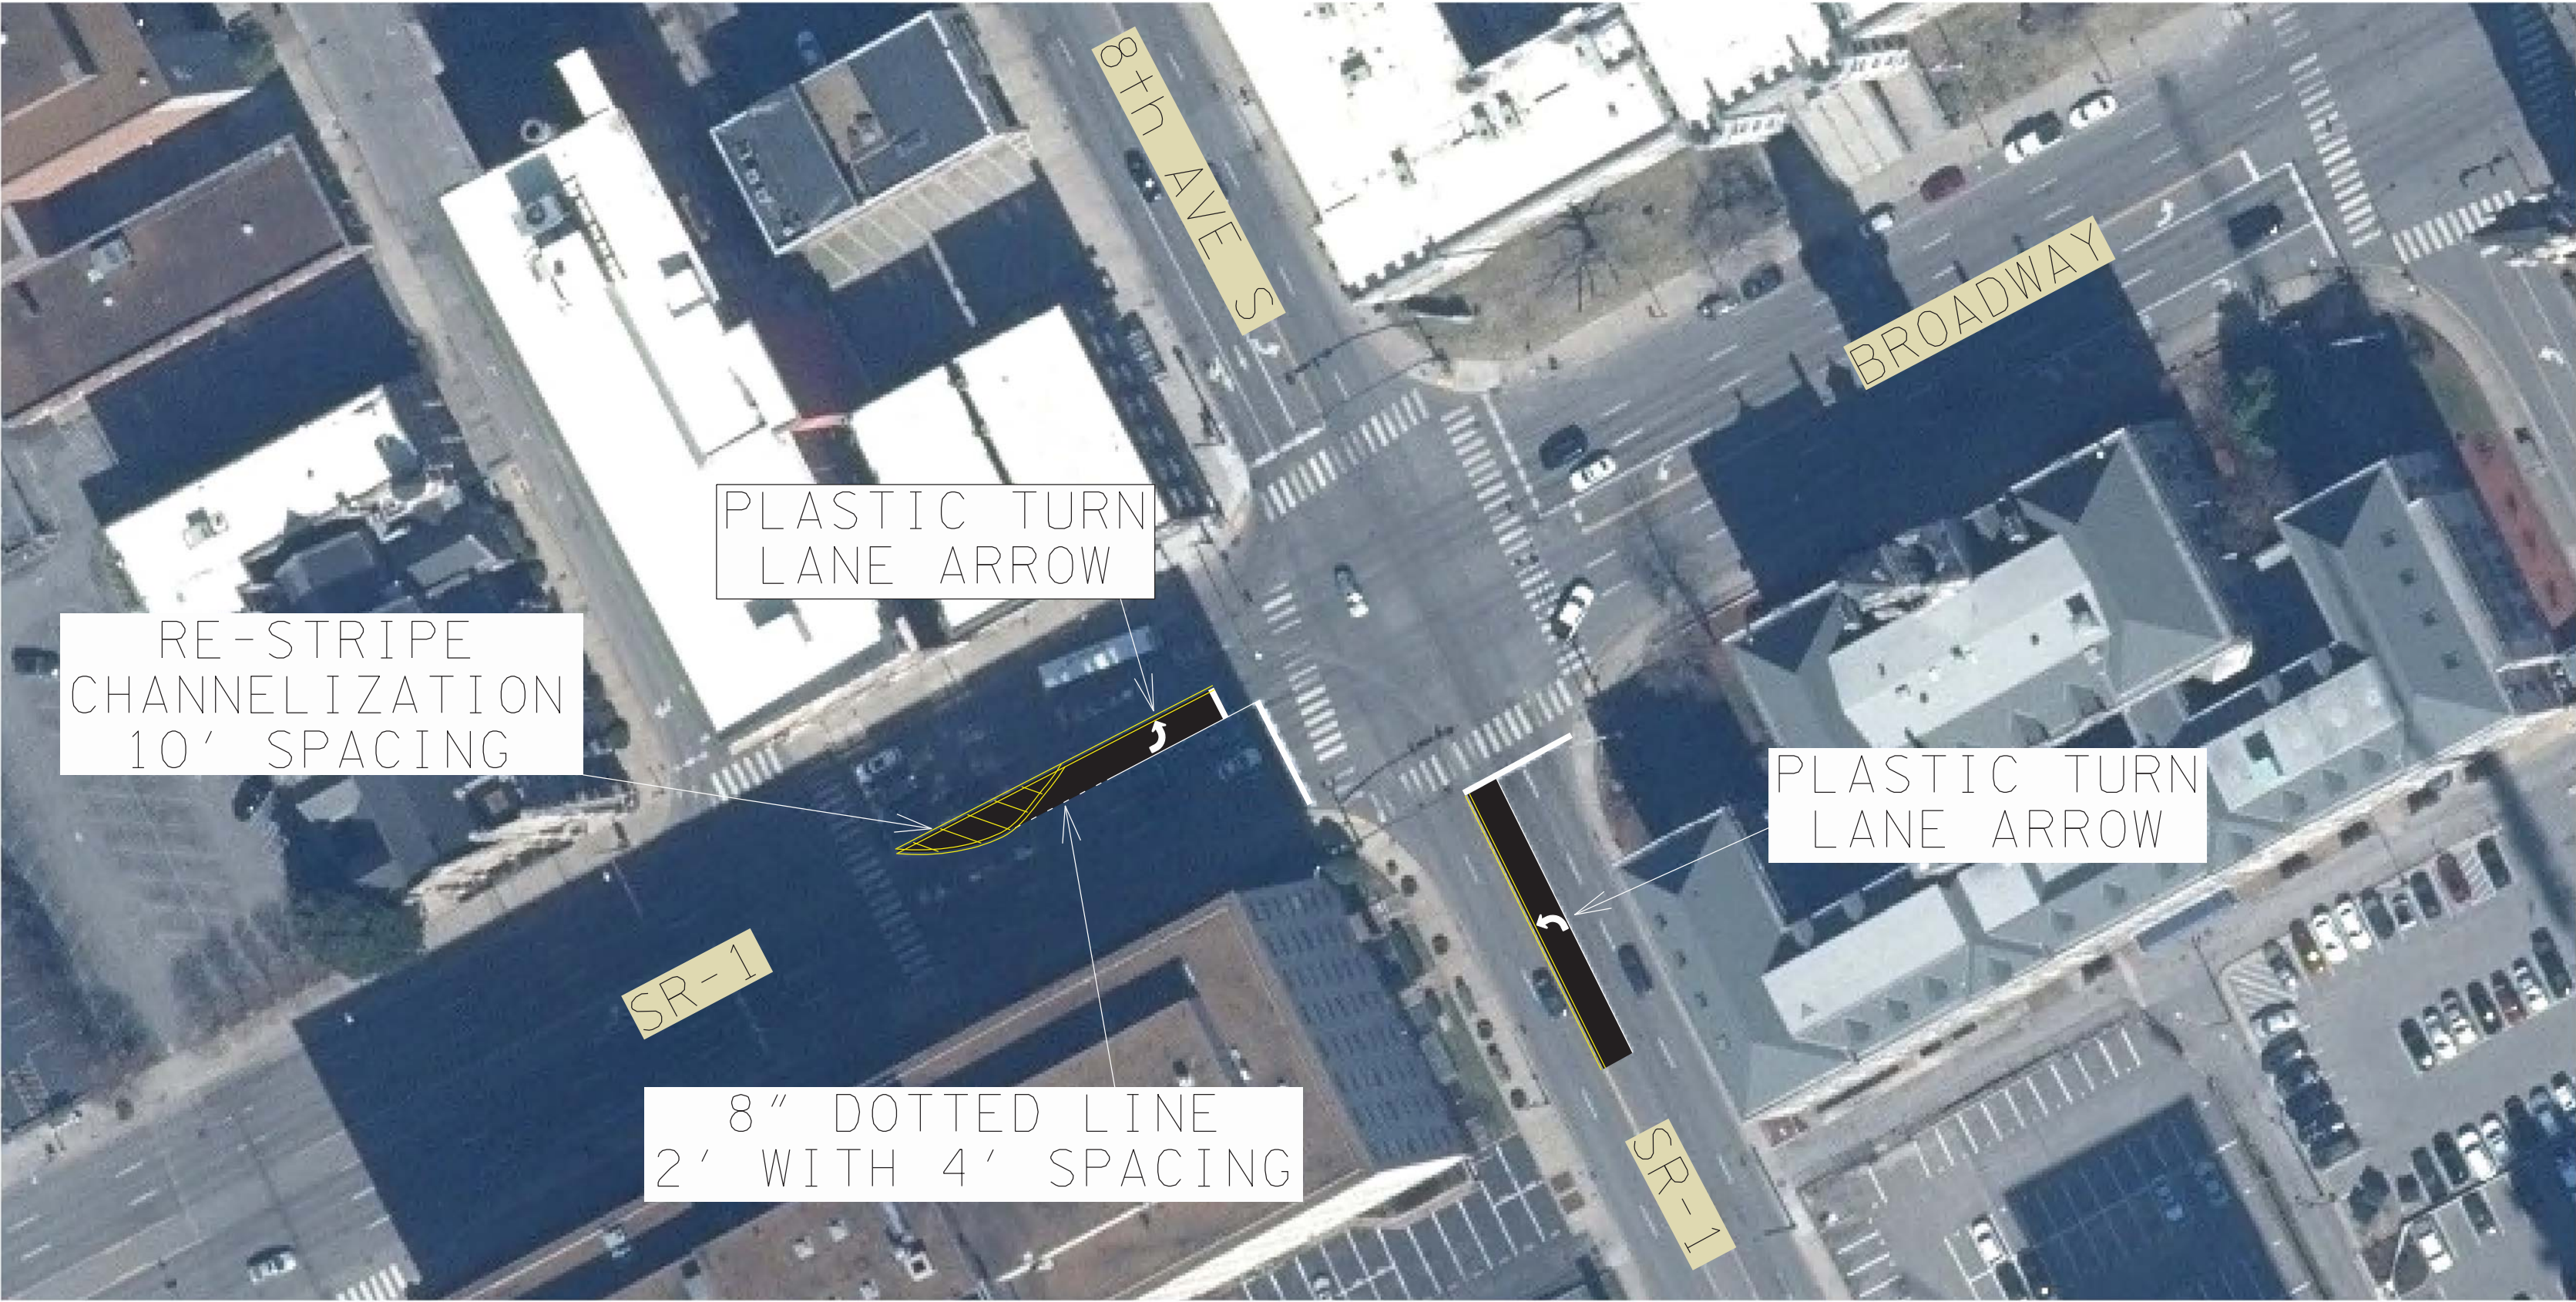

STATE ROUTE 1
17.52 - 17.60 LM
DAVIDSON COUNTY

REFERENCE STANDARD DRAWING
T-M-3, T-M-4

FOR REFERENCE ONLY
PROVIDED BY REGION 3 TRAFFIC

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	2E

SEALED BY




9-10-25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

PAVEMENT
MARKING
IMPROVEMENTS
NOT TO SCALE

9/10/2025 1:41:49 PM
\\tdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\Pavement Marking Improvements\MODIFIED\Davidson (127317.00), SR-1, 17.00-20.42.dgn

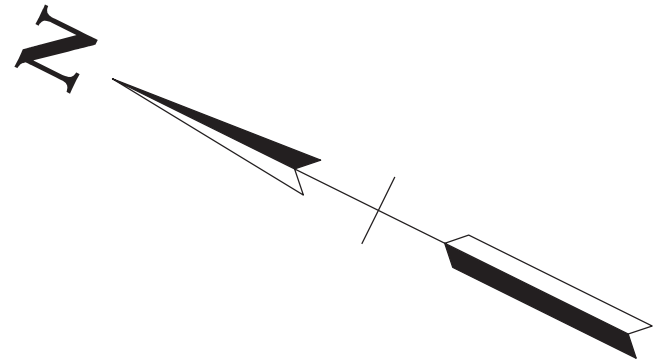

STATE ROUTE 1
17.78 - 17.86 LM
DAVIDSON COUNTY

REFERENCE STANDARD DRAWING
T-M-4

FOR REFERENCE ONLY
PROVIDED BY REGION 3 TRAFFIC

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	2E1

SEALED BY





9-10-25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

PAVEMENT
MARKING
IMPROVEMENTS
NOT TO SCALE

9/10/2025 1:42:28 PM
\\tdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\Pavement Marking Improvements\MODIFIED\Davidson (127317.00), SR-1, 17.00-20.42.dgn

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	2E2

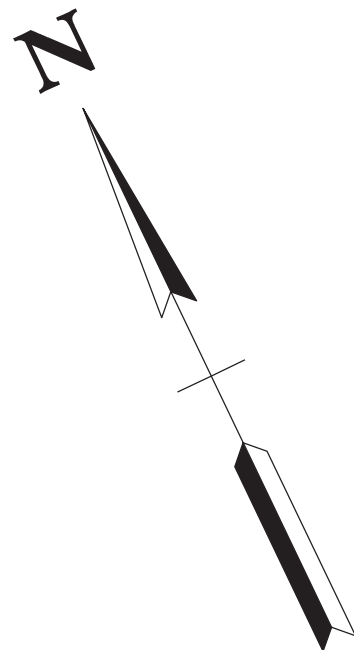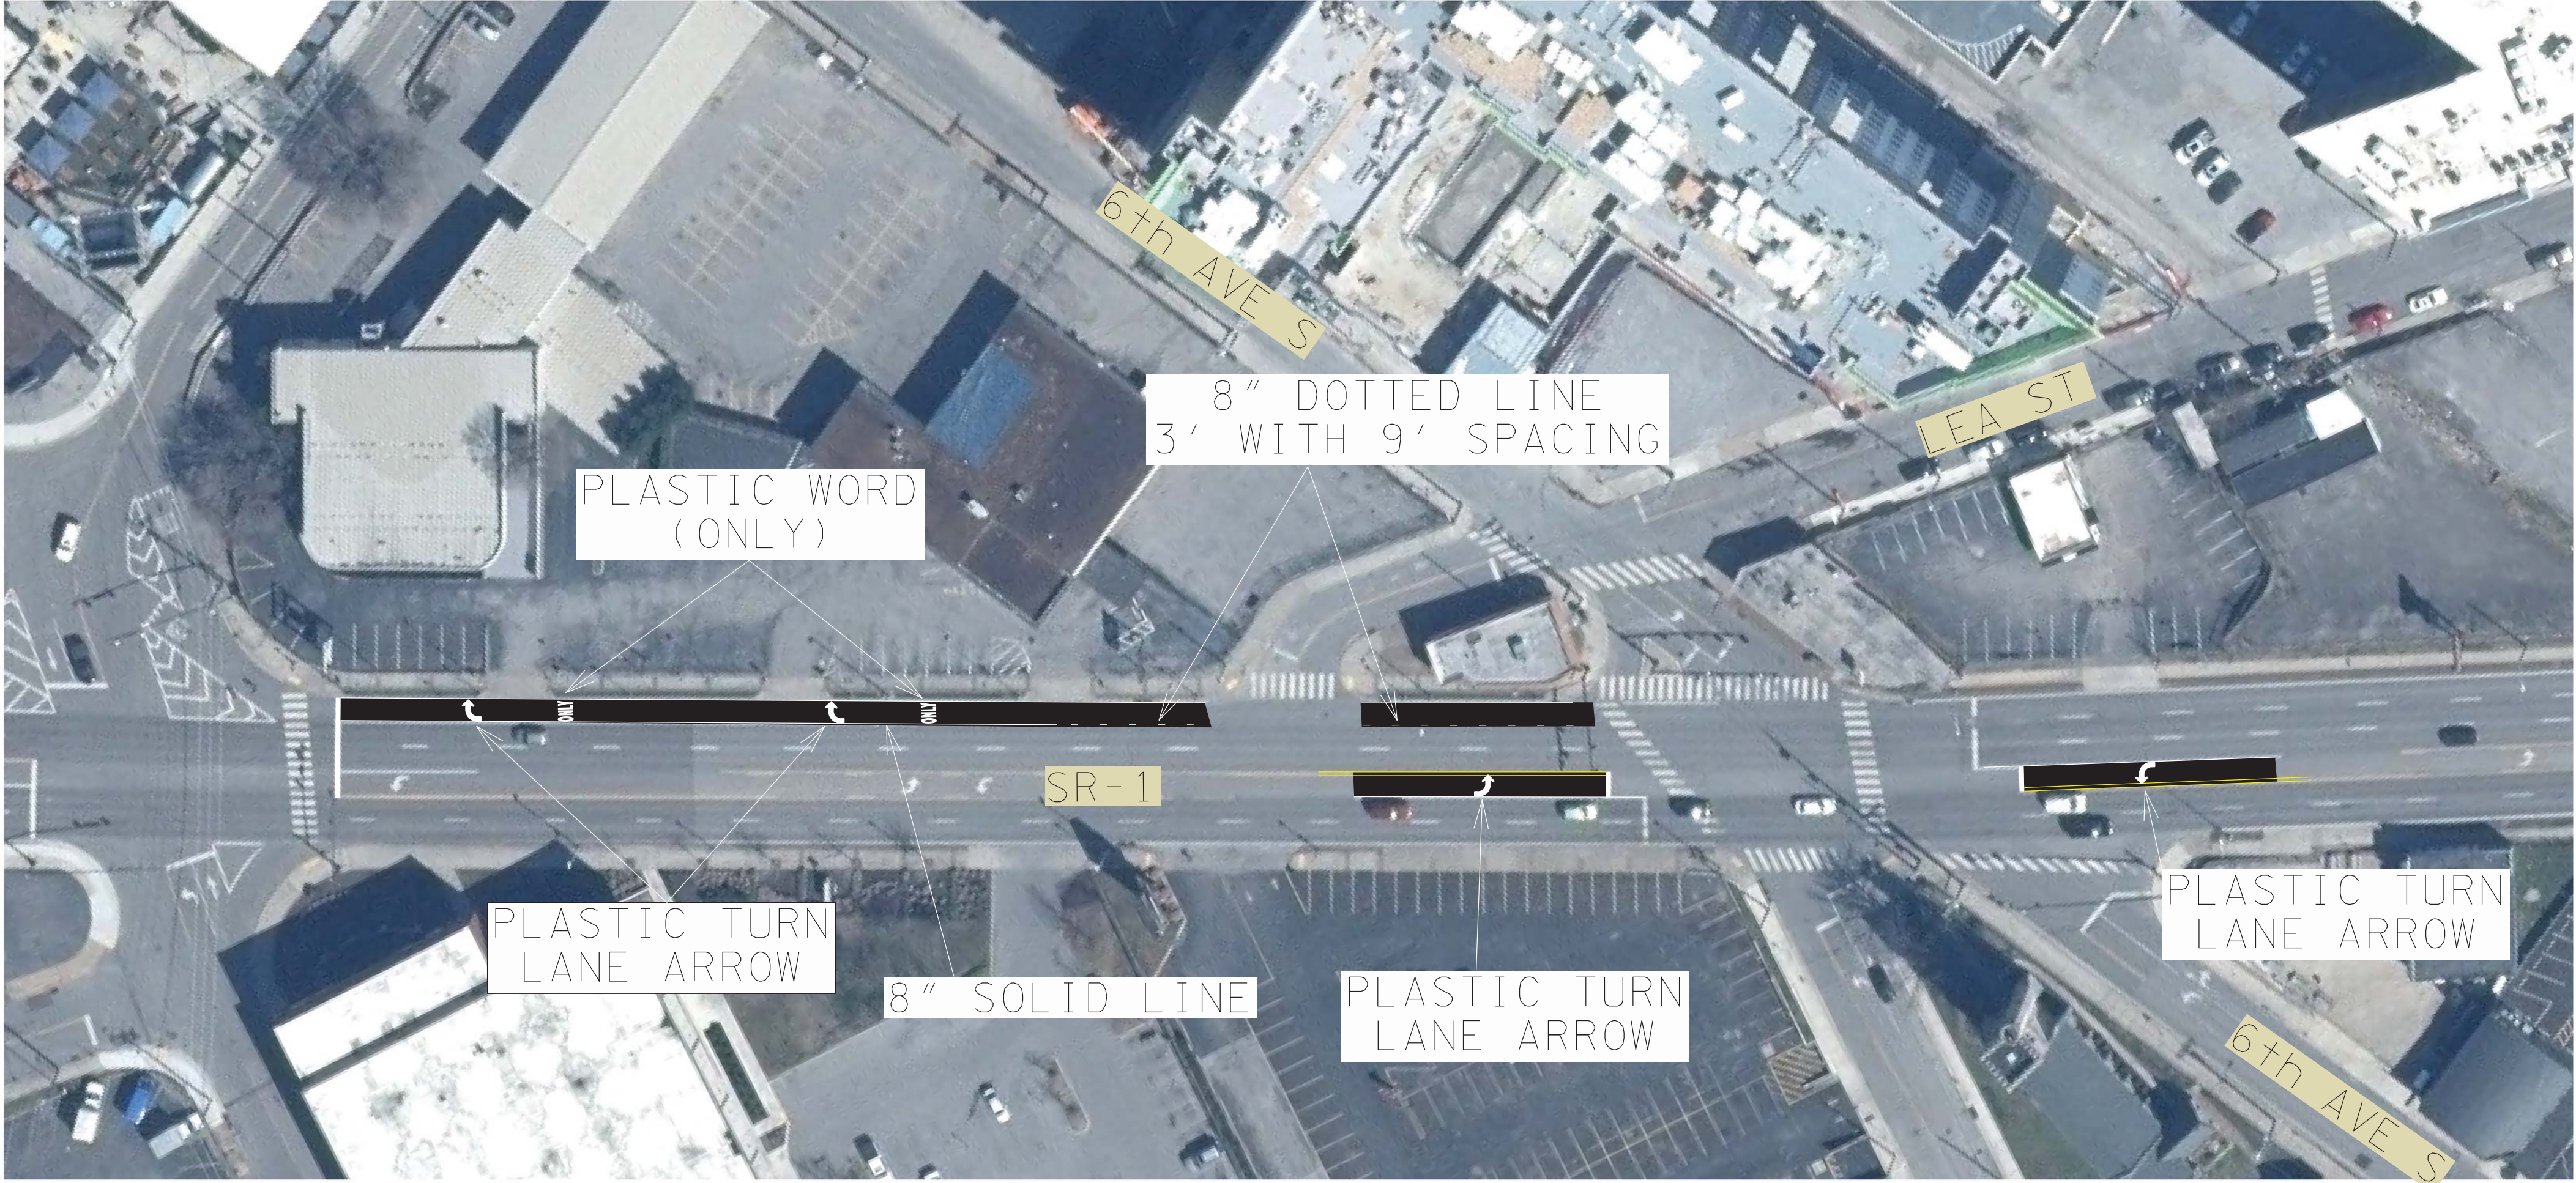

STATE ROUTE 1
18.00 - 18.19 LM
DAVIDSON COUNTY

REFERENCE STANDARD DRAWING
T-M-4

FOR REFERENCE ONLY
PROVIDED BY REGION 3 TRAFFIC


SEALED BY



STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

PAVEMENT
MARKING
IMPROVEMENTS
NOT TO SCALE

9/10/2025 1:43:07 PM
\\tdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\Pavement Marking Improvements\MODIFIED\Davidson (127317.00), SR-1, 17.00-20.42.dgn

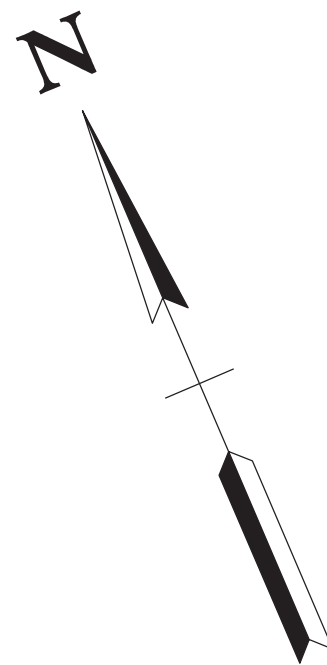

STATE ROUTE 1
18.23 - 18.43 LM
DAVIDSON COUNTY

REFERENCE STANDARD DRAWING
T-M-4

FOR REFERENCE ONLY
PROVIDED BY REGION 3 TRAFFIC

TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2025	NH/HSIP-1(432)	2E3

SEALED BY



9-10-25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

PAVEMENT
MARKING
IMPROVEMENTS
NOT TO SCALE


27-AUG-2025 11:17
\\tdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\127317-00-Construction-003A.dgn

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2021	NH/HSIP-1(432)	3A
RESURF.	2025	NH/HSIP-1(432)	3A

REV. 03-24-22: ADDED TRACT NUMBER TO ACQUISITION TABLE AND PROPOERTY MAP.

REV. 05-04-22: REVISED EXISTING ROW LINES, STATION AND OFFSET, AND ACQUISITION TABLE.

REV. 03-03-23: UPDATED PROPERTY OWNER FOR TRACT 1

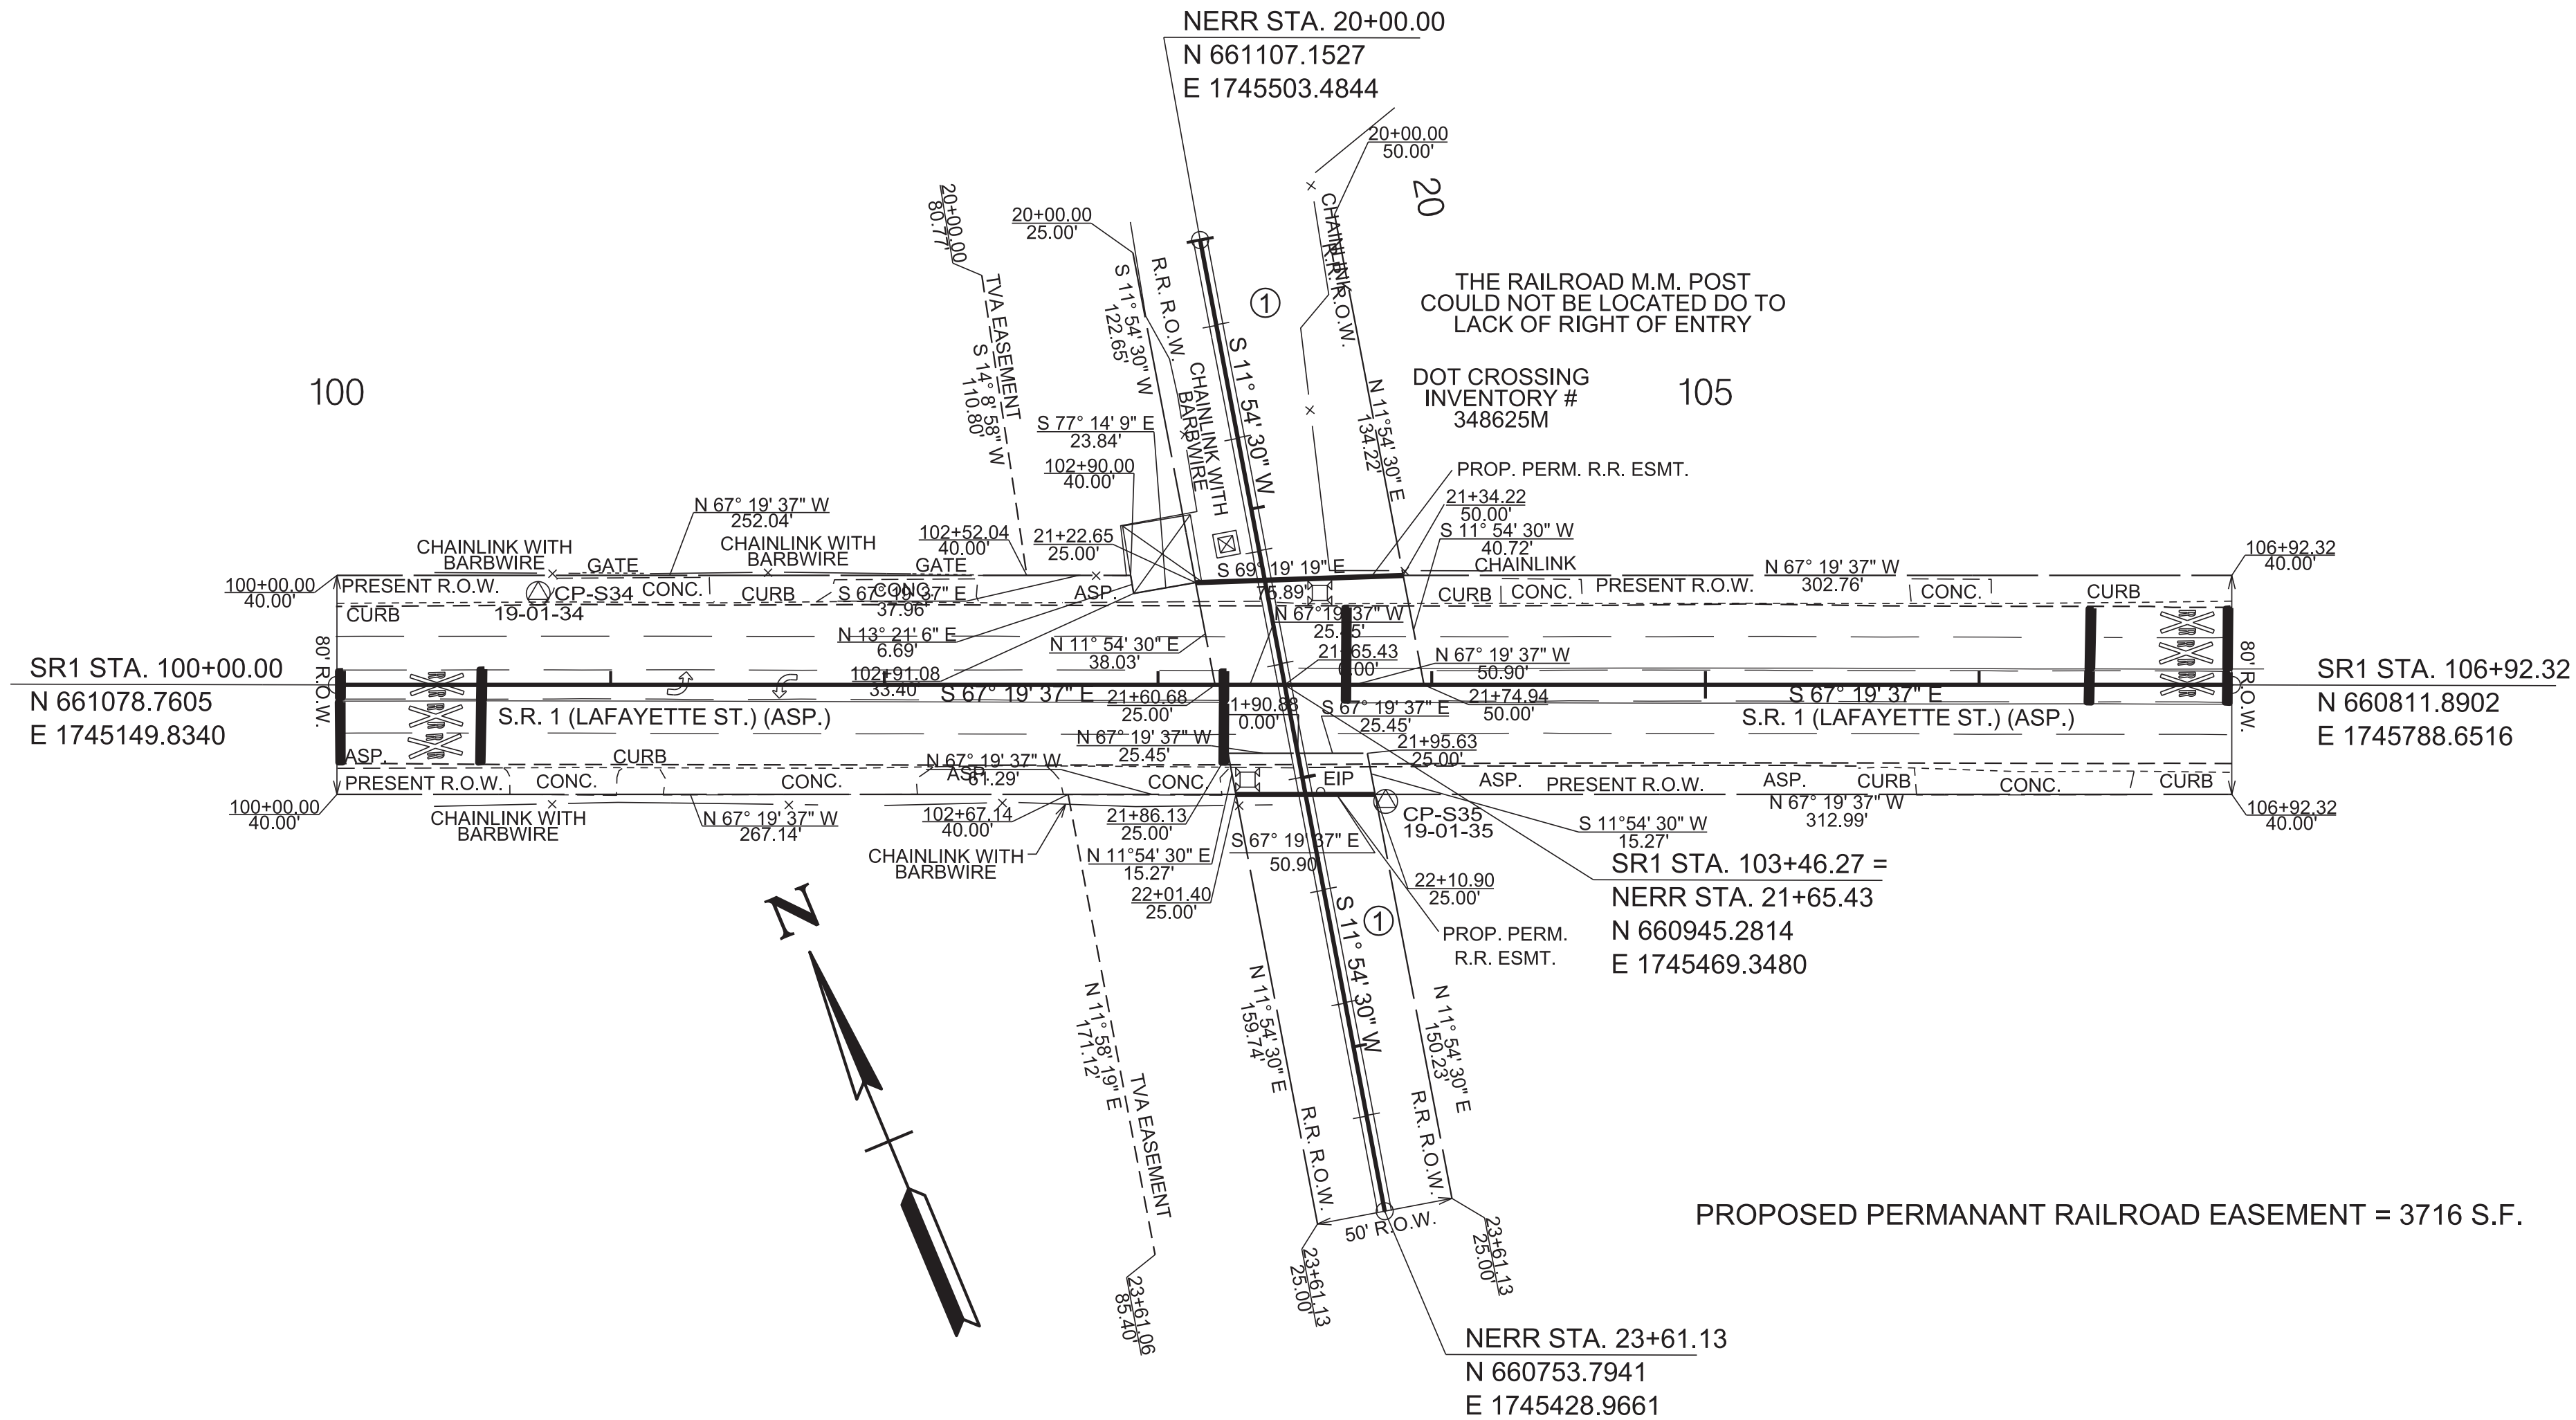

Point	North	East	Elevation	Station	Offset	Description
S34	661081.2289	1745230.5620	427.518	100+73.54	33.40'	XCP=19-01-34
S35	660891.7789	1745486.9823	424.424	103+83.17	42.57'	XCP=19-01-35

R.O.W. ACQUISITION TABLE

TRACT NO.	PROPERTY OWNERS	COUNTY RECORDS				TOTAL AREA (ACRES)			AREA TO BE ACQUIRED (ACRES)			AREA REMAINING (ACRES)		EASEMENT (ACRES)			
		TAX MAP NO.	PARCEL NO.	DEED DOCUMENT REFERENCE		LEFT	RIGHT	TOTAL	LEFT	RIGHT	TOTAL	LEFT	RIGHT	PERMANENT	SLOPE	CONSTRUCTION	AIR RIGHTS
				BOOK	PAGE												
1	NASHVILLE AND EASTERN RAILROAD AUTHORITY			277	477									3716 S.F.			
				277	453												
				277	54												
				4321	325												
				6978	401												
ACQUISITION TOTALS (ACRES)														3716 S.F.			

SCALE: 1"=50'

SEALED BY



9-10-25


STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

PROPERTY MAP
AND
RIGHT-OF-WAY
ACQUISITION
TABLE


TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2021	NH/HSIP-1(432)	4
RESURF.	2025	NH/HSIP-1(432)	4

REV. 03-24-22: ADDED TRACT NUMBER.

REV. 03-03-23: UPDATED
PROPERTY OWNER FOR TRACT 1

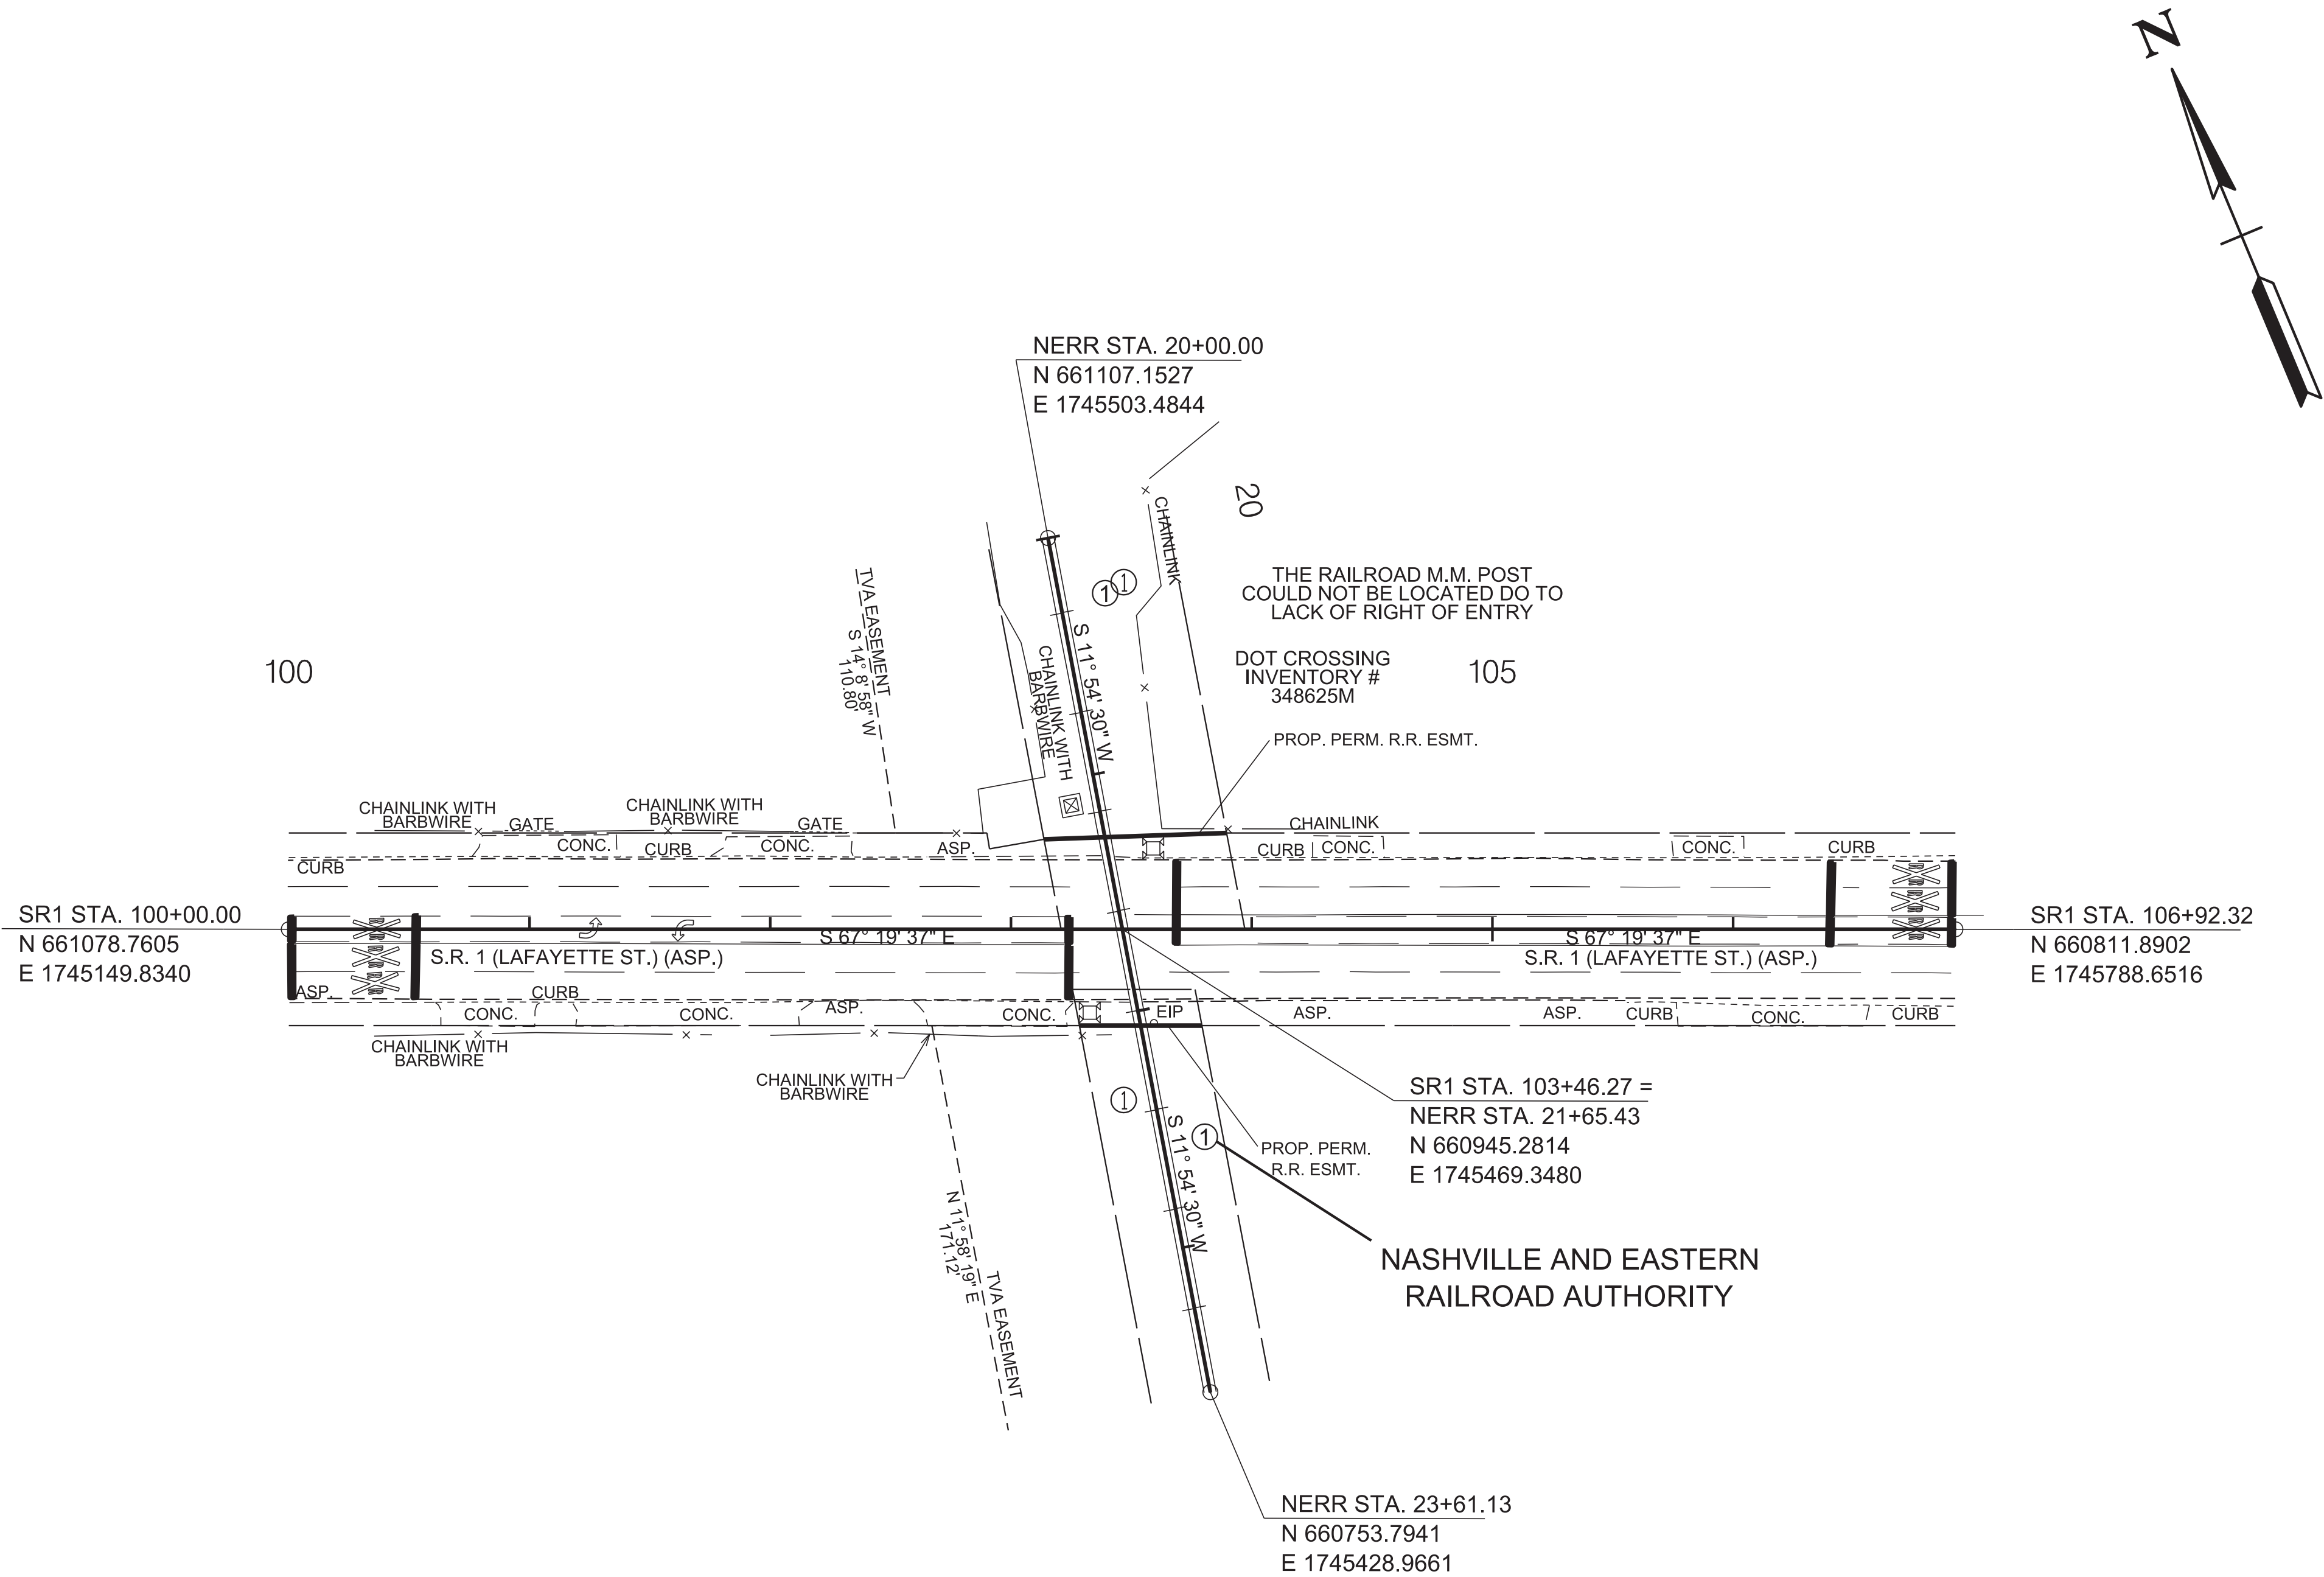

SEALED BY

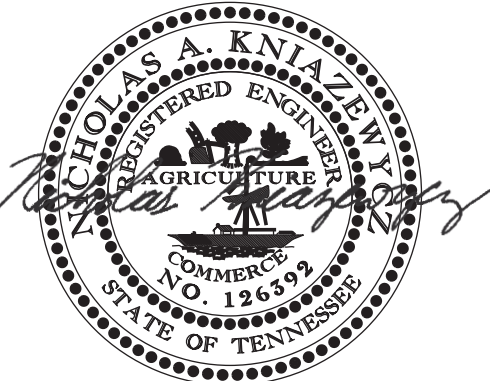

9-10-25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

PRESENT
LAYOUT

STA.100+00 TO STA.106+93
SCALE: 1"=50'


27-AUG-2025 11:18
\\ttdot03nas002.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2026\Davidson Co. SR-1 L.M. 17.00 - 20.42\127317-00-Construction-004A.dgn

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2021	NH/HSIP-1(432)	4A
RESURF.	2025	NH/HSIP-1(432)	4A

REV. 03-24-22: ADDED TRACT NUMBER.

REV. 05-04-22: REVISED EXISTING ROW LINES, STATION AND OFFSET, AND ACQUISITION TABLE.

REV. 03-03-23: UPDATED PROPERTY OWNER FOR TRACT 1

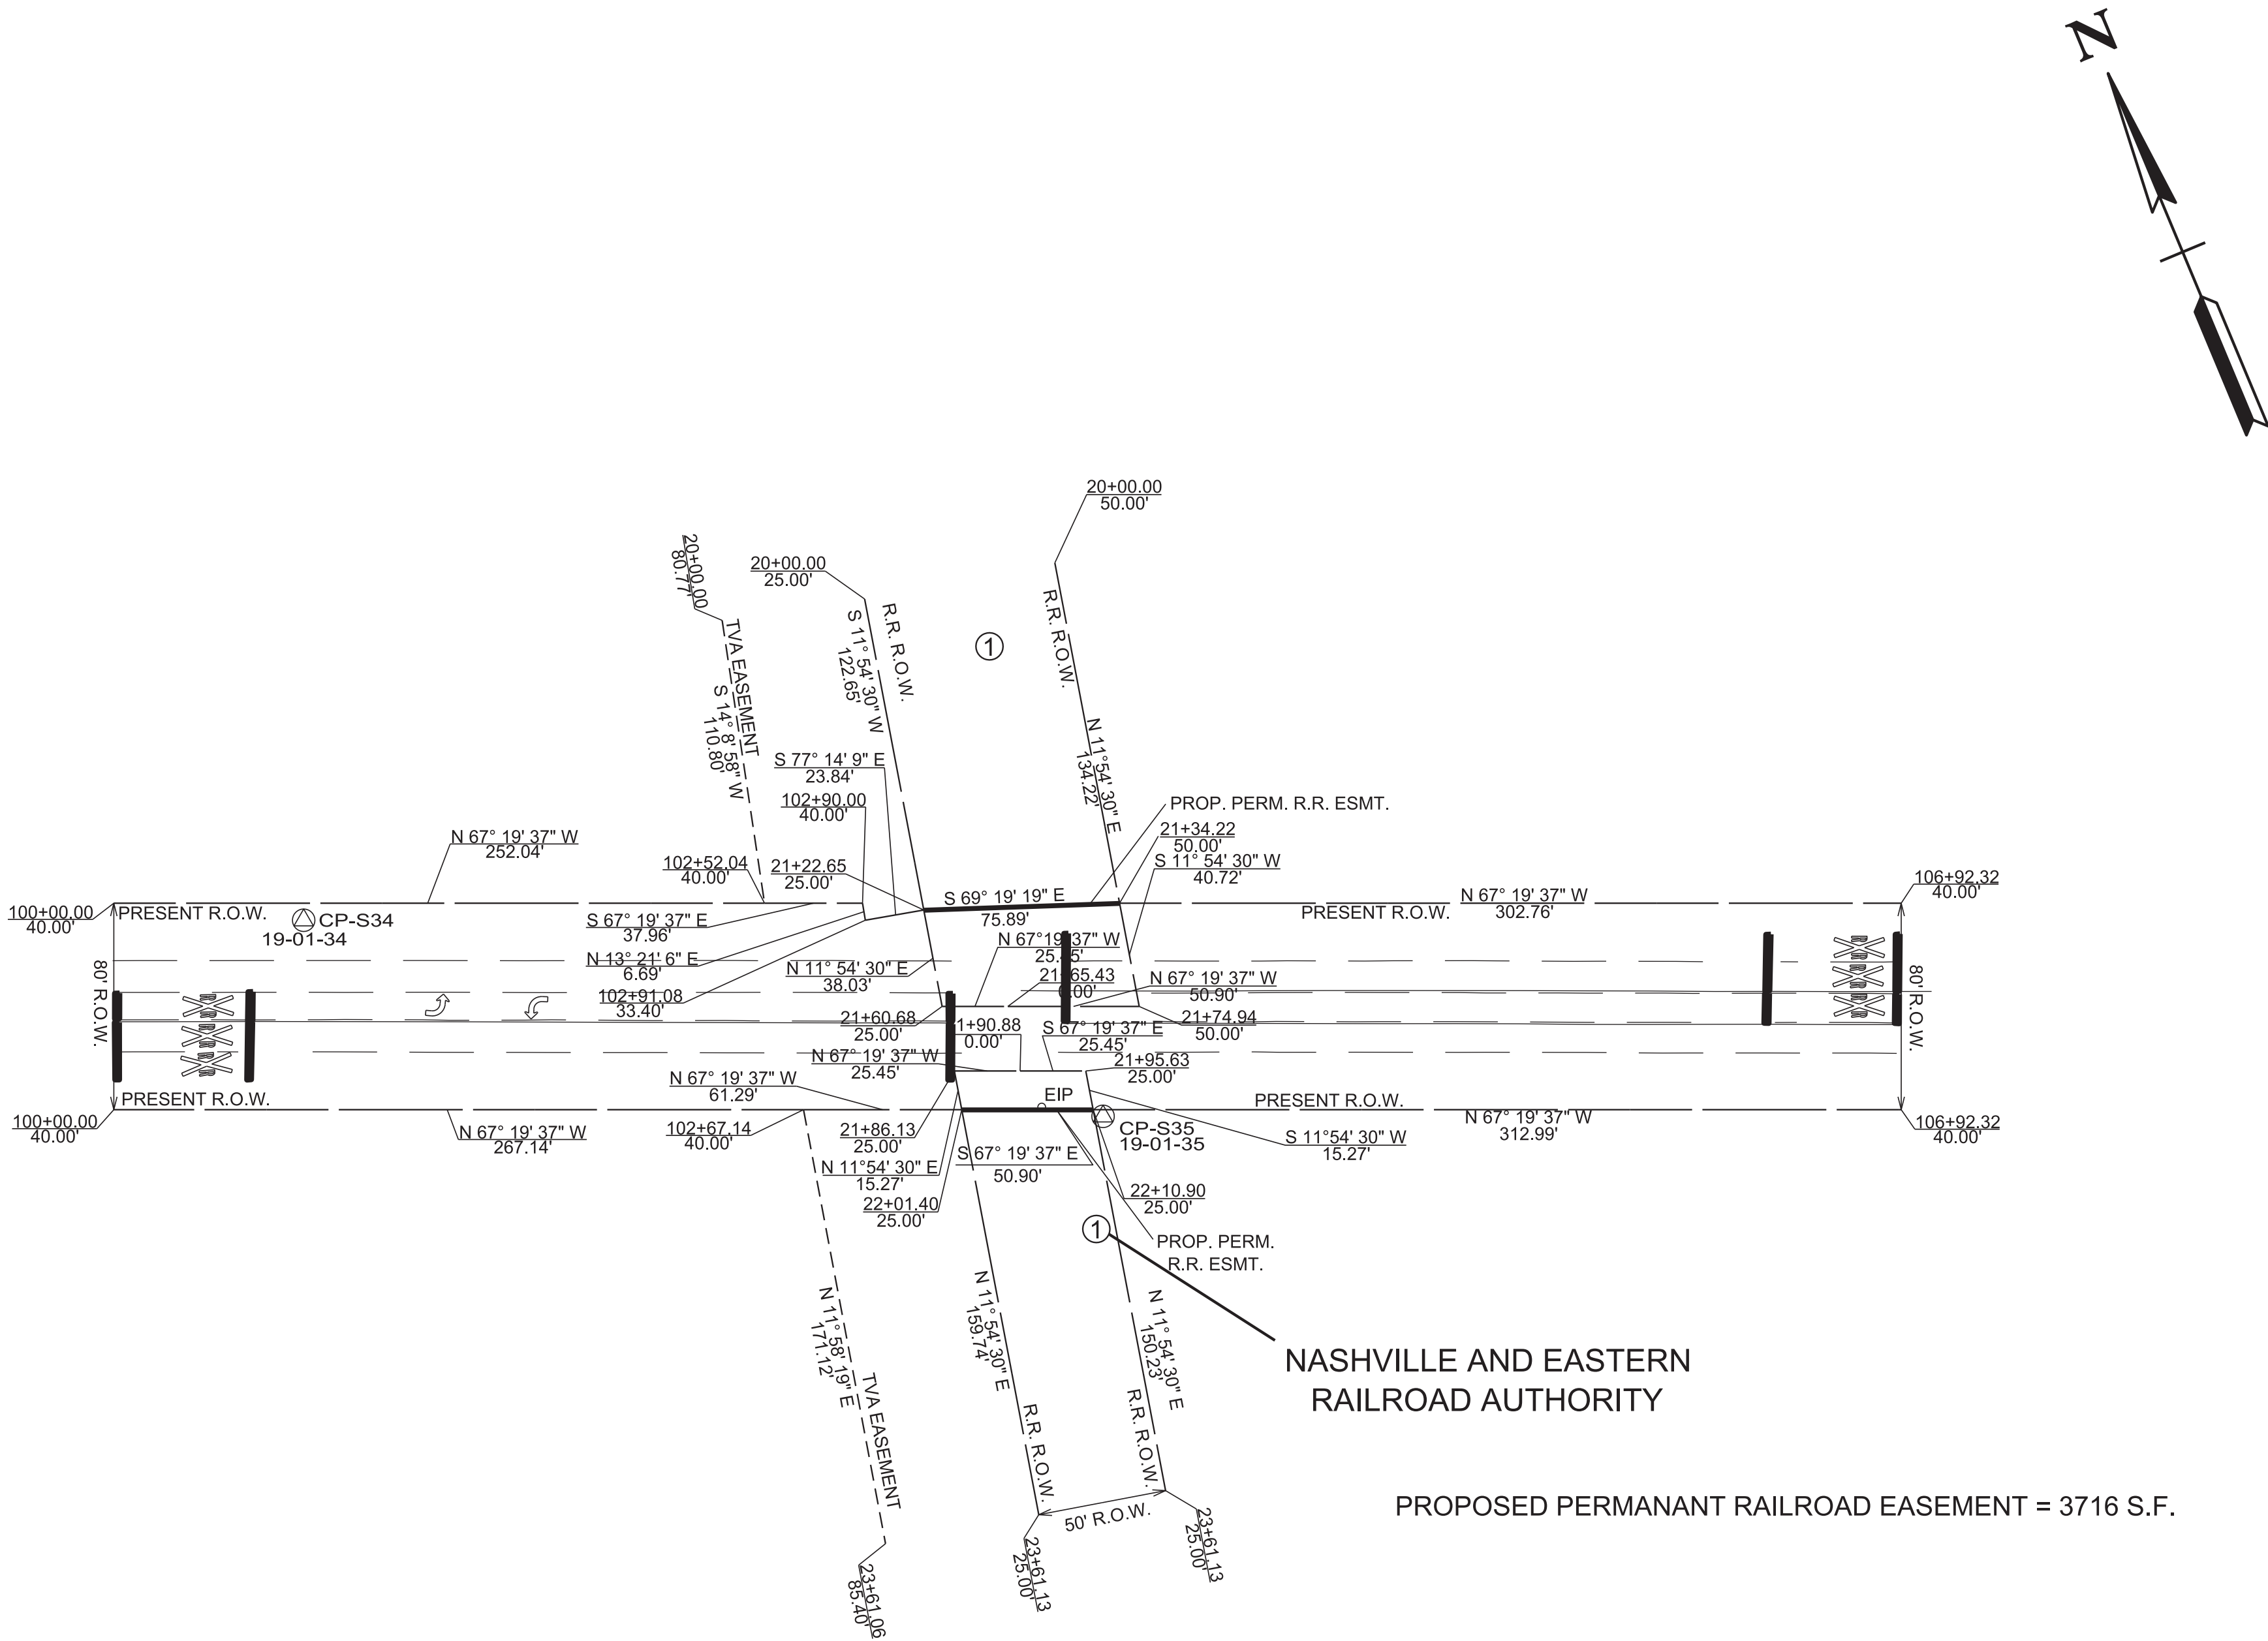

Point	North	East	Elevation	Station	Offset	Description
S34	661081.2289	1745230.5620	427.518	100+73.54	33.40'	XCP=19-01-34
S35	660891.7789	1745486.9823	424.424	103+83.17	42.57'	XCP=19-01-35

SEALED BY



9-10-25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

RIGHT OF WAY
DETAILS

STA.100+00 TO STA.106+93
SCALE: 1"=50'