TYPE	YEAR	PROJECT NO.	SHEET NO.
RESURF.	2016	NH-I-65-2(107)	2A

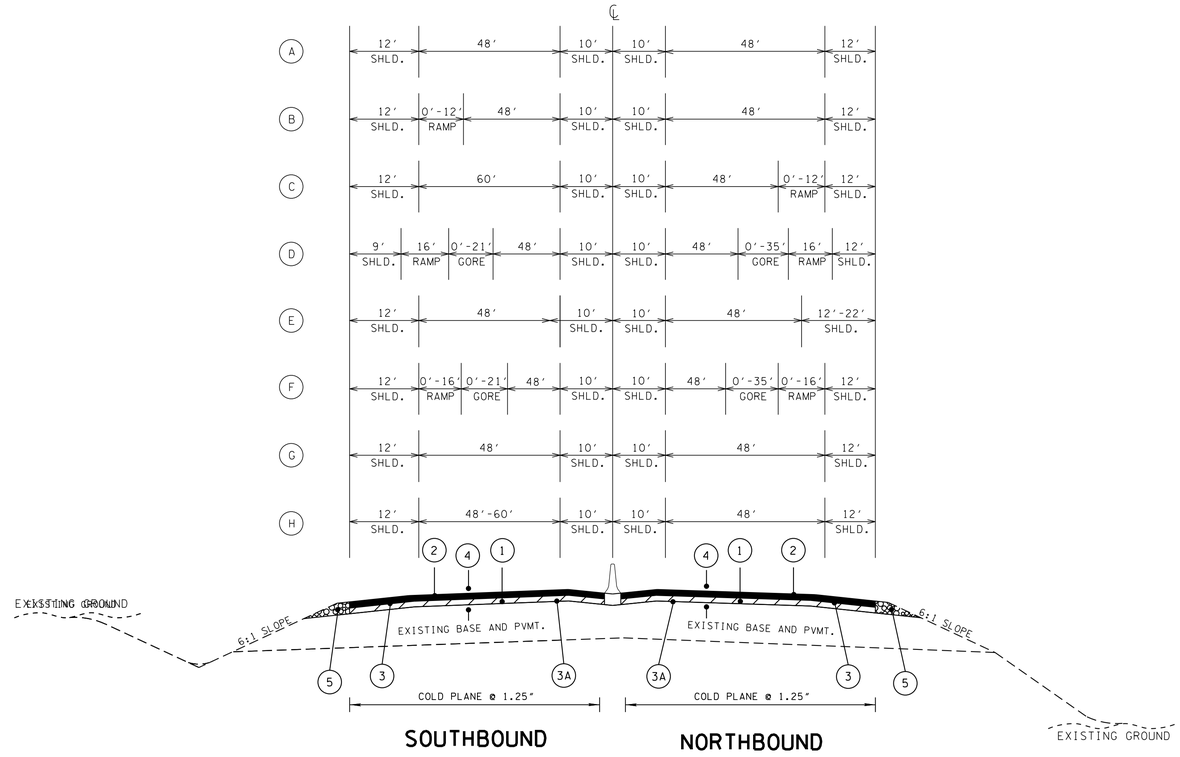

TYPICAL SECTION
I-65

A	L.M. 17.50 to 18.31	E	L.M. 18.54 to 18.76
B	L.M. 18.31 to 18.42	F	L.M. 18.76 to 18.90
C	L.M. 18.42 to 18.50	G	L.M. 18.90 to 21.10
D	L.M. 18.50 to 18.54	H	L.M. 21.10 to 21.38

PROPOSED PAVEMENT SCHEDULE

1 SURFACE @ (65.0 LB/S.Y.) 307-03.10 ACS MIX (PG76-22)(BPMB-HM) GR CS	3A TACK COAT @ 0.10 GAL/SY 403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)
2 SURFACE @ 1.25" THICK (110.0 LB/S.Y.) 411-03.23 OGFC SURFACE MIX (PG76-22)	4 COLD PLANING @ 1.25" THICK 415-01.01 COLD PLANING BITUMINOUS PAVEMENT (TON)
3 TACK COAT @ 0.07 GAL/SY 403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC)	5 MINERAL AGGREGATE (THICKNESS VARIES) 303-01 MINERAL AGGREGATE, TYPE A BASE, GRADING D

SEALED BY

ROBERT RYAN SWEENEY
REGISTERED ENGINEER
AGRICULTURE
No. 111938
STATE OF TENNESSEE
10/20/2015

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS AND PAVEMENT SCHEDULE

10/20/2015 1:44:50 PM
N:\SURVEY\DESIGN\Resurfacing Plans\2016Interstate\WilliamsonCo\I-65(LM17.50-LM21.38) NK\002A Typical Sections.sht