

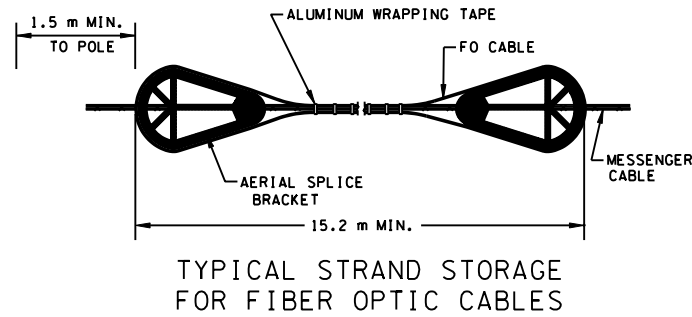
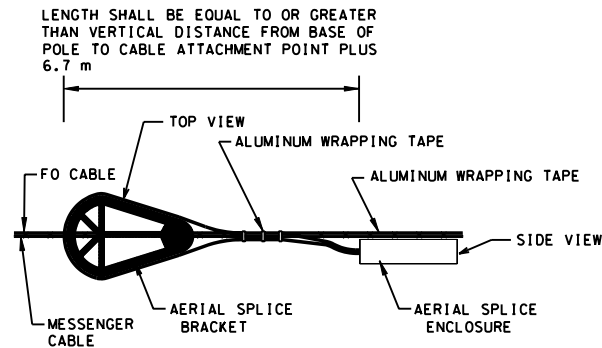
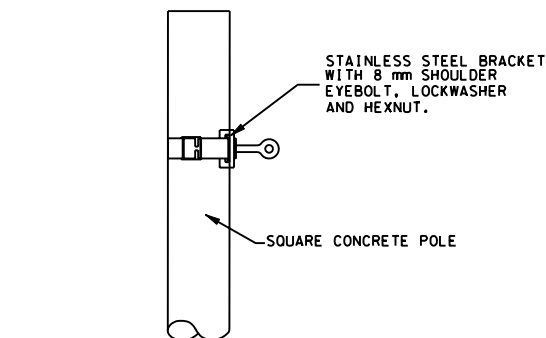
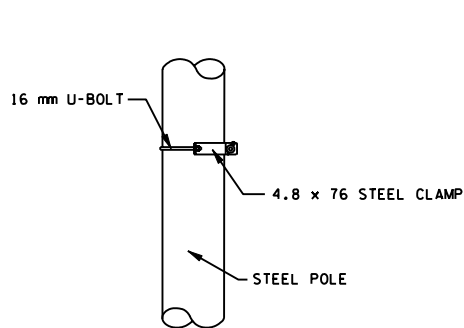
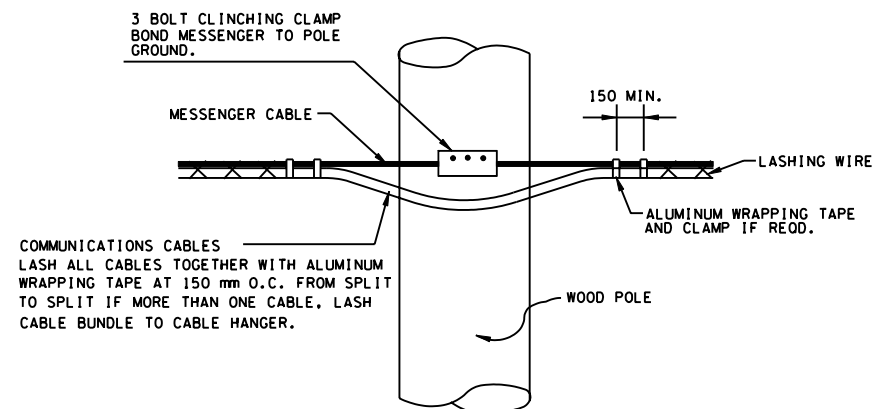
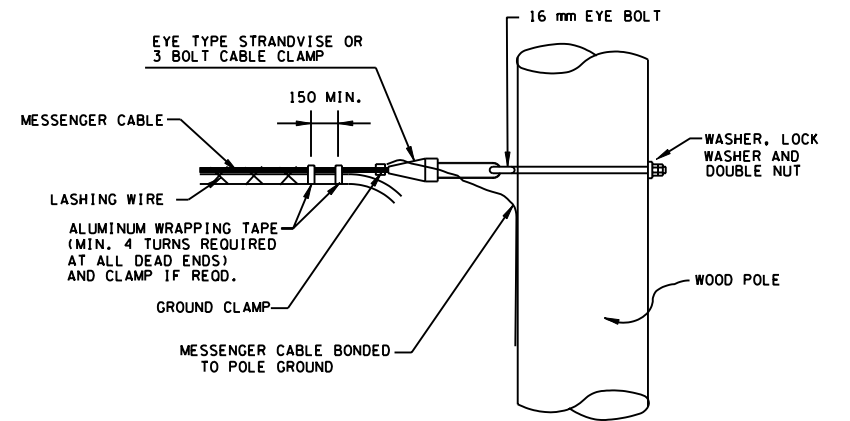




NOTE:
1. BRACKET RADIUS SHALL BE LARGER THAN CABLE MANUFACTURES MINIMUM BEND RADIUS FOR LONG TERM STORAGE OF LARGEST CABLE DIAMETER.

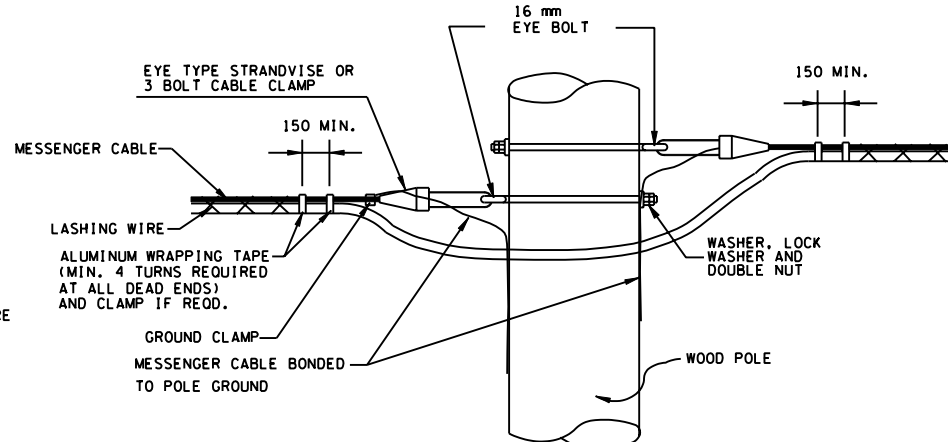


NOTE:
1. AERIAL SLACK BRACKETS SHALL BE USED AT ALL AERIAL SPLICE LOCATIONS.
2. ALL CABLES SHALL ENTER SPLICE CLOSURE AT SAME END.

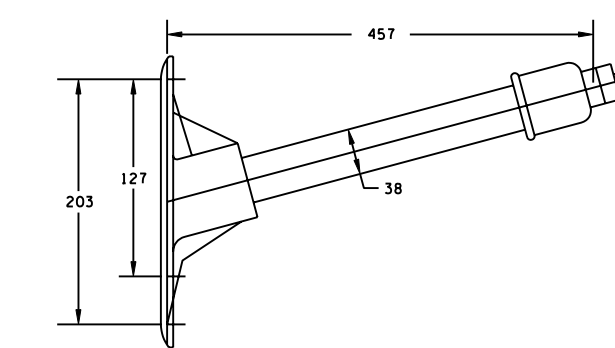

NOTE: DEAD END ATTACHMENTS TO BE UTILIZED ON ALL TRANSFERS FROM UTILITY POLES TO SIGNAL POLES.

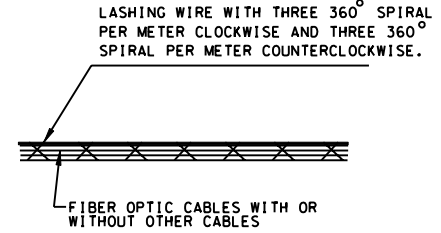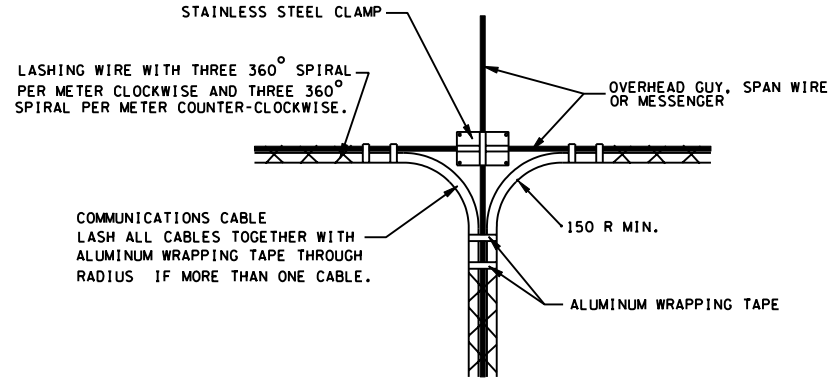

NOTE: ALL FIBER TRUNK CABLE SHALL BE DOUBLE LASHED. DROP CABLE MAY BE SINGLE LASHED



ALL UNITS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.

MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

STATE OF TENNESSEE DEPARTMENT OF TRANSPORTATION

FIBER OPTIC AERIAL CONNECTION DETAILS

7-29-04 TM-FO-3