

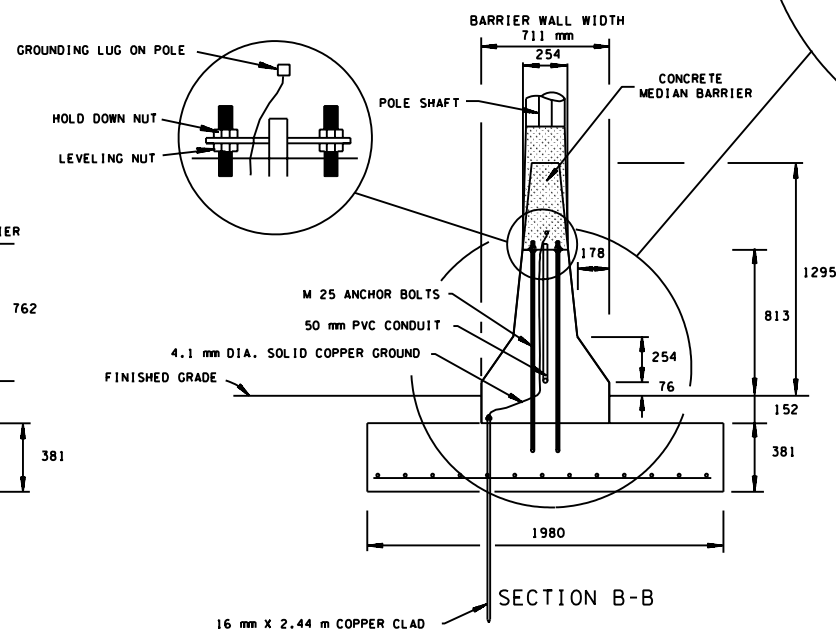
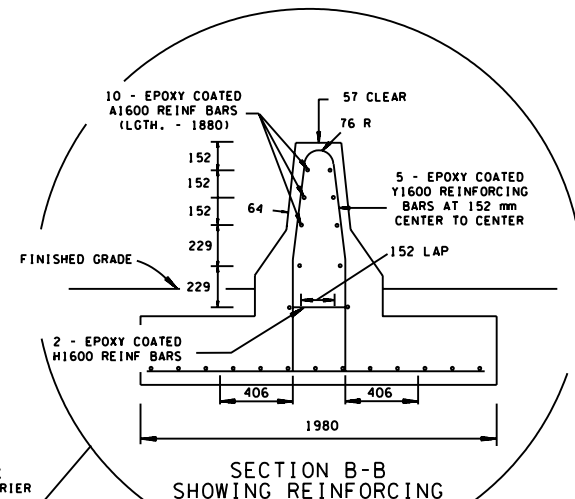
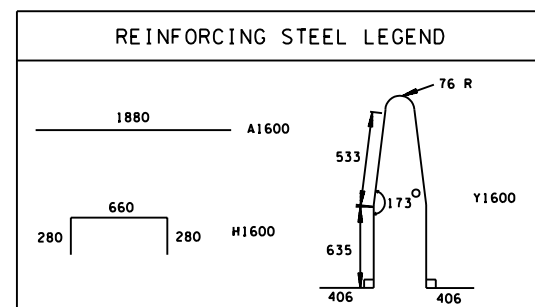
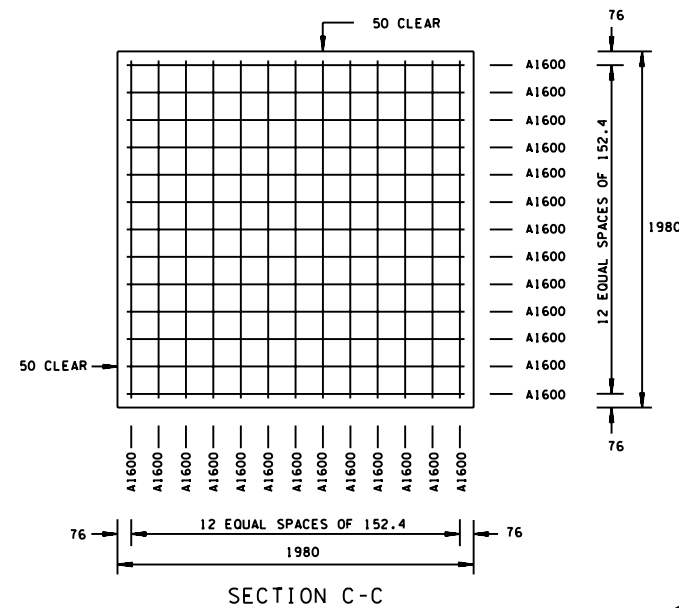
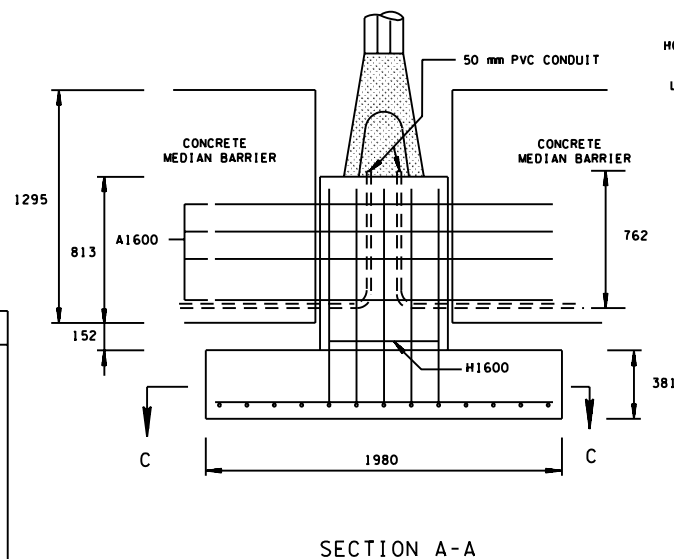
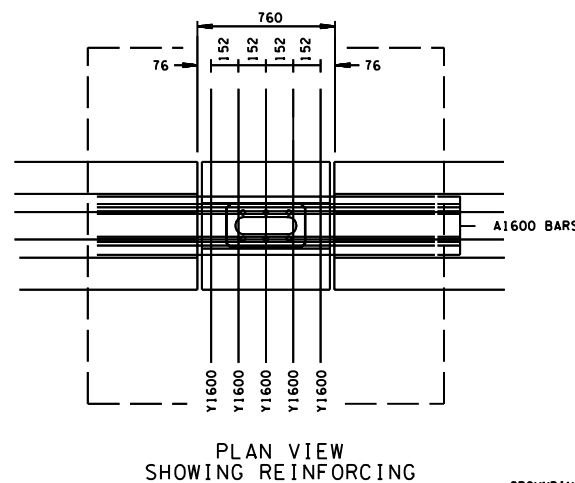


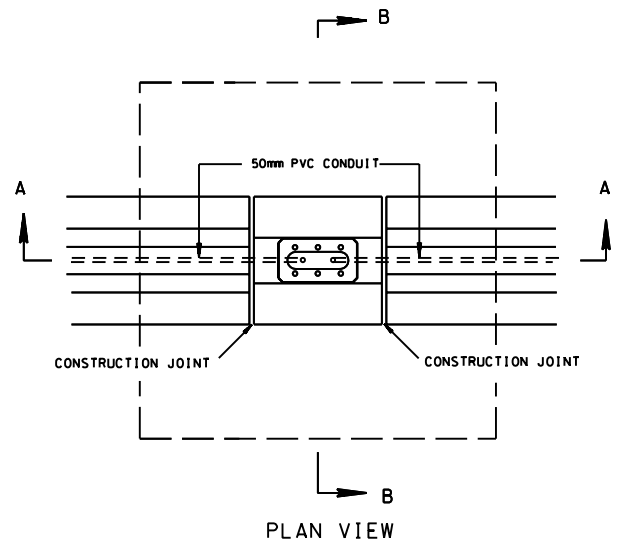

- GENERAL NOTES**
- (A) MATERIALS IN CONCRETE MEDIAN BARRIER WALL AND FOOTINGS ARE TO MEET THE FOLLOWING SPECIFICATIONS:
 CONCRETE: $f'_c = 28$ MPa AT 28 DAYS
 REINFORCING STEEL: ASTM A615M, $F_y = 415$ MPa
 ALL REINFORCING STEEL IS TO BE EPOXY COATED AND INSTALLED AS DETAILED ON THIS DRAWING.
- (B) ESTIMATED QUANTITIES :
 CLASS "A" CONCRETE= 1.83 CUBIC METERS
 NO. 16 STEEL REINFORCING BARS= 135 KILOGRAMS
- (C) UNIT PRICE ITEM NO. 714M08.26, FOUNDATION FOR LIGHT STANDARDS (MEDIAN BARRIER) PER EACH SHALL INCLUDE ALL COSTS OF FURNISHING AND INSTALLING ALL MATERIALS AND LABOR NECESSARY TO CONSTRUCT THE PORTION OF THE MEDIAN BARRIER AND THE FOOTINGS SUPPORTING THE LIGHT STANDARDS.

- REV. 11-1-95: CHANGED TO METRIC.
 REV. 5-27-01: CHANGED ITEM NOS. 303M15.01 TO 303M10.01 AND 714M08 TO 714M08.08.
 REV. 9-11-03: REDRAW AND REDESIGNED SHEET.

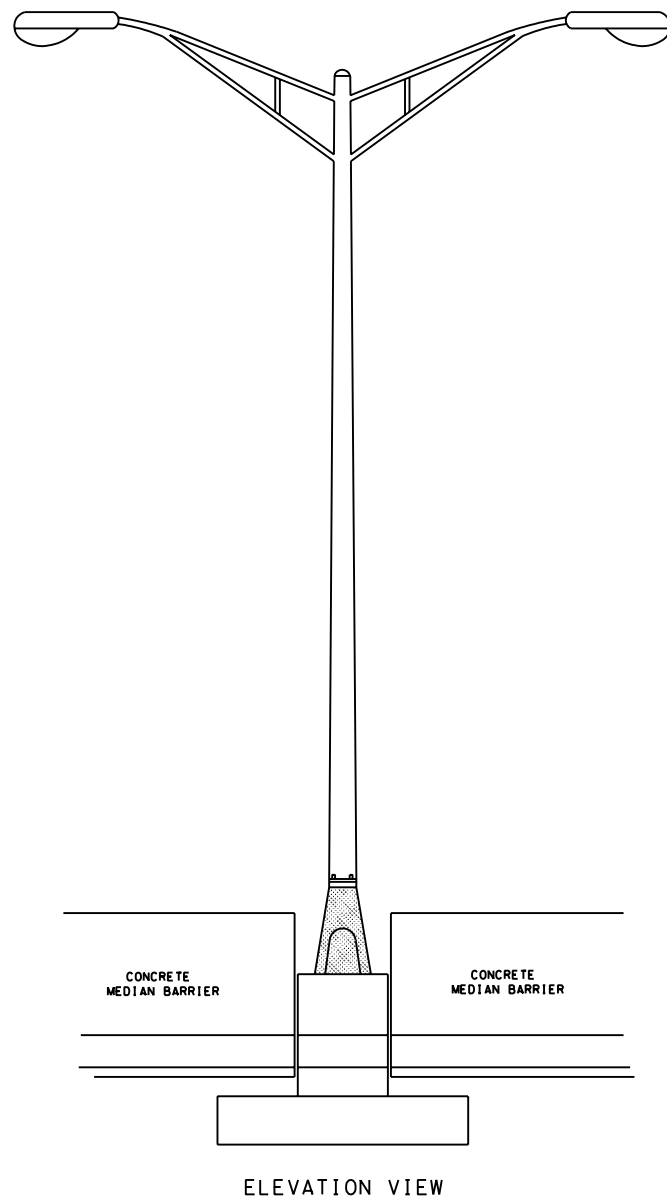

ALL UNITS ARE IN MILLIMETERS
 UNLESS NOTED OTHERWISE.

MINOR REVISION -- FHWA
 APPROVAL NOT REQUIRED.

STATE OF TENNESSEE
 DEPARTMENT OF TRANSPORTATION

FOUNDATION DETAIL
 FOR LUMINAIRE
 MOUNTED ON
 CONCRETE
 MEDIAN BARRIER

9-11-03 TM-L-2