




ELEVATION VIEW SHOWING CONDUIT PLACEMENT IN
 SIDEWALK SECTION

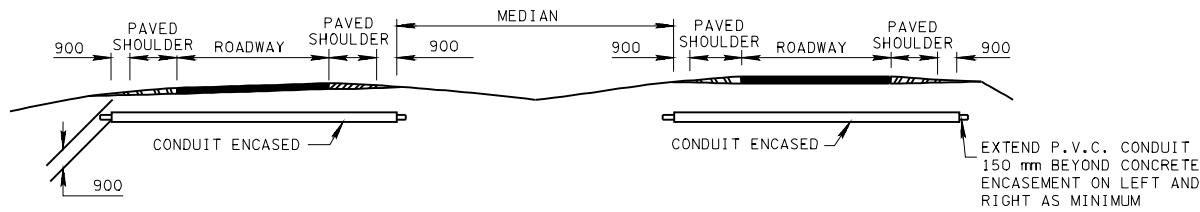


ELEVATION VIEW SHOWING CONDUIT PLACEMENT IN ROADWAY
 WITH PAVED SHOULDERS

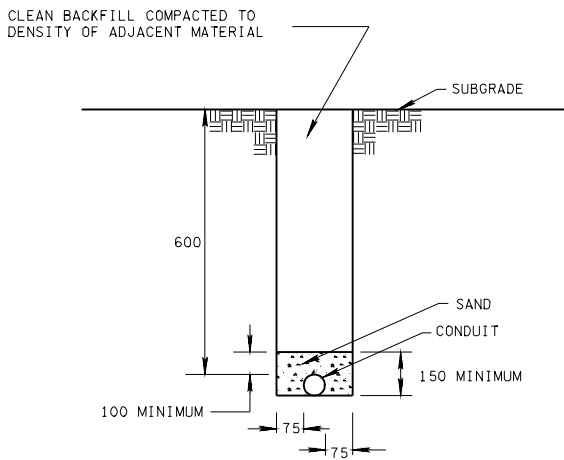

DIRECT BURIAL CONDUIT DETAILS IN EARTH

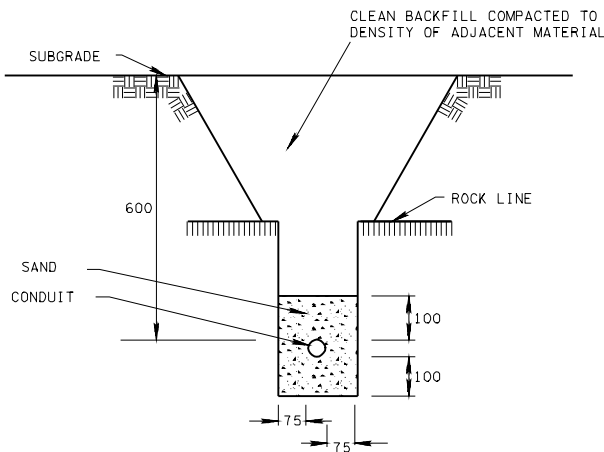


DIRECT BURIAL CONDUIT DETAILS IN ROCK

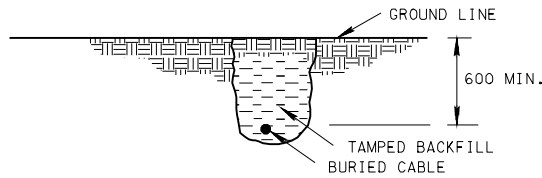


DIRECT BURIAL CABLE


NOTE : WHERE THERE IS MORE THAN ONE CONDUIT PER TRENCH, CONDUITS SHALL
 NOT BE PLACED CLOSER THAN 200 mm CENTER TO CENTER.

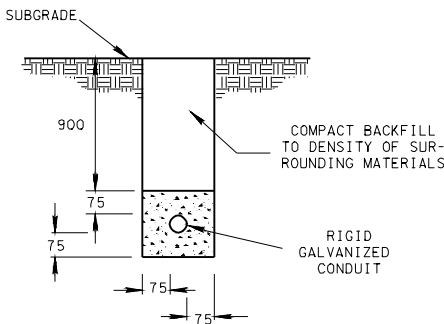

CONCRETE ENCASED CONDUIT IN EARTH

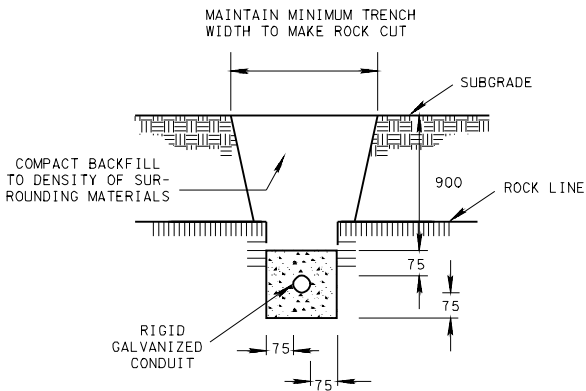

CONCRETE ENCASED CONDUIT IN ROCK

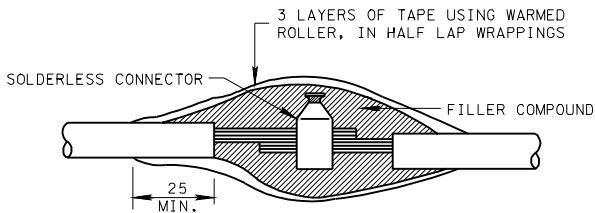

TYPICAL SPLICING & TAPING DETAILS

NOTE: COMPRESSION FITTING CONNECTOR KITS MAY BE USED AS ALTERNATE.



ALL UNITS ARE IN MILLIMETERS
 UNLESS NOTED OTHERWISE.

□ MINOR REVISION -- FHWA
 APPROVAL NOT REQUIRED.

STATE OF TENNESSEE
 DEPARTMENT OF TRANSPORTATION

STANDARD
 LIGHTING DETAILS
 CONDUIT, CABLE
 INSTALLATION