




200 mm OVERHEAD FLASHING  
SCHOOL ZONE SPEED LIMIT BEACON

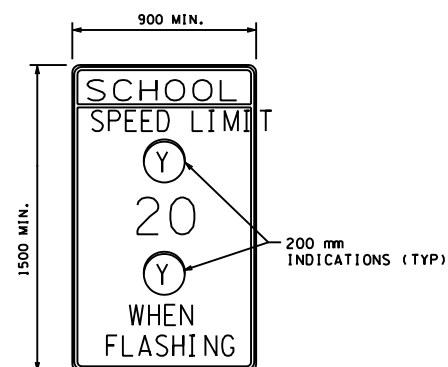


200 mm POLE MOUNTED FLASHING  
SCHOOL ZONE SPEED LIMIT BEACON

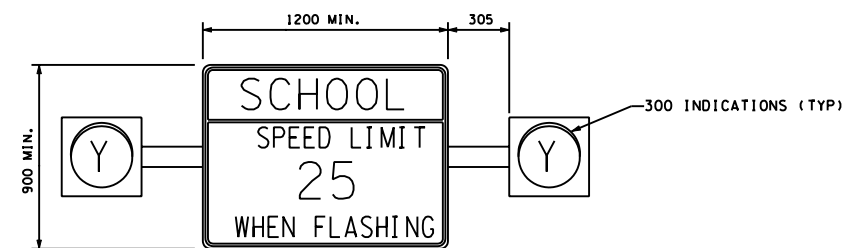


300 mm OVERHEAD FLASHING  
SCHOOL ZONE SPEED LIMIT BEACON

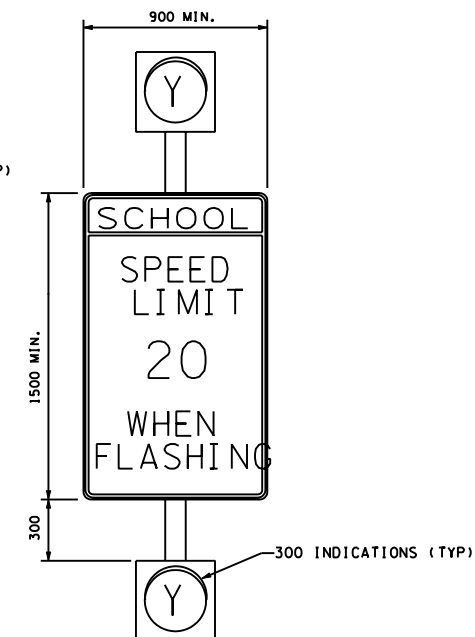


300 mm POLE MOUNTED FLASHING  
SCHOOL ZONE SPEED LIMIT BEACON

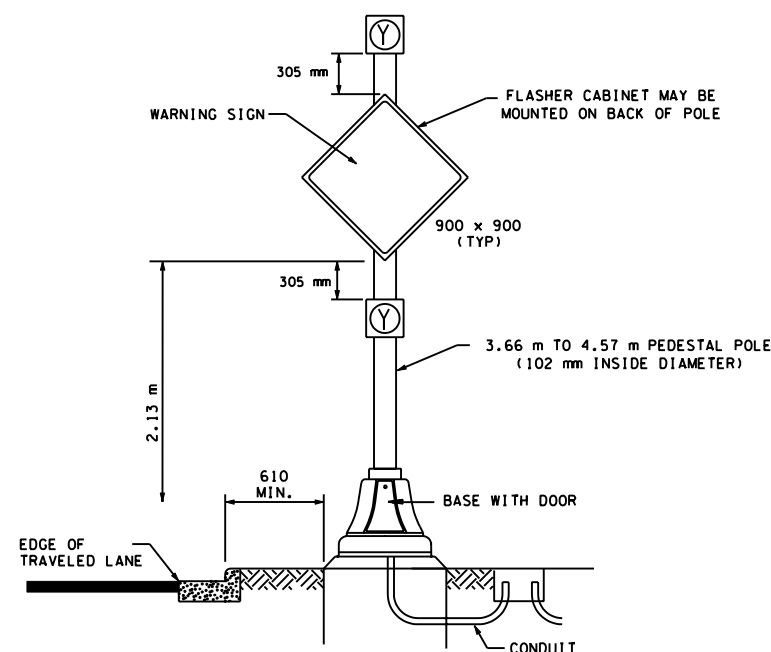

FLASHING WARNING BEACON  
SEE STD. DWG. NO. TM-SG-10 FOR FOUNDATION DETAILS & NOTES

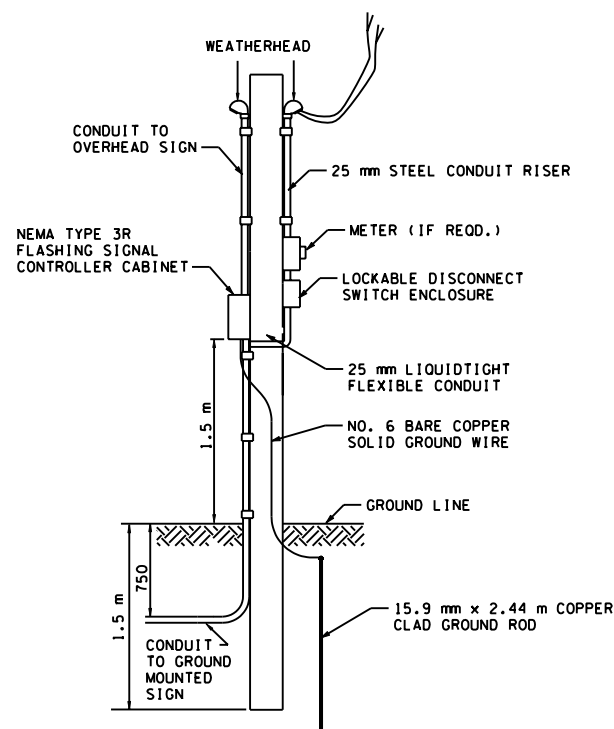

FLASHER CABINET AND  
ELECTRICAL SERVICE

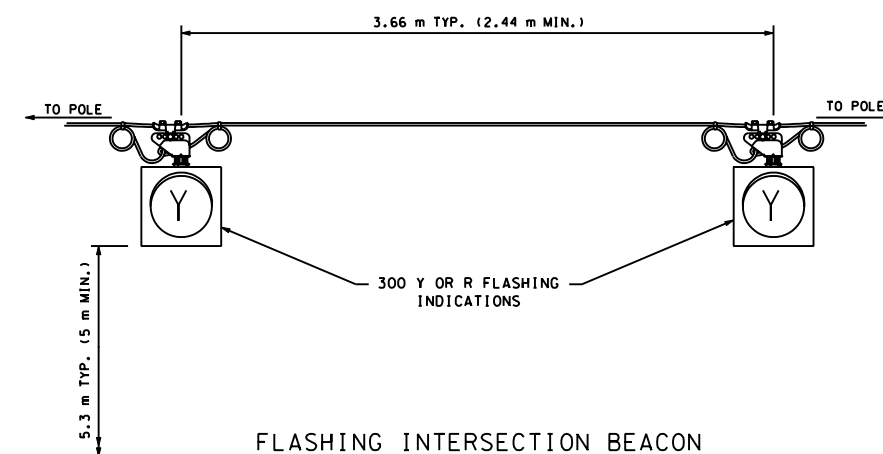

FLASHING INTERSECTION BEACON

#### GENERAL NOTES

- THE FLASHER CONTROLLER SHALL BE ENCLOSED IN A NEMA 3R RAINLIGHT, LOCKABLE ENCLOSURE.
- SIGNAL INDICATIONS SHALL BE MOUNTED 300 mm FROM WARNING SIGNS. (EXCEPT 200 mm INDICATIONS MOUNTED INSIDE SCHOOL ZONE SPEED LIMIT BEACON.)
- SIGNAL INDICATIONS FOR FLASHING WARNING BEACON AND SCHOOL ZONE SPEED LIMIT BEACON SHALL FLASH ALTERNATELY.
- SIGNAL INDICATIONS FOR FLASHING INTERSECTION BEACON TO FLASH SIMULTANEOUSLY.



ALL UNITS ARE IN MILLIMETERS  
UNLESS NOTED OTHERWISE.

MINOR REVISION -- FHWA  
APPROVAL NOT REQUIRED.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

FLASHING  
BEACON  
DETAIL

7-29-04 TM-SG-13