


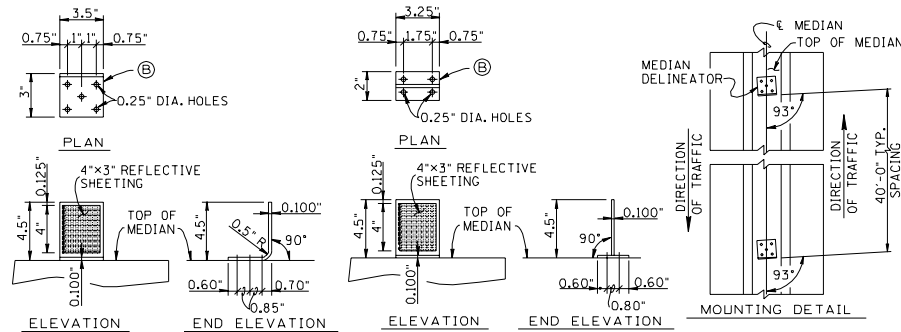



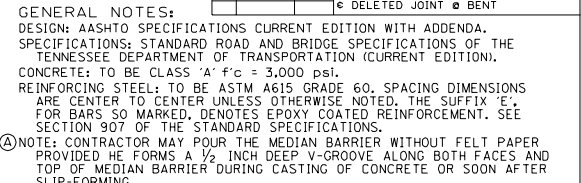


⑧ ① ② MEDIAN BARRIER DELINEATORS SHALL BE HIGH IMPACT, UV-STABILIZED, ENGINEERED THERMOPLASTIC OR POLYCARBONATE SUBSTRATE. SEE TOOL APPROVED QUALIFIED PRODUCT LISTS FOR ACCEPTABLE PRODUCTS.

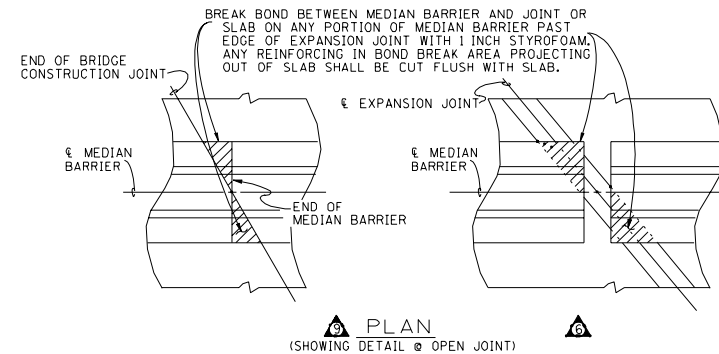


(SHOWING REINFORCING - 32" MEDIAN)




(SHOWING DETAIL @ OPEN JOINT)

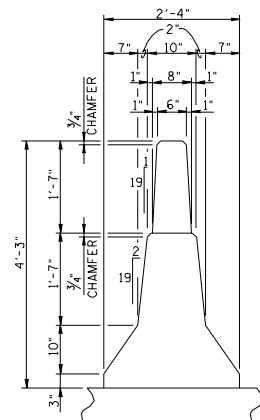


(SHOWING PROPERTIES - 51" MEDIAN
(ALTERNATE 'A')

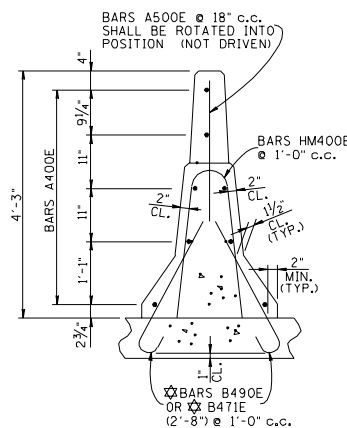

(SHOWING REINFORCING - 51" MEDIAN)
(ALTERNATE 'A')

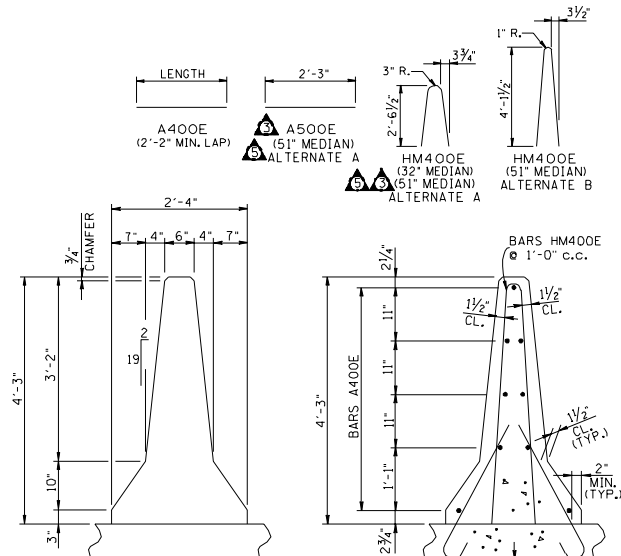

(SHOWING PROPERTIES - 51" MEDIAN
(ALTERNATE 'B')

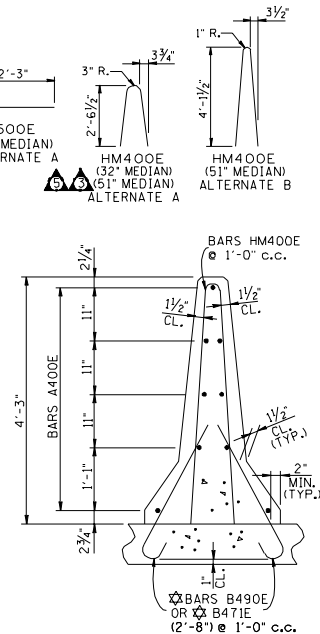

(SHOWING REINFORCING - 51" MEDIAN)
(ALTERNATE 'B')

ITEM	CLASS 'A' CONCRETE (BRIDGES) C.Y.	EPOXY COATED REINFORCING STEEL LB.	TEXTURE COATED FINISH (NEW STRUCTURE) S.Y.
32" MEDIAN	0.134	8	.7199
51" MEDIAN ALT. 'A'	0.168	10	1.0544
51" MEDIAN ALT. 'B'	0.173	12	1.0412

$\frac{M}{R}$ MINOR REVISION - FHWA
APPROVAL NOT REQUIRED

STANDARD
CONCRETE
MEDIAN BARRIER
1993

CORRECT. Edward P. Wasserman
ENGINEER OF STRUCTURES