TYPE	YEAR	PROJECT NO.	SHEET NO.
MAINT.	2015	85008-4206-04	2C

TENNESSEE D.O.T.
DESIGN DIVISION
FILE NO.

PROPOSED PAVEMENT SCHEDULE

(1) TACK COAT @ 0.02 GAL./S.Y. 403-01 BITUMINOUS MATERIAL FOR TACK COAT	(2) GRADING "B-M2" MIXTURE 307-01.08 ASPHALT CONCRETE MIX (PG64-22)(BPMB-HM) GRADING B-M2 2" THICK (APPROX. 226 LB./S.Y.) - 2 LAYERS - SHOULDER AND FULL DEPTH VARIABLE WITH OVERLAY
(3) GRADING "D" SURFACE (PERFORMANCE GRADE PG64-22) @ 1¼" THICK (APPROX. 132.5 LB./S.Y.) 411-01.10 ACS MIX (PG64-22) GRADING D	(4) MINERAL AGGREGATE BASE 303-01 MINERAL AGGREGATE, TYPE A BASE, GRADING D

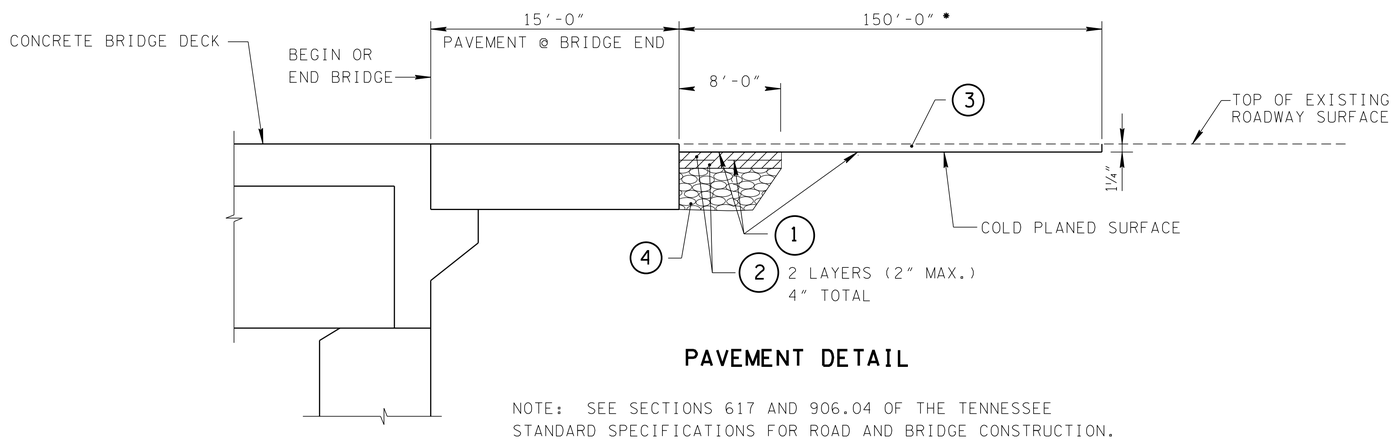

PAVEMENT DETAIL

NOTE: SEE SECTIONS 617 AND 906.04 OF THE TENNESSEE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.

* NOTE: MAY BE INCREASED, DECREASED OR ELIMINATED BY THE ENGINEER INCLUDES TRAVEL LANE AND SHOULDERS

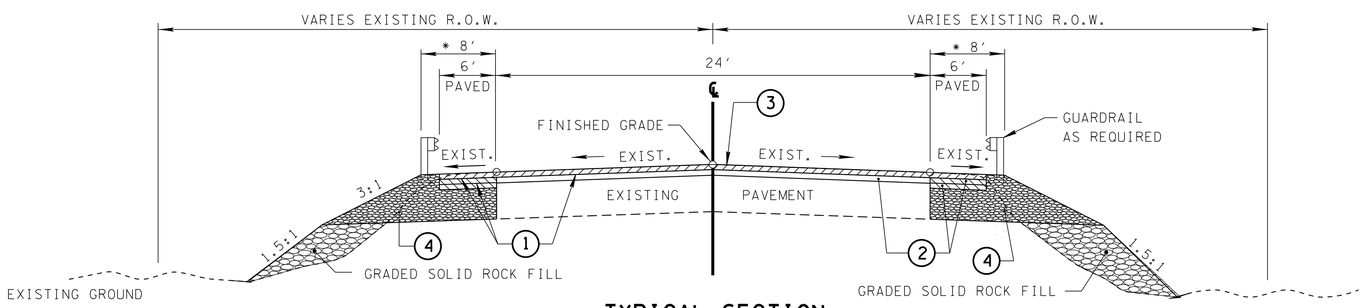

TYPICAL SECTION

STA. 1+37 TO STA. 4+50

* TRANSITION FROM EXISTING WIDTH TO PROPOSED WIDTH WITHIN 100' OF BRIDGE LIMITS

OVERLAY EXISTING ROADWAY FOR LIMITS SHOWN ON SHEET 3 OR AS DIRECTED BY THE ENGINEER.

SEALED BY



STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS AND PAVEMENT SCHEDULE

3/4/2015 1:21:32 PM
P:\2807119\TRSR260002d.sht