TENNESSEE D.O.T.
DESIGN DIVISION
FILE NO.

INDEX

DESCRIPTION	SHT.
TITLE SHEET	1
ESTIMATED QUANTITIES, TYPICAL SECTIONS & DETAILS	2
STANDARD SPECIFICATION OF LONGITUDINAL JOINT STABILIZATION	3
GENERAL NOTES AND SPECIAL NOTES	4

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
BUREAU OF ENGINEERING

TENN.	YEAR	SHEET NO.
	2015	1
FED. AID PROJ. NO.		
STATE PROJ. NO.	98028-4263-04	

VARIOUS STATE ROUTES IN REGION 2 LONGITUDINAL JOINT STABILIZATION

SR 56 Jackson County — From: West of Old Creek Road (LM 10.02) To: SR 53 (LM 10.94)
Total Project Length = 0.92 miles — Total Joint Application = 2.14 miles

SR 53 Jackson County — From: SR 56 (LM 14.22) To: South of SR 56 (LM 15.26)
Total Project Length = 1.04 miles — Total Joint Application = 2.07 miles

SR 111 Pickett County — From: North of Jim Beaty Road (LM 2.28) To: Pendergrass Rd. (Rt.)/Cove Cr. Rd. (Lt.) (LM 5.38)
Total Project Length = 3.10 miles — Total Joint Application = 4.10 miles

SR 52 Overton County — From: Thompson Circle (LM 3.37) To: East of Tower Hill Road (LM 6.89)
Total Project Length = 3.52 miles — Total Joint Application = 4.29 miles

SR 52 Overton County — From: West of Roberts Street (LM 11.26) To: East of SR 294 (East Main Street) (LM 12.32)
Total Project Length = 1.06 miles — Total Joint Application = 1.94 miles

SR 294 Overton County — From: SR 52 (LM 0.00) To: SR 111 (LM 0.58)
Total Project Length = 0.58 miles — Total Joint Application = 1.04 miles

SR 111 Overton County — From: SR 294 (LM 13.96) To: Twin Oaks Road (LM 15.94)
Total Project Length = 1.98 miles — Total Joint Application = 2.59 miles

SR 111 Putnam County — From: North of East 10th Street (LM 7.54) To: South of Main Street (LM 10.31)
Total Project Length = 2.77 miles — Total Joint Application = 11.08 miles

SR 111 White County — From: 1.50 Miles N. of SR 135 Overpass (LM 13.52) To: End of Ramp from SR 136 (LM 17.43)
Total Project Length = 3.91 miles — Total Joint Application = 15.64 miles

SR 53 DeKalb County — From: Cannon County Line (LM 0.00) To: Smith County Line (LM 5.20)
Total Project Length = 5.20 miles — Total Joint Application = 5.20 miles

SR 64 Cannon County — From: Tolbert Hollow Road (LM 2.86) To: SR 1 (LM 9.11)
Total Project Length = 6.25 miles — Total Joint Application = 6.25 miles

SR 99 Cannon County — From: Rutherford County Line (LM 0.00) To: SR 64 (LM 1.37)
Total Project Length = 1.37 miles — Total Joint Application = 1.37 miles

SR 16 Coffee County — From: Intersection w/ SR 55 (LM 4.38) To: Franklin County Line (LM 5.42)
Total Project Length = 1.04 miles — Total Joint Application = 4.16 miles

SR 55 Coffee County — From: Moore County Line (LM 0.00) To: Grade Crossing AEDC Road (LM 3.45)
Total Project Length = 3.45 miles — Total Joint Application = 9.18 miles

SR 16 Franklin County — From: SR 15 (LM 12.96) To: South Drive (LM 19.97)
Total Project Length = 7.01 miles — Total Joint Application = 7.11 miles

SR 108 Grundy County — From: SR 50 (LM 17.81) To: Hampton Road (LM 21.89)
Total Project Length = 4.08 miles — Total Joint Application = 4.08 miles

SR 2 Marion County — From: End of Tennessee River Bridge (LM 21.52) To: McBrien Road (LM 27.44)
Total Project Length = 5.92 miles — Total Joint Application = 8.38 miles

SR 27 Marion County — From: I-24 (LM 4.22) To: West of Lock and Dam Road (LM 6.40)
Total Project Length = 2.18 miles — Total Joint Application = 2.18 miles

SR 422 Marion County — From: Alabama State Line (LM 0.00) To: SR 156 (LM 2.38)
Total Project Length = 2.38 miles — Total Joint Application = 2.38 miles

SR 8 Sequatchie County — From: West of Tram Trail (LM 18.70) To: End of 4-Lane (LM 22.73)
Total Project Length = 4.03 miles — Total Joint Application = 12.09 miles

SR 296 Fentress County — SR 28 (LM 0.00) To: SR 52 (LM 3.02)
Total Project Length = 3.02 miles — Total Joint Application = 3.02 miles

SR 52 Fentress County — From: SR 296 (LM 17.62) To: Shirley Road (LM 22.40)
Total Project Length = 4.78 miles — Total Joint Application = 4.78 miles

SR298 Cumberland County — From: West of Roy McCoy Road (LM 12.38) To: Morgan County Line (LM 18.31)
Total Project Length = 5.93 miles — Total Joint Application = 5.93 miles

SR 68 Rhea County — From: West of Gilliam Road (LM 6.83) To: Bridge over SR 29 & Norfolk Southern R.R. (LM 8.30)
Total Project Length = 1.47 miles — Total Joint Application = 2.59 miles

SR 58 Meigs County — From: South of Old SR 30 (Traffic Signal) (LM 17.88) To: S. of Ratledge Rd. (Rt.)/Heird Rd. (Lt.) (LM 22.40)
Total Project Length = 4.52 miles — Total Joint Application = 4.52 miles

SR 30 McMinn County — From: Clearmont Drive (LM 19.19) To: 9th Street Intersection (LM 21.04)
Total Project Length = 1.85 miles — Total Joint Application = 7.40 miles

SR 40 Polk County — From: East of Main Street (LM 26.00) To: North Carolina State Line (LM 30.03)
Total Project Length = 4.03 miles — Total Joint Application = 16.12 miles

SR 317 Bradley County — From: Hamilton County Line (LM 0.00) To: SR 60 (LM 3.59)
Total Project Length = 3.59 miles — Total Joint Application = 3.59 miles

SR 312 Bradley County — From: Hamilton County Line (LM 0.00) To: White Oak Road (LM 4.77)
Total Project Length = 4.77 miles — Total Joint Application = 4.77 miles

SR 58 Hamilton County — From: Lakewood Acres Road (LM 9.20) To: Greenwood Road (LM 14.68)
Total Project Length = 5.48 miles — Total Joint Application = 21.92 miles

SR 148 Hamilton County — From: Georgia State Line (LM 0.00) To: SR 2 (LM 3.99)
Total Project Length = 3.99 miles — Total Joint Application = 3.99 miles

SR 318 Hamilton County — From: SR 2 (LM 0.00) To: SR 148 (LM 1.05)
Total Project Length = 1.05 miles — Total Joint Application = 1.05 miles

SR 317 Hamilton County — From: East of Bates Road (LM 11.78) To: Bradley County Line (LM 15.76)
Total Project Length = 3.98 miles — Total Joint Application = 3.98 miles

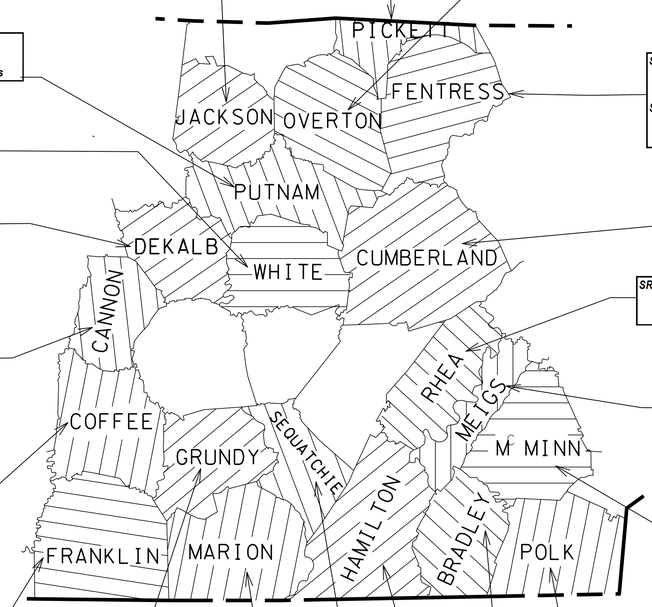

SEALED BY
ROBERT W. RODGERS REGISTERED ENGINEER AGRICULTURE COMMERCE NO. 00022399 STATE OF TENNESSEE
03/03/2015

APPROVED: Paul D. Degges
PAUL D. DEGGES, CHIEF ENGINEER

DATE:

APPROVED:
JOHN SCHROER, COMMISSIONER

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED:

DIVISION ADMINISTRATOR — DATE

SPECIAL NOTES

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED JANUARY 1, 2015 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT ROAD SP. SV. 2 ROBERT RODGERS

DESIGNER DIANE EVITT — CHECKED BY GORDON MASENGALE

P.E. NO. 98023-4217-04

PIN NO. 120436.00

TOTAL PROJECT LENGTH 190.93 MILES
TOTAL LANE MILES LENGTH 319.15 MILES

03-MAR-2015 11:39
\\JJ02WF01.tdot.state.tn.us\02Shared\Design County Folders\Design Resurfacing Folders\Resurf 2015\2015 State Routes\SF8 Region 2 LJSV_TITLE.dgn