PHASE IV (1) (2) (3)

BENT NO. 4 - WESTBOUND

BAR	LOCATION	SIZE	NO. REQ'D.	BENDING DIMENSIONS A	B	C	D	LENGTH
A1070	COUPLER BAR (BENT CAP)	10	36					9'-1"
B1050	BENT CAP	10	12	26'-6"				27'-11"
C950	COLUMN	9	54	10'-11"				12'-6"
CD1060	BENT CAP	10	2	18'-8"	6'-11"	7'-7"		26'-3"
CD1061	BENT CAP	10	2	18'-8"	6'-11"	7'-6"		26'-2"
CD1062	BENT CAP	10	2	18'-8"	6'-9"	7'-4"		26'-0"
CD1063	BENT CAP	10	2	18'-8"	6'-6"	7'-1"		25'-9"
CD1064	BENT CAP	10	2	18'-8"	6'-1"	6'-8"		25'-4"
CD1065	BENT CAP	10	2	18'-8"	5'-4"	5'-10"		24'-6"
CD1066	BENT CAP	10	12	18'-8"	9'-7"	10'-2"		28'-10"
D950	FOOTING (TOP AND BOTTOM)	9	96	11'-6"				14'-0"
SERIES								
L652	BENT CAP	6	2	3'-7"		3'-7"		332'-3"
				DIM "B" VARIES FROM 4'-10" TO 6'-8" IN INC. OF 1 5/8" (15 BARS)				
SERIES								
L653	BENT CAP	6	4	3'-7"		3'-7"		551'-3"
				DIM "B" VARIES FROM 4'-9" TO 6'-7" IN INC. OF 15/16" (25 BARS)				
SERIES								
L654	BENT CAP	6	2	3'-7"		3'-7"		463'-11"
				DIM "B" VARIES FROM 4'-9" TO 6'-8" IN INC. OF 1 3/16" (21 BARS)				
T550	COLUMN	5	56	3'-8"				12'-6"

BENT NO. 5 - WESTBOUND

BAR	LOCATION	SIZE	NO. REQ'D.	A	B	C	D	LENGTH
A760	BENT CAP	7	16					25'-0"
A761	BENT CAP	7	2					20'-3"
A762	BENT CAP	7	2					23'-1"
A763	BENT CAP	7	2					12'-3"
A764	BENT CAP	7	2					13'-11"
A765	BENT CAP	7	2					4'-3"
A766	BENT CAP	7	2					4'-10"
A770	COUPLER BAR (BENT CAP)	7	10					6'-6"
A1054	COLUMN	10	27					24'-7"
A1055	COLUMN	10	27					24'-9"
A1058	BENT CAP	10	12					5'-6"
A1060	BENT CAP	10	60					26'-7"
A1070	COUPLER BAR	10	36					9'-1"
B1050	BENT CAP	10	12	26'-6"				27'-11"

PHASE IV (1) (2) (3)

BENT NO. 5 - WESTBOUND

BAR	LOCATION	SIZE	NO. REQ'D.	BENDING DIMENSIONS A	B	C	D	LENGTH
C950	COLUMN	9	54	10'-11"				12'-6"
CD1060	BENT CAP	10	2	18'-8"	6'-11"	7'-7"		26'-3"
CD1061	BENT CAP	10	2	18'-8"	6'-11"	7'-6"		26'-2"
CD1062	BENT CAP	10	2	18'-8"	6'-9"	7'-4"		26'-0"
CD1063	BENT CAP	10	2	18'-8"	6'-6"	7'-1"		25'-9"
CD1064	BENT CAP	10	2	18'-8"	6'-1"	6'-8"		25'-4"
CD1065	BENT CAP	10	2	18'-8"	5'-4"	5'-10"		24'-6"
CD1066	BENT CAP	10	12	18'-8"	9'-7"	10'-2"		28'-10"
D950	FOOTING (TOP AND BOTTOM)	9	96	11'-6"				14'-0"
SERIES								
L652	BENT CAP	6	2	3'-7"		3'-7"		332'-3"
				DIM "B" VARIES FROM 4'-10" TO 6'-8" IN INC. OF 1 5/8" (15 BARS)				
SERIES								
L653	BENT CAP	6	4	3'-7"		3'-7"		551'-3"
				DIM "B" VARIES FROM 4'-9" TO 6'-7" IN INC. OF 15/16" (25 BARS)				
SERIES								
L654	BENT CAP	6	2	3'-7"		3'-7"		463'-11"
				DIM "B" VARIES FROM 4'-9" TO 6'-8" IN INC. OF 1 3/16" (21 BARS)				
T550	COLUMN	5	50	3'-8"				12'-6"

BENT NO. 1 - EASTBOUND

BAR	LOCATION	SIZE	NO. REQ'D.	BENDING DIMENSIONS A	B	C	D	LENGTH
A760	BENT CAP	7	16					26'-3"
A761	BENT CAP	7	2					19'-7"
A762	BENT CAP	7	2					22'-11"
A763	BENT CAP	7	2					13'-3"
A764	BENT CAP	7	2					13'-11"
A765	BENT CAP	7	2					4'-8"
A766	BENT CAP	7	2					4'-10"
A770	COUPLER BAR (BENT CAP)	7	10					6'-6"
A1055	COLUMN	10	27					46'-10"
A1056	COLUMN	10	27					46'-2"
A1058	BENT CAP	10	12					5'-6"
A1060	BENT CAP	10	60					27'-7"
A1070	COUPLER BAR (BENT CAP)	10	36					9'-1"
B1050	BENT CAP	10	12	26'-6"				27'-11"
C950	COLUMN/FOOTING	9	54	10'-8"				12'-3"
CD1060	BENT CAP	10	2	18'-8"	8'-7"	9'-2"		27'-10"
CD1061	BENT CAP	10	2	18'-8"	8'-6"	9'-1"		27'-9"
CD1062	BENT CAP	10	2	18'-8"	8'-4"	8'-11"		27'-7"
CD1063	BENT CAP	10	2	18'-8"	8'-0"	8'-7"		27'-3"
CD1064	BENT CAP	10	2	18'-8"	7'-6"	8'-0"		26'-8"
CD1065	BENT CAP	10	2	18'-8"	6'-5"	6'-10"		25'-6"
CD1066	BENT CAP	10	12	18'-8"	9'-7"	10'-2"		28'-10"
D950	FOOTING (TOP AND BOTTOM)	9	64	11'-6"				14'-0"

CONST. NO. BR-I-40-3(155)

PROJECT NO.	YEAR	SHEET NO.
11003-3134-94	2014	

REVISIONS

NO.	DATE	BY	BRIEF DESCRIPTION
1	02-05-13	DWT	REVISED QUANTITIES
2	04-26-13	DWT	REVISED BARS A1054, A1055, A1056, T550, SERIES L652, SERIES L653 AND SERIES L654
3	11-06-13	DWT	REVISED QUANTITIES

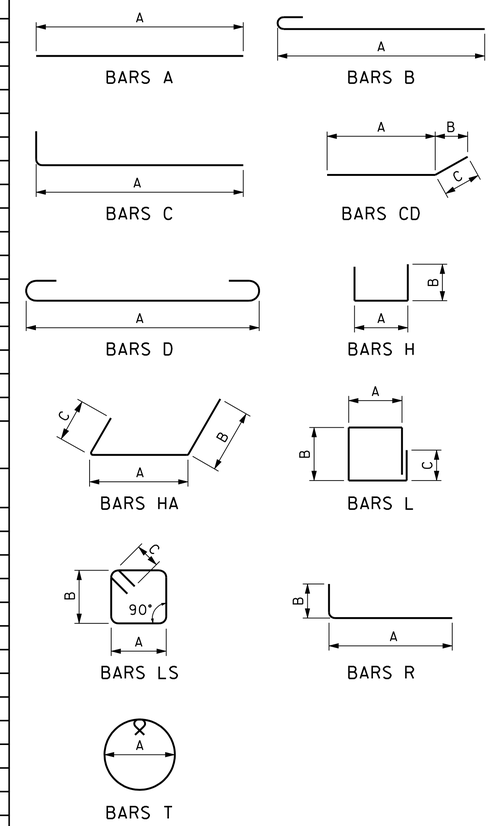

R. DARRELL JAMIE REGISTERED ENGINEER NO. 16281 STATE OF TENNESSEE

04/04/2014

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

BILL OF STEEL
(PHASE IV)

BRIDGE NO. 11-10040-05.63 (EB & WB)
INTERSTATE 40 OVER HARPETH RIVER
CHEATHAM COUNTY
2014

DESIGNED BY D. JAMES/D. THOMPSON DATE
DRAWN BY ANGELA MOORE DATE
SUPERVISED BY D. JAMES/D. THOMPSON DATE
CHECKED BY JAMIE GILLESPIE DATE

JAMIE & ASSOCIATES, INC.

BR-113-62E