

STATE OF TENNESSEE DEPARTMENT OF TRANSPORTATION

ENVIRONMENTAL DIVISION

SUITE 900, JAMES K. POLK BUILDING 505 DEADERICK STREET NASHVILLE, TENNESSEE 37243-1402 (615) 741-3655

JOHN C. SCHROER
COMMISSIONER

BILL HASLAM GOVERNOR

May 22, 2014

Mr. Jim McAdoo, Permit Section TN Department of Environment and Conservation Division of Water Pollution Control 11th Floor William R. Snodgrass Tennessee Tower 312 Rosa L. Parks Avenue Nashville, Tennessee 37243

RE: NOI and SWPPP Submittals for TDOT Construction Activities

Dear Mr. McAdoo:

We request coverage under the General NPDES Permit for Discharges of Storm Water Associated with Construction Activities for the subject project. Enclosed is the Notice of Intent (NOI) for Construction Activity – Storm Water Discharges and one hard copy and one electronic copy on CD of the site-specific Storm Water Pollution Prevention Plan (SWPPP).

Project # 86950-1531-04, PIN 116409.00 SIA Serving Nuclear Fuel Services in Erwin Unicoi County

By copy of this letter, we are sending three hard copies and one CD of this SWPPP to the Region Construction Office (one copy for the contractor).

Please forward our office the Notice of Coverage (NOC) for this project as soon as it becomes available. Please contact me at (615) 253-2466 if I can be of any assistance.

Sincerely,

Melanie Bumpus

Environmental Permits Section

anie Bumpus


Enclosures

JLH: MBB: WMB Enclosures for:

CC:

Ms. Madison Wright, Region 1 Construction (CD)

Reading File, NPDES File

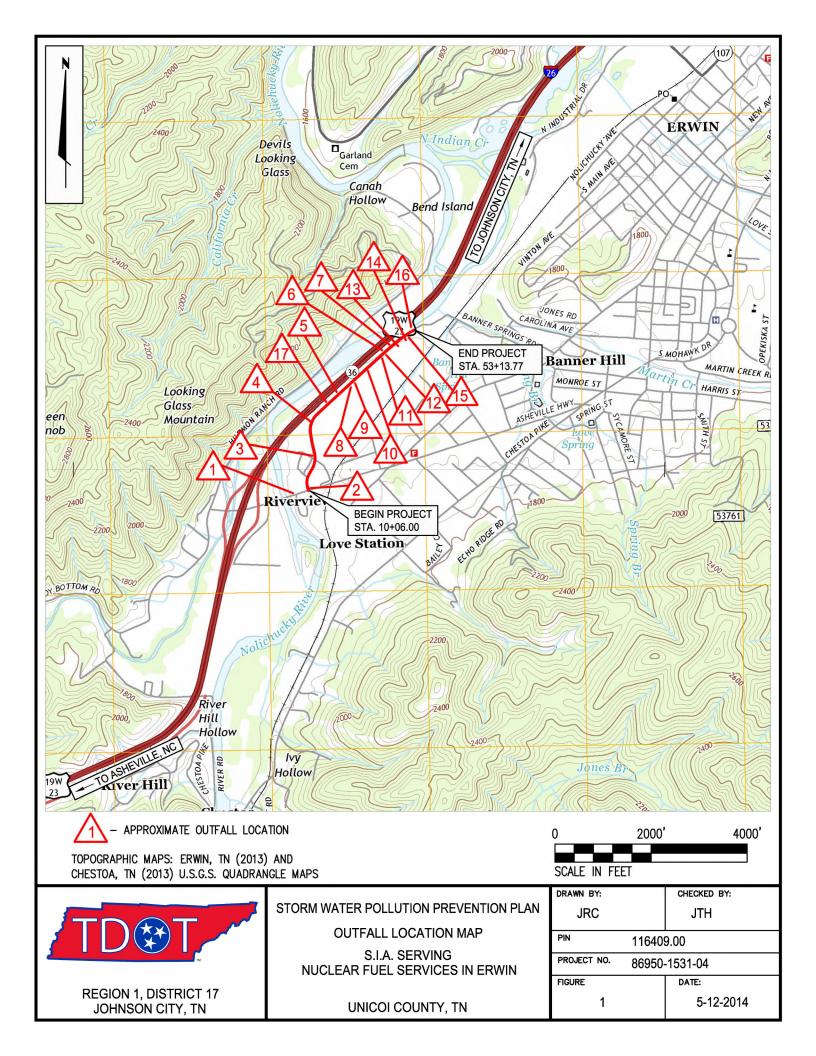

CWDDD INDEX OF CHEETO

| DES | SCRIPTION | SHT. |
|-------------|--|----------|
| 1. | SWPPP REQUIREMENTS | S-1 |
| 2. | SITE DESCRIPTION | S-1 |
| 3. | ORDER OF CONSTRUCTION ACTIVITIES | S-1 |
| 4. | STREAM, OUTFALL, WETLAND, TMDL AND ECOLOGY INFORMATION | S-1 |
| 5. | EROSION PREVENTION AND SEDIMENT CONTROL (EPSC) MEASURES | S-2 |
| ŝ. | CONSTRUCTION SUPPORT ACTIVITIES – BORROW AND WASTE AREAS | S-2 |
| 7. | MAINTENANCE AND INSPECTION | S-2 |
| 8. | SITE ASSESSMENTS | S-3 |
| 9. | STORMWATER MANAGEMENT | S-3 |
| 10. | NON-STORMWATER DISCHARGES | S-3 |
| 11. | SPILL PREVENTION, MANAGEMENT AND NOTIFICATION | S-3 |
| 12. | RECORD-KEEPING | S-4 |
| 13. | SITE WIDE/PRIMARY PERMITTEE CERTIFICATION | S-5 |
| 14. | SECONDARY PERMITTEE (OPERATOR) CERTIFICATION | S-5 |
| 15. | ENVIRONMENTAL PERMITS | S-5 |
| 16. | OUTFALL TABLE | S-6 |
| 1. <u>s</u> | TE: CITATIONS IN PARENTHESIS INDICATE SECTIONS OF THE CURRENT (SWPPP REQUIREMENTS) (3.0) | |
| 1. | HAS THE SWPPP TEMPLATE BEEN PREPARED BY AN INDIVIDUAL THAT FOLLOWING CERTIFICATIONS (3.1.1)? YES | |
| | 1.1.1. ☑ CERTIFIED PROFESSIONAL IN EROSION AND SEDIMENT (CPESC); OR | CONTR |
| | 1.1.2. X TDEC LEVEL II | |
| 1.2 | 2. DOES THE EPSC PLANS INVOLVE STRUCTURAL DESIGN, H HYDROLOGIC OR OTHER ENGINEERING CALCULATIONS FOR EPSC STI MEASURES (SEDIMENT BASINS, ETC.)?(3.1.1)? YES ☐ NO ☒ | RUCTUR |
| | IF YES, HAVE THE EPSC PLANS BEEN PREPARED, STAMPED AND CERT LICENSED PROFESSIONAL ENGINEER OR LANDSCAPE ARCHITECT? ☐YES ☐ NO | IFIED BY |
| 1.3 | 3. DOES THE PROJECT STORMWATER OUTFALLS DISCHARGE I FOLLOWING (5.4.1)? YES ☐ NO ☒ (CHECK ALL THAT APPLY BELOW) | |
| | 1.3.1. MPAIRED WATERS (303d FOR SILTATION OR HABITAT ALTER 1.3.2. KNOWN EXCEPTIONAL TENNESSEE WATERS | ATION) |
| | IF YES TO SECTION 1.3, HAVE THE EPSC PLANS BEEN PREPARINDIVIDUAL WHO HAS COMPLETED TDEC LEVEL II? (5.4.1.b) ☐ YE☐ N/A (MAY 23, 2013 CGP EXEMPTION); AND | |
| | IF YES TO SECTION 1.3, HAS THE SWPPP TEMPLATE BEEN PREPARINDIVIDUAL WHO HAS COMPLETED TDEC LEVEL II? (5.4.1.b) ☐ YE☐ N/A (MAY 23, 2013 CGP EXEMPTION) | |
| 2. <u>S</u> | SITE DESCRIPTION (3.5.1) | |
| 2.1 | PROJECT LIMITS (3.5.1.g): REFER TO TITLE SHEET | |
| 2.2 | 2. PROJECT DESCRIPTION (3.5.1.a): | |
| | TITLE: SIA SERVING NUCLEAR FUEL SERVICES IN ERWIN | |
| | COUNTY: UNICOI | |
| | PIN: 116409.00 | |
| 2.0 | | |
| | 3. SITE MAP(S) (3.5.1.g): REFER TO TITLE SHEET 4. DESCRIPTION OF EXISTING SITE TOPOGRAPHY (3.5.1.d): REFER TO CONTOURS SHEET(S) <u>11-12 & 15-18</u> , USGS QUAD MAP <u>FIGURE 1</u> , OUTFALL TABLE IN SECTION 4.2.3 BELOW. | |
| 2.5 | 5. MAJOR SOIL DISTURBING ACTIVITIES (3.5.1.b) (CHECK ALL THAT APPLY) 2.5.1. 🔀 CLEARING AND GRUBBING |): |

| 2 | 2.5.5. UTILITIES | | | | |
|--------|--|------------|--------------|--------------------------|--|
| | 2.5.6. OTHER (DESCRIBE): | | | | |
| | TOTAL PROJECT AREA (3.5.1.c): 8.8 ACRE | ES | | | |
| 2.7. T | TOTAL AREA TO BE DISTURBED (3.5.1.c): | 6.1 ACRE | S | | |
| | IF GREATER THAN 50 ACRES, HAS CO SPECIFIED IN SECTION 3 BELOW AND IN | | | T PHASING BEEN | |
| Y | YES 🔲 NO 🗌 N/A 🔯 | | | | |
| 2.8. A | ARE THERE ANY SEASONAL LIMITATION | S ON WOF | RK? YES 🗌 N | 10 🛛 | |
| H | F YES, DESCRIBE AND LIST THE CORRE | SPONDIN | G PLAN SHEE | Т: | |
| 2.9. W | WAS ROW FINALIZED PRIOR TO FEBRUA | RY 1, 2010 |) (4.1.2.2)? | | |
| Y | YES 🔲(DATE) NO 🖾 | | | | |
| | IF ROW WAS FINALIZED PRIOR TO FEBRUARY 1, 2010, THIS PROJECT IS CONSIDERED A PRE-APPROVED SITE (4.1.2.2) | | | | |
| 2.10. | ARE UTILITIES INCLUDED IN THE CONTI | RACT? YE | S □ NO □ | | |
| 2.11. | SOIL PROPERTIES (3.5.1.e)(4.1.1). | | | | |
| | | | | | |
| S | SOIL PROPERTIES FOR THE PRIMARY SOILS ARE LISTED IN THE TABLE BELOW. | | | | |
| | SOIL PROPERTIES | | | | |
| | PRIMARY SOIL NAME | HSG | % OF SITE | ERODIBILITY (k value) | |

BUNCOMBE LOAMY SAND

SHOUNS LOAM

TOCCOA LOAM

| RUNOFF COEFFICIENTS FOR EXISTING CONDITIONS | | | | | | |
|---|----------|------------------------------------|-----------------|------|--|--|
| AREA TYPE | AREA(AC) | PERCENTAGE OF TOTAL AREA (%) | OF TOTAL RUNOFF | | | |
| IMPERVIOUS | 2.9 | 33.0 | | 0.95 | | |
| SEMI-IMPERVIOUS (GRAVEL) | 0.3 | 3.4 | | 0.85 | | |
| GRASS | 5.6 | 63.6 | | 0.35 | | |
| WEIGHTED CURVE | | 0.56 | | | | |

| RUNOFF COEFFICIENTS FOR POST-CONSTRUCTION CONDITIONS | | | | | | |
|--|----------|------------------------------------|--------------|-------------|--|--|
| AREA TYPE | AREA(AC) | PERCENTAGE OF TOTAL AREA (%) | RUNOFF CN | C FACTOR | | |
| IMPERVIOUS | 3.8 | 43.0 | | 0.95 | | |
| SEMI-IMPERVIOUS (GRAVEL) | 1.1 | 13.0 | | 0.85 | | |
| GRASS | 3.9 | 44.0 | | 0.35 | | |
| WEIGHTED CURVE NUMBER OR C-FACTOR = | | | | 0.67 | | |

3. ORDER OF CONSTRUCTION ACTIVITIES (3.5.1.b, 3.5.2.a):

- 3.1. INSTALL TRAFFIC CONTROL AND PROTECTION DEVICES.
- 3.2. INSTALL STABILIZED CONSTRUCTION EXITS.
- 3.3. INSTALL PERIMETER PROTECTION WHERE RUNOFF SHEETS FROM THE SITE.
- 3.4. INSTALL INITIAL EPSC (EROSION PREVENTION AND SEDIMENT CONTROL) MEASURES INCLUDING DIVERSIONS.

|) . | NO. |), | | NO. | • |
|------------|-------|----|----|-----|---|
| _ | 8- | -(|)4 | | |
| _ | i 1 - | -(|)4 | S-1 | |
| | | | | | |
| | | | | | |

- 3.5. PERFORM CLEARING AND GRUBBING (NOT MORE THAN 15 DAYS PRIOR TO GRADING OR EARTH-MOVING. REFER TO THE STABILIZATION PRACTICES BELOW.)
- 3.6. REMOVE AND STOCKPILE TOPSOIL. STABILIZE TOPSOIL STOCKPILES WITHIN 15 DAYS OF INACTIVITY.
- 3.7. STABILIZE DISTURBED AREAS WITHIN 14 DAYS OF COMPLETING ANY PHASE OF ACTIVITY.
- 3.8. INSTALL PIPE CULVERTS AND DRAINAGE STRUCTURES.
- 3.9. INSTALL INLET AND CULVERT PROTECTION ONCE STRUCTURES ARE IN PLACE AND CAPABLE OF INTERCEPTING FLOW.
- 3.10. CONSTRUCT FILL, PERFORM FINAL GRADING AND INSTALL BASE STONE.
- 3.11. COMPLETE FINAL PAVING.
- 3.12. COMPLETE FINAL STABILIZATION (TOPSOIL, SOD, ETC.)
- 3.13. REMOVE TEMPORARY EROSION CONTROLS AND ACCUMULATED SEDIMENT FROM AREAS THAT HAVE ESTABLISHED AT LEAST 70 PERCENT PERMANENT VEGETATIVE COVER.
- 3.14. STABILIZE AREAS DISTURBED BY REMOVAL ACTIVITIES (SOD, ROCK, ETC.).

4. STREAM, OUTFALL, WETLAND, TMDL AND ECOLOGY INFORMATION

4.1. STREAM INFORMATION

0.10

0.32

0.24

16.8

5.6

77.6

WILL CONSTRUCTION AND/OR EROSION PREVENTION AND SEDIMENT CONTROLS IMPACT ANY STREAMS? YES ☐ NO ☒

4.1.1. STREAM INFORMATION

4.1.1.1. THE STRUCTURAL EPSC MEASURES HAVE BEEN INCLUDED IN THE TOTAL PROJECT IMPACTS AND HAVE BEEN INCLUDED IN THE AQUATIC RESOURCE ALTERATION (ARAP) PERMIT OR SECTION 401 CERTIFICATION (3.5.1.i). REFER TO THE LIST OF APPLICABLE ENVIRONMENTAL PERMITS LOCATED ON SWPPP SHEET5. ALL PERMITS WILL BE MAINTAINED ON SITE IN THE "DOCUMENTATION AND PERMITS" BINDER.

4.1.1.2. RECEIVING STREAMS (3.5.1.j).

| | RECEIVING STREAM INFORMA | RECEIVING STREAM INFORMATION | | | | |
|------------------------------|---|------------------------------|--|--|--|--|
| NATURAL RESOURCE LABEL | SOURCE NAME OF RECEIVING NATURAL RESOURCE | | KNOWN EXCEPTIONAL TENNESSEE WATERS (YES OR NO) | | | |
| WWC-1 | WET WEATHER CONVEYANCE TO NOLICHUCKY RIVER | NO | NO | | | |
| WWC-2 | WET WEATHER CONVEYANCE TO NOLICHUCKY RIVER | NO | NO | | | |
| WWC-3 | WET WEATHER CONVEYANCE TO NOLICHUCKY RIVER | NO | NO | | | |
| WWC-4 | WET WEATHER CONVEYANCE TO NOLICHUCKY RIVER | NO | NO | | | |

| 1.2. | ARE BUFFER ZONES REQUIRED (4.1.2, 5.4.2)? YES ☐ NO ☒ |
|------|--|
| | IF YES, THEY HAVE BEEN INCLUDED ON PLAN SHEET(S) N/A |
| | IF YES, CHECK THE APPROPRIATE BOX BELOW FOR SIZE OF BUFFER. |
| | ☐ 60-FEET FOR IMPAIRED AND KNOWN EXCEPTIONAL TENNESSEE WATERS (AVERAGE WIDTH PER SIDE WITH A MINIMUM OF 30-FEET) |
| | ☐ 30-FEET FOR ALL OTHER STREAMS (AVERAGE WIDTH PER SIDE WITH A MINIMUM OF 15-FEET) |
| | IF NO, CHECK THE APPROPRIATE BOX BELOW. |
| | ☑ BUFFERS NOT REQUIRED (I.E. NO STREAM, WETLAND, ETC. IMPACTS) |
| | ☐ TDEC ARAP APPLIED FOR |
| | BUFFER ZONE REQUIREMENTS ARE NOT REQUIRED FOR PRE-APPROVED SITES (4.1.2.2.) |
| 1.3. | ARE THERE BUFFER ZONE EXEMPTIONS (4.1.2.1)? YES ☐ NO ☒ |
| | IF YES, EXISTING CONDITIONS DESCRIPTION: |
| | |

State of Tennessee DEPARTMENT OF TRANSPORTATION

STORMWATER POLLUTION PREVENTION PLAN

2.5.2. X EXCAVATION

2.5.3. 🛛 CUTTING AND FILLING

2.5.4. X FINAL GRADING AND SHAPING

4.2. OUTFALL INFORMATION

A SEDIMENT BASIN OR EQUIVALENT MEASURE(S) WILL BE PROVIDED FOR ANY OUTFALL IN A DRAINAGE AREA:

- 4.2.1. OF TEN ACRES OR MORE FOR AN OUTFALL(S) THAT DOES NOT DISCHARGE TO AN IMPAIRED STREAM OR KNOWN EXCEPTIONAL TENNESSEE WATERS (3.5.3.3) OR
- 4.2.2. OF FIVE ACRES OR MORE FOR AN OUTFALL(S) THAT DISCHARGES TO AN IMPAIRED STREAM OR KNOWN EXCEPTIONAL TENNESSEE WATERS (5.4.1.f).
- 4.2.3. OUTFALL TABLE (3.5.1.d, 5.4.1.f).

SEE SWPPP SHEET S-6 FOR OUTFALL INFORMATION.

- 4.2.4. WHERE POSSIBLE, HAS NON-PROJECT RUN-ON BEEN DIVERTED THROUGH THE PROJECT SO THAT THE OFF-SITE RUN-ON WILL NOT FLOW OVER DISTURBED AREAS WITHIN THE ROW. THUS SEPARATING NON-PROJECT RUN-OFF FROM PROJECT RUN-OFF THEREBY REDUCING THE DRAINAGE AREA TO ANY ONE OUTFALL? YES ☒ NO ☐ N/A ☐
- 4.2.5. ARE EQUIVALENT MEASURES BEING SUBSTITUTED FOR A SEDIMENT BASIN(S)? YES ☐ NO ☐ N/A ☒
- 4.2.6. HAVE ALL OUTFALLS BEEN LABELED ON THE EPSC PLAN SHEETS (3.5.1.g, 5.4.1.f)? YES ⊠ NO □
- 4.2.7. HAVE ALL OUTFALLS BEEN LABELED ON A USGS TOPOGRAPHIC MAP INCLUDED IN THE "DOCUMENTATION AND PERMITS" BINDER (2.6.2)? YES ☑ NO □

4.3. WETLAND INFORMATION

WILL CONSTRUCTION AND/OR EROSION AND SEDIMENT CONTROLS IMPACT ANY WETLANDS? YES ☑ NO ☐

IF YES. THE STRUCTURAL EPSC MEASURES HAVE BEEN INCLUDED IN THE TOTAL PROJECT WETLAND IMPACTS AND HAVE BEEN INCLUDED IN THE ARAP PERMIT, 401 OR 404 PERMITS.

| | V | WETLAND INFORM | ATION | |
|------------------|--------------------------|------------------------|---------------------------|---------------------------|
| WETLAND LABEL | FROM STATION LT OR RT | TO STATION LT OR RT | TEMPORARY IMPACTS (AC) | PERMANENT IMPACTS (AC) |
| WTL-1 | 23+25 RT | 28+50 RT | | 0.11 |

- 4.4. TOTAL MAXIMUM DAILY LOADS (TMDL) INFORMATION (3.5.10)
 - 4.4.1. IS THIS PROJECT LOCATED IN A WATERSHED THAT MAINTAINS AN EPA APPROVED TMDL FOR SILTATION? YES ☐ NO 🖾
 - 4.4.2. IF YES, IS THIS PROJECT LOCATED WITHIN A SUBWATERSHED WITH A WASTE LOAD ALLOCATION (WLA)? YES ☐ NO ☐
 - 4.4.3. IF YES, DOES THE PROJECT HAVE A DIRECT DISCHARGE TO A 303(d) LISTED STREAM FOR SILTATION OR HABITAT ALTERATION?
 - YES NO 4.4.4. IF YES, HAS A SUMMARY OF THE CONSULTATION (LETTER) BEEN INCLUDED WITH THE SWPPP DOCUMENTATION? YES ☐ NO ☐
- 4.5. ECOLOGY INFORMATION (3.5.5.e)

IF SPECIAL NOTES ARE PRESENT IN THE TDOT ECOLOGY REPORT, HAVE THEY BEEN ADDED TO THE APPROPRIATE PLAN SHEETS?

YES ☐ NO ☐ NO NOTES REQUIRED 🛛

IF YES, LIST ALL PLAN SHEETS WHERE SPECIAL NOTES HAVE BEEN ADDED.

5. EROSION PREVENTION AND SEDIMENT CONTROL (EPSC) MEASURES (3.5.3)

- 5.1. EPSC MEASURES MUST BE DESIGNED. INSTALLED AND MAINTAINED TO CONTROL STORMWATER VOLUME AND VELOCITY WITHIN THE SITE TO MINIMIZE EROSION (4.1.1).
- 5.2. EPSC MEASURES MUST CONTROL STORMWATER DISCHARGES, INCLUDING BOTH PEAK FLOWS AND TOTAL STORMWATER VOLUME, TO MINIMIZE EROSION AT OUTLETS, STREAM CHANNELS AND STREAM BANKS. (4.1.1)

- 5.3. HAVE THE CONTROL MEASURES BEEN DESIGNED ACCORDING TO THE SIZE AND SLOPE OF THE DISTURBED DRAINAGE AREA (3.5.3.3)? YES ☑ NO ☐
- 5.4. THE CONTROL MEASURES HAVE, AT A MINIMUM, BEEN DESIGNED FOR THE 2-YEAR, 24 HOUR STORM EVENT (3.5.3.3, 5.4.1.a). FOR SITES THAT DISCHARGE INTO AN IMPAIRED OR KNOWN EXCEPTIONAL TENNESSEE WATERS. EPSC MEASURES WILL BE DESIGNED TO CONTROL STORM RUNOFF GENERATED BY A 5-YEAR. 24-HOUR STORM EVENT.
- 5.5. ARE THE LIMITS OF DISTURBANCE CLEARLY MARKED ON THE EPSC PLANS (3.5.1.n)? YES ☑ LIMITS OF CONSTRUCTION EASEMENT AREAS. NO □
- 5.6. HAVE PHASED EPSC PLANS BEEN PREPARED FOR THE PROJECT (3.5.2)?

YES ☑ NO ☐ (IF YES, CHECK ONE BELOW)

- 5.6.1. PROJECT DISTURBED AREA IS THAN LESS THAN 5 ACRES (MINIMUM OF TWO PHASES OF EPSC PLANS)
- 5.6.2. PROJECT DISTURBED AREA IS GREATER THAN 5 ACRES (MINIMUM OF THREE PHASES OF EPSC PLANS)
- 5.7. IS ADDITIONAL PHYSICAL OR CHEMICAL TREATMENT OF STORMWATER RUNOFF NECESSARY (5.4.1.a)? YES ☐ NO 🔀
- 5.8. HAVE STEEP SLOPES (GREATER THAN 35%) BEEN MINIMALLY DISTURBED AND/OR PROTECTED BY CONVEYING RUNOFF NON-EROSIVELY AROUND OR OVER THE SLOPE (3.5.3.2) (10. "STEEP SLOPE")? YES ☑ NO ☐ N/A ☐
- 5.9. ALL PHYSICAL AND/OR CHEMICAL TREATMENT WILL BE RESEARCHED. APPLIED IN ACCORDANCE WITH MANUFACTURE'S GUIDELINES AMD FULLY DESCRIBED ON THE EPSC PLANS (3.5.3.1.b).
- 5.10. ALL EPSC CONTROL MEASURES WILL BE INSTALLED ACCORDING TO TDOT STANDARDS (E.G. STANDARD DRAWINGS).
- 5.11. EPSC MEASURES WILL NOT BE INSTALLED IN A STREAM WITHOUT FIRST OBTAINING US COE SECTION 404, TDEC ARAP, AND TVA PERMITS.
- 5.12. DISCHARGES FROM DEWATERING ACTIVITIES ARE PROHIBITED UNLESS MANAGED BY CONTROLS PROVIDING EQUIVALENT LEVEL OF TREATMENT (FILTRATION) (4.14).
- 5.13. DISCHARGES FROM SEDIMENT BASINS AND IMPOUNDMENTS MUST USE OUTLET STRUCTURES THAT ONLY WITHDRAW WATER FROM NEAR THE SURFACE OF THE BASIN OR IMPOUNDMENT, UNLESS INFEASIBLE (4.1.7).
- 5.14. THE CONTROL MEASURES LISTED IN THE QUANTITIES TABLE ON SHEET 2 HAVE BEEN SELECTED IN ACCORDANCE WITH TDOT STANDARD DRAWINGS AND GOOD ENGINEERING PRACTICES (3.5.3.1.b).
- 5.15. THE QUANTITIES REQUIRED FOR STABILIZED CONSTRUCTION EXITS PER TDOT STANDARDS HAVE BEEN SPECIFIED ON SHEET 2-2A1 (3.5.3.1.n).
- 5.16. STABILIZATION PRACTICES
 - PRE-CONSTRUCTION VEGETATIVE COVER WILL NOT BE DESTROYED, REMOVED OR DISTURBED MORE THAN 15 DAYS PRIOR TO GRADING OR EARTH MOVING UNLESS THE AREA WILL BE SEEDED AND/OR MULCHED OR OTHER TEMPORARY COVER IS INSTALLED (3.5.3.1.h).
- 5.17. STABILIZATION MEASURES WILL BE INITIATED AS SOON AS POSSIBLE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED. TEMPORARY OR PERMANENT STABILIZATION WILL BE COMPLETED WITHIN 14 DAYS AFTER ACTIVITY HAS TEMPORARILY OR PERMANENTLY CEASED IN THAT AREA. PERMANENT STABILIZATION WILL REPLACE TEMPORARY MEASURES AS SOON AS PRACTICABLE (3.5.3.2).
- 5.18. STEEP SLOPES (3.5.3.2)

STEEP SLOPES ARE DEFINED AS A NATURAL OR CREATED SLOPE OF 35% GRADE OR STEEPER REGARDLESS OF HEIGHT. STEEP SLOPES SHALL BE TEMPORARILY STABILIZED NOT LATER THAN 7 DAYS AFTER CONSTRUCTION ACTIVITY ON THE SLOPE HAS TEMPORARILY OR PERMANENTLY CEASED.

6. CONSTRUCTION SUPPORT ACTIVITIES – BORROW AND WASTE AREAS (1.2.2)(3.5.3.1.g)

IF OFFSITE BORROW AND WASTE AREAS BECOME NECESSARY DURING THE LIFE OF THE PROJECT, THIS SUPPORT ACTIVITY SHALL BE ADDRESSED PER THE TDOT WASTE AND BORROW MANUAL AS INDICATED IN THE STATEWIDE STORMWATER MANAGEMENT PLAN (SSWMP).

7. MAINTENANCE AND INSPECTION

- 7.1. INSPECTION PRACTICES (3.5.8)
 - 7.1.1. INSPECTORS MUST HAVE SUCCESSFULLY COMPLETED THE TDEC FUNDAMENTALS OF EROSION AND SEDIMENT CONTROL COURSE (TDEC LEVEL I) AND MAINTAIN THE CERTIFICATION. A COPY OF THE INSPECTOR'S CERTIFICATION SHOULD BE KEPT ON SITE (3.5.8.1).
 - 7.1.2. INSPECTIONS WILL BE CONDUCTED AT LEAST TWICE EVERY CALENDAR WEEK AND AT LEAST 72 HOURS A PART (3.5.8.2.a).
 - 7.1.3. THE FREQUENCY OF EPSC INSPECTIONS MAY BE REDUCED TO ONCE A MONTH (I.E. EXTREME DROUGHT CONDITIONS, FROZEN GROUND, ETC.) WITH WRITTEN NOTIFICATION TO TDEC NASHVILLE CENTRAL OFFICE AND SUBSEQUENT TDEC APPROVAL. WRITTEN NOTIFICATION MUST INCLUDE THE INTENT TO CHANGE FREQUENCY AND JUSTIFICATION (3.5.8.2.a).
 - 7.1.4. ALL DISTURBED AREAS OF THE SITE THAT HAVE NOT BEEN FINALLY STABILIZED, AREAS USED FOR MATERIAL STORAGE THAT ARE EXPOSED TO PRECIPITATION, STRUCTURAL CONTROL MEASURES, AND LOCATIONS WHERE VEHICLES ENTER OR EXIT THE SITE, AND EACH OUTFALL WILL BE INSPECTED (3.5.8.2.b).
 - 7.1.5. THE INSPECTOR WILL OVERSEE THE REQUIREMENTS OF OTHER CONSTRUCTION-RELATED WATER QUALITY PERMITS (I.E. TDEC ARAP, US COE AND TVA SECTION 26a PERMITS) FOR CONSTRUCTION ACTIVITIES AROUND WATERS OF THE STATE (10 "INSPECTOR").
 - 7.1.6. THE SWPPP WILL BE REVISED AS NECESSARY BASED ON THE RESULTS OF THE INSPECTION. REVISION(S) WILL BE RECORDED WITHIN 7 DAYS OF THE INSPECTION. REVISION(S) WILL BE IMPLEMENTED WITHIN 14 DAYS OF THE INSPECTION (3.8.5.2.e AND 3.8.5.2.f).
 - 7.1.7. THE INSPECTOR SHALL CONDUCT PRE-CONSTRUCTION INSPECTIONS TO VERIFY AREAS THAT ARE NOT TO BE DISTURBED HAVE BEEN MARKED IN THE SWPPP AND IN THE FIELD BEFORE LAND DISTURBANCE ACTIVITIES BEGIN AND INITIAL MEASURES HAVE BEEN INSTALLED (10 "INSPECTOR") (3.5.1.n).
 - 7.1.8. INSPECTIONS WILL BE DOCUMENTED ON THE TDOT EPSC INSPECTION REPORT (TDEC PRE-APPROVED) AND INCLUDE THE SCOPE OF THE INSPECTION, NAME(S), TITLE AND TN EPSC CERTIFICATION NUMBER OF PERSONNEL MAKING THE INSPECTION, THE DATE(S) OF THE INSPECTION, CURRENT APPROXIMATE DISTURBED ACREAGE AT TIME OF INSPECTION, CHECKLIST (NOC, SWPPP, RAIN GAUGE, SITE CONTACT INFORMATION, ETC.) AND MAJOR OBSERVATIONS RELATING TO THE IMPLEMENTATION OF THE SWPPP (3.5.8.2.g).
 - 7.1.9. DOCUMENTATION OF INSPECTIONS WILL BE MAINTAINED ON SITE IN THE "DOCUMENTATION AND PERMITS" BINDER. REPORTS WILL BE SUBMITTED TO THE TDOT PROJECT SUPERVISOR PER THE CONTRACT.
 - 7.1.10. THESE INSPECTION REQUIREMENTS DO NOT APPLY TO DEFINABLE AREAS OF THE SITE THAT HAVE MET FINAL STABILIZATION REQUIREMENTS AND HAVE BEEN NOTED IN THE SWPPP.
 - 7.1.11. TRAINED CERTIFIED INSPECTORS SHALL COMPLETE INSPECTION DOCUMENTATION TO THE BEST OF THEIR ABILITY. FALSIFYING INSPECTION RECORDS OR OTHER DOCUMENTATION OR FAILURE TO COMPLETE INSPECTION DOCUMENTATION SHALL RESULT IN A VIOLATION OF THIS PERMIT AND ANY OTHER APPLICABLE ACTS OR RULES (3.8.5.2.h).
- 7.2. DULY AUTHORIZED REPRESENTATIVE (7.7.3)

THE PROJECT SUPERVISOR MAY DELEGATE AN INDIVIDUAL AND/OR CONSULTANT TO SIGN EPSC INSPECTIONS REPORTS. FOR SATISFYING SIGNATORY REQUIREMENTS FOR EPSC INSPECTION REPORTS. THE PROJECT SUPERVISOR AND NEWLY AUTHORIZED INDIVIDUAL ACCEPTING RESPONSIBILITY MUST PERFORM THE FOLLOWING:

- 7.2.1. COMPLETE AND SIGN THE TDOT CONSTRUCTION DIVISION EPSC DELEGATION OF AUTHORITY.
- 7.2.2. SUBMIT THE EPSC DELEGATION OF AUTHORITY TO THE LOCAL TDEC EFO.
- 7.3. MAINTENANCE PRACTICES (3.5.3.1 AND 3.5.7)
 - 7.3.1. ALL CONTROLS WILL BE MAINTAINED IN GOOD AND EFFECTIVE OPERATING ORDER. NECESSARY REPAIRS OR MAINTENANCE WILL BE ACCOMPLISHED BEFORE THE NEXT STORM EVENT AND IN NO CASE MORE THAN 24 HOURS AFTER THE NEED IS IDENTIFIED. IN A CASE WHERE THE ACTIVITY IS DEEMED IMPRACTICABLE. ANY SUCH CONDITIONS WILL BE DOCUMENTED (3.5.8.2.e).

STATE OF TENNESSEE department of transportation

PROJECT NO.

86950-3528-04

86950-1531-04

CONST. 2014

STORMWATER POLLUTION PREVENTION PLAN

| TENNESSEE D.O.T. | DESIGN DIVISION | |
|------------------|-----------------|--|
| | | |

:ILE NO.

7.3.2. ALL CONTROLS WILL BE MAINTAINED IN ACCORDANCE WITH TDOT STANDARD DRAWINGS AND GOOD ENGINEERING PRACTICES. (3.5.3.1.b)
7.3.3. SEDIMENT WILL BE REMOVED FROM SEDIMENT TRAPS. SILT FENCE.

HAS BEEN REDUCED BY 50% (3.5.3.1.e).
7.3.4. CHECK DAMS WILL BE INSPECTED FOR STABILITY. SEDIMENT WILL BE REMOVED WHEN DEPTH REACHES ONE-HALF (½) THE HEIGHT OF THE

SEDIMENT BASINS, AND OTHER CONTROLS WHEN THE DESIGN CAPACITY

- 7.3.5. LITTER, CONSTRUCTION DEBRIS, AND CONSTRUCTION CHEMICALS EXPOSED TO STORMWATER WILL BE PICKED UP AND REMOVED FROM STORMWATER EXPOSURE PRIOR TO ANTICIPATED STORM EVENTS OR BEFORE BEING CARRIED OFF OF THE SITE BY WIND, OR OTHERWISE PREVENTED FROM BECOMING A POLLUTANT SOURCE FOR STORMWATER DISCHARGES. AFTER USE, MATERIALS USED FOR EROSION CONTROL WILL BE REMOVED (3.5.3.1.f).
- 7.3.6. ALL SEEDED AREAS WILL BE CHECKED FOR BARE SPOTS, EROSION WASHOUTS, AND VIGOROUS GROWTH FREE OF SIGNIFICANT WEED INFESTATIONS.
- 7.3.7. THE TDOT PROJECT SUPERVISOR OR THEIR DESIGNEE AND THE CONTRACTOR'S SITE SUPERINTENDENT ARE RESPONSIBLE FOR INSPECTIONS. MAINTENANCE AND REPAIR ACTIVITIES ARE THE RESPONSIBILITY OF THE CONTRACTOR. THE TDOT PROJECT SUPERVISOR OR THEIR DESIGNEE WILL COMPLETE THE INSPECTION REPORTS AND DISTRIBUTE COPIES PER THE CONTRACT.

8. SITE ASSESSMENTS (3.1.2)

QUALITY ASSURANCE SITE ASSESSMENTS OF EROSION PREVENTION AND SEDIMENT CONTROLS SHALL BE PERFORMED BY THE TDOT ENVIRONMENTAL DIVISION COMPREHENSIVE INSPECTIONS OFFICE GUIDELINES.

9. STORMWATER MANAGEMENT (3.5.4)

- 9.1. STORMWATER MANAGEMENT WILL BE HANDLED BY TEMPORARY CONTROLS OUTLINED IN THIS SWPPP AND ANY PERMANENT CONTROLS NEEDED TO MEET PERMANENT STORMWATER MANAGEMENT NEEDS IN THE POST CONSTRUCTION PERIOD. PERMANENT CONTROLS WILL BE SHOWN ON THE PLANS AND NOTED AS PERMANENT.
- 9.2. DESCRIBE ANY SPECIFIC POST-CONSTRUCTION MEASURES THAT WILL CONTROL VELOCITY, POLLUTANTS, AND/OR EROSION (3.5.1.F, 3.5.4): PERMANENT STABILIZATION OF SOD LINED CONVEYANCES.
- 9.3. OTHER ITEMS NEEDING CONTROL (3.5.5)
 - 9.3.1. CONSTRUCTION MATERIALS

THE FOLLOWING MATERIALS OR SUBSTANCES ARE EXPECTED TO BE PRESENT ON THE SITE DURING THE CONSTRUCTION PERIOD. (CHECK ALL THAT APPLY).

9.3.1.1. 🖂 LUMBER, GUARDRAIL, TRAFFIC CONTROL DEVICES

9.3.1.2. X CONCRETE WASHOUT

9.3.1.3. CONCRETE AND CORRUGATED METAL PIPES

9.3.1.4. MINERAL AGGREGATES, ASPHALT

9.3.1.5. 🛛 EARTH

9.3.1.6. 🖂 LIQUID TRAFFIC STRIPING MATERIALS, PAINT

9.3.1.7. **⊠** ROCK

9.3.1.8.

CURING COMPOUND

9.3.1.10. OTHER

THESE MATERIALS WILL BE HANDLED AS NOTED IN THIS SWPPP.

9.3.2. WASTE MATERIALS (3.5.5.b)

WASTE MATERIAL (EARTH, ROCK, ASPHALT, CONCRETE, ETC.) NOT REQUIRED FOR THE CONSTRUCTION OF THE PROJECT WILL BE DISPOSED OF BY THE CONTRACTOR. THE CONTRACTOR WILL OBTAIN ANY AND ALL NECESSARY PERMITS INCLUDING, BUT NOT LIMITED TO NPDES, AQUATIC RESOURCES ALTERATION PERMIT(S) CORPS OF ENGINEERS SECTION 404 PERMITS, AND TVA SECTION 26A PERMITS TO DISPOSE OF WASTE MATERIALS.

9.3.3. HAZARDOUS WASTE (3.5.5.c) (7.9)

ALL HAZARDOUS WASTE MATERIALS WILL BE DISPOSED OF IN A MANNER WHICH IS COMPLIANT WITH LOCAL OR STATE REGULATIONS. SITE

PERSONNEL WILL BE INSTRUCTED IN THESE PRACTICES, AND THE INDIVIDUAL DESIGNATED AS THE CONTRACTOR'S ON-SITE REPRESENTATIVE WILL BE RESPONSIBLE FOR SEEING THAT THESE PRACTICES ARE FOLLOWED. THE CONTRACTOR WILL OBTAIN ANY AND ALL NECESSARY PERMITS TO DISPOSE OF HAZARDOUS MATERIAL.

9.3.4. SANITARY WASTE (3.5.5.b)

PORTABLE SANITARY FACILITIES WILL BE PROVIDED ON ALL CONSTRUCTION SITES. SANITARY WASTE WILL BE COLLECTED FROM THE PORTABLE UNITS IN A TIMELY MANNER BY A LICENSED WASTE MANAGEMENT CONTRACTOR OR AS REQUIRED BY ANY LOCAL REGULATIONS. THE CONTRACTOR WILL OBTAIN ANY AND ALL NECESSARY PERMITS TO DISPOSE OF SANITARY WASTE.

9.3.5. OTHER MATERIALS

THE FOLLOWING MATERIALS OR SUBSTANCES ARE EXPECTED TO BE PRESENT ON THE SITE DURING THE CONSTRUCTION PERIOD. (CHECK ALL THAT APPLY).

9.3.5.1. T FERTILIZERS AND LIME

9.3.5.2. PESTICIDES AND/OR HERBICIDES

9.3.5.3. DIESEL AND GASOLINE

9.3.5.4. MACHINERY LUBRICANTS (OIL AND GREASE)

THESE MATERIALS WILL BE HANDLED AS NOTED THIS SWPPP.

10. NON-STORMWATER DISCHARGES (3.5.9)

- 10.1. THE FOLLOWING NON-STORMWATER DISCHARGES ARE ANTICIPATED DURING THE COURSE OF THIS PROJECT (CHECK ALL THAT APPLY):
 - 10.1.1. ☑ DEWATERING OF WORK AREAS OF COLLECTED STORMWATER AND GROUND WATER
 - 10.1.2. WATERS USED TO WASH VEHICLES (OF DUST AND SOIL) WHERE DETERGENTS ARE NOT USED AND DETENTION AND/OR FILTERING IS PROVIDED BEFORE THE WATER LEAVES SITE
 - 10.1.3. WATER USED TO CONTROL DUST (3.5.3.1.n)
 - 10.1.4.

 POTABLE WATER SOURCES INCLUDING WATERLINE FLUSHINGS FROM WHICH CHLORINE HAS BEEN REMOVED TO THE MAXIMUM EXTENT PRACTICABLE
 - 10.1.5.

 UNCONTAMINATED GROUNDWATER OR SPRING WATER
 - 10.1.6.
 FOUNDATION OR FOOTING DRAINS WHERE FLOWS ARE NOT CONTAMINATED WITH POLLUTANTS

10.1.7. OTHER:

- 10.2. ALL ALLOWABLE NON-STORMWATER DISCHARGES WILL BE DIRECTED TO STABLE DISCHARGE STRUCTURES PRIOR TO LEAVING THE SITE. FILTERING OR CHEMICAL TREATMENT MAY BE NECESSARY PRIOR TO DISCHARGE.
- 10.3. THE DESIGN OF ALL IMPACTED EPSC MEASURES RECEIVING FLOW FROM ALLOWABLE NON-STORMWATER DISCHARGES MUST BE DESIGNED TO HANDLE THE VOLUME OF THE NON-STORMWATER COMPONENT.
- 10.4. WASH DOWN OR WASTE DISCHARGE OF CONCRETE TRUCKS WILL NOT BE PERMITTED ON-SITE UNLESS PROPER SETTLEMENT AREAS HAVE BEEN PROVIDED IN ACCORDANCE WITH BOTH STATE AND FEDERAL REGULATIONS.
- 10.5. ARE ANY DISCHARGES ASSOCIATED WITH INDUSTRIAL (NON-CONSTRUCTION STORMWATER) ACTIVITY EXPECTED (3.5.1.h)?

YES NO IF YES, SPECIFY THE LOCATION OF THE ACTIVITY AND ITS PERMIT NUMBER.

11. SPILL PREVENTION, MANAGEMENT AND NOTIFICATION (3.5.5.c, 5.1)

11.1. SPILL PREVENTION (3.5.5.c)

11.1.1. MATERIAL MANAGEMENT

11.1.1.1. HOUSEKEEPING

ONLY PRODUCTS NEEDED WILL BE STORED ON-SITE BY THE CONTRACTOR. EXCEPT FOR BULK MATERIALS THE CONTRACTOR WILL STORE ALL MATERIALS UNDER COVER AND IN APPROPRIATE CONTAINERS. PRODUCTS MUST BE STORED IN ORIGINAL CONTAINERS AND LABELED. MATERIAL MIXING WILL BE CONDUCTED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. WHEN POSSIBLE, ALL PRODUCTS WILL BE USED COMPLETELY BEFORE PROPERLY DISPOSING OF THE CONTAINER OFF SITE. THE MANUFACTURER'S DIRECTIONS FOR DISPOSAL OF MATERIALS AND CONTAINERS WILL BE FOLLOWED.

THE CONTRACTOR'S SITE SUPERINTENDENT WILL INSPECT MATERIALS STORAGE AREAS REGULARLY TO ENSURE PROPER USE AND DISPOSAL. DUST GENERATED WILL BE CONTROLLED IN AN ENVIRONMENTALLY SAFE MANNER. VEGETATION AREAS NOT ESSENTIAL TO THE CONSTRUCTION PROJECT WILL BE PRESERVED AND MAINTAINED AS NOTED ON THE PLANS.

11.1.1.2. HAZARDOUS MATERIALS

PRODUCTS WILL BE KEPT IN ORIGINAL CONTAINERS UNLESS THE CONTAINER IS NOT RESEALABLE. ORIGINAL LABELS AND MATERIAL SAFETY DATA SHEETS WILL BE RETAINED IN A SAFE PLACE TO RELAY IMPORTANT PRODUCT INFORMATION. IF SURPLUS PRODUCT MUST BE DISPOSED OF, MANUFACTURER'S LABEL DIRECTIONS FOR DISPOSAL WILL BE FOLLOWED. MAINTENANCE AND REPAIR OF ALL EQUIPMENT AND VEHICLES INVOLVING OIL CHANGES, HYDRAULIC SYSTEM DRAIN DOWN, DE-GREASING OPERATIONS, FUEL TANK DRAIN DOWN AND REMOVAL AND OTHER ACTIVITIES WHICH MAY RESULT IN THE ACCIDENTAL RELEASE OF CONTAMINANTS WILL BE CONDUCTED ON AN IMPERVIOUS SURFACE AND UNDER COVER DURING WET WEATHER TO PREVENT THE RELEASE OF CONTAMINANTS ONTO THE GROUND. WHEEL WASH WATER WILL BE COLLECTED AND ALLOWED TO SETTLE OUT SUSPENDED SOLIDS PRIOR TO DISCHARGE. WHEEL WASH WATER WILL NOT BE DISCHARGED DIRECTLY INTO ANY STORMWATER SYSTEM OR STORMWATER TREATMENT SYSTEM. POTENTIAL PH-MODIFYING MATERIALS SUCH AS: BULK CEMENT, CEMENT KILN DUST, FLY ASH, NEW CONCRETE WASHINGS AND CURING WATERS. CONCRETE PUMPING, AND MIXER WASHOUT WATERS WILL BE COLLECTED ON SITE AND MANAGED TO PREVENT CONTAMINATION OF STORMWATER RUNOFF.

11.1.1.3. PRODUCT SPECIFIC PRACTICES

- 11.1.1.3.1. PETROLEUM PRODUCTS: ALL ON-SITE VEHICLES WILL BE MONITORED FOR LEAKS AND RECEIVE REGULAR PREVENTIVE MAINTENANCE TO REDUCE THE CHANCE OF LEAKAGE. PETROLEUM PRODUCTS WILL BE STORED IN TIGHTLY SEALED CONTAINERS WHICH ARE CLEARLY LABELED.
- 11.1.1.3.2. FERTILIZERS: FERTILIZERS WILL BE APPLIED ONLY IN THE AMOUNTS SPECIFIED BY TDOT. ONCE APPLIED, FERTILIZERS WILL BE WORKED INTO THE SOIL TO LIMIT THE EXPOSURE TO STORMWATER. FERTILIZERS WILL BE STORED IN AN ENCLOSED AREA UNDER COVER. THE CONTENTS OF PARTIALLY USED FERTILIZER BAGS WILL BE TRANSFERRED TO SEALABLE CONTAINERS TO AVOID SPILLS.
- 11.1.1.3.3. PAINTS: ALL CONTAINERS WILL BE TIGHTLY SEALED AND STORED WHEN NOT REQUIRED FOR USE. THE EXCESS WILL BE DISPOSED OF ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS AND APPLICABLE STATE AND LOCAL REGULATIONS.
- 11.1.1.3.4. CONCRETE TRUCKS: CONTRACTORS WILL PROVIDE DESIGNATED TRUCK WASHOUT AREAS ON THE SITE. THESE AREAS MUST BE SELF CONTAINED AND NOT CONNECTED TO ANY STORMWATER OUTLET OF THE SITE. UPON COMPLETION OF CONSTRUCTION WASHOUT AREAS WILL BE PROPERLY STABILIZED.

11.2. SPILL MANAGEMENT

- 11.2.1. IN ADDITION TO THE PREVIOUS HOUSEKEEPING AND MANAGEMENT PRACTICES, THE FOLLOWING PRACTICES WILL BE FOLLOWED FOR SPILL PREVENTION AND CLEANUP IF NECESSARY.
- 11.2.2. FOR ALL HAZARDOUS MATERIALS STORED ON SITE, THE MANUFACTURER'S RECOMMENDED METHODS FOR SPILL CLEAN UP WILL BE CLEARLY POSTED. SITE PERSONNEL WILL BE MADE AWARE OF THE PROCEDURES AND THE LOCATIONS OF THE INFORMATION AND CLEANUP SUPPLIES.
- 11.2.3. APPROPRIATE CLEANUP MATERIALS AND EQUIPMENT WILL BE MAINTAINED BY THE CONTRACTOR IN THE MATERIALS STORAGE AREA ON-SITE AND UNDER COVER. AS APPROPRIATE, EQUIPMENT AND MATERIALS MAY INCLUDE ITEMS SUCH AS BOOMS, DUST PANS, MOPS, RAGS, GLOVES, GOGGLES, KITTY LITTER, SAND, SAWDUST, AND PLASTIC AND METAL TRASH CONTAINERS SPECIFICALLY FOR CLEAN UP PURPOSES.

State of tennessee Department of transportation

PROJECT NO.

86950-3528-04

86950-1531-04

CONST. 2014

STORMWATER POLLUTION PREVENTION PLAN

88SY TIME 888888

\$\$\$\$YTIME\$\$\$\$\$\$

| 1.2.4. ALL SPILLS WILL BE CLEANED IMMEDIATELY AFTER DISCOVERY AND THE |
|---|
| MATERIALS DISPOSED OF PROPERLY. THE SPILL AREA WILL BE KEPT |
| WELL VENTILATED AND PERSONNEL WILL WEAR APPROPRIATE |
| PROTECTIVE CLOTHING TO PREVENT INJURY FROM CONTACT WITH A |
| HAZARDOUS SUBSTANCE. |

- 11.2.5. THE CONTRACTOR'S SITE SUPERINTENDENT WILL BE THE SPILL PREVENTION AND CLEANUP COORDINATOR. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT THE SITE SUPERINTENDENT HAS HAD APPROPRIATE TRAINING FOR HAZARDOUS MATERIALS HANDLING, SPILL MANAGEMENT, AND CLEANUP.
- 11.2.6. IF SPILLS REPRESENT AN IMMINENT THREAT OF ESCAPING THE SITE AND ENTERING RECEIVING WATERS, PERSONNEL WILL RESPOND IMMEDIATELY TO CONTAIN THE RELEASE AND NOTIFY THE SUPERINTENDENT AFTER THE SITUATION HAS BEEN STABILIZED.
- 11.2.7. IF OIL SHEEN IS OBSERVED ON SURFACE WATER (E.G. SETTLING PONDS, DETENTION PONDS, SWALES), ACTION WILL BE TAKEN IMMEDIATELY TO REMOVE THE MATERIAL CAUSING THE SHEEN. THE CONTRACTOR WILL USE APPROPRIATE MATERIALS TO CONTAIN AND ABSORB THE SPILL. THE SOURCE OF THE OIL SHEEN WILL ALSO BE IDENTIFIED AND REMOVED OR REPAIRED AS NECESSARY TO PREVENT FURTHER RELEASES.
- 11.2.8. IF A SPILL OCCURS THE SUPERINTENDENT OR THE SUPERINTENDENT'S DESIGNEE WILL BE RESPONSIBLE FOR COMPLETING THE SPILL REPORTING FORM AND FOR REPORTING THE SPILL TO THE TDOT PROJECT SUPERVISOR.
- 11.2.9. SPILL RESPONSE EQUIPMENT WILL BE INSPECTED AND MAINTAINED BY THE CONTRACTOR AS NECESSARY TO REPLACE ANY MATERIALS USED IN SPILL RESPONSE ACTIVITIES.

11.3. SPILL NOTIFICATION (5.1)

WHERE A RELEASE CONTAINING A HAZARDOUS SUBSTANCE IN AN AMOUNT EQUAL TO OR IN EXCESS OF A REPORTABLE QUANTITY ESTABLISHED UNDER EITHER 40 CFR 117 OR 40 CFR 302 OCCURS DURING A 24 HOUR PERIOD:

- 11.3.1. THE TDOT PROJECT SUPERVISOR IS RESPONSIBLE FOR NOTIFYING THE REGIONAL ENVIRONMENTAL COORDINATOR OR ASSISTANT REGIONAL ENVIRONMENTAL COORDINATOR AS SOON AS HE OR SHE HAS KNOWLEDGE OF THE DISCHARGE.
- 11.3.2. THE TDOT REGIONAL ENVIRONMENTAL COORDINATOR WILL NOTIFY THE LOCAL TDEC ENVIRONMENTAL FIELD OFFICE AND ANY OTHER APPLICABLE REGULATORY AGENCIES WITHIN 24 HOURS OF THE SPILL.
- 11.3.3. A WRITTEN DESCRIPTION OF THE RELEASE, DATE OF RELEASE AND CIRCUMSTANCES LEADING TO THE RELEASE, WHAT ACTIONS WERE TAKEN TO MITIGATE EFFECTS OF THE RELEASE, AND STEPS TAKEN TO MINIMIZE THE CHANCE OF FUTURE OCCURRENCES WILL BE SUBMITTED TO THE APPROPRIATE TDEC ENVIRONMENTAL FIELD OFFICE WITHIN 14 DAYS OF KNOWLEDGE OF THE RELEASE.
- 11.3.4. THE SWPPP MUST BE MODIFIED WITHIN 14 DAYS OF KNOWLEDGE OF THE RELEASE PROVIDING A DESCRIPTION OF THE RELEASE, CIRCUMSTANCES LEADING TO THE RELEASE, AND THE DATE OF RELEASE. THE SWPPP WILL BE REVIEWED AND MODIFIED AS NECESSARY TO IDENTIFY MEASURES TO PREVENT THE REOCCURRENCE OF SUCH RELEASES AND TO RESPOND TO SUCH RELEASES.

12. RECORD-KEEPING

12.1. REQUIRED RECORDS

TDOT OR THEIR DESIGNEE WILL MAINTAIN AT THE SITE THE FOLLOWING RECORDS OF CONSTRUCTION ACTIVITIES (3.5.3.1.m) (6.2.1):

- 12.1.1. THE DATES WHEN MAJOR GRADING ACTIVITIES OCCUR
- 12.1.2. THE DATES WHEN CONSTRUCTION ACTIVITIES TEMPORARILY OR PERMANENTLY CEASE ON A PORTION OF THE SITE
- 12.1.3. THE DATES WHEN STABILIZATION MEASURES ARE INITIATED
- 12.1.4. RECORDS OF TWICE WEEKLY EPSC INSPECTION REPORTS AND CORRECTIVE MEASURES
- 12.1.5. RECORDS OF QUALITY ASSURANCE SITE ASSESSMENTS
- 12.1.6. COPY OF SITE EPSC INSPECTOR'S TDEC LEVEL 1 CERTIFICATION
- 12.1.7. RAINFALL MONITORING PLAN (3.5.3.1.o):

12.1.7.1. EQUIPMENT

AT A MINIMUM, THE CONTRACTOR WILL INSTALL A FENCE POST TYPE RAIN GAUGE TO MEASURE RAINFALL. THE STANDARD FENCE POST RAIN GAUGE WILL BE A WEDGE-SHAPED GAUGE THAT MEASURES UP TO 6 INCHES OF RAINFALL. AN ENGLISH SCALE WILL BE PROVIDED ON ONE FACE, WITH A METRIC SCALE ON THE OTHER FACE. GRADUATION WILL BE PERMANENTLY MOLDED IN DURABLE WEATHER-RESISTANT PLASTIC. THE MINIMUM GRADUATION WILL BE 0.01 INCH (OR 0.1MM). AN ALUMINUM BRACKET WITH SCREWS MAY BE USED TO MOUNT THE GAUGE ON A WOODEN SUPPORT.

12.1.7.2. LOCATION

THE RAIN GAUGE WILL BE LOCATED AT OR ALONG THE PROJECT SITE, AS DEFINED IN THE NOI OF THE NPDES PERMIT, IN AN OPEN AREA SUCH THAT THE MEASUREMENT WILL NOT BE INFLUENCED BY OUTSIDE FACTORS (I.E. OVERHANGS, GUTTER, TREES, ETC). AT LEAST ONE RAIN GAUGE PER LINEAR MILE IS REQUIRED ALONG (AS MEASURED ALONG THE CENTERLINE OF THE PRIMARY ALIGNMENT) THE PROJECT WHERE CLEARING, GRUBBING, EXCAVATION, GRADING, CUTTING OR FILLING IS ACTIVELY PERFORMED, OR EXPOSED SOIL HAS NOT YET BEEN PERMANENTLY STABILIZED.

12.1.7.3. METHODS

- 12.1.7.3.1. RAINFALL MONITORING WILL BE INITIATED PRIOR TO CLEARING, GRUBBING, EXCAVATION, GRADING, CUTTING, OR FILLING, EXCEPT AS SUCH MINIMAL CLEARING MAY BE NECESSARY TO INSTALL A RAIN GAUGE IN AN OPEN AREA. THE RAIN GAUGE WILL BE CHECKED FOR OPERATIONAL SOUNDNESS DAILY (DURING NORMAL BUSINESS HOURS) IN WET TIMES AND WEEKLY IN DRY TIMES. GAUGES WILL BE REPAIRED OR REPLACED ON THE SAME DAY IF FOUND TO BE NON-OPERATIONAL OR MISSING.
- 12.1.7.3.2. EACH RAIN GAUGE WILL BE READ (FOR DETAILED RECORDS OF RAINFALL) AND EMPTIED AFTER EVERY RAINFALL EVENT OCCURRING ON THE PROJECT SITE AT APPROXIMATELY THE SAME TIME OF THE DAY (DURING NORMAL BUSINESS HOURS). DURING PERIODS OF DRY CONDITIONS, IT WILL NOT BE NECESSARY TO READ THE RAIN GAUGE EVERY DAY. IN LIEU OF THIS REQUIREMENT ON WEEKENDS AND ON STATE HOLIDAYS, THE RAIN GAUGES CAN BE EMPTIED THE NEXT BUSINESS DAY AND A REFERENCE SITE USED FOR A RECORD OF DAILY AMOUNT OF PRECIPITATION FOR THOSE DAYS. A REFERENCE SITE IS THE DOCUMENTATION FROM THE CLOSEST GAUGE WITHIN PROXIMITY OF THE PROJECT FROM A RECOGNIZED SOURCE SUCH AS THE NOAA NATIONAL WEATHER SERVICE.
- 12.1.7.3.3. DETAILED RECORDS WILL BE RECORDED OF RAINFALL EVENTS INCLUDE DATES, AMOUNTS OF RAINFALL, AND THE APPROXIMATE DURATION (OR THE STARTING AND ENDING TIMES). THE RAINFALL RECORDS SHALL BE RECORDED ON THE TDOT EROSION AND SEDIMENT CONTROL CONSTRUCTION INSPECTION REPORT LOCATED IN CONSTRUCTION CIRCULAR 209.01-02 AND SHALL BE MAINTAINED IN THE "DOCUMENTATION AND PERMITS" BINDER.
- 12.1.7.3.4. IF, IN THE EVENT THAT THE RAINFALL EVENT IS STILL IN PROGRESS AT THE DAILY RECORDING TIME, THE GAUGE WILL BE EMPTIED AND THE RECORD WILL INDICATE THAT THE STORM EVENT WAS STILL IN PROGRESS.
- 12.1.7.3.5. RAIN GAUGE INFORMATION (DETAILED RECORDS), INCLUDING THE LOCATION OF THE NEAREST OUTFALL, WILL BE RECORDED ON THE EPSC INSPECTION REPORT FORMS AT THE TIME OF MEASUREMENT.

12.2. KEEPING PLANS CURRENT (3.4)

TDOT OR THEIR DESIGNEE WILL MODIFY AND UPDATE THE SWPPP WHEN ANY OF THE FOLLOWING CONDITIONS APPLY:

12.2.1. WHENEVER THERE IS A CHANGE IN THE SCOPE OF THE PROJECT THAT WOULD BE EXPECTED TO HAVE A SIGNIFICANT EFFECT ON THE DISCHARGE OF POLLUTANTS TO THE WATERS OF THE STATE AND WHICH HAS NOT OTHERWISE BEEN ADDRESSED IN THE SWPPP:

| 12.2.2. WHENEVER INSPECTIONS OR INVESTIGATIONS BY SITE OPERATORS, |
|---|
| LOCAL, STATE, OR FEDERAL OFFICIALS INDICATE THE SWPPP IS |
| PROVING INEFFECTIVE IN ELIMINATING OR SIGNIFICANTLY MINIMIZING |
| POLLUTANTS FROM CONSTRUCTION ACTIVITY SOURCES, OR IS |
| OTHERWISE NOT ACHIEVING THE GENERAL OBJECTIVES OF |
| CONTROLLING POLLUTANTS IN STORMWATER DISCHARGES ASSOCIATED |
| WITH CONSTRUCTION ACTIVITY; WHERE LOCAL, STATE, OR FEDERAL |
| OFFICIALS DETERMINE THAT THE SWPPP IS INEFFECTIVE IN ELIMINATING |
| OR SIGNIFICANTLY MINIMIZING POLLUTANT SOURCES, A COPY OF ANY |
| CORRESPONDENCE TO THAT EFFECT MUST BE RETAINED IN THE SWPPP: |

- 12.2.3. WHEN ANY NEW OPERATOR AND/OR SUB-OPERATOR IS ASSIGNED OR RELIEVED OF THEIR RESPONSIBILITY TO IMPLEMENT A PORTION OF THE SWPPP:
- 12.2.4. TO PREVENT A NEGATIVE IMPACT TO LEGALLY PROTECTED STATE OR FEDERALLY LISTED OR PROPOSED THREATENED OR ENDANGERED AQUATIC FAUNA:
- 12.2.5. WHEN THERE IS A CHANGE IN CHEMICAL TREATMENT METHODS INCLUDING: USE OF DIFFERENT TREATMENT CHEMICALS, DIFFERENT DOSAGE OR APPLICATION RATES OR A DIFFERENT AREA OF APPLICATION NOT SPECIFIED ON THE EPSC PLANS: OR
- 12.2.6. WHEN A TMDL IS DEVELOPED FOR THE RECEIVING WATERS FOR A POLLUTANT OF CONCERN (SILTATION AND/OR HABITAT ALTERATION)

12.3. MAKING PLANS ACCESSIBLE

- 12.3.1. TDOT WILL RETAIN A COPY OF THIS SWPPP (INCLUDING A COPY OF THE "DOCUMENTATION AND PERMITS" BINDER AT THE CONSTRUCTION SITE (OR OTHER LOCATION ACCESSIBLE TO TDEC AND THE PUBLIC) FROM THE DATE CONSTRUCTION COMMENCES TO THE DATE OF FINAL STABILIZATION. TDOT WILL HAVE A COPY OF THE SWPPP AVAILABLE AT THE LOCATION WHERE WORK IS OCCURRING ON-SITE FOR THE USE OF OPERATORS AND THOSE IDENTIFIED AS HAVING RESPONSIBILITIES UNDER THE SWPPP WHENEVER THEY ARE ON THE CONSTRUCTION SITE (6.2).
- 12.3.2. PRIOR TO THE INITIATION OF LAND DISTURBING ACTIVITIES AND UNTIL THE SITE HAS MET THE FINAL STABILIZATION CRITERIA, TDOT OR THEIR DESIGNEE WILL POST A NOTICE NEAR THE MAIN ENTRANCE OF THE CONSTRUCTION SITE WITH THE FOLLOWING INFORMATION (3.3.3) (6.2.1):
 - 12.3.2.1. A COPY OF THE NOTICE OF COVERAGE (NOC) WITH THE NPDES PERMIT NUMBER FOR THE PROJECT;
 - 12.3.2.2. THE INDIVIDUAL NAME, COMPANY NAME, E-MAIL ADDRESS (IF APPLICABLE) AND TELEPHONE NUMBER OF THE LOCAL PROJECT SITE OWNER AND OPERATOR CONTACT:
 - 12.3.2.3. A BRIEF DESCRIPTION OF THE PROJECT: AND
 - 12.3.2.4. THE LOCATION OF THE SWPPP.
- 12.3.3. ALL INFORMATION DESCRIBED IN SECTION 10.3.2 MUST BE MAINTAINED IN LEGIBLE CONDITION. IF POSTING THIS INFORMATION NEAR A MAIN ENTRANCE IS INFEASIBLE DUE TO SAFETY CONCERNS, THE NOTICE SHALL BE POSTED IN A LOCAL BUILDING. THE NOTICE MUST BE PLACED IN A PUBLICLY ACCESSIBLE LOCATION WHERE CONSTRUCTION IS ACTIVELY UNDERWAY AND MOVED AS NECESSARY.

12.4. NOTICE OF TERMINATION (8.0)

- 12.4.1. WHEN ALL STORMWATER DISCHARGES FROM CONSTRUCTION ACTIVITIES THAT ARE AUTHORIZED BY THE PERMIT ARE ELIMINATED BY FINAL STABILIZATION, TDOT WILL SUBMIT A NOTICE OF TERMINATION (NOT) THAT IS SIGNED IN ACCORDANCE WITH THE PERMIT TO THE TDEC CENTRAL OFFICE IN NASHVILLE. TN.
- 12.4.2. FOR THE PURPOSES OF THE CERTIFICATION REQUIRED BY THE NOT, THE ELIMINATION OF STORMWATER DISCHARGES ASSOCIATED WITH THE CONSTRUCTION ACTIVITY MEANS THE FOLLOWING:
 - 12.4.2.1. ALL EARTH-DISTURBING ACTIVITIES ON THE SITE ARE COMPLETED AND ALL DISTURBED SOILS AT THE PORTION OF THE CONSTRUCTION SITE WHERE THE OPERATOR HAD CONTROL HAVE BEEN FINALLY STABILIZED: AND
 - 12.4.2.2. ALL CONSTRUCTION MATERIALS, WASTE AND WASTE HANDLING DEVICES, AND ALL EQUIPMENT, AND VEHICLES THAT WERE USED DURING CONSTRUCTION HAVE BEEN REMOVED AND PROPERLY DISPOSED: AND
 - 12.4.2.3. ALL STORMWATER CONTROLS THAT WERE INSTALLED AND MAINTAINED DURING CONSTRUCTION, EXCEPT THOSE THAT ARE

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

PROJECT NO.

86950-1531-04

CONST. 2014 86950-3528-04

STORMWATER POLLUTION PREVENTION PLAN

INTENDED FOR LONG-TERM USE FOLLOWING TERMINATION OF PERMIT COVERAGE. HAVE BEEN REMOVED: AND

- 12.4.2.4. ALL POTENTIAL POLLUTANTS AND POLLUTANT GENERATING ACTIVITIES ASSOCIATED WITH CONSTRUCTION HAVE BEEN REMOVED; AND
- 12.4.2.5. THE PERMITTEE HAS IDENTIFIED WHO IS RESPONSIBLE FOR ONGOING MAINTENANCE OF ANY STORMWATER CONTROLS LEFT ON THE SITE FOR LONG-TERM USE FOLLOWING TERMINATION OF PERMIT COVERAGE; AND
- 12.4.2.6. TEMPORARY EPSC MEASURES HAVE BEEN OR WILL BE REMOVED AT AN APPROPRIATE TIME TO ENSURE FINAL STABILIZATION IS MAINTAINED: AND
- 12.4.2.7. ALL STORMWATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES FROM THE IDENTIFIED SITE THAT ARE AUTHORIZED BY A NPDES GENERAL PERMIT HAVE OTHERWISE BEEN ELIMINATED FROM THE PORTION OF THE CONSTRUCTION SITE WHERE THE OPERATOR HAD CONTROL.

12.5. RETENTION OF RECORDS (6.2)

TDOT WILL RETAIN COPIES OF THE SWPPP, ALL REPORTS REQUIRED BY THE PERMIT, AND RECORDS OF ALL DATA USED TO COMPLETE THE NOTICE OF INTENT FOR THE PROJECT FOR A PERIOD OF AT LEAST THREE (3) YEARS FROM THE DATE THE NOT WAS FILED.

13. SITE WIDE/PRIMARY PERMITTEE CERTIFICATION (7.7.5)

I CERTIFY UNDER PENALTY OF LAW THAT THIS DOCUMENT AND ALL ATTACHMENTS WERE PREPARED UNDER MY DIRECTION OR SUPERVISION IN ACCORDANCE WITH A SYSTEM DESIGNED TO ASSURE THAT QUALIFIED PERSONNEL PROPERLY GATHER AND EVALUATE THE INFORMATION SUBMITTED. BASED ON MY INQUIRY OF THE PERSON OR PERSONS WHO MANAGE THE SYSTEM, OR THOSE PERSONS DIRECTLY RESPONSIBLE FOR GATHERING THE INFORMATION, THE INFORMATION SUBMITTED IS, TO THE BEST OF MY KNOWLEDGE AND BELIEF, TRUE, ACCURATE, AND COMPLETE. I AM AWARE THAT THERE ARE SIGNIFICANT PENALTIES FOR SUBMITTING FALSE INFORMATION, INCLUDING THE POSSIBILITY OF FINE AND IMPRISONMENT FOR KNOWING VIOLATIONS.

| L 0- | ~5 |
|----------------|-----------------------------|
| AUT FORIZED TO | PERSONNEL SIGNATURE (3.3.1) |

JIM OZMENT

PRINTED NAME

ENVIRONMENTAL DIVISION DIRECTOR

TITLE

05-22-2014

DATE

14. SECONDARY PERMITTEE (OPERATOR) CERTIFICATION (7.7.6)

I CERTIFY UNDER PENALTY OF LAW THAT I HAVE REVIEWED THIS DOCUMENT, ANY ATTACHMENTS, AND THE SWPPP REFERENCED ABOVE. BASED ON MY INQUIRY OF THE CONSTRUCTION SITE OWNER/DEVELOPER IDENTIFIED ABOVE AND/OR MY INQUIRY OF THE PERSON DIRECTLY RESPONSIBLE FOR ASSEMBLING THIS NOI AND SWPPP, I BELIEVE THE INFORMATION SUBMITTED IS ACCURATE. I AM AWARE THAT THIS NOI, IF APPROVED, MAKES THE ABOVE-DESCRIBED CONSTRUCTION ACTIVITY SUBJECT TO NPDES PERMIT NUMBER TNR100000, AND THAT CERTAIN OF MY ACTIVITIES ON-SITE ARE THEREBY REGULATED. I AM AWARE THAT THERE ARE SIGNIFICANT PENALTIES, INCLUDING THE POSSIBILITY OF FINE AND IMPRISONMENT FOR KNOWING VIOLATIONS, AND FOR FAILURE TO COMPLY WITH THESE PERMIT REQUIREMENTS.

| AUTHORIZED OPERATOR (CONTRACTOR) SIGNATURE (3.3.1) |
|--|
| |
| PRINTED NAME |
| |
| TITLE |
| |
| DATE |

15. ENVIRONMENTAL PERMITS (9.0)

LIST ALL ENVIRONMENTAL PERMITS AND EXPIRATION DATES FOR PROJECT (TO BE COMPLETED AT THE ENVIRONMENTAL PRECONSTRUCTION MEETING BY TDOT CONSTRUCTION OR THEIR DESIGNEE):

| ENVIRONMENTAL PERMITS | | | | | | | | | |
|--|-----------|---------------------------|---------------------|--|--|--|--|--|--|
| PERMIT | YES OR NO | PERMIT OR TRACKING NO. | EXPIRATION DATE* | | | | | | |
| TDEC ARAP | | | | | | | | | |
| CORPS OF ENGINEERS (COE) | | | | | | | | | |
| TVA 26A | | | | | | | | | |
| TDEC CGP | | | | | | | | | |
| OTHER: | | | | | | | | | |
| TDEC ARAP CORPS OF ENGINEERS (COE) TVA 26A TDEC CGP OTHER: | | OR TRACKING NO. | | | | | | | |

*THE TDOT ENVIRONMENTAL DIVISION MUST BE NOTIFIED SIX MONTHS PRIOR TO PERMIT EXPIRATION DATE.

CONST. 2014 86950-3528-04
P.E. 2014 86950-1531-04 S-5

PROJECT NO.

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

STORMWATER POLLUTION PREVENTION PLAN TENNESSEE D.O.T.
DESIGN DIVISION

4.2.3 OUTFALL TABLE (3.5.1.d, 5.4.1.f)

| EPSC PHASE | OUTFALL LABEL | SUB OUT- FALL | STATION CL, LT OR RT | SLOPE WITHIN ROW (%) | PHASE 1 (P1) DRAINAGE AREA (AC) | PHASE 2 (P2) DRAINAGE AREA (AC) | PHASE 3 (P3) DRAINAGE AREA (AC) | SEDIMENT BASIN OR EQUIVALENT MEASURE(S) (YES, NO OR N/A) | RECEIVING NATURAL RESOURCE NAME OR LABEL | COMMENTS |
|---------------|------------------|---------------------|----------------------------|-------------------------------|---|---|---|--|--|---------------------|
| 1, 2, 3 | OUT-1 | | 10+25, LT | 10% | 4.19 | 4.19 | 4.19 | N/A | WWC-1 | |
| 1, 2 | OUT-2 | | 10+25, RT | 10% | 3.85 | 3.85 | N/A | N/A | WWC-3 | |
| 1, 2, 3 | OUT-3 | | 17+25, LT | 2% | 0.12 | 0.12 | 0.12 | N/A | DITCH | |
| 1, 2, 3 | OUT-4 | | 23+75, LT | 4% | 0.66 | 0.66 | 0.66 | N/A | DITCH | |
| 2, 3 | OUT-5 | | 32+20, LT | 2% | N/A | 0.20 | 0.20 | N/A | | CLOSED STORM SYSTEM |
| 1 | OUT-6 | | 45+00, LT | 2% | 1.68 | N/A | N/A | N/A | DITCH | |
| 1 | OUT-7 | | 46+80, LT | 2% | 0.65 | N/A | N/A | N/A | DITCH | |
| 2, 3 | OUT-8 | | 35+00, RT | 1% | N/A | 3.50 | 3.50 | N/A | | CLOSED STORM SYSTEM |
| 2, 3 | OUT-9 | | 36+20, RT | 1% | N/A | 0.20 | 0.20 | N/A | | CLOSED STORM SYSTEM |
| 2, 3 | OUT-10 | | 40+00, RT | 1% | N/A | 4.40 | 4.40 | N/A | | CLOSED STORM SYSTEM |
| 2, 3 | OUT-11 | | 43+50, RT | 1% | N/A | 9.10 | 9.10 | YES | | CLOSED STORM SYSTEM |
| 2, 3 | OUT-12 | | 45+00, RT | 1% | N/A | 2.50 | 2.50 | N/A | | CLOSED STORM SYSTEM |
| 2, 3 | OUT-13 | | 48+00, RT | 1% | N/A | 0.65 | 0.65 | N/A | | CLOSED STORM SYSTEM |
| 2, 3 | OUT-14 | | 50+10, RT | 1% | N/A | 0.07 | 0.07 | N/A | | CLOSED STORM SYSTEM |
| 2, 3 | OUT-15 | | 50+75, RT | 1% | N/A | 0.20 | 0.20 | N/A | | CLOSED STORM SYSTEM |
| 1, 2 | OUT-16 | | 52+75, LT | 6% | 5.0 | 5.0 | N/A | YES | POND | |
| 1 | OUT-17 | | 29+20, LT | 4% | 1.40 | N/A | N/A | N/A | DITCH | |

ALL UNUSED FIELDS WITHIN THE OUTFALL TABLE ARE TO BE SHADED OR HATCHED TO INDICATE THEIR NON-USAGE.

State of Tennessee Department of Transportation

CONST. 2014 86950-3528-04

P.E. 2014 86950-1531-04

STORMWATER
POLLUTION
PREVENTION
PLAN

8SYTIME \$55555



Documentation and Permits Binder

SIA SERVING NUCLEAR FUEL SERVICES IN ERWIN

Project No.: 86950-1531-04

PIN: 116409.00

Unicoi County, Tennessee

Prepared for:
Tennessee Department of Transportation – TDOT

Prepared by: CEC and ARCADIS

Consultant Reference No.: (CEC 133-010) (ARCADIS CTT28002.0000)

DOCUMENTS AND PERMITS BINDER

CHECKLIST

PROJECT NAME: SIA SERVING NUCLEAR FUEL SERVICES IN ERWIN

PIN: 116409.00

| | | O. 86950-1531-04 UNTY, TENNESSEE |
|-----|---------------------------|---|
| 1. | ⊠ IND | EX OF REVISIONS |
| 2. | ⊠ RAII | NFALL RECORD SHEETS |
| 3. | ⊠ EPS | C INSPECTION REPORTS |
| 4. | ⊠ NOI | AND □ NOC |
| 5. | ⊠ BLA | NK NOT |
| 6. | ⊠ CON | ISTRUCTION GENERAL PERMIT (CGP) |
| 7. | 7.1 \(\) 7.2 PE a. b. c. | DNMENTAL PERMITS PERMIT APPLICATION LETTER ERMITS TDEC ARAP CORPS OF ENGINEERS (COE) TVA 26A OTHER |
| 8. | ⊠ ECO | LOGY REPORT |
| 9. | TRAINI | NG CERTIFICATIONS |
| | b. c. | TDEC LEVEL I □ EPSC INSPECTOR □ TDOT PROJECT SUPERVISOR □ TDOT PROJECT SUPERVISOR MANAGER □ CONTRACTOR PROJECT SUPERVISOR |
| | e. | TDEC LEVEL II ☐ TDOT PROJECT SUPERVISOR MANAGER |
| 10. | TMDL I | NFORMATION REQUIRED |
| | a. | □Yes |
| | b. | ⊠ No |





| | Index of SWPPP Revisions | | | | | | | | | |
|------------|--------------------------|----------------------|-------------|-------------------------|---|--|--|--|--|--|
| | | | Revision on | | Signature of TDOT Project | | | | | |
| Revision # | Date | Revision Description | EC Sheet # | Signature of Contractor | Signature of TDOT Project Supervisor | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |



| State Route (SR) / US Route or Road Name: | TDOT Construction No.: | TDOT Contract No.: |
|---|-----------------------------|---------------------|
| otate route (ort) oo route or rout rame. | i DO i Odlišti učtičii i io | i DO i Golitiact No |



TDOT EPSC Inspection Monthly Rainfall Data Log

| Date | Day of Week ¹ | Predicted Precipitation (%) ² | Rainfall Gage 1 (in) | Rainfall Gage 2 (in) | Rainfall Gage 3 (in) | Rainfall Gage 4 (in) | Rainfall Gage 5 (in) | Duration (hr) |
|------|-----------------------------|--|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|------------------|
| 1 | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 7 | | | | | | | | |
| 8 | | | | | | | | |
| 9 | | | | | | | | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |
| 13 | | | | | | | | |
| 14 | | | | | | | | |
| 15 | | | | | | | | |
| 16 | | | | | | | | |
| 17 | | | | | | | | |
| 18 | | | | | | | | |
| 19 | | | | | | | | |
| 20 | | | | | | | | |
| 21 | | | | | | | | |
| 22 | | | | | | | | |
| 23 | | | | | | | | |
| 24 | | | | | | | | |
| 25 | | | | | | | | |
| 26 | | | | | | | | |
| 27 | | | | | | | | |
| 28 | | | | | | | | |
| 29 | | | | | | | | |
| 30 | | | | | | | | |
| | | M Tu W Th F Sa | | | | | | |

Day of Week= Su,M,Tu,W,Th,F,Sa

² Predicted Precipitation Source: ______



NOAA Atlas 14, Volume 2, Version 3 Location name: Erwin, Tennessee, US* Latitude: 36.1278°, Longitude: -82.4402° Elevation: 1649ft* * source: Google Maps



POINT PRECIPITATION FREQUENCY ESTIMATES

G.M. Bonnin, D. Martin, B. Lin, T. Parzybok, M.Yekta, and D. Riley NOAA, National Weather Service, Silver Spring, Maryland

PF tabular | PF graphical | Maps & aerials

PF tabular


| Р | PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches) ¹ | | | | | | | | | es) ¹ |
|----------|--|----------------------------|-------------------------------|-------------------------------|----------------------------|-------------------------------|-------------------------------|-------------------------------|----------------------------|-------------------------------|
| Duration | | | | Avera | ige recurren | ce interval (y | /ears) | | | |
| Duration | 1 | 2 | 5 | 10 | 25 | 50 | 100 | 200 | 500 | 1000 |
| 5-min | 0.325 (0.294-0.360) | 0.383 (0.349-0.426) | 0.454 (0.411-0.504) | 0.509 (0.460-0.564) | 0.581 (0.522-0.643) | 0.636 (0.567-0.703) | 0.691 (0.612-0.764) | 0.745 (0.655-0.826) | 0.816 (0.709-0.908) | 0.871 (0.749-0.974) |
| 10-min | 0.519 (0.470-0.575) | 0.613 (0.558-0.681) | 0.727 (0.658-0.806) | 0.814 (0.735-0.901) | 0.926 (0.831-1.03) | 1.01 (0.902-1.12) | 1.10 (0.972-1.21) | 1.18 (1.04-1.31) | 1.29 (1.12-1.44) | 1.37 (1.18-1.53) |
| 15-min | 0.649 (0.588-0.719) | 0.771 (0.701-0.856) | 0.920 (0.832-1.02) | 1.03 (0.930-1.14) | 1.17 (1.05-1.30) | 1.28 (1.14-1.42) | 1.39 (1.23-1.53) | 1.49 (1.31-1.65) | 1.62 (1.41-1.81) | 1.72 (1.48-1.93) |
| 30-min | 0.889 (0.806-0.986) | 1.07 (0.968-1.18) | 1.31 (1.18-1.45) | 1.49 (1.35-1.65) | 1.74 (1.56-1.92) | 1.93 (1.72-2.14) | 2.12 (1.88-2.35) | 2.32 (2.04-2.57) | 2.58 (2.25-2.88) | 2.79 (2.40-3.12) |
| 60-min | 1.11 (1.01-1.23) | 1.34 (1.22-1.48) | 1.68 (1.52-1.86) | 1.94 (1.76-2.15) | 2.32 (2.08-2.56) | 2.62 (2.33-2.89) | 2.93 (2.59-3.24) | 3.25 (2.86-3.61) | 3.71 (3.22-4.13) | 4.07 (3.50-4.55) |
| 2-hr | 1.25 (1.14-1.38) | 1.51 (1.37-1.66) | 1.89 (1.71-2.08) | 2.20 (1.99-2.43) | 2.64 (2.37-2.90) | 3.00 (2.67-3.30) | 3.37 (2.98-3.71) | 3.77 (3.31-4.16) | 4.32 (3.74-4.79) | 4.76 (4.08-5.30) |
| 3-hr | 1.33 (1.21-1.47) | 1.59 (1.45-1.76) | 1.99 (1.81-2.19) | 2.31 (2.10-2.55) | 2.78 (2.50-3.06) | 3.17 (2.83-3.48) | 3.59 (3.17-3.94) | 4.03 (3.53-4.44) | 4.66 (4.02-5.16) | 5.17 (4.40-5.74) |
| 6-hr | 1.64 (1.51-1.79) | 1.94 (1.79-2.13) | 2.38 (2.19-2.60) | 2.75 (2.52-3.00) | 3.28 (2.99-3.58) | 3.74 (3.38-4.07) | 4.21 (3.77-4.59) | 4.73 (4.19-5.17) | 5.47 (4.76-6.00) | 6.07 (5.22-6.68) |
| 12-hr | 2.05 (1.89-2.23) | 2.44 (2.25-2.65) | 2.96 (2.73-3.22) | 3.39 (3.11-3.68) | 3.98 (3.64-4.32) | 4.46 (4.05-4.84) | 4.95 (4.47-5.38) | 5.45 (4.89-5.95) | 6.15 (5.46-6.75) | 6.69 (5.89-7.38) |
| 24-hr | 2.52 (2.32-2.77) | 2.99 (2.76-3.29) | 3.58 (3.29-3.93) | 4.03 (3.69-4.44) | 4.63 (4.22-5.10) | 5.10 (4.63-5.63) | 5.57 (5.04-6.17) | 6.04 (5.43-6.72) | 6.69 (5.96-7.48) | 7.20 (6.36-8.09) |
| 2-day | 2.98 (2.76-3.23) | 3.53 (3.27-3.83) | 4.22 (3.91-4.58) | 4.77 (4.40-5.18) | 5.49 (5.06-5.97) | 6.06 (5.57-6.60) | 6.63 (6.06-7.23) | 7.21 (6.55-7.89) | 7.98 (7.20-8.78) | 8.58 (7.67-9.48) |
| 3-day | 3.20 (2.98-3.45) | 3.80 (3.53-4.10) | 4.53 (4.20-4.88) | 5.09 (4.72-5.50) | 5.86 (5.41-6.33) | 6.45 (5.94-6.98) | 7.05 (6.46-7.64) | 7.65 (6.97-8.33) | 8.46 (7.65-9.25) | 9.08 (8.15-9.98) |
| 4-day | 3.43 (3.19-3.68) | 4.06 (3.79-4.36) | 4.83 (4.50-5.18) | 5.42 (5.03-5.81) | 6.22 (5.76-6.68) | 6.85 (6.32-7.36) | 7.47 (6.87-8.05) | 8.10 (7.40-8.77) | 8.94 (8.11-9.73) | 9.59 (8.63-10.5) |
| 7-day | 4.10 (3.82-4.41) | 4.86 (4.53-5.21) | 5.77 (5.36-6.19) | 6.48 (6.01-6.95) | 7.42 (6.87-7.97) | 8.17 (7.53-8.77) | 8.91 (8.17-9.59) | 9.66 (8.81-10.4) | 10.7 (9.65-11.6) | 11.4 (10.3-12.5) |
| 10-day | 4.75 (4.43-5.09) | 5.60 (5.23-6.01) | 6.58 (6.13-7.07) | 7.36 (6.85-7.91) | 8.41 (7.80-9.05) | 9.24 (8.54-9.94) | 10.1 (9.25-10.9) | 10.9 (9.97-11.8) | 12.0 (10.9-13.1) | 12.9 (11.6-14.1) |
| 20-day | 6.59 (6.19-7.03) | 7.72 (7.25-8.23) | 8.89 (8.35-9.48) | 9.80 (9.19-10.5) | 11.0 (10.3-11.7) | 11.9 (11.1-12.7) | 12.8 (11.9-13.7) | 13.6 (12.6-14.6) | 14.7 (13.6-15.9) | 15.5 (14.3-16.8) |
| 30-day | 8.19 (7.78-8.62) | 9.55 (9.07-10.0) | 10.8 (10.2-11.4) | 11.7 (11.1-12.4) | 12.9 (12.2-13.6) | 13.8 (13.0-14.6) | 14.6 (13.8-15.5) | 15.4 (14.5-16.4) | 16.4 (15.4-17.5) | 17.2 (16.0-18.3) |
| 45-day | 10.4 (9.89-10.9) | 12.1 (11.5-12.7) | 13.5 (12.8-14.1) | 14.5 (13.8-15.2) | 15.8 (15.0-16.6) | 16.7 (15.9-17.6) | 17.6 (16.7-18.6) | 18.4 (17.4-19.5) | 19.4 (18.3-20.6) | 20.1 (18.9-21.4) |
| 60-day | 12.5 (11.9-13.2) | 14.5 (13.8-15.2) | 16.0 (15.3-16.9) | 17.2 (16.4-18.1) | 18.7 (17.7-19.6) | 19.7 (18.7-20.7) | 20.7 (19.5-21.8) | 21.5 (20.3-22.7) | 22.6 (21.3-23.9) | 23.3 (21.9-24.7) |

Precipitation frequency (PF) estimates in this table are based on frequency analysis of partial duration series (PDS).

Numbers in parenthesis are PF estimates at lower and upper bounds of the 90% confidence interval. The probability that precipitation frequency estimates (for a given duration and average recurrence interval) will be greater than the upper bound (or less than the lower bound) is 5%. Estimates at upper bounds are not checked against probable maximum precipitation (PMP) estimates and may be higher than currently valid PMP values. Please refer to NOAA Atlas 14 document for more information.

Back to Top

PF graphical

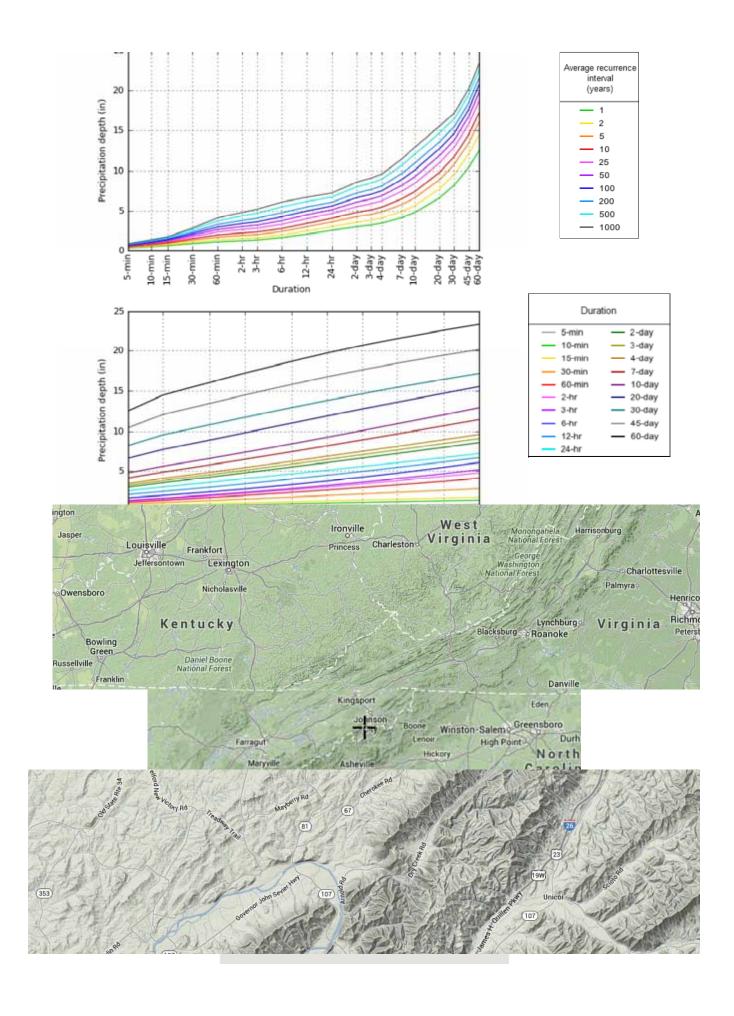





CONSTRUCTION DIVISION EPSC DELEGATION OF AUTHORITY

| In accordance with Section 7.7.3 (Duly Authorized Representation | ative) of the Tennessee General NPDES Permit for | | | | | |
|---|--|--|--|--|--|--|
| Discharges of Stormwater Associated with Construction Activities | es, I | | | | | |
| (print name of TDOT project supervisor), delegate the reporting responsibility of coordination with the erosion | | | | | | |
| prevention and sediment control (EPSC) inspection services con | nsultant for TDOT contract # | | | | | |
| to: | | | | | | |
| Name: | (print name of TDOT delegate) | | | | | |
| Title: | | | | | | |
| Address: | | | | | | |
| | | | | | | |
| | | | | | | |
| Phone No.: | | | | | | |
| Email Address: | | | | | | |
| | | | | | | |
| I am providing delegation of authority as stated above and confi | · · | | | | | |
| knowledge of the subject project and the ability to discuss the re | | | | | | |
| inspection services consultant on the subject project directly to t | ne contractor. | | | | | |
| (signature of T | DOT Project Supervisor) | | | | | |
| | | | | | | |
| (signature of T | DOT delegate) | | | | | |
| (date) | | | | | | |

The EPSC Delegation of Authority shall be submitted to the local TDEC WPC Environmental Field Office (EFO) address (see table below) for record keeping. A copy shall be placed within the on-site SWPPP Documentation and Permits Binder.

| EFO | Street Address | Zip Code | EFO | Street Address | Zip Code |
|-----------|--------------------------------|----------|--------------|-----------------------------|----------|
| Memphis | 8383 Wolf Lake Drive, Bartlett | 38133 | Cookeville | 1221 South Willow Ave. | 38506 |
| Jackson | 1625 Hollywood Drive | 38305 | Chattanooga | 540 McCallie Avenue STE 550 | 37402 |
| Nashville | 711 R S Gass Boulevard | 37243 | Knoxville | 3711 Middlebrook Pike | 37921 |
| Columbia | 1421 Hampshire Pike | 38401 | Johnson City | 2305 Silverdale Road | 37601 |



TENNESSEE DEPARTMENT OF TRANSPORTATION EROSION PREVENTION & SEDIMENT CONTROL (EPSC) INSPECTION REPORT

EPSC Inspection Schedule (circle one): 1st Weekly or 2nd Weekly Date of Inspection:

| Site | or Project Name (State Route | e (SR) / US Route or Road N | ame and Description): | Are corrective (Yes /No): | actions | required by tl | nis inspecti | on report | Current approximate disturbed acreage: |
|--|---|---|---|---|-------------|--|--------------|--|---|
| Cour | nty(ies): | TDOT PIN: | NPDES Tracking Number: TNR | Number of Ne Corrective Actions/Deficie | | Number of I Corrective Actions/Def | J | Number of New Sediment Releases: | Number of Un-Corrected Sediment Releases: |
| TDO | T Project No.: | TDOT Contract No.: | Contractor: | | | | | | |
| Plea | se check the box if the follo | owing items are on-site: | | 1 | | | | | |
| □N | otice of Coverage (NOC) | ☐ Stormwater Pollution | Prevention Plan (SWPPP) |] Twice Weekly In | spection | Documentat | ion 🗆 | Site Contact Inform | nation Rain Gauge(s) |
| | ff-site Reference Rain Gaug | e Location: | | Has daily rain | fall beer | n checked/do | cumented o | on the TDOT Monthly | y Rainfall Log? ☐Yes ☐No |
| Best | Management Practices (B | MPs) | | | | | TDOT/Co | ntractor Agrees with | h EPSC Inspection Report: |
| Are t | the Erosion Prevention and | d Sediment Controls (EPSC | s) functioning correctly: If "No," se | ee attached page(| s) for de | scription. | NO or YE | S. If No, Explain and | initial comment: |
| 1. | | stalled and maintained per the S\ | | | □Yes | | | | |
| 2. | , | • | Il storage areas per section 4.1.5 of the 0 | CP2 | □Yes | | | | |
| 3. | Are EPSC's functioning corre | • | ch that there is no objectionable color co | | □Yes | | | | |
| 4. | Are EPSC's functioning corre | ctly at ingress/egress points such | that there is no evidence of track out? | | □Yes | □No | | | |
| 5. | If construction activity at any I | ocation on-site has temporarily/p | ermanently ceased, was the area stabilize the depage(s) for each location and measure. | | □Yes | | | | |
| 6. | pollutants from equipment and | d vehicle washing, wheel and wa | ed, and maintained to minimize the disct sh water and other wash waters per sect e implemented to address deficiencies. | | □Yes | □No | | | |
| 7. | | | managed by appropriate controls per s) for measures to be implemented to | □N/A | ∐Yes | □No | | | |
| 8. | "No," refer to the attached page | ge(s) for measures to be impleme | | □N/A | □Yes | | (Ad | ditional pages may b | pe attached, if needed) |
| | | | nspector and the permittees per Sec | | | | | | |
| assur informana the in | re that qualified personnel prop mation presented. Based on mage the system, or those person formation, I certify that inspec | ny inquiry of the person(s) who ons directly responsible for gath tions of storm water discharge | points TN EPSC Certification No. | | (print or t | type): | Signature | : | Date: |
| and r drain desig | ecorded. I certify that erosion age area of the identified outfarmed in working order as record | all were installed as planned an | Contractor (Secondary Per type): | | Title (pr | rint or | Signature | : | Date: |
| were subm accur subm impri | prepared by me, or under my hitted information is to the best rate, and complete. I am awar hitting false information, includi | direction or supervision. The of my knowledge and belief, tree there are significant penaltiering the possibility of fine and nessee Code annotated section | ue, s for | | ary Perm | nittee) | Signature | | Date: |



| State/05 Route of Road Name Dot Project No TDOT Contract No Date of hispection | State/US Route or Road Name: | TDOT Project No.: | TDOT Contract No.: | Date of Inspection: |
|--|------------------------------|-------------------|--------------------|---------------------|
|--|------------------------------|-------------------|--------------------|---------------------|

| Outfall Name or Station No. | Rain Gauge No. | Approx. Station No. From/To | LT, RT, or CL | Date Last Disturbed | Date of Stabilization and Code T=Temporary P=Permanent | Existing EPSC Control Measures Codes * | Current Condition Codes * | Objectionable Color Contrast Discharge to Receiving Stream or Other Water Quality Impacts? Y, N, N/A | Corrective Action(s) or Comment(s) |
|-----------------------------------|----------------------|--------------------------------|------------------------|------------------------|--|--|---------------------------------|--|------------------------------------|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

EROSION PREVENTION AND SEDIMENT CONTROL MEASURE CODES

- 1. Temporary Silt Fence
- 2. Temporary Diversion Berm or Ditch
- 3. Temporary Slope Drain
- 4. Rock Check Dams
- 5. Brush Barrier
- 6. Sediment Removal
- 7. Rock Filter Ring / Rock Ring
- 8. Sand Bags
- 9. Sediment Trap / Basin
- 10. Temporary Sediment Filter Bag / Dewatering
- 11. Polyethylene Sheeting
- 12. Machined Rip Rap
- 13. Geotextile
- 14. Permanent Seeding with Mulch or Sod

- 15. Temporary Seeding with Mulch
- 16. Temporary Mulching
- 17. Erosion Control Blanket
- 10 El :: 0
- 18. Flexible Channel Liner
- 19. Catch Basin / Storm Inlet Protection
- 20. Riprap Outlet Structure
- 21. Riprap Energy / Velocity Dissipater
- 22. Curb, Gutter, or Storm Sewer Protection
- 23. Temporary Construction Exit / Entrance
- 24. Temporary Stream Crossing
- 25. Turbidity Barrier / Silt Boom
- 26. Temporary Stream Diversion
- 27. Preserve Natural Resource / Buffer Zone
- 28. Mineral Aggregate Base on Subgrade

- 29. Excess Dirt Removed from Rdwy. Daily
- 30. Haul Roads Dampened for Dust Control
- 31. Ditch Liner
- 32. Rock Silt Screen
- 33. Temporary Silt Fence with Backing
- 34. Enhanced Silt Fence
- 35. Sediment Tube
- 36. Sediment Dam
- 37. Concrete Washout, other pollution issues
- 38. Berm (soil, riprap, rock)
- 39. Gabion
- 40. Sheet Piling
- 41. 42.

CONDITION CODES

- A Active (Under Construction)
- C Cleaning Needed-Maintenance
- FM Future Maintenance
- FS Final Stabilized
- Increase Measures
- R Repair and/or Replace-Maintenance
- RO Repeat Occurrence
- SR Sediment Release

Other (#1).

- S Stable (No Action Needed)
- J Upgrade Needed (Failure Noted)
- W Too Wet to Work Conditions

| Other | (# 1). | | | |
|-------|--------------------|------|------|--|
| Other | (#2): | | | |

Other (#2): _____



TENNESSEE DEPARTMENT OF ENVIRONMENT AND CONSERVATION

Division of Water Resources

William R. Snodgrass Tennessee Tower, 312 Rosa L. Parks Ave., 11th Floor, Nashville, TN 37243 1-888-891-8332 (TDEC)

Notice of Intent (NOI) for General NPDES Permit for Stormwater Discharges from Construction Activities (TNR100000)

| Sife or Project Name | SIA SERVING NUCI (PIN 116409.00) | LEAR F | UEL SERVICES IN | ERWIN | Existing NPDES Number: TNR | Tracking | |
|---|-------------------------------------|------------|------------------------|--|-------------------------------|-------------------|------------------|
| | FROM JACKSON LO | | Y NORTH 0.813 MII | LES ALONG | Start date: | | JUNE 2014 |
| Location: | INDUSTRIAL DRIVE | Ξ | | | Estimated end da | nte: | JUNE 2019 |
| Site Activity | ROADWAY IMPROV | /EMENT | ΓS | | Latitude (dd.ddd | | 36.125639 |
| Description: | | | | | Longitude (dd.dd | | -82.441363 |
| County(ies): | UNICOI | | MS4 Jurisdiction: | TDOT | Acres Disturbed: | | 6.1 |
| | 1 1 12111 | ,. [| | | Total Acres: | 0 | 8.8 |
| Does a topographic map sho If wetlands are located on-sulf an Aquatic Resource Alte | ite and may be impacted | d, attach | wetlands delineation | report. | ARAP permit | | |
| Receiving waters: | UNNAMED TRIBUTA | RIES TO | NOLICHUCKY RIVER | R & NOLICHUCKY R | RIVER | | |
| Attach the SWPPP with the | NOI | SWP | PPP Attached | Attach a site location map | Map Attac | hed | |
| Site Owner/Developer Entite specifications): Tennessee Department of Tra | | (person | , company, or legal er | tity that has operati | onal or design con | trol over constru | action plans and |
| Site Owner/Developer Sign below): (individual respons | | | certification | Signatory's Title of below): Director | | | ns certification |
| Mailing Address: 900 Jame | s K. Polk Bldg., 505 D | eaderick | Street | City: Nashville | | State:TN | Zip:37243-0334 |
| Phone: (615) 741-537. | 3 | Fax: (| 615) 741-1098 | E-mail: Environme | ental.NPDES.TDC | OT@tn.gov | |
| Optional Contact: Melanie Bumpus | | | | Title or Position: Senior Transportat | tion Specialist | | |
| Mailing Address: 900 Jame | s K. Polk Bldg., 505 De | eaderick | Street | City: Nashville | | State:TN | Zip: 37243-0334 |
| Phone: (615) 253-2466 | 6 | Fax: (| 615) 741-1098 | E-mail: melanie.bu | umpus@tn.gov | | |
| Owner or Developer Certification (must be signed by president, vice-president or equivalent, or ranking elected official) (Primary Permittee) I certify under penalty of law that this document and all attachments were prepared by me, or under my direction or supervision. The submitted information is to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment. As specified in Tennessee Code Annotated Section 39-16-702(a)(4), this declaration is made under penalty of perjury. Owner or Developer Name; (print or type) Jim Ozment Signature: Date: 05-22-2014 | | | | | | | Date: 05-22-2014 |
| Contractor(s) Certification | n (must be signed by pr | esident, | vice-president or equi | valent, or ranki d g el | lected official) (Se | condary Permitt | ree) |
| I certify under penalty of law that I have reviewed this document, any attachments, and the SWPPP referenced above. Based on my inquiry of the construction site owner/developer identified above and/or my inquiry of the person directly responsible for assembling this NOI and SWPPP, I believe the information submitted is accurate. I am aware that this NOI, if approved, makes the above-described construction activity subject to NPDES permit number TNR100000, and that certain of my activities on-site are thereby regulated. I certify under penalty of law that this document and all attachments were prepared by me, or under my direction or supervision. The submitted information is to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment. As specified in Tennessee Code Annotated Section 39-16-702(a)(4), this declaration is made under penalty of perjury. | | | | | | | |
| Contractor company name (Contractor signatory (print/t | | 1) | | G: | | | D. |
| Contractor signatory (print/t | ype): (v.P. level or nig | (ner) | | Signature: | | | Date: |
| Mailing Address: | | | | City: | | State: | Zip: |
| Phone: () | | Fax | :() | E-mail: | | | |
| Other Contractor company | u 21 / | | - | | | | |
| Other Contractor signatory | (print/type): (V.P. level | l or highe | er) | Signature: | | | Date: |
| Mailing Address: | | | | City: | | State: | Zip: |
| Phone: () | | Fax: (|) | E-mail: | | | |
| OFFICIAL STATE USI | | Т | | | | | |
| Received Date: | Reviewer: | Fiel | ld Office: | Permit Number TNR | | Exceptional TN | N Water: |
| Fee(s): | T & E Aquatic Flora and Fa | iuna: | | Impaired Receiving Stro | eam: | Notice of Cove | erage Date: |

Notice of Intent (NOI) for General NPDES Permit for Stormwater Discharges from Construction Activities (TNR100000)

<u>Purpose of this form</u> A completed notice of intent (NOI) must be submitted to obtain coverage under the Tennessee General NPDES Permit for Discharges of Stormwater Associated with Construction Activity (permit). **Requesting coverage under this permit means that an applicant has obtained and examined a copy of this permit, and thereby acknowledges applicant's claim of ability to be in compliance with permit terms and conditions.** This permit is required for stormwater discharge(s) from construction activities including clearing, grading, filling and excavating (including borrow pits) of one or more acres of land. This form should be submitted at least 30 days prior to the commencement of land disturbing activities, or no later than 48 hours prior to when a new operator assumes operational control over site specifications or commences work at the site.

<u>Permit fee</u> (see table below) must accompany the NOI and is based on total acreage to be disturbed by an entire project, including any associated construction support activities (e.g. equipment staging yards, material storage areas, excavated material disposal areas, borrow or waste sites). There is no fee for sites less than 1 acre.

| Acres Disturbed | = or > 150 acres | = or $> 50 < 150$ acres | = or > 5 < 50 acres | = or > 1 < 5 acres |
|-----------------|------------------|-------------------------|---------------------|--------------------|
| Fee | \$7,500 | \$4,000 | \$1,000 | \$250 |

Who must submit the NOI form? Per Section 2 of the permit, all site operators must submit an NOI form. "Operator" for the purpose of this permit and in the context of stormwater associated with construction activity means any person associated with a construction project who meets either or both of the following two criteria: (1) The person has operational or design control over construction plans and specifications, including the ability to make modifications to those plans and specifications. This person is typically the owner or developer of the project or a portion of the project (e.g. subsequent builder), or the person that is the current land owner of the construction site. This person is considered the primary permittee; or (2) The person has day-to-day operational control of those activities at a project which are necessary to ensure compliance with a SWPPP for the site or other permit conditions. This person is typically a contractor or a commercial builder who is hired by the primary permittee, and is considered a secondary permittee.

Owners, developers and all contractors that meet the definition of the operator in subsection 2.2 of the permit shall apply for permit coverage on the same NOI, insofar as possible. After permit coverage has been granted to the primary permittee, any subsequent NOI submittals must include the site's previously assigned permit tracking number and the project name. The comprehensive site-specific SWPPP shall be prepared in accordance with the requirements of part 3 of the permit and must be submitted with the NOI unless the NOI being submitted is to only add a contractor (secondary permittee) to an existing coverage.

Notice of Coverage The division will review the NOI for completeness and accuracy and prepare a notice of coverage (NOC). Stormwater discharge from the construction site is authorized as of the effective date of the NOC.

<u>Complete the form</u> Type or print clearly, using ink and not markers or pencil. Answer each item or enter "NA," for not applicable, if a particular item does not fit the circumstances or characteristics of your construction site or activity. If you need additional space, attach a separate piece of paper to the NOI form. The NOI will be considered incomplete without a permit fee, a map, and the SWPPP.

Describe and locate the project Use the legal or official name of the construction site. If a construction site lacks street name or route number, give the most accurate geographic information available to describe the location (reference to adjacent highways, roads and structures; e.g. intersection of state highways 70 and 100). Latitude and longitude (expressed in decimal degrees) of the center of the site can be located on USGS quadrangle maps. The quadrangle maps can be obtained at the USGS World Wide Web site: http://www.usgs.gov/; latitude and longitude information can be found at numerous other web sites. Attach a copy of a portion of a 7.5 minute quad map, showing location of site, with boundaries at least one mile outside the site boundaries. Provide estimated starting date of clearing activities and completion date of the project, and an estimate of the number of acres of the site on which soil will be disturbed, including borrow areas, fill areas, stockpiles and the total acres. For linear projects, give location at each end of the construction area.

MS4 Jurisdiction: If this construction site is located within a Municipal Separate Storm Sewer System (MS4), please list name of MS4. A current list of MS4s in Tennessee may be found at http://www.tn.gov/environment/wpc/stormh2o/docs/MS4s Jan2012.pdf

Give name of the receiving waters Trace the route of stormwater runoff from the construction site and determine the name of the river(s), stream(s), creek(s), wetland(s), lake(s) or any other water course(s) into which the stormwater runoff drains. Note that the receiving water course may or may not be located on the construction site. If the first water body receiving construction site runoff is unnamed ("unnamed tributary"), determine the name of the water body that the unnamed tributary enters.

ARAP permit may be required **If your work will disturb or cause alterations of a stream or wetland, you must obtain an appropriate Aquatic Resource Alteration Permit (ARAP).** If you have a question about the ARAP program or permits, contact your local Environmental Field Office (EFO).

<u>Submitting the form and obtaining more information</u> Note that this form must be signed by the company President, Vice-President, or a ranking elected official in the case of a municipality, for details see subpart 2.5. For more information, contact your local EFO at the toll-free number 1-888-891-8332 (TDEC). Submit the completed NOI form (keep a copy for your records) to the TDEC Nashville, TN address below, addressed to **Attention: Stormwater NOI Processing**.

Tennessee Department of Environment and Conservation Division of Water Resources Attn: Storm Water NOI Processing William R. Snodgrass Tennessee Tower 312 Rosa L. Parks Avenue, 11th Floor Nashville, TN 37243

CN-0940 (Rev. 2-13) (Page 2) RDA 2366



TENNESSEE DEPARTMENT OF ENVIRONMENT AND CONSERVATION (TDEC)

Division of Water Resources William R. Snodgrass Tennessee Tower, 312 Rosa L. Parks Ave., 11th Floor, Nashville, TN 37243 1-888-891-TDEC (8332)

Notice of Termination (NOT) for General NPDES Permit for Stormwater Discharges from Construction Activities (CGP)

This form is required to be submitted when requesting termination of coverage from the CGP. The purpose of this form is to notify the TDEC that either all stormwater discharges associated with construction activity from the portion of the identified facility where you, as an operator, have ceased or have been eliminated; or you are no longer an operator at the construction site. Submission of this form shall in no way relieve the permittee of permit obligations required prior to submission of this form. Please submit this form to the TDEC Nashville, TN address depicted below. For more information, contact your local EFO at the toll-free number 1-888-891-8332 (TDEC).

Type or print clearly, using ink.

| Site | or Project Name: SIA SERVING NUCLE (PIN 116409.00) | CAR FUEL SERVICES IN ERWIN | NPDES Tra | _ | | | |
|-------------------------------|---|--|-----------------|------------------|-----------|--|--|
| | et Address or Location: FROM JACKSON LO DUSTRIAL DRIVE | VE HWY NORTH 0.813 MILES ALONG | County(ies): | : UNICOI | | | |
| Nan | ne of Permittee Requesting Termination of C | Coverage: Tennessee Department of Transpor | tation | | | | |
| Perr | mittee Contact Name: | Title or Position: | | | | | |
| Mai | ling Address: | City: | | State: | Zip: | | |
| Pho: | ne: | E-mail: | | | | | |
| Che | eck the reason(s) for termination of pern | nit coverage: | | | | | |
| | | ction activity is no longer occurring and the perr such as rip rap or geotextiles, in areas not cover | | | permanent | | |
| | You are no longer the operator at the construction | ction site (i.e., termination of site-wide, primary of | or secondary pe | ermittee coverag | e). | | |
| Cer | tification and Signature: (must be signed | l by president, vice-president or equivalent i | ranking electe | ed official) | | | |
| facil by s gene unde | I certify under penalty of law that either: (a) all stormwater discharges associated with construction activity from the portion of the identified facility where I was an operator have ceased or have been eliminated or (b) I am no longer an operator at the construction site. I understand that by submitting this notice of termination, I am no longer authorized to discharge stormwater associated with construction activity under this general permit, and that discharging pollutants in stormwater associated with construction activity to waters of the United States is unlawful under the Clean Water Act where the discharge is not authorized by a NPDES permit. I also understand that the submittal of this notice of termination does not release an operator from liability for any violations of this permit or the Clean Water Act. | | | | | | |
| discl from cons | For the purposes of this certification, elimination of stormwater discharges associated with construction activity means that all stormwater discharges associated with construction activities from the identified site that are authorized by a NPDES general permit have been eliminated from the portion of the construction site where the operator had control. Specifically, this means that all disturbed soils at the portion of the construction site where the operator had control have been finally stabilized, the temporary erosion and sediment control measures have been removed, and/or subsequent operators have obtained permit coverage for the site or portions of the site where the operator had control. | | | | | | |
| infor false | I certify under penalty of law that this document and all attachments were prepared by me, or under my direction or supervision. The submitted information is to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment. As specified in Tennessee Code Annotated Section 39-16-702(a)(4), this declaration is made under penalty of perjury. | | | | | | |
| Pern | nittee name (print or type): | Signature: | | Date: | | | |
| | | tee Department of Environment and Conservation of Water Resources | | | | | |

CN-1175 (Rev. 2-13) RDA 2366

Attn: Storm Water NOI Processing William R. Snodgrass Tennessee Tower 312 Rosa L. Parks Avenue, 11th Floor

Nashville, TN 37243





GENERAL NPDES PERMIT FOR DISCHARGES OF STORMWATER ASSOCIATED WITH CONSTRUCTION ACTIVITIES

PERMIT NO. TNR100000

Under authority of the Tennessee Water Quality Control Act of 1977 (T.C.A. 69-3-101 et seq.) and the authorization by the United States Environmental Protection Agency under the Federal Water Pollution Control Act, as amended by the Clean Water Act of 1977 (33 U.S.C. 1251, et seq.) and the Water Quality Act of 1987, P.L. 100-4, including special requirements as provided in part 5.4 (Discharges into Impaired or Exceptional Tennessee Waters) of this general permit, operators of point source discharges of stormwater associated with construction activities into waters of the State of Tennessee, are authorized to discharge stormwater associated with construction activities in accordance with the following permit monitoring and reporting requirements, effluent limitations, and other provisions as set forth in parts 1 through 10 herein, from the subject outfalls to waters of the State of Tennessee.

This permit is issued on: May 23, 2011

This permit is effective on: May 24, 2011

This permit expires on: May 23, 2016

for Paul E. Davis, P.E., Director Division of Water Pollution Control

CN-0759 RDAs 2352 and 2366

Table of Contents

| 1. | COVERAGE UNDER THIS GENERAL PERMIT | 1 |
|--|--|----------------|
| 1.1. | Permit Area | 1 |
| 1.2.1. 1.2.2. 1.2.3. 1.2.4. | Discharges Covered by this Permit | 1 1 2 |
| 1.3. | Limitations on Coverage | 2 |
| 1.4.1. 1.4.2. 1.4.3. 1.4.4. 1.4.5. | Obtaining Permit Coverage Notice of Intent (NOI) Stormwater Pollution Prevention Plan (SWPPP) Permit application fees Submittal of a copy of the NOC and NOT to the local MS4. Permit Coverage through Qualifying Local Program | |
| 1.5. 1.5.1. 1.5.2. | Notice of Coverage (NOC) Permit tracking numbers | 6 |
| 2. | NOTICE OF INTENT (NOI) REQUIREMENTS | 7 |
| 2.1. | Who Must Submit an NOI? | 7 |
| 2.2.1. 2.2.2. 2.2.3. | Typical Construction Site Operators Owner/Developer Commercial builders Contractors | 8 8 |
| 2.3. 2.3.1. 2.3.2. | Responsibilities of Operators | 9 |
| 2.4. 2.4.1. 2.4.2. 2.4.3. 2.4.4. | NOI Submittal Existing site Application for new permit coverage New operator Late NOIs | 10 10 10 |
| 2.5. | Who Must Sign the NOI? | 11 |
| 2.6. | NOI Form | 11 |

| 2.6.1. | Contents of the NOI form | |
|------------------|---|----|
| 2.6.2. | Construction site map | |
| 2.6.3. | Application completeness | 12 |
| 2.7. | Where to Submit the NOI, SWPPP and Permitting Fee? | 12 |
| 2.8. | List of the TDEC Environmental Field Offices (EFOs) and Corresponding Counties | 12 |
| | | |
| 3. | STORMWATER POLLUTION PREVENTION PLAN (SWPPP) REQUIREMENTS | 13 |
| 3.1. | The General Purpose of the SWPPP | 13 |
| 3.1.1. | Registered engineer or landscape architect requirement | |
| 3.1.2. | Site Assessment | |
| 3.2. | SWPPP Preparation and Compliance | 15 |
| 3.2.1. | Existing site | |
| 3.2.2. | New site | |
| 3.3. | Signature Requirements, Plan Review and Making Plans Available | 15 |
| 3.3.1. | Signature Requirements for a SWPPP | |
| 3.3.2. | SWPPP Review | |
| 3.3.3. | Making plans available | |
| 3.4. | Keeping Plans Current | 15 |
| 3.4.1. | SWPPP modifications | |
| | | |
| 3.5. | Components of the SWPPP | |
| 3.5.1. 3.5.2. | Site description | |
| 3.5.2. 3.5.3. | Description of stormwater runoff controls | |
| 3.5.4. | Stormwater management | |
| 3.5.5. | Other items needing control | |
| 3.5.6. | Approved local government sediment and erosion control requirements | |
| 3.5.7. | Maintenance | |
| 3.5.8. | Inspections | |
| 3.5.9. | Pollution prevention measures for non-stormwater discharges | 25 |
| 3.5.10. | Documentation of permit eligibility related to Total Maximum Daily Loads | |
| | (TMDL) | 25 |
| 4. | CONSTRUCTION AND DEVELOPMENT EFFLUENT GUIDELINES | 25 |
| 4.1. | Non-Numeric Effluent Limitations | 25 |
| 4.1.1. | Erosion Prevention and Sediment Controls | 25 |
| 4.1.2. | Buffer zone requirements | |
| 4.1.3. | Soil stabilization | 27 |
| 4.1.4. | Dewatering | |
| 4.1.5. | Pollution prevention measures | |
| 4.1.6. | Prohibited discharges | |
| 4.1.7. | Surface outlets | 28 |

| 5. | SPECIAL CONDITIONS, MANAGEMENT PRACTICES, AND OTHER NON-NUMERIC LIMITATIONS | 28 |
|------------------|---|-----|
| 5.1. | Releases in Excess of Reportable Quantities | |
| 5.2. | Spills | 29 |
| 5.3. | Discharge Compliance with State Water Quality Standards | 29 |
| 5.3.1. | Violation of Water Quality Standards | |
| 5.3.2. | Discharge quality | |
| 5.4. | Discharges into Impaired or Exceptional Tennessee Waters | 30 |
| 5.4.1. | Additional SWPPP/BMP Requirements for discharges into impaired or | |
| | exceptional TN Waters | 30 |
| 5.4.2. | Buffer zone requirements for discharges into impaired or exceptional TN | 2.1 |
| 5.4.3. | waters Pre-Approved sites | |
| 3.4.3. | Fie-Approved sites | 32 |
| 6. | RETENTION, ACCESSIBILITY AND SUBMISSION OF RECORDS | 32 |
| 6.1. | Documents | 32 |
| 6.2. | Accessibility and Retention of Records | 32 |
| 6.2.1. | Posting information at the construction site | |
| 6.3. | Electronic Submission of NOIs, NOTs and Reports | 33 |
| 7. | STANDARD PERMIT CONDITIONS | 33 |
| 7.1. | Duty to Comply | 33 |
| 7.1.1. | Permittee's duty to comply | |
| 7.1.2. | Penalties for violations of permit conditions | |
| 7.1.3. | Civil and criminal liability | |
| 7.1.4. | Liability under state law | 34 |
| 7.2. | Continuation of the Expired General Permit | 34 |
| 7.3. | Need to Halt or Reduce Activity Not a Defense | 35 |
| 7.4. | Duty to Mitigate | 35 |
| 7.5. | Duty to Provide Information | 35 |
| 7.6. | Other Information | 35 |
| 7.7. | Signatory Requirements | 35 |
| 7.7.1. | Signatory requirements for a Notice of Intent (NOI) | 36 |
| 7.7.2. | Signatory requirements for reports and other items | |
| 7.7.3. | Duly authorized representative | |
| 7.7.4. 7.7.5. | Changes to authorization | |
| 7.7.6. | Signatory requirements for primary permittees | |
| 7.8. | Penalties for Falsification of Reports | |
| 7.9. | Oil and Hazardous Substance Liability | |
| 1 | VII aug 11ata1900 Suustauve 1/14000 vaaaaaaaaaaaaaaaaaaaaaaaa | |

| 7.10. | Property Rights | 38 |
|--------------------|---|----|
| 7.11. | Severability | 38 |
| 7.12. | Requiring an Individual Permit | 38 |
| 7.12.1. 7.12.2. | Director can require a site to obtain an individual permit Permittee may request individual permit instead of coverage under this general permit | |
| 7.12.3. | Individual permit terminates general permit. | |
| 7.13. | Other, Non-Stormwater, Program Requirements | 39 |
| 7.14. | Proper Operation and Maintenance | 40 |
| 7.15. | Inspection and Entry | 40 |
| 7.16. | Permit Actions | 40 |
| 8. | REQUIREMENTS FOR TERMINATION OF COVERAGE | 40 |
| 8.1. | Termination of Developer and Builder Coverage | 40 |
| 8.1.1. 8.1.2. | Termination process for primary permittees | |
| 8.2. | Termination of Builder and Contractor Coverage | 42 |
| 8.2.1. | Termination process for secondary permittees | 42 |
| 8.3. | NOT certification | 42 |
| 8.4. | Where to Submit a Notice of Termination (NOT)? | 42 |
| 9. | AQUATIC RESOURCE ALTERATION PERMITS (ARAP) | 42 |
| 10. | DEFINITIONS | 43 |
| 11. | LIST OF ACRONYMS | 50 |
| | APPENDIX A – Notice of Intent (NOI) Form APPENDIX B – Notice of Termination (NOT) Form | |
| | APPENDIX B – Notice of Termination (NOT) Form APPENDIX C – Inspection Report Form | |
| | APPENDIX D – Stormwater Monitoring Report Form | |

1. COVERAGE UNDER THIS GENERAL PERMIT

1.1. Permit Area

This construction general permit (CGP) covers all areas of the State of Tennessee.

1.2. Discharges Covered by this Permit

1.2.1. Stormwater discharges associated with construction activities

This permit authorizes point source discharges of stormwater from construction activities including clearing, grading, filling and excavating (including borrow pits and stockpile/material storage areas containing erodible material), or other similar construction activities that result in the disturbance of one acre or more of total land area. Projects or developments of less than one acre of land disturbance are required to obtain authorization under this permit if the construction activities at the site are part of a larger common plan of development or sale that comprise at least one acre of land disturbance. One or more site operators must maintain coverage under this permit for all portions of a site that have not been finally stabilized.

Projects or developments of less than one acre of total land disturbance may also be required to obtain authorization under this permit if:

- a) the director has determined that the stormwater discharge from a site is causing, contributing to, or is likely to contribute to a violation of a state water quality standard;
- b) the director has determined that the stormwater discharge is, or is likely to be a significant contributor of pollutants to waters of the state, or
- c) changes in state or federal rules require sites of less than one acre that are not part of a larger common plan of development or sale to obtain a stormwater permit.

Note: Any discharge of stormwater or other fluid to an improved sinkhole or other injection well, as defined, must be authorized by permit or rule as a Class V underground injection well under the provisions of TDEC Rules, Chapter 1200-4-6.

1.2.2. Stormwater discharges associated with construction support activities

This permit also authorizes stormwater discharges from support activities associated with a permitted construction site (e.g., concrete or asphalt batch plants, equipment staging yards, material storage areas, excavated material disposal areas, borrow areas) provided all of the following are met:

- a) the support activity is primarily related to a construction site that is covered under this general permit;
- b) the operator of the support activity is the same as the operator of the construction site;
- c) the support activity is not a commercial operation serving multiple unrelated construction projects by different operators;
- d) the support activity does not operate beyond the completion of the construction activity of the last construction project it supports; and

e) support activities are identified in the Notice of Intent (NOI) and the Stormwater Pollution Prevention Plan (SWPPP). The appropriate erosion prevention and sediment controls and measures applicable to the support activity shall be described in a comprehensive SWPPP covering the discharges from the support activity areas.

TDOT projects shall be addressed in the <u>Waste and Borrow Manual</u> per the <u>Statewide</u> <u>Stormwater Management Plan (SSWMP)</u>. Stormwater discharges associated with support activities that have been issued a separate individual permit or an alternative general permit are not authorized by this general permit. This permit does not authorize any process wastewater discharges from support activities. Process wastewater discharges from support activities must be authorized by an individual permit or other appropriate general permit.

1.2.3. Non-stormwater discharges authorized by this permit

The following non-stormwater discharges from active construction sites are authorized by this permit provided the non-stormwater component of the discharge is in compliance with section 3.5.9 below (*Pollution prevention measures for non-stormwater discharges*):

- a) dewatering of work areas of collected stormwater and ground water (filtering or chemical treatment may be necessary prior to discharge);
- b) waters used to wash vehicles (of dust and soil, not process materials such as oils, asphalt or concrete) where detergents are not used and detention and/or filtering is provided before the water leaves site;
- c) water used to control dust in accordance with section 3.5.5 below;
- d) potable water sources including waterline flushings from which chlorine has been removed to the maximum extent practicable;
- e) routine external building washdown that does not use detergents or other chemicals;
- f) uncontaminated groundwater or spring water; and
- g) foundation or footing drains where flows are not contaminated with pollutants (process materials such as solvents, heavy metals, etc.).

All non-stormwater discharges authorized by this permit must be free of sediment or other solids and must not cause erosion of soil or the stream bank, or result in sediment impacts to the receiving stream.

1.2.4. Other NPDES-permitted discharges

Discharges of stormwater or wastewater authorized by and in compliance with a different NPDES permit (other than this permit) may be mixed with discharges authorized by this permit.

1.3. Limitations on Coverage

Except for discharges from support activities, as described in section 1.2.2 above and certain non-stormwater discharges listed in section 1.2.3 above, all discharges covered by this permit shall be composed entirely of stormwater. This permit does <u>not</u> authorize the following discharges:

a) <u>Post-Construction Discharges (Permanent Stormwater Management)</u> - Stormwater discharges associated with construction activity that originate from the construction site

- after construction activities have been completed, the site has undergone final stabilization, and the coverage under this permit has been terminated.
- b) <u>Discharges Mixed with Non-Stormwater</u> Discharges that are mixed with sources of non-stormwater, other than discharges which are identified in section 1.2.4 above (*Other NPDES-permitted discharges*) and in compliance with section 3.5.9 below (*Pollution prevention measures for non-stormwater discharges*) of this permit.
- c) <u>Discharges Covered by Another Permit</u> Stormwater discharges associated with construction activity that have been issued an individual permit in accordance with subpart 7.12 below (*Requiring an Individual Permit*).
- d) <u>Discharges Threatening Water Quality</u> Stormwater discharges from construction sites, that the director determines will cause, have the reasonable potential to cause, or contribute to violations of water quality standards. Where such determination has been made, the discharger will be notified by the director in writing that an individual permit application is necessary as described in subpart 7.12 below (*Requiring an Individual Permit*). However, the division may authorize coverage under this permit after appropriate controls and implementation procedures have been included in the <u>SWPPP</u> that are designed to bring the discharge into compliance with water quality standards.
- e) <u>Discharges into Impaired Streams</u> This permit does not authorize discharges that would add loadings of a pollutant that is identified as causing or contributing to the impairment of a water body on the list of impaired waters. Impaired waters means any segment of surface waters that has been identified by the division as failing to support its designated classified uses. Compliance with the additional requirements set forth in sub-part 5.4 is not considered as contributing to loadings to impaired waters or degradation unless the division determines upon review of the SWPPP that there is a reason to limit coverage as set forth in paragraph d) above and the SWPPP cannot be modified to bring the site into compliance.
- f) <u>Discharges into Outstanding National Resource Waters</u> The director shall not grant coverage under this permit for discharges into waters that are designated by the Water Quality Control Board as Outstanding National Resource Waters (ONRWs). Designation of ONRWs are made according to TDEC Rules, <u>Chapter 1200-4-3-.06</u>.
- g) <u>Discharges into Exceptional Quality Waters</u> The director shall not grant coverage under this permit for potential discharges of pollutants which would cause degradation to waters designated by TDEC as exceptional quality waters (see sub-part 5.4 (Discharges into Impaired or Exceptional Tennessee Waters for additional permit requirements). Compliance with the additional requirements set forth in sub-part 5.4 is not considered as contributing to loadings to exceptional quality waters or degradation unless the division determines upon review of the SWPPP that there is a reason to limit coverage as set forth in paragraph d) above and the SWPPP cannot be modified to bring the site into compliance. Identification of exceptional quality waters is made according to TDEC Rules, Chapter 1200-4-3-.06.
- h) Discharges Not Protective of Federal or State listed Threatened and Endangered Species, Species Deemed in Need of Management or Special Concern Species Stormwater discharges and stormwater discharge-related activities that are not protective of legally protected listed or proposed threatened or endangered aquatic fauna or flora (or species proposed for such protection) in the receiving stream(s); or discharges or activities that would result in a "take" of a state or federal listed endangered or threatened aquatic or wildlife species deemed in need of management or special concern species, or such species' habitat. If the division finds that stormwater discharges or stormwater related activities are likely to result in any of the above effects, the director will deny the

- coverage under this general permit unless and until project plans are changed to adequately protect the species.
- i) <u>Discharges from a New or Proposed Mining Operation</u> This permit does not cover discharges from a new or proposed mining operation.
- j) <u>Discharges Negatively Affecting a Property on the National Historic Register</u> -Stormwater discharges that would negatively affect a property that is listed or is eligible for listing in the <u>National Historic Register</u> maintained by the Secretary of Interior.
- Discharging into Receiving Waters With an Approved Total Maximum Daily Load Analysis - Discharges of pollutants of concern to waters for which there is an EPAapproved total maximum daily load (TMDL) for the same pollutant are not covered by this permit unless measures or controls that are consistent with the assumptions and requirements of such TMDL are incorporated into the SWPPP. If a specific wasteload allocation has been established that would apply to the discharge, that allocation must be incorporated into the SWPPP and steps necessary to meet that allocation must be implemented. In a situation where an EPA-approved or established TMDL has specified a general wasteload allocation applicable to construction stormwater discharges, but no specific requirements for construction sites have been identified, the permittee should consult with the division to confirm that adherence to a SWPPP that meets the requirements of this permit will be consistent with the approved TMDL. Where an EPAapproved or established TMDL has not specified a wasteload allocation applicable to construction stormwater discharges, but has not specifically excluded these discharges, adherence to a SWPPP that meets the requirements of the CGP will generally be assumed to be consistent with the approved TMDL. If the EPA-approved or established TMDL specifically precludes construction stormwater discharges, the operator is not eligible for coverage under the CGP.

1.4. Obtaining Permit Coverage

Submitting a complete NOI, a SWPPP and an appropriate permitting application fee are required to obtain coverage under this general permit. Requesting coverage under this permit means that an applicant has obtained and examined a copy of this permit, and thereby acknowledges applicant's claim of ability to comply with permit terms and conditions. Upon completing NOI review, the division will:

- a) issue a notice of coverage (NOC) to the operator identified as a primary permittee on the NOI form (see subpart 1.5 below *Effective Date of Coverage*); or
- b) notify the applicant of needed changes to their NOI submittal (see section 2.6.3 below *Application completeness*); or
- c) deny coverage under this general permit (see subpart 7.12 below *Requiring an Individual Permit*).

1.4.1. Notice of Intent (NOI)

Operators wishing to obtain coverage under this permit must submit a completed NOI in accordance with requirements of part 2 below, using the NOI form provided in Appendix A of this permit (or a copy thereof). The division will review NOIs for completeness and accuracy and, when deemed necessary, investigate the proposed project for potential impacts to the waters of the state.

1.4.2. Stormwater Pollution Prevention Plan (SWPPP)

Operators wishing to obtain coverage under this permit must develop and submit a site-specific SWPPP with the NOI. The initial, comprehensive SWPPP, developed and submitted by the site-wide permittee (typically owner/developer who applied for coverage at project commencement¹), should address all construction-related activities from the date construction commences to the date of termination of permit coverage, to the maximum extent practicable. The SWPPP must be developed, implemented and updated according to the requirements in part 3 below (SWPPP Requirements) and subpart 2.3 below (Responsibilities of Operators). The SWPPP must be implemented prior to commencement of construction activities.

If the initial, comprehensive SWPPP does not address all activities until final stabilization of the site, an updated SWPPP or addendums to the plan addressing all aspects of current site disturbance must be prepared. An active, updated SWPPP must be in place for all disturbed portions of a site until each portion has been completed and finally stabilized.

Preparation and implementation of the comprehensive SWPPP may be a cooperative effort with all operators at a site. New operators with design and operational control of their portion of the construction site are expected to adopt, modify, update and implement a comprehensive SWPPP. Primary permittees at the site may develop a SWPPP addressing only their portion of the project, as long as the proposed Best Management Practices (BMPs) are compatible with the comprehensive SWPPP and complying with conditions of this general permit.

1.4.3. Permit application fees

The permit application fee should accompany the site-wide permittee's NOI form. The fee is based on the total acreage planned to be disturbed by an entire construction project for which the site-wide permittee is requesting coverage, including any associated construction support activities (see section 1.2.2 above). *The disturbed area* means the total area presented as part of the development (and/or of a larger common plan of development) subject to being cleared, graded, or excavated during the life of the development. The area cannot be limited to only the portion of the total area that the site-wide owner/developer initially disturbs through the process of various land clearing activities and/or in the construction of roadways, sewers and water utilities, stormwater drainage structures, etc., to make the property marketable. The site-wide owner/developer may present documentation of common areas in the project that will not be subject to disturbance at anytime during the life of the project and have these areas excluded from the fee calculation.

The application fees shall be as specified in the TDEC Rules, <u>Chapter 1200-4-11</u>. The application will be deemed incomplete until the appropriate application fee is paid in full. Checks for the appropriate fee should be made payable to "Treasurer, State of Tennessee." There is no additional fee for subsequent owner/operator to obtain permit coverage (see section 2.4.3 below - *New operator*), as long as the site-wide primary permittee has active permit coverage at the time of receipt of the subsequent operator's application, because the site-wide primary permittee paid the appropriate fee for the entire area of site disturbance. If a project was previously permitted, but permit coverage was terminated (see section 8.1.1 below - Termination process for primary permittees), and subsequent site disturbance or re-development occurs, the new operator must obtain coverage and pay the appropriate fee for the disturbed acreage.

¹ See sub-part 2.1 on page 7 for a definition of an site-wide permittee.

1.4.4. Submittal of a copy of the NOC and NOT to the local MS4

Permittees who discharge stormwater through an NPDES-permitted municipal separate storm sewer system (MS4) who are not exempted in section 1.4.5 below (*Permit Coverage through Qualifying Local Program*) must submit a courtesy copy of the notice of coverage (NOC), and at project completion, a copy of the signed notice of termination (NOT) to the MS4 upon their request. Permitting status of all permittees covered (or previously covered) under this general permit as well as the most current list of all MS4 permits is available at the division's DataViewer web site².

1.4.5. Permit Coverage through Qualifying Local Program

Coverage equivalent to coverage under this general permit may be obtained from a qualifying local erosion prevention and sediment control Municipal Separate Storm Sewer System (MS4) program. A qualifying local program (QLP) is a municipal stormwater program for stormwater discharges associated with construction activity that has been formally approved by the division. More information about Tennessee's QLP program and MS4 participants can be found at: http://tn.gov/environment/wpc/stormh2o/qlp.shtml.

If a construction site is within the jurisdiction of and has obtained a notice of coverage from a QLP, the operator of the construction activity is authorized to discharge stormwater associated with construction activity under this general permit without the submittal of an NOI to the division. The permittee is also not required to submit a SWPPP, a notice of termination or a permit fee to the division. At the time of issuance of this permit, there were no qualifying local erosion prevention and sediment control MS4 programs in Tennessee. Permitting of stormwater runoff from construction sites from federal or state agencies (including, but not limited to the Tennessee Department of Transportation (TDOT) and Tennessee Valley Authority (TVA)) and the local MS4 program itself will remain solely under the authority of TDEC.

The division may require any owner/developer or operator located within the jurisdiction of a QLP to obtain permit coverage directly from the division. The operator shall be notified in writing by the division that coverage by the QLP is no longer applicable, and how to obtain coverage under this permit.

1.5. Effective Date of Coverage

1.5.1. Notice of Coverage (NOC)

The NOC is a notice from the division to the primary permittee, which informs the primary permittee that the NOI, the SWPPP and the appropriate fee were received and accepted, and stormwater discharges from a specified area of a construction activity have been approved under this general permit. The permittee is authorized to discharge stormwater associated with construction activity as of the effective date listed on the NOC.

Assigning a permit tracking number by the division to a proposed discharge from a construction site does <u>not</u> confirm or imply an authorization to discharge under this permit. Correspondence

² http://www.tn.gov/environment/wpc/dataviewer/

with the permittee is maintained through the Site Owner or Developer listed in the NOI, not the optional contact or the secondary permittee.

If any Aquatic Resource Alteration Permits (ARAP) are required for a site in areas proposed for active construction, the NOC will not be issued until ARAP application(s) are submitted and deemed by TDEC to be complete. The treatment and disposal of wastewater (including, but not limited to sanitary wastewater) generated during and after the construction must be also addressed. The issuance of the NOC may be delayed until adequate wastewater treatment and accompanying permits are issued.

1.5.2. Permit tracking numbers

Construction sites covered under this permit will be assigned permit tracking numbers in the sequence TNR100001, TNR100002, etc. An operator presently permitted under a previous construction general permit shall be granted coverage under this new general permit. Permit tracking numbers assigned under a previous construction general permit will be retained (see section 2.4.1 below). An operator receiving new permit coverage will be assigned a new permit tracking number (see section 2.4.2 below).

2. NOTICE OF INTENT (NOI) REQUIREMENTS

2.1. Who Must Submit an NOI?

All site operators must submit an NOI form. "Operator" for the purpose of this permit and in the context of stormwater associated with construction activity means any person associated with a construction project who meets either or both of the following two criteria:

- a) The person has operational or design control over construction plans and specifications, including the ability to make modifications to those plans and specifications. This person is typically the owner or developer of the project or a portion of the project (e.g. subsequent builder), or the person that is the current land owner of the construction site. This person is considered the primary permittee; or
- b) The person has day-to-day operational control of those activities at a project which are necessary to ensure compliance with a SWPPP for the site or other permit conditions. This person is typically a contractor or a commercial builder who is hired by the primary permittee, and is considered a secondary permittee.

The site-wide permittee is the first primary permittee to apply for coverage at the site. There may be other primary permittees for a project, but there is only one site-wide permittee. Where there are multiple operators associated with the same project, all operators are required to obtain permit coverage. Once covered by a permit, all such operators are to be considered as copermittees if their involvement in the construction activities affects the same project site, and are held jointly and severally responsible for complying with the permit.

2.2. Typical Construction Site Operators

2.2.1. Owner/Developer

An owner or developer(s) of a project is a primary permittee. This person has operational or design control over construction plans and specifications, including the ability to make modifications to those plans and specifications. This person may include, but is not limited to a developer, landowner, realtor, commercial builder, homebuilder, etc. An owner or developer's responsibility to comply with requirements of this permit extends until permit coverage is terminated in accordance with requirements of part 8 below.

2.2.2. Commercial builders

A commercial builder can be a primary or secondary permittee at a construction site.

A commercial builder who purchases one or more lots from an owner/developer (site-wide permittee) for the purpose of constructing and selling a structure (e.g., residential house, non-residential structure, commercial building, industrial facility, etc.) and has design or operational control over construction plans and specifications is a primary permittee for that portion of the site. A commercial builder may also be hired by the end user (e.g., a lot owner who may not be a permittee). In either case the commercial builder is considered a new operator and must submit a new NOI following requirements in section 2.4.3 below.

The commercial builder may also be hired by the primary permittee or a lot owner to build a structure. In this case, the commercial builder signs the primary permittee's NOI and SWPPP as a contractor (see section 2.2.3 below) and is considered a secondary permittee.

2.2.3. Contractors

A contractor is considered a secondary permittee. This person has day-to-day operational control of those activities at a project which are necessary to ensure compliance with a SWPPP for the site or other permit conditions (e.g., contractor is authorized to direct workers at a site to carry out activities required by the SWPPP or comply with other permit conditions).

A contractor may be, but is not limited to a general contractor, grading contractor, erosion control contractor, sub-contractor responsible for any land disturbing activities and/or erosion prevention and sediment control (EPSC) implementation/maintenance, commercial builder hired by the owner/developer, etc. The contractor may need to include in their contract with the party that hired them specific details for the contractor's responsibilities concerning EPSC measures. This includes the ability of the contractor to make EPSC modifications. The contractor should sign the NOI and SWPPP associated with the construction project at which they will be an operator.

2.3. Responsibilities of Operators

A permittee may meet one or more of the operational control components in the definition of "operator" found in subpart 2.1 above. Either section 2.3.1 or 2.3.2 below, or both, will apply depending on the type of operational control exerted by an individual permittee.

2.3.1. Permittee(s) with design control (owner/developer)

Permittee(s) with <u>design</u> control (i.e., operational control over construction plans and specifications) at the construction site, including the ability to make modifications to those plans and specifications (e.g., owner/developer) must:

- a) Ensure the project specifications they develop meet the minimum requirements of part 3 below (stormwater pollution prevention plan - SWPPP) and all other applicable conditions;
- b) Ensure that the SWPPP indicates the areas of the project where they have design control (including the ability to make modifications in specifications), and ensure all other permittees implementing and maintaining portions of the SWPPP impacted by any changes they make to the plan are notified of such modifications in a timely manner;
- c) Ensure that all common facilities (i.e., sediment treatment basin and drainage structures) that are necessary for the prevention of erosion or control of sediment are maintained and effective until all construction is complete and all disturbed areas in the entire project are stabilized, unless permit coverage has been obtained and responsibility has been taken over by a new (replacement) owner/operator.
- d) If parties with <u>day-to-day operational control</u> of the construction site have not been identified at the time the comprehensive <u>SWPPP</u> is initially developed, the permittee with design control shall be considered to be the responsible person until such time the supplemental NOI is submitted, identifying the new operator(s) (see section 2.4.3 below). These new operators (e.g., general contractor, utilities contractors, subcontractors, erosion control contractors, hired commercial builders) are considered secondary permittees. The <u>SWPPP</u> must be updated to reflect the addition of new operators as needed to reflect operational or design control.
- e) Ensure that all operators on the site have permit coverage, if required, and are complying with the SWPPP.

2.3.2. Permittee(s) with day-to-day operational control (contractor – secondary permittee)

Permittee(s) with <u>day-to-day operational control</u> of those activities at a project which are necessary to ensure compliance with the <u>SWPPP</u> for the site or other permit conditions (e.g., general contractor, utilities contractors, sub-contractors, erosion control contractors, hired commercial builders) must:

- a) Ensure that the SWPPP for portions of the project where they are operators meets the minimum requirements of part 3 below (SWPPP Requirements) and identifies the parties responsible for implementation of control measures identified in the plan:
- Ensure that the SWPPP indicates areas of the project where they have operational control over day-to-day activities;
- c) Ensure that measures in the SWPPP are adequate to prevent erosion and control any sediment that may result from their earth disturbing activity:
- d) Permittees with operational control over only a <u>portion</u> of a larger construction project are responsible for compliance with all applicable terms and conditions of this permit as it relates to their activities on their portion of the construction site. This includes, but is not limited to, implementation of Best Management Practices (BMPs) and other controls required by the SWPPP. Permittees shall ensure either directly or through coordination with other permittees, that their activities do not render another person's pollution control ineffective. All permittees must implement their portions of a comprehensive SWPPP.

2.4. NOI Submittal

2.4.1. Existing site

An operator presently permitted under the 2005 construction general permit shall be granted coverage under this new general permit. There will be no additional fees associated with an extension of coverage for existing sites under the new permit. The division may, at its discretion, require permittees to confirm their intent to be covered under this new general permit following its effective date through submission of an updated NOI. Should the confirmation be required and is not received, coverage under the new general permit will be terminated. Should a site with terminated coverage be unstable or construction continues, a new NOI, SWPPP and an appropriate fee must be submitted.

2.4.2. Application for new permit coverage

Except as provided in section 2.4.3 below, operators must submit a complete NOI, SWPPP and an appropriate fee in accordance with the requirements described in subpart 1.4 above. The complete application should be submitted at least 30 days prior to commencement of construction activities. The permittee is authorized to discharge stormwater associated with construction activity as of the effective date listed on the NOC. The land disturbing activities shall not start until a NOC is prepared and written approval by the division staff is obtained according to subpart 1.5 above.

2.4.3. New operator

For stormwater discharges from construction sites or portions of the sites where the operator changes (new owner), or projects where an operator is added (new contractor) after the initial NOI and comprehensive SWPPP have been submitted, the supplemental (submitted by a new contractor) or additional (submitted by a new owner) NOI should be submitted as soon as practicable, and always before the new operator commences work at the site. The supplemental NOI must reference the project name and tracking number assigned to the primary permittee's NOI.

If the site under the control of the new owner is inactive and all areas disturbed are completely stabilized, the NOI may not need to be submitted immediately upon assuming operational control. However, the division should be notified if a new operator obtains operational control at a site, but commencement of construction under the direction of the operator at the site is going to be delayed.

If upon the sale or transfer of the site's ownership does not change the signatory requirements for the NOI (see section 7.7.1 below), but the site's owner or developer's company name has changed, a new, updated NOI should be submitted to the division within 30 days of the name change. If the new operator agrees to comply with an existing comprehensive SWPPP already implemented at the site, a copy of the supplemental or modified SWPPP does not have to be submitted with the NOI. There will be no additional fees associated with the sale or transfer of ownership for existing permitted sites.

If the transfer of ownership is due to foreclosure or a permittee filing for bankruptcy proceedings, the new owner (including but not limited to a lending institution) must obtain permit coverage if the property is inactive, but is not stabilized sufficiently. If the property is sufficiently stabilized permit coverage may not be necessary, unless and until construction activity at the site resumes.

2.4.4. Late NOIs

Dischargers are not prohibited from submitting late NOIs. When a late NOI is submitted, and if the division authorizes coverage under this permit, such authorization is only for future discharges; any prior, unpermitted, discharges or permit noncompliances are subject to penalties as described in section 7.1.2 below.

2.5. Who Must Sign the NOI?

All construction site operators as defined in subsection 2.2 above (*Typical Construction Site Operators*) must sign the NOI form. Signatory requirements for a NOI are described in section 7.7.1 below. All signatures must be original. An NOI that does not bear an original signature will be deemed incomplete. The division recommends that signatures be in blue ink.

2.6. NOI Form

2.6.1. Contents of the NOI form

NOI for construction projects shall be submitted on the form provided in Appendix A of this permit, or on a copy thereof. This form and its instructions set forth the required content of the NOI. The NOI form must be filled in completely. If sections of the NOI are left blank, a narrative explaining the omission must be provided as an attachment.

Owners, developers and all contractors that meet the definition of the operator in subsection 2.2 above (*Typical Construction Site Operators*) shall apply for permit coverage on the same NOI, insofar as possible. The NOI is designed for more than one contractor (secondary permittee). The division may accept separate NOI forms from different operators for the same construction site when warranted.

After permit coverage has been granted to the primary permittee, any subsequent NOI submittals must include the site's previously assigned permit tracking number and the project name. The comprehensive site-specific SWPPP shall be prepared in accordance with the requirements of part 3 below, and must be submitted with the NOI unless the NOI being submitted is to only add a contractor (secondary permittee) to an existing coverage.

2.6.2. Construction site map

An excerpt (8 ½" by 11" or 11" by 17") from the appropriate 7.5 minute <u>United States</u> <u>Geological Survey</u> (USGS) topographic map, with the proposed construction site centered, must be included with the NOI. The entire proposed construction area must be clearly identified (outlined) on this map. The total area to be disturbed (in acres) should be included on the map. The map should outline the boundaries of projects, developments and the construction site in relation to major roads, streams or other landmarks. All outfalls where runoff will leave the property should be identified. Stream(s) receiving the discharge, and storm sewer system(s)

conveying the discharge from all site outfalls should be clearly identified and marked on the map. The map should also list and indicate the location of EPSCs that will be used at the construction site. NOIs for linear projects must specify the location of each end of the construction area and all areas to be disturbed. Commercial builders that develop separate SWPPPs that cover only their portion of the project shall also submit a site or plat map that clearly indicates the lots which they purchased and for which they are applying for permit coverage and the location of EPSCs that will be used at each lot.

2.6.3. Application completeness

Based on a review of the NOI or other available information, the division shall:

- 1. prepare a notice of coverage (NOC) for the construction site (see subpart 1.5 above); or
- 2. prepare a deficiency letter stating additional information must be provided before the NOC can be issued; or
- 3. deny coverage under this general permit and require the discharger to obtain coverage under an individual NPDES permit (see subpart 7.12 below).

2.7. Where to Submit the NOI, SWPPP and Permitting Fee?

The applicant shall submit the NOI, SWPPP and permitting fee to the appropriate TDEC Environmental Field Office (EFO) for the county(ies) where the construction activity is located and where stormwater discharges enters waters of the state. If a site straddles a county line of counties that are in areas of different EFOs, the operators shall send NOIs to each EFO. The permitting fee should be submitted to the EFO that provides coverage for the majority of the proposed construction activity.

A list of counties and the corresponding EFOs is provided in subpart 2.8 below. The division's Nashville Central Office will serve as a processing office for NOIs submitted by federal or state agencies (including, but not limited to the Tennessee Department of Transportation (TDOT), Tennessee Valley Authority (TVA) and the local MS4 programs).

2.8. List of the TDEC Environmental Field Offices (EFOs) and Corresponding Counties

| EFO Name | List of Counties |
|--------------------|---|
| <u>Chattanooga</u> | Bledsoe, Bradley, Grundy, Hamilton, Marion, McMinn, Meigs, Polk, Rhea, Sequatchie |
| <u>Columbia</u> | Bedford, Coffee, Franklin, Giles, Hickman, Lawrence, Lewis, Lincoln, Marshall, Maury, |
| | Moore, Perry, Wayne |
| Cookeville | Cannon, Clay, Cumberland, De Kalb, Fentress, Jackson, Macon, Overton, Pickett, |
| | Putnam, Smith, Van Buren, Warren, White |
| <u>Jackson</u> | Benton, Carroll, Chester, Crockett, Decatur, Dyer, Gibson, Hardeman, Hardin, |
| | Haywood, Henderson, Henry, Lake, Lauderdale, Madison, McNairy, Obion, Weakley |
| Johnson City | Carter, Greene, Hancock, Hawkins, Johnson, Sullivan, Unicoi, Washington |
| Knoxville | Anderson, Blount, Campbell, Claiborne, Cocke, Grainger, Hamblen, Jefferson, Knox, |
| | Loudon, Monroe, Morgan, Roane, Scott, Sevier, Union |
| Memphis | Fayette, Shelby, Tipton |
| Nashville | Cheatham, Davidson, Dickson, Houston, Humphreys, Montgomery, Robertson, |
| | Rutherford, Stewart, Sumner, Trousdale, Williamson, Wilson |

TDEC may be reached by telephone at the toll-free number 1-888-891-8332 (TDEC). Local EFOs may be reached directly when calling this number from the construction site, using a land line.

3. STORMWATER POLLUTION PREVENTION PLAN (SWPPP) REQUIREMENTS

3.1. The General Purpose of the SWPPP

A comprehensive SWPPP must be prepared and submitted along with the NOI as required in section 1.4.2 above. The primary permittee must implement the SWPPP as written from commencement of construction activity until final stabilization is complete, or until the permittee does not have design or operational control of any portion of the construction site. Requirements for termination of site coverage are provided in part 8 below.

A site-specific SWPPP must be developed for each construction project or site covered by this permit. The design, inspection and maintenance of Best Management Practices (BMPs) described in SWPPP must be prepared in accordance with good engineering practices. At a minimum, BMPs shall be consistent with the requirements and recommendations contained in the current edition of the Tennessee Erosion and Sediment Control Handbook (the handbook). The handbook is designed to provide information to planners, developers, engineers, and contractors on the proper selection, installation, and maintenance of BMPs. This permit allows the use of innovative or alternative BMPs, whose performance has been documented to be equivalent or superior to conventional BMPs as certified by the SWPPP designer.

Once a definable area has been finally stabilized, the permittee may identify this area on the site-specific SWPPP. No further SWPPP or inspection requirements apply to that portion of the site (e.g., earth-disturbing activities around one of three buildings in a complex are done and the area is finally stabilized, one mile of a roadway or pipeline project is done and finally stabilized, etc).

For more effective coordination of BMPs a cooperative effort by the different operators at a site to prepare and participate in a comprehensive SWPPP is expected. Primary permittees at a site may develop separate SWPPPs that cover only their portion of the project. In instances where there is more than one SWPPP for a site, the permittees must ensure the stormwater discharge controls and other measures are compatible with one another and do not prevent another operator from complying with permit conditions. The comprehensive SWPPP developed and submitted by the primary permittee must assign responsibilities to subsequent (secondary) permittees and coordinate all BMPs at the construction site. Assignment and coordination can be done by name or by job title.

3.1.1. Registered engineer or landscape architect requirement

The narrative portion of the SWPPP may be prepared by an individual that has a working knowledge of erosion prevention and sediment controls, such as a Certified Professional in Erosion and Sediment Control (CPESC) or a person that successfully completed the "Level II Design Principles for Erosion Prevention and Sediment Control for Construction Sites" course. Plans and specifications for any building or structure, including the design of sediment basins or other sediment controls involving structural, hydraulic, hydrologic or other engineering calculations shall be prepared by a licensed professional engineer or landscape architect and

stamped and certified in accordance with the <u>Tennessee Code Annotated</u>, Title 62, Chapter 2 (see part 10 below) and the rules of the <u>Tennessee Board of Architectural and Engineering Examiners</u>. Engineering design of sediment basins and other sediment controls must be included in <u>SWPPPs</u> for construction sites involving drainage to an outfall totaling 10 or more acres (see subsection 3.5.3.3 below) or 5 or more acres if draining to an impaired or exceptional quality waters (see subsection 5.4.1 below).

3.1.2. Site Assessment

Quality assurance of erosion prevention and sediment controls shall be done by performing site assessment at a construction site. The site assessment shall be conducted at each outfall involving drainage totaling 10 or more acres (see subsection 3.5.3.3 below) or 5 or more acres if draining to an impaired or exceptional quality waters (see subsection 5.4.1 below), within a month of construction commencing at each portion of the site that drains the qualifying acreage of such portion of the site. The site assessment shall be performed by individuals with following qualifications:

- a licensed professional engineer or landscape architect;
- a Certified Professional in Erosion and Sediment Control (CPESC) or
- a person that successfully completed the "<u>Level II Design Principles for Erosion Prevention and Sediment Control for Construction Sites</u>" course.

As a minimum, site assessment should be performed to verify the installation, functionality and performance of the EPSC measures described in the SWPPP. The site assessment should be performed with the inspector (as defined in part 10 below – Definitions), and should include a review and update (if applicable) of the SWPPP. Modifications of plans and specifications for any building or structure, including the design of sediment basins or other sediment controls involving structural, hydraulic, hydrologic or other engineering calculations shall be prepared by a licensed professional engineer or landscape architect and stamped and certified in accordance with the Tennessee Code Annotated, Title 62, Chapter 2 (see part 10 below) and the rules of the Tennessee Board of Architectural and Engineering Examiners.

The site assessment findings shall be documented and the documentation kept with the SWPPP at the site. At a minimum, the documentation shall include information included in the inspection form provided in Appendix C of this permit. The documentation must contain the printed name and signature of the individual performing the site assessment and the following certification:

"I certify under penalty of law that this report and all attachments are, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

The site assessment can take the place of one of the twice weekly inspections requirement from subsection 3.5.8.2 below.

The division may require additional site assessment(s) to be performed if site inspection by division's personnel reveals site conditions that have potential of causing pollution to the waters of the state.

3.2. SWPPP Preparation and Compliance

3.2.1. Existing site

Operator(s) of an existing site presently permitted under the division's previous construction general permit shall maintain full compliance with the current SWPPP. The current SWPPP should be modified, if necessary, to meet requirements of this new general permit, and the SWPPP changes implemented no later than 12 months following the new permit effective date (May 24, 2011), excluding the buffer zone requirements as stated in section 4.1.2 below. The permittee shall make the updated SWPPP available for the division's review upon request.

3.2.2. New site

For construction stormwater discharges not authorized under an NPDES permit as of the effective date of this permit, a SWPPP that meets the requirements of subpart 3.5 below of this permit shall be prepared and submitted along with the NOI and an appropriate fee for coverage under this permit.

3.3. Signature Requirements, Plan Review and Making Plans Available

3.3.1. Signature Requirements for a SWPPP

The SWPPP shall be signed by the operator(s) in accordance with subpart 7.7 below, and if applicable, certified according to requirements in section 3.1.1 above. All signatures must be original. A SWPPP that does not bear an original signature will be deemed incomplete. The division recommends that signatures be in blue ink.

3.3.2. SWPPP Review

The permittee shall make updated plans and inspection reports available upon request to the director, local agency approving erosion prevention and sediment control plan, grading plans, land disturbance plans, or stormwater management plans, or the operator of an MS4.

3.3.3. Making plans available

A copy of the SWPPP shall be retained on-site at the location which generates the stormwater discharge in accordance with part 6 below of this permit. If the site is inactive or does not have an onsite location adequate to store the SWPPP, the location of the SWPPP, along with a contact phone number, shall be posted on-site. If the SWPPP is located offsite, reasonable local access to the plan, during normal working hours, must be provided.

3.4. Keeping Plans Current

3.4.1. SWPPP modifications

The permittee must modify and update the SWPPP if any of the following are met:

a) whenever there is a change in the scope of the project, which would be expected to have a significant effect on the discharge of pollutants to the waters of the state and which has

- not otherwise been addressed in the SWPPP. If applicable, the SWPPP must be modified or updated whenever there is a change in chemical treatment methods, including the use of different treatment chemical, different dosage or application rate, or different area of application;
- b) whenever inspections or investigations by site operators, local, state or federal officials indicate the SWPPP is proving ineffective in eliminating or significantly minimizing pollutants from sources identified under section 3.5.2 below of this permit, or is otherwise not achieving the general objectives of controlling pollutants in stormwater discharges associated with construction activity. Where local, state or federal officials determine that the SWPPP is ineffective in eliminating or significantly minimizing pollutant sources, a copy of any correspondence to that effect must be retained in the SWPPP:
- c) to identify any new operator (typically contractor and/or subcontractor) as needed to reflect operational or design control that will implement a measure of the SWPPP (see subparts 2.1 and 2.2 above for further description of which operators must be identified); and
- d) to include measures necessary to prevent a negative impact to legally protected state or federally listed fauna or flora (or species proposed for such protection – see subpart 1.3 above). Amendments to the SWPPP may be reviewed by the division, a local MS4, the EPA or an authorized regulatory agency; and
- a TMDL is developed for the receiving waters for a pollutant of concern (siltation and/or habitat alteration).

3.5. Components of the SWPPP

The SWPPP shall include the following items, as described in sections 3.5.1 to 3.5.10 below: site description, description of stormwater runoff controls, erosion prevention and sediment controls, stormwater management, description of other items needing control, approved local government sediment and erosion control requirements, maintenance, inspections, pollution prevention measures for non-stormwater discharges, and documentation of permit eligibility related to Total Maximum Daily Loads (TMDL). The SWPPP must:

- a) identify all potential sources of pollution which are likely to affect the quality of stormwater discharges from the construction site;
- b) describe practices to be used to reduce pollutants in stormwater discharges from the construction site; and
- c) assure compliance with the terms and conditions of this permit.

3.5.1. Site description

Each plan shall provide a description of pollutant sources and other information as indicated below:

- a) a description of all construction activities at the site (not just grading and street construction);
- b) the intended sequence of major activities which disturb soils for major portions of the site (e.g., grubbing, excavation, grading, utilities and infrastructure installation, etc.);
- c) estimates of the total area of the site and the total area that is expected to be disturbed by excavation, grading, filling, or other construction activities;

- d) a description of the topography of the site including an estimation of the percent slope and the variation in percent slope found on the site; such estimation should be on a basis of a drainage area serving each outfall, rather than an entire project;
- e) any data describing the soil (data may be referenced or summarized) and how the soil type will dictate the needed control measures and how the soil may affect the expected quality of runoff from the site;
- f) an estimate of the runoff coefficient of the site after construction activities are completed and how the runoff will be handled to prevent erosion at the permanent outfall and receiving stream, as well as the estimate of the percentage of impervious area before and after construction;
- g) an erosion prevention and sediment control plan of the site with the proposed construction area clearly outlined. The plan should indicate the boundaries of the permitted area, drainage patterns and approximate slopes anticipated after major grading activities, areas of soil disturbance, an outline of areas which are not to be disturbed, the location of major structural and nonstructural controls identified in the SWPPP, the location of areas where stabilization practices are expected to occur, surface waters including wetlands, sinkholes, and careful identification on the site plan of outfall points intended for coverage under the general permit for stormwater discharges from the site. The erosion control plan must meet requirements stated in section 3.5.2 below;
- h) a description of any discharge associated with industrial activity other than construction stormwater that originates on site and the location of that activity and its permit number;
- identification of any stream or wetland on or adjacent to the project, a description of any anticipated alteration of these waters and the permit number or the tracking number of the <u>Aquatic Resources Alteration Permit</u> (ARAP) or Section 401 Certification issued for the alteration;
- the name of the receiving water(s), and approximate size and location of affected wetland acreage at the site;
- k) if applicable, clearly identify and outline the buffer zones established to protect waters of the state located within the boundaries of the project;
- some construction projects, such as residential or commercial subdivisions and/or developments or industrial parks are subdivided. Subdivided lots are sometimes sold to new owners prior to completion of construction. The site-wide developer/owner must describe EPSC measures implemented at those lots. Once the property is sold, the new operator must obtain coverage under this permit;
- m) for projects of more than 50 acres, the construction phases must be described (see subsection 3.5.3.1 below); and
- n) if only a portion of the total acreage of the construction site is to be disturbed, then the protections employed to limit the disturbance must be discussed, i.e., caution fence, stream side buffer zones, etc. Limits of disturbance shall be clearly marked in the SWPPP and areas to be undisturbed clearly marked in the field before construction activities begin.

3.5.2. Description of stormwater runoff controls

The SWPPP shall include a description of appropriate erosion prevention and sediment controls and other Best Management Practices (BMPs) that will be implemented at the construction site. The SWPPP must clearly describe each major activity which disturbs soils for major portions of the site (e.g., grubbing, excavation, grading, utilities and infrastructure installation, etc.):

- a) appropriate control measures and the general timing for the measures to be implemented during construction activities; and
- b) which permittee is responsible for implementation of which controls.

The SWPPP must include erosion prevention and sediment control (EPSC) plans showing the approximate location of each control measure along with a description of the timing during the construction process for implementing each measure (e.g., prior to the start of earth disturbance, as the slopes are altered and after major grading is finished). The different stages of construction (initial/major grading, installation of infrastructure, final contours, etc.) and the erosion preventions and sediment control measures that will be utilized during each stage should be depicted on multiple plan sheets (see paragraphs below). Half sheets are acceptable. One sheet showing all EPSCs that will be used during the life of the multi-phase project implementing different EPSC controls at each stage will not be considered complete.

For site disturbances less than 5 acres, at least two separate EPSC plan sheets shall be developed. At least two stages shall be identified, with associated EPSC measures addressed. The plan stages shall be addressed separately in plan sheets, with each stage reflecting the conditions and EPSC measures necessary to manage stormwater runoff, erosion and sediment during the initial land disturbance (initial grading) and the conditions and EPSC measures necessary to manage stormwater, erosion and sediment at final grading.

For site disturbances more than 5 acres, at least 3 separate EPSC plan sheets shall be developed. Three stages shall be identified. The first plan sheet should reflect the conditions and EPSC measures necessary to manage stormwater runoff, during the initial land disturbance (initial grading). The second plan sheet shall reflect the conditions and the EPSC measures necessary to manage stormwater runoff from interim land disturbance activities. The third plan sheet shall reflect the conditions and EPSC measures necessary to manage stormwater runoff, erosion and sediment at final grading.

The description and implementation of controls shall address the following minimum components, as described in sections 3.5.3, 3.5.4 and 3.5.5 below. Additional controls may be necessary to comply with section 5.3.2 below.

3.5.3. Erosion prevention and sediment controls

3.5.3.1. General criteria and requirements

- a) The construction-phase erosion prevention controls shall be designed to eliminate (or minimize if complete elimination is not possible) the dislodging and suspension of soil in water. Sediment controls shall be designed to retain mobilized sediment on site to the maximum extent practicable.
- b) The design, inspection and maintenance of Best Management Practices (BMPs) described in SWPPP must be prepared in accordance with good engineering practices and, at a minimum, shall be consistent with the requirements and recommendations contained in the current edition of the <u>Tennessee Erosion and Sediment Control Handbook</u>. In addition, all control measures must be properly selected, installed, and maintained in accordance with the manufacturer's specifications (where applicable). All control measures selected must be able to slow runoff so that rill and gully formation is prevented. When steep slopes and/or fine particle soils are present at the site, additional physical or chemical treatment of stormwater runoff may be required. Proposed physical

- and/or chemical treatment must be researched and applied according to the manufacturer's guidelines and fully described in the SWPPP. If periodic inspections or other information indicates a control has been used inappropriately, or incorrectly, the permittee must replace or modify the control for relevant site situations.
- c) If permanent or temporary vegetation is to be used as a control measure, then the timing of the planting of the vegetation cover must be discussed in the SWPPP. Planning for planting cover vegetation during winter months or dry months should be avoided.
- d) If sediment escapes the permitted area, off-site accumulations of sediment that have not reached a stream must be removed at a frequency sufficient to minimize offsite impacts (e.g., fugitive sediment that has escaped the construction site and has collected in a street must be removed so that it is not subsequently washed into storm sewers and streams by the next rain and/or so that it does not pose a safety hazard to users of public streets). Permittees shall not initiate remediation/restoration of a stream without consulting the division first. This permit does not authorize access to private property. Arrangements concerning removal of sediment on adjoining property must be settled by the permittee with the adjoining landowner.
- e) Sediment should be removed from sediment traps, silt fences, sedimentation ponds, and other sediment controls as recommended in the <u>Tennessee Erosion and Sediment Control Handbook</u>, and must be removed when design capacity has been reduced by 50%.
- f) Litter, construction debris, and construction chemicals exposed to stormwater shall be picked up prior to anticipated storm events or before being carried off of the site by wind (e.g., forecasted by local weather reports), or otherwise prevented from becoming a pollutant source for stormwater discharges (e.g., screening outfalls, daily pick-up, etc.). After use, materials used for erosion prevention and sediment control (such as silt fence) should be removed or otherwise prevented from becoming a pollutant source for stormwater discharges.
- g) Erodible material storage areas (including but not limited to overburden and stockpiles of soil etc.) and borrow pits used primarily for the permitted project and which are contiguous to the site are considered a part of the site and shall be identified on the NOI, addressed in the SWPPP and included in the fee calculation. TDOT projects shall be addressed in the Waste and Borrow Manual per the Statewide Stormwater Management Plan (SSWMP).
- h) Pre-construction vegetative ground cover shall not be destroyed, removed or disturbed more than 15 days prior to grading or earth moving unless the area is seeded and/or mulched or other temporary cover is installed.
- Clearing and grubbing must be held to the minimum necessary for grading and equipment operation. Existing vegetation at the site should be preserved to the maximum extent practicable.
- j) Construction must be sequenced to minimize the exposure time of graded or denuded
- k) Construction phasing is required on all projects regardless of size as a major practice for minimizing erosion and limiting sedimentation. Construction must be phased to keep the total disturbed area less than 50 acres at any one time. Areas of the completed phase must be stabilized within 14 days (see subsection 3.5.3.2 below). No more than 50 acres of active soil disturbance is allowed at any time during the construction project. This includes off-site borrow or disposal areas that meet the conditions of section 1.2.2 above of this general permit.

The 50 acre limitation does not apply to linear construction projects (such as roadway, pipeline, and other infrastructure construction activities) if the following conditions are met:

- Where no one area of active soil disturbance is greater than 50 acres and the various areas of disturbance have distinct receiving waters; or
- Where contiguous disturbances amount to greater than 50 acres, but no one distinct water is receiving run off from more than 50 disturbed acres; or
- With the department's written concurrence, where more than 50 acres of disturbance is to occur and where one receiving water will receive run-off from more than 50 acres; or
- Where no one area of active soil disturbance is greater than 50 acres and the various areas of disturbance are more than 5 miles apart.

In order for a linear project to take advantage of the 50 acre rule exemption outlined in this paragraph, the contractor shall conduct monthly site assessments as described in section 3.1.2 above until the site is permanently stabilized.

- Erosion prevention and sediment control measures must be in place and functional before earth moving operations begin, and must be constructed and maintained throughout the construction period. Temporary measures may be removed at the beginning of the workday, but must be replaced at the end of the workday.
- m) The following records shall be maintained on or near site: the dates when major grading activities occur; the dates when construction activities temporarily or permanently cease on a portion of the site; the dates when stabilization measures are initiated; inspection records and rainfall records.
- n) Off-site vehicle tracking of sediments and the generation of dust shall be minimized. A stabilized construction access (a point of entrance/exit to a construction site) shall be described and implemented, as needed, to reduce the tracking of mud and dirt onto public roads by construction vehicles.
- o) Permittees shall maintain a rain gauge and daily rainfall records at the site, or use a reference site for a record of daily amount of precipitation.

3.5.3.2. Stabilization practices

The SWPPP shall include a description of interim and permanent stabilization practices, including site-specific scheduling of the implementation of the practices. Site plans should ensure that existing vegetation is preserved where attainable and that disturbed portions of the site are stabilized. Site plans should comply with buffer zone requirements (see sections 4.1.2 and 5.4.2 below), if applicable, in which construction activities, borrow and/or fill are prohibited. Stabilization practices may include: temporary seeding, permanent seeding, mulching, geotextiles, sod stabilization, vegetative buffer strips, protection of trees, preservation of mature vegetation, and other appropriate measures. Use of impervious surfaces for final stabilization in lieu of a permanent vegetative cover should be avoided where practicable. No stabilization, erosion prevention and sediment control measures are to be installed in a stream without obtaining a Section 404 permit and an Aquatic Resources Alteration Permit (ARAP), if such permits are required and appropriate.

Stabilization measures shall be initiated as soon as possible in portions of the site where construction activities have temporarily or permanently ceased. Temporary or permanent soil stabilization at the construction site (or a phase of the project) must be completed no later than 14 days after the construction activity in that portion of the site has temporarily or permanently ceased. In the following situations, temporary stabilization measures are not required:

- a) where the initiation of stabilization measures is precluded by snow cover or frozen ground conditions or adverse soggy ground conditions, stabilization measures shall be initiated as soon as practicable; or
- b) where construction activity on a portion of the site is temporarily ceased, and earth disturbing activities will be resumed within 14 days.

Steep slopes shall be temporarily stabilized not later than 7 days after construction activity on the slope has temporarily or permanently ceased.

Permanent stabilization with perennial vegetation (using native herbaceous and woody plants where practicable) or other permanently stable, non-eroding surface shall replace any temporary measures as soon as practicable. Unpacked gravel containing fines (silt and clay sized particles) or crusher runs will not be considered a non-eroding surface.

3.5.3.3. Structural practices

The SWPPP shall include a description of structural practices to divert flows from exposed soils, store flows or otherwise limit runoff and discharge of pollutants from exposed areas of the site. Such practices may include silt fences, earth dikes, drainage swales, sediment traps, check dams, subsurface drains, pipe slope drains, level spreaders, storm drain inlet protection, rock outlet protection, reinforced soil retaining systems, gabions, and temporary or permanent sediment basins. Structural controls shall not be placed in streams or wetlands except as authorized by a section 404 permit and/or Aquatic Resources Alteration Permit (ARAP).

Erosion prevention and sediment control measures must be prepared in accordance with good engineering practices and the latest edition of the <u>Tennessee Erosion and Sediment Control Handbook</u>. In addition, erosion prevention and sediment controls shall be designed to minimize erosion and maximize sediment removal resulting from a 2-year, 24-hour storm (the design storm – see part 10 below: "2-year and 5-year design storm depths and intensities"), as a minimum, either from total rainfall in the designated period or the equivalent intensity as specified on the following website http://hdsc.nws.noaa.gov/hdsc/pfds/orb/tn_pfds.html. When clay and other fine particle soils are present at the construction site, chemical treatment may be used to minimize amount of sediment being discharged.

For an on-site outfall which receives drainage from 10 or more acres, a minimum sediment basin volume that will provide treatment for a calculated volume of runoff from a 2 year, 24 hour storm and runoff from each acre drained, or equivalent control measures as specified in the Tennessee Erosion and Sediment Control Handbook, shall be provided until final stabilization of the site. A drainage area of 10 or more acres includes both disturbed and undisturbed portions of the site or areas adjacent to the site, all draining through the common outfall. Where an equivalent control measure is substituted for a sediment retention basin, the equivalency must be justified to the division. Runoff from any undisturbed acreage should be diverted around the disturbed area and the sediment basin. Diverted runoff can be omitted from the volume calculation. Sediment storage expected from the disturbed areas must be included.

All calculations of drainage areas, runoff coefficients and basin volumes must be provided in the SWPPP. The discharge structure from a sediment basin must be designed to retain sediment during the lower flows. Muddy water to be pumped from excavation and work areas must be held in settling basins or filtered or chemically treated prior to its discharge into surface waters. Water must be discharged through a pipe, well-grassed or lined channel or other equivalent means so that the discharge does not cause erosion and sedimentation. Discharged water must not cause an objectionable color contrast with the receiving stream.

3.5.4. Stormwater management

The SWPPP shall include a description of any measures that will be installed during the construction process to control pollutants in stormwater discharges that will occur <u>after</u> construction operations have been completed.

For projects discharging to waters considered impaired by sediment or habitat alteration due to in-channel erosion, the SWPPP shall include a description of measures that will be installed during the construction process to control pollutants and any increase in the volume of stormwater discharges that will occur after construction operations have been completed. For steep slope sites, the SWPPP shall also include a description of measures that will be installed to dissipate the volume and energy of the stormwater runoff to pre-development levels.

This permit only addresses the installation of stormwater management measures, and not the ultimate operation and maintenance of such structures after the construction activities have been completed, the site has undergone final stabilization, and the permit coverage has been terminated. Permittees are only responsible for the installation and maintenance of stormwater management measures prior to final stabilization of the site, and are not responsible for maintenance after stormwater discharges associated with construction activity have been eliminated from the site. All permittees are encouraged to limit the amount of post construction runoff, if not required by local building regulations or local MS4 program requirements, in order to minimize in-stream channel erosion in the receiving stream.

Construction stormwater runoff management practices may include: stormwater detention structures (including ponds with a permanent pool); stormwater retention structures; flow attenuation by use of open vegetated swales and natural depressions; infiltration of runoff onsite; and sequential systems (which combine several practices).

Velocity dissipation devices shall be placed at discharge locations and along the length of any outfall channel to provide a non-erosive velocity flow from the structure to the receiving stream so that the natural physical and biological characteristics and functions of the stream are maintained and protected (e.g., there should be no significant changes in the hydrological regime of the receiving water). The SWPPP shall include an explanation of the technical basis used to select the velocity dissipation devices to control pollution where flows exceed pre-development levels. The Tennessee Erosion and Sediment Control Handbook provides measures that can be incorporated into the design or implemented on site to decrease erosive velocities. An Aquatic Resources Alteration Permit (ARAP) may be required if such velocity dissipation devices installed would alter the receiving stream and/or its banks.

3.5.5. Other items needing control

- a) No solid materials, including building materials, shall be placed in waters of the state, except as authorized by a section 404 permit and/or <u>Aquatic Resources Alteration Permit</u> (ARAP)(see part 9 below).
- b) For installation of any waste disposal systems on site, or sanitary sewer or septic system, the SWPPP shall identify these systems and provide for the necessary EPSC controls. Permittees must also comply with applicable state and/or local waste disposal, sanitary sewer or septic system regulations for such systems to the extent these are located within the permitted area.
- c) The SWPPP shall include a description of construction and waste materials expected to be stored on-site. The SWPPP shall also include a description of controls used to reduce pollutants from materials stored on site, including storage practices to minimize exposure of the materials to stormwater, and spill prevention and response.
- d) A description of stormwater sources from areas other than construction and a description of controls and measures that will be implemented at those sites.
- e) A description of measures necessary to prevent "taking" of legally protected state or federal listed threatened or endangered aquatic fauna and/or critical habitat (if applicable). The permittee must describe and implement such measures to maintain eligibility for coverage under this permit.

3.5.6. Approved local government sediment and erosion control requirements

Permittees must comply with any additional erosion prevention, sediment controls and stormwater management measures required by a local municipality or permitted MS4 program.

3.5.7. Maintenance

The SWPPP shall describe procedures to ensure that vegetation, erosion and sediment control measures, buffer zones, and other protective measures identified in the site plan are kept in good and effective operating condition. Maintenance needs identified in inspections or by other means shall be accomplished before the next storm event, but in no case more than 7 days after the need is identified.

3.5.8. Inspections

3.5.8.1. Inspector training and certification

Inspectors performing the required twice weekly inspections must have an active certification by completing the "Fundamentals of Erosion Prevention and Sediment Control Level I" course. A copy of the certification or training record for inspector certification should be kept on site.

3.5.8.2. Schedule of inspections

a) Inspections described in paragraphs b, c and d below, shall be performed at least twice every calendar week. Inspections shall be performed at least 72 hours apart. Where sites or portion(s) of construction sites have been temporarily stabilized, or runoff is unlikely due to winter conditions (e.g., site covered with snow or ice) or due to extreme drought, such inspection only has to be conducted once per month until thawing or precipitation results in runoff or construction activity resumes. Inspection requirements do not apply

- to definable areas that have been finally stabilized, as described in subpart 3.1 above. Written notification of the intent to change the inspection frequency and the justification for such request must be submitted to the local Environmental Field Office, or the division's Nashville Central Office for projects of the Tennessee Department of Transportation (TDOT) and the Tennessee Valley Authority (TVA). Should the division discover that monthly inspections of the site are not appropriate due to insufficient stabilization measures or otherwise, twice weekly inspections shall resume. The division may inspect the site to confirm or deny the notification to conduct monthly inspections.
- b) Qualified personnel, as defined in section 3.5.8.1 above (provided by the permittee or cooperatively by multiple permittees) shall inspect disturbed areas of the construction site that have not been finally stabilized, areas used for storage of materials that are exposed to precipitation, structural control measures, locations where vehicles enter or exit the site, and each outfall.
- c) Disturbed areas and areas used for storage of materials that are exposed to precipitation shall be inspected for evidence of, or the potential for, pollutants entering the site's drainage system. Erosion prevention and sediment control measures shall be observed to ensure that they are operating correctly.
- d) Outfall points (where discharges leave the site and/or enter waters of the state) shall be inspected to determine whether erosion prevention and sediment control measures are effective in preventing significant impacts to receiving waters. Where discharge locations are inaccessible, nearby downstream locations shall be inspected. Locations where vehicles enter or exit the site shall be inspected for evidence of offsite sediment tracking.
- e) Based on the results of the inspection, any inadequate control measures or control measures in disrepair shall be replaced or modified, or repaired as necessary, before the next rain event, but in no case more than 7 days after the need is identified.
- f) Based on the results of the inspection, the site description identified in the SWPPP in accordance with section 3.5.1 above and pollution prevention measures identified in the SWPPP in accordance with section 3.5.2 above shall be revised as appropriate, but in no case later than 7 days following the inspection. Such modifications shall provide for timely implementation of any changes to the SWPPP, but in no case later than 14 days following the inspection.
- g) All inspections shall be documented on the Construction Stormwater Inspection Certification form provided in Appendix C of this permit for all construction sites. An alternative inspection form may be used as long as the form contents and the inspection certification language are, at a minimum, equivalent to the division's form (Appendix C) and the permittee has obtained a written approval from the division to use the alternative form. Inspection documentation will be maintained on site and made available to the division upon request. Inspection reports must be submitted to the division within 10 days of the request. If the division requests the Construction Stormwater Inspection Certification form to be submitted, the submitted form must contain the printed name and signature of the trained certified inspector and the person who meets the signatory requirements of section 7.7.2 below of this permit.
- h) Trained certified inspectors shall complete inspection documentation to the best of their ability. Falsifying inspection records or other documentation or failure to complete inspection documentation shall result in a violation of this permit and any other applicable acts or rules.
- i) Subsequent operator(s) (primary permittees) who have obtained coverage under this permit should conduct twice weekly inspections, unless their portion(s) of the site has been temporarily stabilized, or runoff is unlikely due to winter conditions or due to

extreme drought as stated in paragraph a) above. The primary permittee (such as a developer) is no longer required to conduct inspections of portions of the site that are covered by a subsequent primary permittee (such as a home builder).

3.5.9. Pollution prevention measures for non-stormwater discharges

Sources of non-stormwater listed in section 1.2.3 above of this permit that are combined with stormwater discharges associated with construction activity must be identified in the SWPPP. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater must be discharged through stable discharge structures. Estimated volume of the non-stormwater component(s) of the discharge must be included in the design of all impacted control measures.

3.5.10. Documentation of permit eligibility related to Total Maximum Daily Loads (TMDL)

The SWPPP must include documentation supporting a determination of permit eligibility with regard to waters that have an approved TMDL for a pollutant of concern, including:

- a) identification of whether the discharge is identified, either specifically or generally, in an approved TMDL and any associated wasteload allocations, site-specific requirements, and assumptions identified for the construction stormwater discharge;
- b) summaries of consultation with the division on consistency of SWPPP conditions with the approved TMDL, and
- c) measures taken to ensure that the discharge of TMDL identified pollutants from the site is consistent with the assumptions and requirements of the approved TMDL, including any specific wasteload allocation that has been established that would apply to the construction stormwater discharge.

4. CONSTRUCTION AND DEVELOPMENT EFFLUENT GUIDELINES

4.1. Non-Numeric Effluent Limitations

Any point source authorized by this general permit must achieve, at a minimum, the effluent limitations representing the degree of effluent reduction attainable by application of best practicable control technology (BPT) currently available and is described in sections 4.1.1 through 4.1.7 below.

4.1.1. Erosion Prevention and Sediment Controls

Design, install and maintain effective erosion prevention and sediment controls to minimize the discharge of pollutants. At a minimum, such controls must be designed, installed and maintained to:

- (1) Control stormwater volume and velocity within the site to minimize soil erosion;
- (2) Control stormwater discharges, including both peak flow rates and total stormwater volume, to minimize erosion at outlets and to minimize downstream channel and streambank erosion;
- (3) Minimize the amount of soil exposed during construction activity;
- (4) Minimize the disturbance of steep slopes;

- (5) Eliminate (or minimize if complete elimination is not possible) sediment discharges from the site. The design, installation and maintenance of erosion prevention and sediment controls must address factors such as the design storm (see sub-section 3.5.3.3 above) and soil characteristics, including the range of soil particle sizes expected to be present on the site:
- (6) Provide and maintain natural buffers around surface waters, direct stormwater to vegetated areas to increase sediment removal and maximize stormwater infiltration, unless infeasible (see section 4.1.2 below); and
- (7) Minimize soil compaction and, unless infeasible, preserve topsoil.

4.1.2. <u>Buffer zone requirements</u>

Buffer zone requirements in this section apply to all streams adjacent to construction sites, with an exception for streams designated as impaired or Exceptional Tennessee waters (see section 5.4.2 below). A 30-foot natural riparian buffer zone adjacent to all streams at the construction site shall be preserved, to the maximum extent practicable, during construction activities at the site. The water quality buffer zone is required to protect waters of the state (e.g., perennial and intermittent streams, rivers, lakes, wetlands) located within or immediately adjacent to the boundaries of the project, as identified using methodology from Standard Operating Procedures for Hydrologic Determinations (see rules to implement a certification program for Qualified Hydrologic Professionals, TN Rules Chapter 0400-40-17). Buffer zones are not primary sediment control measures and should not be relied on as such. Rehabilitation and enhancement of a natural buffer zone is allowed, if necessary, for improvement of its effectiveness of protection of the waters of the state. The buffer zone requirement only applies to new construction sites, as described in section 2.4.2 above.

The riparian buffer zone should be preserved between the top of stream bank and the disturbed construction area. The 30-feet criterion for the width of the buffer zone can be established on an average width basis at a project, as long as the minimum width of the buffer zone is more than 15 feet at any measured location.

Every attempt should be made for construction activities not to take place within the buffer zone. BMPs providing equivalent protection to a receiving stream as a natural riparian zone may be used at a construction site. Such equivalent BMPs shall be designed to be as effective in protecting the receiving stream from effects of stormwater runoff as a natural riparian zone. A justification for use and a design of equivalent BMPs shall be included in the SWPPP. Such equivalent BMPs are expected to be routinely used at construction projects typically located adjacent to surface waters. These projects include, but are not limited to: sewer line construction, roadway construction, utility line or equipment installation, greenway construction, construction of a permanent outfall or a velocity dissipating structure, etc.

This requirement does not apply to any valid <u>Aquatic Resources Alteration Permit</u> (ARAP), or equivalent permits issued by federal authorities. Additional <u>buffer zone</u> requirements may be established by the local <u>MS4</u> program.

4.1.2.1. Buffer zone exemption based on existing uses

Buffer zones as described in section 4.1.2 above shall not be required to portions of the buffer where certain land uses exist and are to remain in place according to the following:

- A use shall be considered existing if it was present within the buffer zone as of the date of
 the Notice of Intent for coverage under the CGP. Existing uses shall include, but not be
 limited to, buildings, parking lots, roadways, utility lines and on-site sanitary sewage
 systems. Only the portion of the buffer zone that contains the footprint of the existing land
 use is exempt from buffer zones. Activities necessary to maintain uses are allowed provided
 that no additional vegetation is removed from the buffer zone.
- 2. If an area with an existing land use is proposed to be converted to another use or the impervious surfaces located within the buffer area are being removed buffer zone requirements shall apply.

4.1.2.2. Pre-Approved Sites

Construction activity at sites that have been pre-approved before February 1, 2010, are exempt from the buffer requirements of section 4.1.2 above. Evidence of pre-approval for highway projects shall be a final right-of-way plan and for other construction projects, the final design drawings with attached dated, written approval by the local, state or federal agency with authority to approve such design drawings for construction.

4.1.3. Soil stabilization

Stabilization of disturbed areas must, at a minimum, be initiated immediately whenever any clearing, grading, excavating or other earth disturbing activities have temporarily or permanently ceased on any portion of the site, and will not resume for a period exceeding 14 calendar days. Soil stabilization (temporary or permanent) of those of disturbed areas must be completed as soon as possible, but not later than 14 days after the construction activity in that portion of the site has temporarily or permanently ceased. In arid, semiarid, and drought-stricken areas where initiating vegetative stabilization measures immediately is infeasible, alternative stabilization measures (such as, but not limited to: properly anchored mulch, soil binders, matting) must be employed.

4.1.4. Dewatering

Discharges from dewatering activities, including discharges from dewatering of trenches and excavations, are prohibited unless managed by appropriate controls. Appropriate controls include, but are not limited to: weir tank, dewatering tank, gravity bag filter, sand media particulate filter, pressurized bag filter, cartridge filter or other control units providing the level of treatment necessary to comply with permit requirements.

4.1.5. Pollution prevention measures

The permittee must design, install, implement, and maintain effective pollution prevention measures to minimize the discharge of pollutants. At a minimum, such measures must be designed, installed, implemented and maintained to:

- (1) Minimize the discharge of pollutants from equipment and vehicle washing, wheel wash water, and other wash waters. Wash waters must be treated in a sediment basin or alternative control that provides equivalent or better treatment prior to discharge;
- (2) Minimize the exposure of building materials, building products, construction wastes, trash, landscape materials, fertilizers, pesticides, herbicides, detergents, sanitary waste and other materials present on the site to precipitation and to stormwater; and
- (3) Minimize the discharge of pollutants from spills and leaks and implement chemical spill and leak prevention and response procedures.

4.1.6. <u>Prohibited discharges</u>

The following discharges are prohibited:

- (1) Wastewater from washout of concrete, unless managed by an appropriate control;
- (2) Wastewater from washout and cleanout of stucco, paint, form release oils, curing compounds and other construction materials:
- (3) Fuels, oils, or other pollutants used in vehicle and equipment operation and maintenance; and
- (4) Soaps or solvents used in vehicle and equipment washing.

4.1.7. Surface outlets

When discharging from basins and impoundments, utilize outlet structures that only withdraw water from near the surface of the basin or impoundment, unless infeasible.

5. SPECIAL CONDITIONS, MANAGEMENT PRACTICES, AND OTHER NON-NUMERIC LIMITATIONS

5.1. Releases in Excess of Reportable Quantities

The discharge of hazardous substances or oil in the stormwater discharge(s) from a facility shall be prevented or minimized in accordance with the applicable stormwater pollution prevention plan for the facility. This permit does not relieve the permittee of the reporting requirements of 40 CFR 117 and 40 CFR 302. Where a release containing a hazardous substance in an amount equal to or in excess of a reportable quantity established under either 40 CFR 117 or 40 CFR 302 occurs during a 24 hour period:

- a) the permittee is required to notify the National Response Center (NRC) (800-424-8802) and the Tennessee Emergency Management Agency (emergencies: 800-262-3300; non-emergencies: 800-262-3400) in accordance with the requirements of 40 CFR 117 or 40 CFR 302 as soon as he or she has knowledge of the discharge;
- b) the permittee shall submit, within 14 days of knowledge of the release, a written description of: the release (including the type and estimate of the amount of material

- released), the date that such release occurred, the circumstances leading to the release, what actions were taken to mitigate effects of the release, and steps to be taken to minimize the chance of future occurrences, to the appropriate Environmental Field Office (see subpart 2.8 above); and
- c) the SWPPP required under part 3 above of this permit must be updated within 14 days of knowledge of the release: to provide a description of the release, the circumstances leading to the release, and the date of the release. This can be accomplished by including a copy of a written description of the release as described in the paragraph b) above. In addition, the SWPPP must be reviewed to identify measures to prevent the reoccurrence of such releases and to respond to such releases, and the plan must be modified where appropriate.

5.2. Spills

This permit does not authorize the discharge of hazardous substances or oil resulting from an onsite spill.

5.3. Discharge Compliance with State Water Quality Standards

5.3.1. Violation of Water Quality Standards

This permit does not authorize stormwater or other discharges that would result in a violation of a state water quality standard (the TDEC Rules, Chapters 1200-4-3, 1200-4-4). Such discharges constitute a violation of this permit.

Where a discharge is already authorized under this permit and the division determines the discharge to cause or contribute to the violation of applicable state water quality standards, the division will notify the operator of such violation(s). The permittee shall take all necessary actions to ensure future discharges do not cause or contribute to the violation of a water quality standard and shall document these actions in the SWPPP.

5.3.2. <u>Discharge quality</u>

- a) The construction activity shall be carried out in such a manner that will prevent violations of water quality criteria as stated in the TDEC Rules, <u>Chapter 1200-4-3-.03</u>. This includes but is not limited to the prevention of any discharge that causes a condition in which visible solids, bottom deposits, or turbidity impairs the usefulness of waters of the state for any of the uses designated for that water body by TDEC Rules, <u>Chapter 1200-4-4</u>. Construction activity carried out in the manner required by this permit shall be considered compliance with the TDEC Rules, <u>Chapter 1200-4-3-.03</u>.
- b) There shall be no distinctly visible floating scum, oil or other matter contained in the stormwater discharge.
- c) The stormwater discharge must not cause an objectionable color contrast in the receiving stream.
- d) The stormwater discharge must result in no materials in concentrations sufficient to be hazardous or otherwise detrimental to humans, livestock, wildlife, plant life, or fish and aquatic life in the receiving stream. This provision includes species covered under subpart 1.3 above.

5.4. Discharges into Impaired or Exceptional Tennessee Waters

5.4.1. Additional SWPPP/BMP Requirements for discharges into impaired or exceptional TN Waters

Discharges that would add loadings of a pollutant that is identified as causing or contributing to an impairment of a water body on the list of impaired waters, or which would cause degradation to waters designated by TDEC as Exceptional Tennessee waters are <u>not</u> authorized by this permit (see subpart 1.3 above). To be eligible to obtain and maintain coverage under this permit, the operator must satisfy, at a minimum, the following additional requirements for discharges into waters impaired by siltation (or discharges upstream of such waters and because of the proximity to the impaired segment and the nature of the discharge is likely to contribute pollutants of concern in amounts measurable in the impaired segment that may affect the impaired waters) and for discharges to waters identified by TDEC as Exceptional Tennessee waters (or discharges upstream of such waters and because of the proximity to the exceptional segment and the nature of the discharge is likely to contribute pollutants of concern in amounts measurable in the exceptional segment that may affect the Exceptional Tennessee waters):

- a) The SWPPP must certify that erosion prevention and sediment controls used at the site are designed to control storm runoff generated by a 5-year, 24-hour storm event (the design storm - see part 10 below: "2-year and 5-year design storm depths and intensities"), as a minimum, either from total rainfall in the designated period or the equivalent intensity as specified on the following website http://hdsc.nws.noaa.gov/hdsc/pfds/orb/tn_pfds.html. When clay and other fine particle soils are found on sites, additional physical or chemical treatment of stormwater runoff may be used.
- b) The SWPPP must be prepared by a person who, at a minimum, has completed the department's <u>Level II Design Principles for Erosion Prevention and Sediment Control for Construction Sites</u> course. This requirement goes in effect 24 months following the new permit effective date. A copy of the certification or training record for inspector certification should be included with the SWPPP.
- c) The permittee shall perform inspections described in section 3.5.8 above at least twice every calendar week. Inspections shall be performed at least 72 hours apart.
- d) The permittee must certify on the form provided in Appendix C of this permit whether or not all planned and designed erosion prevention and sediment controls are installed and in working order. The form must contain the printed name and signature of the inspector and the certification must be executed by a person who meets the signatory requirements of section 7.7.2 below of this permit. The record of inspections must be kept at the construction site with a copy of the SWPPP. For record retention requirements, see part 6 below.
- e) In the event the division finds that a discharger is complying with the SWPPP, but contributing to the impairment of receiving stream, then the discharger will be notified by the director in writing that the discharge is no longer eligible for coverage under the general permit. The permittee may update the SWPPP and implement the necessary changes designed to eliminate further impairment of the receiving stream. If the permittee does not implement the SWPPP changes within 7 days of receipt of notification, the permittee will be notified in writing that continued discharges must be covered by an individual permit (see subpart 7.12 below). To obtain the individual permit, the operator must file an individual permit application (EPA Forms 1 and 2F). The project must be stabilized immediately until the SWPPP is updated and the

- individual permit is issued. Only discharges from earth disturbing activities necessary for stabilization are authorized to continue until the individual permit is issued.
- f) For an on-site outfall in a drainage area of a total of 5 or more acres, a minimum temporary (or permanent) sediment basin volume that will provide treatment for a calculated volume of runoff from a 5 year, 24 hour storm and runoff from each acre drained, or equivalent control measures as specified in the Tennessee Erosion and Sediment Control Handbook, shall be provided until final stabilization of the site. A drainage area of 5 or more acres includes both disturbed and undisturbed portions of the site or areas adjacent to the site, all draining through the common outfall. Where an equivalent control measure is substituted for a sediment retention basin, the equivalency must be justified. Runoff from any undisturbed acreage should be diverted around the disturbed area and the sediment basin and, if so, can be omitted from the volume calculation. Sediment storage expected from the disturbed areas must be included and a marker installed signifying a cleanout need.
- g) The director may require revisions to the SWPPP necessary to prevent a negative impact to legally protected state or federally listed aquatic fauna, their habitat, or the receiving waters.

5.4.2. Buffer zone requirements for discharges into impaired or exceptional TN waters

For sites that contain and/or are adjacent to a receiving stream designated as impaired or Exceptional Tennessee waters a 60-foot natural riparian buffer zone adjacent to the receiving stream shall be preserved, to the maximum extent practicable, during construction activities at the site. The water quality buffer zone is required to protect waters of the state (e.g., perennial and intermittent streams, rivers, lakes, wetlands) located within or immediately adjacent to the boundaries of the project, as identified using methodology from Standard Operating Procedures for Hydrologic Determinations (see rules to implement a certification program for Qualified Hydrologic Professionals, TN Rules Chapter 0400-40-17). Buffer zones are not primary sediment control measures and should not be relied on as such. Rehabilitation and enhancement of a natural buffer zone is allowed, if necessary, for improvement of its effectiveness of protection of the waters of the state. The buffer zone requirement only applies to new construction sites, as described in section 2.4.2 above.

The natural buffer zone should be established between the top of stream bank and the disturbed construction area. The 60-feet criterion for the width of the buffer zone can be established on an average width basis at a project, as long as the minimum width of the buffer zone is more than 30 feet at any measured location.

Every attempt should be made for construction activities not to take place within the buffer zone. BMPs providing equivalent protection to a receiving stream as a natural riparian zone may be used at a construction site. Such equivalent BMPs shall be designed to be as effective in protecting the receiving stream from effects of stormwater runoff as a natural buffer zone. A justification for use and a design of equivalent BMPs shall be included in the SWPPP. Such equivalent BMPs are expected to be routinely used at construction projects typically located adjacent to surface waters. These projects include, but are not limited to: sewer line construction, roadway construction, utility line or equipment installation, greenway construction, construction of a permanent outfall or a velocity dissipating structure, etc.

This requirement does not apply to an area that is being altered under the authorization of a valid Aquatic Resources Alteration Permit (ARAP), or equivalent permits issued by federal

authorities. Additional natural buffer zone requirements may be established by the local MS4 program.

5.4.2.1. Buffer zone exemption based on existing uses

Buffer zones as described in section 5.4.2 above shall not be required to portions of the buffer where certain land uses exist and are to remain in place according to the following:

- 1. A use shall be considered existing if it was present within the buffer zone as of the date of the Notice of Intent for coverage under the CGP. Existing uses shall include, but not be limited to, buildings, parking lots, roadways, utility lines and on-site sanitary sewage systems. Only the portion of the buffer zone that contains the footprint of the existing land use is exempt from buffer zones. Activities necessary to maintain uses are allowed provided that no additional vegetation is removed from the buffer zone.
- 2. If an area with an existing land use is proposed to be converted to another use or the impervious surfaces located within the buffer area are being removed buffer zone requirements shall apply.

5.4.3. Pre-Approved sites

Construction activity at sites that have been pre-approved before June 16, 2005, are exempt from the design storm requirements of section 5.4.1 a) and e) above and the buffer requirements of section 5.4.2 above. Evidence of pre-approval for highway projects shall be a final right-of-way plan and for other construction projects, the final design drawings with attached dated, written approval by the local, state or federal agency with authority to approve such design drawings for construction.

6. RETENTION, ACCESSIBILITY AND SUBMISSION OF RECORDS

6.1. Documents

The permittee shall retain copies of stormwater pollution prevention plans and all reports required by this permit, and records of all data used to complete the NOI and the NOT to be covered by this permit, for a period of at least three years from the date the notice of termination is submitted. This period may be extended by written request of the director.

6.2. Accessibility and Retention of Records

The permittee shall retain a copy of the SWPPP required by this permit (including a copy of the permit) at the construction site (or other local location accessible to the director and the public) from the date construction commences to the date of termination of permit coverage. Permittees with day-to-day operational control over pollution prevention plan implementation shall have a copy of the SWPPP available at a central location onsite for the use of all operators and those identified as having responsibilities under the plan whenever they are on the construction site. Once coverage is terminated, the permittee shall maintain a copy of all records for a period of three years.

6.2.1. Posting information at the construction site

The permittee shall post a notice near the main entrance of the construction site accessible to the public with the following information:

- a) a copy of the NOC with the NPDES permit tracking number for the construction project;
- b) name, company name, E-mail address (if available), telephone number and address of the project site owner/operator or a local contact person;
- c) a brief description of the project; and
- d) the location of the SWPPP (see section 3.3.3 above).

The notice must be maintained in a legible condition. If posting this information near a main entrance is infeasible due to safety concerns, or not accessible to the public, the notice shall be posted in a local public building. If the construction project is a linear construction project (e.g., pipeline, highway, etc.), the notice must be placed in a publicly accessible location near where construction is actively underway and moved as necessary. This permit does not provide the public with any right to trespass on a construction site for any reason, including inspection of a site. This permit does not require that permittees allow members of the public access to a construction site.

The permittee shall also retain following items/information in an appropriate location on-site:

- a) a rain gauge;
- b) a copy of twice weekly inspection reports:
- c) a documentation of quality assurance site assessments, if applicable (see section 3.1.2 above); and
- d) a copy of the site inspector's <u>Fundamentals of Erosion Prevention and Sediment Control</u> Level 1 certification.

6.3. Electronic Submission of NOIs, NOTs and Reports

If the division notifies dischargers (directly by mail or E-mail, by public notice, or by making information available on the world wide web) of electronic forms or other report options that become available at a later date (e.g., electronic submission of forms), the operators may take advantage of those options to satisfy the NOI, NOT and other report notification requirements.

7. STANDARD PERMIT CONDITIONS

7.1. Duty to Comply

7.1.1. Permittee's duty to comply

The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Tennessee Water Quality Control Act (TWQCA) and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or for denial of a permit renewal application.

7.1.2. Penalties for violations of permit conditions

Pursuant to T.C.A. § 69-3-115 of The Tennessee Water Quality Control Act of 1977, as amended:

- a) any person who violates an effluent standard or limitation or a water quality standard established under this part (T.C.A. § 69-3-101, et. seq.); violates the terms or conditions of this permit; fails to complete a filing requirement; fails to allow or perform an entry, inspection, monitoring or reporting requirement; violates a final determination or order of the board, panel or commissioner; or violates any other provision of this part or any rule or regulation promulgated by the board, is subject to a civil penalty of up to ten thousand dollars (\$10,000) per day for each day during which the act or omission continues or occurs;
- b) any person unlawfully polluting the waters of the state or violating or failing, neglecting, or refusing to comply with any of the provisions of this part (T.C.A. § 69-3-101, et. seq.) commits a Class C misdemeanor. Each day upon which such violation occurs constitutes a separate offense;
- c) any person who willfully and knowingly falsifies any records, information, plans, specifications, or other data required by the board or the commissioner, or who willfully and knowingly pollutes the waters of the state, or willfully fails, neglects or refuses to comply with any of the provisions of this part (T.C.A. § 69-3-101, et. seq.) commits a Class E felony and shall be punished by a fine of not more than twenty-five thousand dollars (\$25,000) or incarceration, or both.

7.1.3. Civil and criminal liability

Nothing in this permit shall be construed to relieve the discharger from civil or criminal penalties for noncompliance. Notwithstanding this permit, the discharger shall remain liable for any damages sustained by the State of Tennessee, including but not limited to fish kills and losses of aquatic life and/or wildlife, as a result of the discharge to any surface or subsurface waters. Additionally, notwithstanding this permit, it shall be the responsibility of the discharger to conduct stormwater discharge activities in a manner such that public or private nuisances or health hazards will not be created. Furthermore, nothing in this permit shall be construed to preclude the State of Tennessee from any legal action or relieve the discharger from any responsibilities, liabilities, or penalties established pursuant to any applicable state law or the Federal Water Pollution Control Act.

7.1.4. Liability under state law

Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities, or penalties established pursuant to any applicable local, state or federal law.

7.2. Continuation of the Expired General Permit

Permittees shall maintain coverage under this general permit until a new general permit is issued. Permittees who choose not to maintain coverage under the expired general permit, or are required to obtain an individual permit, must submit an application (U.S. EPA NPDES Forms <u>1</u> and <u>2F</u> and any other <u>applicable forms</u>) at least 180 days prior to expiration of this general permit.

Permittees who are eligible and choose to be covered by the new general permit must submit an NOI by the date specified in that permit. Facilities that have not obtained coverage under this permit by the permit expiration date cannot become authorized to discharge under the continued permit.

Operator(s) of an existing site permitted under the division's 2005 construction general permit shall maintain full compliance with the existing SWPPP. The existing SWPPP should be modified, if necessary, to meet requirements of this new general permit, and the SWPPP changes implemented no later than 12 months following the new permit effective date. The permittee shall make the updated SWPPP available for the division's review upon request.

7.3. Need to Halt or Reduce Activity Not a Defense

It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

7.4. Duty to Mitigate

The permittee shall take all reasonable steps to minimize or prevent any discharge in violation of this permit that has a reasonable likelihood of adversely affecting human health or the environment.

7.5. Duty to Provide Information

The permittee shall furnish to the division or an authorized representative of the division, within a time specified by the division, any information that the division may request to determine compliance with this permit or other information relevant to the protection of the waters of the state. The permittee shall also furnish to the division, upon request, copies of records required to be kept by this permit.

7.6. Other Information

When the permittee becomes aware that he or she failed to submit any relevant facts or submitted incorrect information in the Notice of Intent or in any other report to the director, he or she shall promptly submit such facts or information.

7.7. Signatory Requirements

All Notices of Intent (NOIs), stormwater pollution prevention plans (SWPPPs), requests for termination of permit coverage (NOTs), Construction Stormwater Inspection Certifications, Construction Stormwater Monitoring Report forms, reports, certifications or information either submitted to the director or the operator of a large or medium municipal separate storm sewer system and/or any other information either submitted to the division, or that this permit requires be maintained by the permittee, shall be signed as described in sections 7.7.1 and 7.7.2 below and dated.

7.7.1. Signatory requirements for a Notice of Intent (NOI)³

NOI shall be signed as follows:

- a) For a corporation, by a responsible corporate officer. For the purpose of this section, a responsible corporate officer means:
 - (i) a president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy or decision-making functions for the corporation, or
 - (ii) the manager of one or more manufacturing, production, or operating facilities, provided, the manager is authorized to make management decisions which govern the operation of the regulated site including having the explicit or implicit duty of making major capital investment recommendations, and initiating and directing other comprehensive measures to assure long term environmental compliance with environmental laws and regulations; the manager can ensure that the necessary systems are established or actions taken to gather complete and accurate information for permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures.

NOTE: The division does not require specific assignments or delegations of authority to responsible corporate officers. The division will presume that these responsible corporate officers have the requisite authority to sign permit applications unless the corporation has notified the director to the contrary. Corporate procedures governing authority to sign permit applications may provide for assignment or delegation to applicable corporate positions rather than to specific individuals.

- b) For a partnership or sole proprietorship, by a general partner or the proprietor, respectively.
- c) For a municipality, state, federal, or other public agency, by either a principal executive officer or ranking elected official. For purposes of this section, a principal executive officer of a Federal agency includes:
 - (i) the chief executive officer of the agency, or
 - (ii) a senior executive officer having responsibility for the overall operations of a principal geographic unit of the agency (e.g., Regional Administrators of EPA).

7.7.2. Signatory requirements for reports and other items

SWPPPs, Construction Stormwater Inspection Certification forms, reports, certifications or other information submittals required by the permit and other information requested by the division, including but not limited to Notice of Violation responses, shall be signed by a person described in section 7.7.1 above, or by a duly authorized representative of that person.

³ As specified in 40 CFR 122.22(a)(1)-(3) [48 FR 14153, Apr. 1, 1983, as amended at 48 FR 39619, Sept. 1, 1983; 49 FR 38047, Sept. 29, 1984; 50 FR 6941, Feb. 19, 1985; 55 FR 48063, Nov. 16, 1990; 65 FR 30907, May 15, 2000]

7.7.3. <u>Duly authorized representative</u>

For a purpose of satisfying signatory requirements for reports (see section 7.7.2 above), a person is a duly authorized representative only if:

- a) the authorization is made in writing by a person described in section 7.7.1 above;
- b) the authorization specifies either an individual or a position having responsibility for the overall operation of the regulated site or activity such as the position of plant manager, superintendent, position of equivalent responsibility, or an individual or position having overall responsibility for environmental matters for the company; a duly authorized representative may thus be either a named individual or any individual occupying a named position and,
- c) the written authorization is submitted to the director or an appropriate EFO (see section 2.8 above). The written authorization shall be a written document including the name of the newly authorized person and the contact information (title, mailing address, phone number, fax number and E-mail address) for the authorized person. The written authorization shall be signed by the newly authorized person accepting responsibility and by the person described in section 7.7.1 above delegating the authority.

7.7.4. Changes to authorization

If an authorization under sections 7.7.1 above or 7.7.3 above is no longer accurate because a different individual or position has responsibility as the primary or secondary permittee, but the company name (permittee name) remains the same, a new NOI and SWPPP certification shall be submitted to an appropriate EFO (see section 2.8 above) and signed by the new party who meets signatory authority satisfying the requirements of sections 7.7.1 above or 7.7.3 above. The NOI shall include the new individual's information (title, mailing address, phone number, fax number and E-mail address), the existing tracking number and the project name.

7.7.5. Signatory requirements for primary permittees

Primary permittees required to sign an NOI and SWPPP because they meet the definition of an operator (see subpart 2.2 above) shall sign the following certification statement on the NOI and SWPPP:

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

7.7.6. Signatory requirements for secondary permittees

Secondary permittees (typically construction contractors) required to sign an NOI and SWPPP because they meet the definition of an operator but who are not primarily responsible for

preparing an NOI and SWPPP, shall sign the following certification statement on the NOI and SWPPP:

"I certify under penalty of law that I have reviewed this document, any attachments, and the SWPPP referenced above. Based on my inquiry of the construction site owner/developer identified above and/or my inquiry of the person directly responsible for assembling this NOI and SWPPP, I believe the information submitted is accurate. I am aware that this NOI, if approved, makes the above-described construction activity subject to NPDES permit number TNR100000, and that certain of my activities onsite are thereby regulated. I am aware that there are significant penalties, including the possibility of fine and imprisonment for knowing violations, and for failure to comply with these permit requirements."

7.8. Penalties for Falsification of Reports

Knowingly making any false statement on any report or form required by this permit may result in the imposition of criminal penalties as provided for in Section 309 of the Clean Water Act and in T.C.A. §69-3-115 of the Tennessee Water Quality Control Act.

7.9. Oil and Hazardous Substance Liability

Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities, or penalties to which the permittee is or may be subject to Section 311 of the Clean Water Act or Section 106 of the Comprehensive Environmental Response, Compensation and Liability Act of 1980 (CERCLA).

7.10. Property Rights

The issuance of this permit does not convey any property rights of any sort, nor any exclusive privileges, nor does it authorize any injury to private property nor any invasion of personal rights, nor any infringement of federal, state or local laws or regulations. The issuance of this permit does not authorize trespassing or discharges of stormwater or non-stormwater across private property.

7.11. Severability

The provisions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this permit shall not be affected thereby.

7.12. Requiring an Individual Permit

7.12.1. Director can require a site to obtain an individual permit

The director may require any person authorized by this permit to apply for and/or obtain an individual NPDES permit in order to obtain adequate protection of designated uses of a receiving stream. Any interested person may petition the director in writing to take action under this paragraph, but must include in their petition the justification for such an action. Where the

director requires a discharger authorized to discharge under this permit to apply for an individual NPDES permit, the director shall notify the discharger in writing that an individual permit application is required. This notification will include a brief statement of the reasons for this decision, an application form, a statement setting a deadline for the discharger to file the application, and a statement that coverage under this general permit shall terminate upon the effective date of an individual NPDES permit or denial of coverage under an individual permit. The notification may require stabilization of the site and suspend coverage under this general permit until the individual permit is issued. Individual permit applications shall be submitted to the appropriate Environmental Field Office of the division as indicated in subpart 2.8 above of this permit. The director may grant additional time to submit the application upon request of the applicant. If a discharger fails to submit in a timely manner an individual NPDES permit application as required by the director under this paragraph, then the applicability of this permit to the discharger will be terminated at the end of the day specified by the director for application submittal.

If the decision to require an individual NPDES permit precedes the issuance of coverage under this general permit, earth disturbing activities cannot begin until the individual permit is issued.

7.12.2. Permittee may request individual permit instead of coverage under this general permit

Any discharger authorized by this permit may request to be excluded from the coverage of this permit by applying for an individual permit. Any discharger that knowingly cannot abide by the terms and conditions of this permit must apply for an individual permit. In such cases, the permittee shall submit an individual application in accordance with the requirements of 40 CFR 122.26(c)(1)(ii), with reasons supporting the request, to the appropriate division's Environmental Field Office. The request may be granted by issuance of an individual permit, or alternative general permit, if the reasons cited by the permittee are adequate to support the request.

7.12.3. Individual permit terminates general permit

When an individual NPDES permit is issued to a discharger otherwise subject to this permit, or the discharger is authorized to discharge under an alternative NPDES general permit, the applicability of this permit to the discharger is terminated on the effective date of the individual permit or the date of authorization of coverage under the alternative general permit, whichever the case may be. When an individual NPDES permit is denied to an owner or operator otherwise subject to this permit, or the owner or operator is denied for coverage under an alternative NPDES general permit, the applicability of this permit to the individual NPDES permittee is terminated on the date of such denial, unless otherwise specified by the director. Coverage under the Tennessee Multi-Sector General Permit for the Discharge of Stormwater from an Industrial Activity (TMSP) will not be considered as an alternative general permit under this section without being specified by the director.

7.13. Other, Non-Stormwater, Program Requirements

No condition of this permit shall release the permittee from any responsibility or requirements under other environmental statutes or regulations.

7.14. Proper Operation and Maintenance

The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related equipment) which are installed or used by the permittee to achieve compliance with the conditions of this permit and with the requirements of stormwater pollution prevention plans.

Proper operation and maintenance also includes adequate laboratory quality assurance and quality control procedures. Proper operation and maintenance requires the operation of backup or auxiliary facilities or similar systems, installed by a permittee, when determined by the permittee or the division to be necessary to achieve compliance with the conditions of the permit.

7.15. Inspection and Entry

The permittee shall allow authorized representatives of the Environmental Protection Agency, the director or an authorized representative of the commissioner of TDEC, or, in the case of a construction site which discharges through a municipal separate storm sewer, an authorized representative of the MS4 receiving the discharge, upon the presentation of credentials and other documents as may be required by law:

- a) to enter upon the permittee's premises where a regulated facility or activity is located or conducted or where records must be kept under the conditions of this permit;
- b) to have access to and copy at reasonable times, any records that must be kept under the conditions of this permit; and
- c) to inspect any facilities or equipment (including monitoring and control equipment).

7.16. Permit Actions

This permit may be issued, modified, revoked, reissued or terminated for cause in accordance with this permit and the applicable requirements of <u>T.C.A. § 69-3-108</u>. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any permit condition.

8.1.1. Termination of builder and contractor coverage

8. REQUIREMENTS FOR TERMINATION OF COVERAGE

8.1. Termination of Developer and Builder Coverage

8.1.1. Termination process for primary permittees

Primary permittees wishing to terminate coverage under this permit must submit a completed notice of termination (NOT) form, provided in Appendix B of this permit (or copy thereof). Primary permittees who abandon the site and fail to submit the NOT will be in violation of this permit. Signs notifying the public of the construction activity shall be in place until the NOT form has been submitted. Primary permittees may terminate permit coverage only if the conditions described in items 1, 2 or 3 below occur at the site:

- 1. All earth-disturbing activities at the site are completed and, if applicable, construction support activities permitted under section 1.2.2 above, and the following requirements are met:
 - (a) For any areas that
 - were disturbed during construction,
 - are not covered over by permanent structures, and
 - over which the permittee had control during the construction activities the requirements for final vegetative or non-vegetative stabilization described in subsection 3.5.3.2 above are met;
 - (b) The permittee has removed and properly disposed of all construction materials, waste and waste handling devices, and have removed all equipment and vehicles that were used during construction, unless intended for long-term use following termination of permit coverage;
 - (c) The permittee has removed all stormwater controls that were installed and maintained during construction, except those that are intended for long-term use following termination of permit coverage;
 - (d) The permittee has removed all potential pollutants and pollutant-generating activities associated with construction, unless needed for long-term use following termination of permit coverage: and
 - (e) The permittee must identify who is responsible for ongoing maintenance of any stormwater controls left on the site for long-term use following termination of permit coverage; or
- 2. The permittee has transferred control of all areas of the site for which he is responsible (including, but not limited to, infrastructure, common areas, stormwater drainage structures, sediment control basin, etc.) under this permit to another operator, and that operator has submitted an NOI and obtained coverage under this permit; or
- 3. The permittee obtains coverage under an individual or alternative general NPDES permit.

8.1.2. NOT review

The division will review NOTs for completeness and accuracy and, when necessary, investigate the proposed site for which the NOT was submitted. Upon completing the NOT review, the division will:

- 1) prepare and transmit a notification that a NOT form was received:
- 2) notify the applicant of needed changes to their NOT submittal; or
- 3) deny a request for termination of coverage under this general permit.

The division retains the right to deny termination of coverage under this general permit upon receipt of the NOT. If the local Environmental Field Office has information indicating that the permit coverage is not eligible for termination, written notification will be provided that permit

coverage has not been terminated. The notification will include a summary of existing deficiencies. When the site meets the termination criteria, the NOT should be re-submitted.

If any permittee files for bankruptcy or the site is foreclosed on by the lender, the permittee should notify the division of the situation so that the division may assess the site to determine if permit coverage should be obtained by any other person or whether other action is needed.

8.2. Termination of Builder and Contractor Coverage

8.2.1. Termination process for secondary permittees

Secondary permittees (builders/contractors) must request termination of coverage under this permit by submitting an NOT when they are no longer an operator at the construction site. Secondary permittees receive coverage under this permit, but are not normally mailed a Notice of Coverage. Consequently, the division may, but is not required to, notify secondary permittees that their notice of termination has been received. If the division has reason to believe that the secondary permittee's NOT should not have been submitted, the division will deny the secondary permittee's NOT in writing, with specific reasons as to why the NOT should not have been submitted.

8.3. NOT certification

The NOT and the following certification must be signed in accordance with subpart 7.7 above (Signatory Requirements) of this permit:

"I certify under penalty of law that either: (a) all stormwater discharges associated with construction activity from the portion of the identified facility where I was an operator have ceased or have been eliminated or (b) I am no longer an operator at the construction site. I understand that by submitting this notice of termination, I am no longer authorized to discharge stormwater associated with construction activity under this general permit, and that discharging pollutants in stormwater associated with construction activity to waters of the United States is unlawful under the Clean Water Act where the discharge is not authorized by a NPDES permit. I also understand that the submittal of this notice of termination does not release an operator from liability for any violations of this permit or the Clean Water Act."

8.4. Where to Submit a Notice of Termination (NOT)?

The NOT shall be submitted to the Environmental Field Office (EFO) which issued the NOC to the primary permittee. A list of counties and the corresponding EFOs is provided in subpart 2.8 above. The appropriate permit tracking number must be clearly printed on the form.

9. Aquatic Resource Alteration Permits (ARAP)

Alterations to channels or waterbodies (stream, wetland and/or other waters of the state) that are contained on, traverse through or are adjacent to the construction site, may require an <u>Aquatic Resources Alteration Permit</u> (ARAP) (http://www.tn.gov/environment/permits/arap.shtml). It is

the responsibility of the developer to provide a determination of the water's status⁴. This determination must be conducted using methodology from Standard Operating Procedures for Hydrologic Determinations (see rules to implement a certification program for Qualified Hydrologic Professionals, TN Rules Chapter 0400-40-17). The permittee can make an assumption that streams/wetlands are present at the site in order to expedite the permit process. In some cases, issuance of coverage under the CGP may be delayed or withheld if the appropriate ARAP has not been obtained. At a minimum, any delay in obtaining an ARAP for water body alteration associated with the proposed project must be adequately addressed in the SWPPP prior to issuance of an NOC. Failure to obtain an ARAP prior to any actual alteration may result in enforcement action for the unauthorized alteration.

10. **DEFINITIONS**

"2-year and 5-year design storm depths and intensities" The estimated design rainfall amounts, for any return period interval (i.e., 2-yr, 5-yr, 25-yr, etc,) in terms of either 24-hour depths or intensities for any duration, can be found by accessing the following NOAA National Weather Service Atlas 14 data for Tennessee: http://hdsc.nws.noaa.gov/hdsc/pfds/orb/tn pfds.html. Other data sources may be acceptable with prior written approval by TDEC Water Pollution Control.

"Best Management Practices" ("BMPs") means schedules of activities, prohibitions of practices, maintenance procedures, and other management practices to prevent or reduce the discharge of pollutants to waters of the state. BMPs also include treatment requirements, operating procedures, and practices to control plant site runoff, spillage or leaks, sludge or waste disposal, or drainage from raw material storage.

"Borrow Pit" is an excavation from which erodible material (typically soil) is removed to be fill for another site. There is no processing or separation of erodible material conducted at the site. Given the nature of activity and pollutants present at such excavation, a borrow pit is considered a construction activity for the purpose of this permit.

"Buffer Zone" is a strip of dense undisturbed perennial native vegetation, either original or reestablished, that borders streams and rivers, ponds and lakes, wetlands, and seeps. Buffer zones
are established for the purposes of slowing water runoff, enhancing water infiltration, and
minimizing the risk of any potential nutrients or pollutants from leaving the upland area and
reaching surface waters. Buffer zones are most effective when stormwater runoff is flowing into
and through the buffer zone as shallow sheet flow, rather than in concentrated form such as in
channels, gullies, or wet weather conveyances. Therefore, it is critical that the design of any
development include management practices, to the maximum extent practical, that will result in
stormwater runoff flowing into and through the buffer zone as shallow sheet flow. Buffer zones
are established for the primary purpose of protecting water quality and maintaining a healthy
aquatic ecosystem in receiving waters.

"Clearing" in the definition of discharges associated with construction activity, typically refers to removal of vegetation and disturbance of soil prior to grading or excavation in anticipation of construction activities. Clearing may also refer to wide area land disturbance in anticipation of

⁴ The EPA considers inventorying a site's natural features is a technique called fingerprinting. More info can be found in EPA's document - EPA's Developing Your SWPPP – A Guide for Construction Sites (EPA-833-R-06-004 May 2007)

non-construction activities; for instance, clearing forested land in order to convert forestland to pasture for wildlife management purposes. Clearing, grading and excavation do not refer to clearing of vegetation along existing or new roadways, highways, dams or power lines for sight distance or other maintenance and/or safety concerns, or cold planing, milling, and/or removal of concrete and/or bituminous asphalt roadway pavement surfaces. The clearing of land for agricultural purposes is exempt from federal stormwater NPDES permitting in accordance with Section 401(1)(1) of the 1987 Water Quality Act and state stormwater NPDES permitting in accordance with the Tennessee Water Quality Control Act of 1977 (T.C.A. 69-3-101 et seq.).

- "Commencement of construction" The initial disturbance of soils associated with clearing, grading, or excavating activities or other construction activities.
- "Common plan of development or sale" is broadly defined as any announcement or documentation (including a sign, public notice or hearing, sales pitch, advertisement, drawing, permit application, zoning request, computer design, etc.) or physical demarcation (including boundary signs, lot stakes, surveyor markings, etc.) indicating construction activities may occur on a specific plot. A common plan of development or sale identifies a situation in which multiple areas of disturbance are occurring on contiguous areas. This applies because the activities may take place at different times, on different schedules, by different operators.
- "Control measure" As used in this permit, refers to any Best Management Practice (BMP) or other method used to prevent or reduce the discharge of pollutants to waters of the state.
- "CWA" means the Clean Water Act of 1977 or the Federal Water Pollution Control Act (33 U.S.C. 1251, et seq.)
- "Department" means the Department of Environment and Conservation.
- "Director" means the director, or authorized representative, of the Division of Water Pollution Control of the State of Tennessee, Department of Environment and Conservation.
- "Discharge of stormwater associated with construction activity" As used in this permit, refers to stormwater point source discharges from areas where soil disturbing activities (e.g., clearing, grading, excavation, etc.), or construction materials or equipment storage or maintenance (e.g., earth fill piles, fueling, waste material etc.) are located.
- "Division" means the Division of Water Pollution Control of the State of Tennessee, Department of Environment and Conservation.
- "Final Stabilization" means that all soil disturbing activities at the site have been completed and one of the three following criteria is met:
 - a. A uniform (e.g., evenly distributed, without large bare areas) perennial vegetative cover with a uniform density of at least 70 percent of the (preferably) native vegetative cover for the area has been established on all unpaved areas and areas not covered by permanent structures, and all slopes and channels have been permanently stabilized against erosion, or

- b. Equivalent permanent stabilization measures (such as the use of riprap; permanent geotextiles, hardened surface materials including concrete, asphalt, gabion baskets, or Reno mattresses) have been employed, or
- c. For construction projects on land used for agricultural or silvicultural purposes, final stabilization may be accomplished by returning the disturbed land to its preconstruction agricultural or silvicultural use.

"Exceptional Tennessee waters" are surface waters of the State of Tennessee that satisfy characteristics of exceptional Tennessee waters as listed Chapter 1200-4-3-.06 of the official compilation - Rules and Regulations of the State of Tennessee. Characteristics include waters designated by the Water Quality Control Board as Outstanding National Resource Waters (ONRW); waters that provide habitat for ecologically significant populations of certain aquatic or semi-aquatic plants or animals; waters that provide specialized recreational opportunities; waters that possess outstanding scenic or geologic values; or waters where existing conditions are better than water quality standards.

"Impaired waters" (unavailable conditions waters) means any segment of surface waters that has been identified by the division as failing to support one or more classified uses. For the purpose of this permit, pollutants of concern include, but are not limited to: siltation (silt/sediment) and habitat alterations. Based on the most recent assessment information available to staff, the division will notify applicants and permittees if their discharge is into, or is affecting, impaired waters. Resources to be used in making this determination include biennial compilations of impaired waters, databases of assessment information, updated GIS coverages (http://tnmap.tn.gov/wpc/), and the results of recent field surveys. GIS coverages of the streams and lakes not meeting water quality standards, plus the biennial list of impaired waters, can be found at http://tn.gov/environment/wpc.

"Improved sinkhole" is a natural surface depression that has been altered in order to direct fluids into the hole opening. Improved sinkhole is a type of injection well regulated under the Underground Injection Control (UIC) program. Underground injection constitutes an intentional disposal of waste waters in natural depressions, open fractures, and crevices (such as those commonly associated with weathering of limestone).

"Inspector" An inspector is a person that has successfully completed (has a valid certification from) the "Fundamentals of Erosion Prevention and Sediment Control Level I" course or equivalent course. An inspector performs and documents the required inspections, paying particular attention to time-sensitive permit requirements such as stabilization and maintenance activities. An inspector may also have the following responsibilities:

- a) oversee the requirements of other construction-related permits, such as <u>Aquatic Resources Alteration Permit</u> (ARAP) or Corps of Engineers permit for construction activities in or around waters of the state;
- b) update field SWPPPs;
- c) conduct pre-construction inspection to verify that undisturbed areas have been properly marked and initial measures have been installed; and
- d) inform the permit holder of activities that may be necessary to gain or remain in compliance with the CGP and other environmental permits.

"Linear Project" – is a land disturbing activity as conducted by an underground/overhead utility or highway department, including but not limited to any cable line or wire for the transmission of electrical energy; any conveyance pipeline for transportation of gaseous or liquid substance; any cable line or wire for communications; or any other energy resource transmission ROW or utility infrastructure, e.g., roads and highways. Activities include the construction and installation of these utilities within a corridor. Linear project activities also include the construction of access roads, staging areas, and borrow/spoil sites associated with the linear project. Land disturbance specific to the development of a residential and/or commercial subdivision or high-rise structures is not considered a linear project.

"Monthly" refers to calendar months.

- "Municipal Separate Storm Sewer System" or "MS4" is defined at 40 CFR §122.26(b)(8) to mean a conveyance or system of conveyances (including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, manmade channels, or storm drains):
 - 1. Owned and operated by a state, city, town, borough, county, parish, district, association, or other public body (created by or pursuant to state law) having jurisdiction over disposal of sewage, industrial wastes, stormwater, or other wastes, including special districts under state law such as a sewer district, flood control district or drainage district, or similar entity, or an Indian tribe or an authorized Indian tribal organization, or a designated and approved management agency under section 208 of the CWA that discharges to waters of the United States;
 - 2. Designed or used for collecting or conveying stormwater;
 - 3. Which is not a combined sewer; and
 - 4. Which is not part of a Publicly Owned Treatment Works (POTW) as defined at 40 CFR \$122.2.

"NOI" means notice of intent to be covered by this permit (see part 2 above of this permit.)

"NOT" means notice of termination (see part 8 above of this permit).

- "Operator" for the purpose of this permit and in the context of stormwater associated with construction activity, means any person associated with a construction project that meets either of the following two criteria:
 - a) This person has operational or design control over construction plans and specifications, including the ability to make modifications to those plans and specifications. This person is typically the owner or developer of the project or a portion of the project, and is considered the primary permittee; or
 - b) This person has day-to-day operational control of those activities at a project which are necessary to ensure compliance with a SWPPP for the site or other permit conditions. This person is typically a contractor or a commercial builder who is hired by the primary permittee, and is considered a secondary permittee.

It is anticipated that at different phases of a construction project, different types of parties may satisfy the definition of "operator."

"Point source" means any discernible, confined, and discrete conveyance, including but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, landfill leachate collection system, vessel or other floating craft from which pollutants are or may be discharged. This term does not include introduction of pollutants from non point-source agricultural and silvicultural activities, including stormwater runoff from orchards, cultivated crops, pastures, range lands, and forest lands or return flows from irrigated agriculture or agricultural stormwater runoff.

"Qualifying State, Tribal, or local erosion and sediment control program" is one that includes, as defined in 40 CFR 122.44(s):

- (i) Requirements for construction site operators to implement appropriate erosion and sediment control best management practices;
- (ii) Requirements for construction site operators to control waste such as discarded building materials, concrete truck washout, chemicals, litter, and sanitary waste at the construction site that may cause adverse impacts to water quality;
- (iii) Requirements for construction site operators to develop and implement a stormwater pollution prevention plan. (A stormwater pollution prevention plan includes site descriptions, descriptions of appropriate control measures, copies of approved State, Tribal or local requirements, maintenance procedures, inspection procedures, and identification of non-stormwater discharges); and
- (iv) Requirements to submit a site plan for review that incorporates consideration of potential water quality impacts.

"Quality Assurance Site Assessment" means documented site inspection to verify the functionality and performance of the SWPPP and for determining if construction, operation and maintenance accurately comply with permit requirements, as presented in the narrative, engineering specifications; maps, plans and drawings; and details for erosion prevention, sediment control and stormwater management.

"Registered Engineer" and "Registered Landscape Architect" An engineer or landscape architect certified and registered by the <u>State Board of Architectural and Engineer Examiners</u> pursuant to <u>Section 62-202</u>, <u>Tennessee Code Annotated</u>, to practice in Tennessee.

"Runoff coefficient" means the fraction of total rainfall that will appear at the conveyance as runoff. Runoff coefficient is also defined as the ratio of the amount of water that is NOT absorbed by the surface to the total amount of water that falls during a rainstorm.

"Sediment" means solid material, both inorganic (mineral) and organic, that is in suspension, is being transported, or has been moved from the site of origin by wind, water, gravity, or ice as a product of erosion.

"Sediment basin" A temporary basin consisting of an embankment constructed across a wet weather conveyance, or an excavation that creates a basin or by a combination of both. A sediment basin typically consists of a forebay cell, dam, impoundment, permanent pool, primary spillway, secondary or emergency spillway, and surface dewatering device. The size and shape of the basin depends on the location, size of drainage area, incoming runoff volume and peak flow, soil type and particle size, land cover, and receiving stream classification (i.e., impaired, HQ, or unimpaired).

- "Sedimentation" means the action or process of forming or depositing sediment.
- "Significant contributor of pollutants to waters of the state" means any discharge containing pollutants that are reasonably expected to cause or contribute to an impairment of receiving stream water quality or designated uses.
- "Soil" means the unconsolidated mineral and organic material on the immediate surface of the earth that serves as a natural medium for the growth of plants.
- "Steep Slope" A natural or created slope of 35% grade or greater. Designers of sites with steep slopes must pay attention to stormwater management in the SWPPP to engineer runoff non-erosively around or over a steep slope. In addition, site managers should focus on erosion prevention on the slope(s) and stabilize the slope(s) as soon as practicable to prevent slope failure and/or sediment discharges from the project.
- "Stormwater" means rainfall runoff, snow melt runoff, and surface runoff and drainage.
- "Stormwater associated with industrial activity" is defined at 40 CFR 122.26(b)(14) and incorporated here by reference. Most relevant to this permit is 40 CFR 122.26(b)(14)(x), which relates to construction activity including clearing, grading, filling and excavation activities (including borrow pits containing erodible material). Disturbance of soil for the purpose of crop production is exempted from permit requirements, but stormwater discharges from agriculture-related activities which involve construction of structures (e.g., barn construction, road construction, pond construction, etc.) are considered associated with industrial activity. Maintenance performed to maintain the original line and grade, hydraulic capacity, or original purpose of the facility, e.g. re-clearing, minor excavation performed around an existing structure necessary for maintenance or repair, and repaving of an existing road, is not considered a construction activity for the purpose of this permit.
- "Stormwater discharge-related activities" include: activities which cause, contribute to, or result in point source stormwater pollutant discharges, including but not limited to: excavation, site development, grading and other surface disturbance activities; and measures to control stormwater including the siting, construction and operation of best management practices (BMPs) to control, reduce or prevent stormwater pollution.
- "Stormwater Pollution Prevention Plan" (SWPPP): A written plan required by this permit that includes site map(s), an identification of construction/contractor activities that could cause pollutants in the stormwater, and a description of measures or practices to control these pollutants. It must be prepared and approved before construction begins. In order to effectively reduce erosion and sedimentation impacts, Best Management Practices (BMPs) must be designed, installed, and maintained during land disturbing activities. The SWPPP should be prepared in accordance with the Tennessee Erosion and Sediment Control Handbook. The handbook is designed to provide information to planners, developers, engineers, and contractors on the proper selection, installation, and maintenance of BMPs. The handbook is intended for use during the design and construction of projects that require erosion and sediment controls to protect waters of the state. It also aids in the development of SWPPPs and other reports, plans, or specifications required when participating in Tennessee's water quality regulations.

- "Take" of an endangered species means to harass, harm, pursue, hunt, shoot, wound, kill, trap, capture or collect, or attempt to engage in any such conduct.
- "Temporary stabilization" is achieved when vegetation and/or a non-erodible surface have been established on the area of disturbance and construction activity has temporarily ceased. Under certain conditions, temporary stabilization is required when construction activities temporarily cease. However, if future construction activity is planned, permit coverage continues.
- "Total maximum daily load" (TMDL) The sum of the individual wasteload allocations for point sources and load allocations for nonpoint sources and natural background (40 CFR 130.2(1)). TMDL is a study that: quantifies the amount of a pollutant in a stream, identifies the sources of the pollutant, and recommends regulatory or other actions that may need to be taken in order for the stream to cease being polluted. Some of the actions that might be taken are:
 - Re-allocation of limits on the sources of pollutants documented as impacting streams. It
 might be necessary to lower the amount of pollutants being discharged under NPDES
 permits or to require the installation of other control measures, if necessary, to ensure
 that water quality standards will be met.
 - 2.) For sources over which the division does not have regulatory authority, such as ordinary agricultural or forestry activities, provide information and technical assistance to other state and federal agencies that work directly with these groups to install appropriate Best Management Practices (BMPs).

Even for impacted streams, TMDL development is not considered appropriate for all bodies of water: if enforcement has already been taken and a compliance schedule has been developed; or if best management practices have already been installed for non-regulated activities, the TMDL is considered not applicable. In cases involving pollution sources in other states, the recommendation may be that another state or EPA perform the TMDL. TMDLs can also be described by the following equation:

TMDL = sum of non point sources (LA)+ sum of point sources (WLA)+ margin of safety

A list of completed TMDLs that have been approved by EPA cab found at our web site: http://tn.gov/environment/wpc/tmdl/approved.shtml

- "Turbidity" is the cloudiness or haziness of a fluid caused by individual particles (suspended solids) that are generally invisible to the naked eye, similar to smoke in air.
- "Waters" or "waters of the state" means any and all water, public or private, on or beneath the surface of the ground, which are contained within, flow through, or border upon Tennessee or any portion thereof except those bodies of water confined to and retained within the limits of private property in single ownership which do not combine or effect a junction with natural surface or underground waters.
- "Waste site" is an area where material from a construction site is disposed of. When the material is erodible, such as soil, the site must be treated as a construction site.
- "Wet weather conveyances" are man-made or natural watercourses, including natural watercourses that have been modified by channelization that flow only in direct response to

precipitation runoff in their immediate locality; whose channels are at all times above the ground water table; that are not suitable for drinking water supplies; and in which hydrological and biological analyses indicate that, under normal weather conditions, due to naturally occurring ephemeral or low flow there is not sufficient water to support fish or multiple populations of obligate lotic aquatic organisms whose life cycle includes an aquatic phage of at least two months. (Rules and Regulations of the State of Tennessee, Chapter 1200-4-3-.04(3)).

11. LIST OF ACRONYMS

ARAP Aquatic Resource Alteration Permit

BMP Best Management Practice

CERCLA Comprehensive Environmental Response, Compensation and Liability Act

CGP Construction General Permit

CWA Clean Water Act

EFO Environmental Field Office

EPA (U.S.) Environmental Protection Agency EPSC Erosion Prevention and Sediment Control MS4 Municipal Separate Storm Sewer System

NOC Notice of Coverage NOI Notice of Intent NOT Notice of Termination

NPDES National Pollutant Discharge Elimination System

ONRW Outstanding National Resource Waters
POTW Publicly Owned Treatment Works
SWPPP Stormwater Pollution Prevention Plan

TDEC Tennessee Department of Environment and Conservation

TDOT Tennessee Department of Transportation

TMDL Total Maximum Daily Load

TMSP Tennessee Multi-Sector General Permit for the Discharge of Stormwater from an

Industrial Activity

TVA Tennessee Valley Authority

TWQCA Tennessee Water Quality Control Act
UIC Underground Injection Control
USGS United States Geological Survey

(End of body of permit; appendices follow.)

APPENDIX A – Notice of Intent (NOI) Form (next page)



TENNESSEE DEPARTMENT OF ENVIRONMENT AND CONSERVATION

Division of Water Pollution Control 6th Floor Annex, L&C Tower, 401 Church Street, Nashville, Tennessee 37243 1-888-891-8332 (TDEC)

Notice of Intent (NOI) for General NPDES Permit for Stormwater Discharges from Construction Activities (TNR100000)

| Site or Project Name: | | | | NPDES Trackin | g Number: ' | ΓNR |
|--|---|---|--|---|----------------|-----------------------------|
| Street Address or | | | | Construction Start Date: | | |
| Location: | | | | Estimated End I | Date: | |
| Site | | | | Latitude (dd.ddd | | |
| Description: | | | | Longitude (-dd.c | | |
| County(ies): | | MS4 | | Acres Disturbed | : | |
| | | Jurisdiction: | | Total Acres: | | |
| If wetlands are located on-s | ow dotted or solid blue lines [ite and may be impacted, attac eration Permit has been obtain | h wetlands delineation | report. | ARAP Number | | |
| Receiving waters: | | | | | | |
| Attach the SWPPP with the | NOI SV | VPPP Attached | Attach a site location map | Map Attac | ched | |
| Name of Site Owner or Deplans and specifications) | veloper (Site-Wide Permitte | ee): (person, company, o | or legal entity that ha | as operational or c | lesign contro | ol over construction |
| Site Owner or Developer Co | ontact Name: (individual resp | onsible for site) | Title or Position: (| the party who sign | ns the certifi | cation below): |
| Mailing Address: | | | City: | | State: | Zip: |
| Phone: | Fax: | | E-mail: | | | |
| Optional Contact: | | | Title or Position: | | | |
| Mailing Address: | | | City: | | State: | Zip: |
| Phone: | Fax: |) | E-mail: | | | |
| Owner or Developer Certi | fication: (must be signed by p | president, vice-presiden | t or equivalent, or ra | anking elected offi | icial) (Prima | ry Permittee) |
| qualified personnel properly gar responsible for gathering the in | at this document and all attachm ther and evaluate the information formation, the information submitting false information, including | submitted. Based on my i itted is, to the best of my k | inquiry of the person or mowledge and belief, t | r persons who mana rue, accurate, and co | ge the system | , or those persons directly |
| Owner or Developer Name: | (print or type) | | Signature: Date: | | | te: |
| Contractor(s) Certification | n: (must be signed by presider | nt, vice-president or equ | uivalent, or ranking | elected official) (S | secondary Po | ermittee) |
| I certify under penalty of law that I have reviewed this document, any attachments, and the SWPPP referenced above. Based on my inquiry of the construction site owner/developer identified above and/or my inquiry of the person directly responsible for assembling this NOI and SWPPP, I believe the information submitted is accurate. I am aware that this NOI, if approved, makes the above-described construction activity subject to NPDES permit number TNR100000, and that certain of my activities on-site are thereby regulated. I am aware that there are significant penalties, including the possibility of fine and imprisonment for knowing violations, and for failure to comply with these permit requirements. | | | | | | |
| Primary contractor name and address: (print or type) | | | Signature: Date: | | te: | |
| Other contractor name and address: (print or type) | | | Signature: Date: | | te: | |
| Other contractor name and address: (print or type) | | | Signature: | | Da | te: |
| OFFICIAL STATE USI | E ONLY | | | | | |
| Received Date: | Reviewer: | rield Office: | Permit Number TNR | | Exception | nal TN Water: |
| Fee(s): | T & E Aquatic Flora and Fauna: | | Impaired Receiving Stre | eam: | Notice of | Coverage Date: |

CONSTRUCTION ACTIVITY – STORMWATER DISCHARGES NOTICE OF INTENT (NOI) - INSTRUCTIONS

Notice of Intent (NOI) for General NPDES Permit for Stormwater Discharges from Construction Activities (TNR100000)

<u>Purpose of this form</u> A completed notice of intent (NOI) must be submitted to obtain coverage under the Tennessee General NPDES Permit for Discharges of Stormwater Associated with Construction Activity (permit). **Requesting coverage under this permit means that an applicant has obtained and examined a copy of this permit, and thereby acknowledges applicant's claim of ability to be in compliance with permit terms and conditions. This permit is required for stormwater discharge(s) from construction activities including clearing, grading, filling and excavating (including borrow pits) of one or more acres of land. This form should be submitted at least 30 days prior to the commencement of land disturbing activities, or no later than 48 hours prior to when a new operator assumes operational control over site specifications or commences work at the site.**

<u>Permit fee</u> (see table below) must accompany the NOI and is based on total acreage to be disturbed by an entire project, including any associated construction support activities (e.g. equipment staging yards, material storage areas, excavated material disposal areas, borrow or waste sites). There is no fee for sites less than 1 acre.

| Acres Disturbed | = or > 150 acres | = or > 50 < 150 acres | = or > 5 < 50 acres | = or > 1 < 5 acres |
|-----------------|------------------|-----------------------|---------------------|--------------------|
| Fee | \$7,500 | \$4,000 | \$1,000 | \$250 |

Who must submit the NOI form? Per Section 2 of the permit, all site operators must submit an NOI form. "Operator" for the purpose of this permit and in the context of stormwater associated with construction activity means any person associated with a construction project who meets either or both of the following two criteria: (1) The person has operational or design control over construction plans and specifications, including the ability to make modifications to those plans and specifications. This person is typically the owner or developer of the project or a portion of the project (e.g. subsequent builder), or the person that is the current land owner of the construction site. This person is considered the primary permittee; or (2) The person has day-to-day operational control of those activities at a project which are necessary to ensure compliance with a SWPPP for the site or other permit conditions. This person is typically a contractor or a commercial builder who is hired by the primary permittee, and is considered a secondary permittee.

Owners, developers and all contractors that meet the definition of the operator in subsection 2.2 of the permit shall apply for permit coverage on the same NOI, insofar as possible. After permit coverage has been granted to the primary permittee, any subsequent NOI submittals must include the site's previously assigned permit tracking number and the project name. The comprehensive site-specific SWPPP shall be prepared in accordance with the requirements of part 3 of the permit and must be submitted with the NOI unless the NOI being submitted is to only add a contractor (secondary permittee) to an existing coverage.

Notice of Coverage The division will review the NOI for completeness and accuracy and prepare a notice of coverage (NOC). Stormwater discharge from the construction site is authorized as of the effective date of the NOC.

<u>Complete the form</u> Type or print clearly, using ink and not markers or pencil. Answer each item or enter "NA," for not applicable, if a particular item does not fit the circumstances or characteristics of your construction site or activity. If you need additional space, attach a separate piece of paper to the NOI form. **The NOI will be considered incomplete without a permit fee, a map, and the SWPPP.**

Describe and locate the project Use the legal or official name of the construction site. If a construction site lacks street name or route number, give the most accurate geographic information available to describe the location (reference to adjacent highways, roads and structures; e.g. intersection of state highways 70 and 100). Latitude and longitude (expressed in decimal degrees) of the center of the site can be located on USGS quadrangle maps. The quadrangle maps can be obtained at the USGS World Wide Web site: http://www.usgs.gov/; latitude and longitude information can be found at numerous other web sites. Attach a copy of a portion of a 7.5 minute quad map, showing location of site, with boundaries at least one mile outside the site boundaries. Provide estimated starting date of clearing activities and completion date of the project, and an estimate of the number of acres of the site on which soil will be disturbed, including borrow areas, fill areas, stockpiles and the total acres. For linear projects, give location at each end of the construction area.

Give name of the receiving waters Trace the route of stormwater runoff from the construction site and determine the name of the river(s), stream(s), creek(s), wetland(s), lake(s) or any other water course(s) into which the stormwater runoff drains. Note that the receiving water course may or may not be located on the construction site. If the first water body receiving construction site runoff is unnamed ("unnamed tributary"), determine the name of the water body that the unnamed tributary enters.

ARAP permit may be required If your work will disturb or cause alterations of a stream or wetland, you must obtain an appropriate Aquatic Resource Alteration Permit (ARAP). If you have a question about the ARAP program or permits, contact your local Environmental Field Office (EFO).

<u>Submitting the form and obtaining more information</u> Note that this form must be signed by the company President, Vice-President, or a ranking elected official in the case of a municipality, for details see subpart 2.5. For more information, contact your local EFO at the toll-free number 1-888-891-8332 (TDEC). Submit the completed NOI form (keep a copy for your records) to the appropriate EFO for the county(ies) where the construction activity is located, addressed to **Attention: Stormwater NOI Processing**.

| EFO | Street Address | Zip Code | EFO | Street Address | Zip Code |
|-----------|--------------------------------|------------|--------------|-----------------------------|------------|
| Memphis | 8383 Wolf Lake Drive, Bartlett | 38133-4119 | Cookeville | 1221 South Willow Ave. | 38506 |
| Jackson | 1625 Hollywood Drive | 38305-4316 | Chattanooga | 540 McCallie Avenue STE 550 | 37402-2013 |
| Nashville | 711 R S Gass Boulevard | 37243 | Knoxville | 3711 Middlebrook Pike | 37921 |
| Columbia | 1421 Hampshire Pike | 38401 | Johnson City | 2305 Silverdale Road | 37601 |

APPENDIX B – Notice of Termination (NOT) Form (next page)



TENNESSEE DEPARTMENT OF ENVIRONMENT AND CONSERVATION (TDEC)

Division of Water Pollution Control (WPC) 6th Floor Annex, L&C Tower, 401 Church Street, Nashville, Tennessee 37243 1-888-891-TDEC (8332)

Notice of Termination (NOT) for General NPDES Permit for Stormwater Discharges from Construction Activities (CGP)

This form is required to be submitted when requesting termination of coverage from the CGP. The purpose of this form is to notify the TDEC that either all stormwater discharges associated with construction activity from the portion of the identified facility where you, as an operator, have ceased or have been eliminated; or you are no longer an operator at the construction site. Submission of this form shall in no way relieve the permittee of permit obligations required prior to submission of this form. Please submit this form to the local WPC Environmental Field Office (EFO) address (see table below). For more information, contact your local EFO at the toll-free number 1-888-891-8332 (TDEC).

Type or print clearly, using ink and not markers or pencil.

| Site or Project Name: | | | | NPDES Tracking Number: TNR | | | |
|--|---|---|--------------------|-------------------------------|------------------------|-------------------|----------|
| Street Address or Location: | | | | | County(ies | s): | |
| Name | e of Permitt | ee Requesting Termination of Covera | ge: | | | | |
| Perm: | ittee Contac | t Name | | Title or Position: | | | |
| Maili | ing Address: | | | City: | | State: | Zip: |
| Phon (| e:) | | | E-mail: | | | |
| Chec | ck the reas | on(s) for termination of permit co | verage: | | | | |
| | Stormwater discharge associated with construction activity is no longer occurring and the permitted area has a uniform 70% permanent vegetative cover OR has equivalent measures such as rip rap or geotextiles, in areas not covered with impervious surfaces. | | | | | permanent | |
| | You are no | longer the operator at the construction | site (i.e., termin | ation of site-wide, pr | rimary or secondary | permittee coverag | ge). |
| Cert | ification a | nd Signature: (must be signed by p | resident, vice- | president or equiva | alent ranking elect | ed official) | |
| I certify under penalty of law that either: (a) all stormwater discharges associated with construction activity from the portion of the identified facility where I was an operator have ceased or have been eliminated or (b) I am no longer an operator at the construction site. I understand that by submitting this notice of termination, I am no longer authorized to discharge stormwater associated with construction activity under this general permit, and that discharging pollutants in stormwater associated with construction activity to waters of the United States is unlawful under the Clean Water Act where the discharge is not authorized by a NPDES permit. I also understand that the submittal of this notice of termination does not release an operator from liability for any violations of this permit or the Clean Water Act. For the purposes of this certification, elimination of stormwater discharges associated with construction activity means that all disturbed soils at the portion of the construction site where the operator had control have been finally stabilized, the temporary erosion and sediment control measures have been removed, and/or the site or portions of the site have obtained permit coverage by subsequent operators or that all stormwater discharges associated with construction activities from the identified site that are authorized by a NPDES general permit have otherwise been eliminated from the portion of the construction site where the operator had control. | | | | | | | |
| Permittee name (print or type): | | | Signature: | | Date: | | |
| | | | | | | | |
| EFO | | Street Address | Zip Code | EFO | Street Address | | Zip Code |
| Mem | phis | 8383 Wolf Lake Drive, Bartlett, TN | 38133 | Cookeville | 1221 South Willow | Ave. | 38506 |
| Jacks | on | 1625 Hollywood Drive | 38305 | Chattanooga | 540 McCallie Aven | ue STE 550 | 37402 |
| Nash | ville | 711 R S Gass Boulevard | 37243 | Knoxville | 3711 Middlebrook Pike | | 37921 |
| Colur | mbia | 1421 Hampshire Pike | 38401 | Johnson City | 2305 Silverdale Road 3 | | 37601 |

CN-1175 (Rev. 4-11) RDAs 2399 and 2400

APPENDIX C – Twice-Weekly Inspection Report Form (next page)



TENNESSEE DEPARTMENT OF ENVIRONMENT AND CONSERVATION (TDEC)

Division of Water Pollution Control (WPC) 6th Floor Annex, L&C Tower, 401 Church Street, Nashville, Tennessee 37243 1-888-891-8332 (TDEC)

General NPDES Permit for Stormwater Discharges from Construction Activities (CGP) CGP Inspection Worksheet for Twice-Weekly Inspections of Erosion Prevention and Sediment Controls

| Site of | Project Name: | NPDES Tracking Number: TNR | | | | |
|---|---|--|---------|--------------|-----|--|
| Prima | y Permittee Name: | Date of Inspection: | | | | |
| Currer | Current approximate disturbed acreage: Has daily rainfall been documented? Name of Inspector: ☐ Yes ☐ No | | | | | |
| Current weather/site conditions: Inspector's TNEPSC Certification Nu | | | | ımber: | | |
| Please check the box if the following items are on-site: ☐ Notice of Coverage (NOC) ☐ Stormwater Pollution Prevention Plan (SWPPP) ☐ Twice weekly inspection documentation ☐ Site contact information ☐ Rain Gage ☐ Off-site Reference Rain Gage Location: | | | | | | |
| Best N | Ianagement Practices (BMPs): | | | | | |
| Are th | e Erosion Prevention and Sediment Controls (EPSCs) functioning | g correctly in the following locations: | | | | |
| 1. | Disturbed areas/material storage areas | | | □Yes | □No | |
| 2. | Outfall points (or nearest accessible downstream point if an outfall is | is inaccessible) | | □Yes | □No | |
| 3. | Construction ingress/egress points | | | □Yes | □No | |
| pertinent observations: | | | | | | |
| 4. Are (EPSCs) installed and maintained in the field per SWPPP? If "No", describe below. | | | | Yes | □No | |
| 5. Have site discharges caused an objectionable color contrast in the receiving stream (Permit section 5.3.2)? If "Yes", describe below the measures implemented to eliminate contrast. | | | | □Yes | □No | |
| 6. Have discharges from dewatering activities been managed by appropriate controls per Section 4.1.4 of the Permit? If "No", describe below the measures to be implemented to achieve compliance. | | | t? If | □Yes | □No | |
| 7. | If construction activity at any location on-site has temporarily/perm per Section 3.5.3.2? If, "No", describe below each location and mea | anently ceased, was the area stabilized within | 14 days | □Yes | □No | |
| Are non-stormwater discharges (per Section 1.2.3) and housekeeping measures such as storing chemicals, construction related debris litter, oils, fuels, building products, truck wash (per Section 3.5.3.1 (f) and (g)) being properly managed? If "No", describe below the measures to be implemented to achieve compliance. | | | | □Yes | □No | |
| 9. | If a concrete washout facility is located on site, is it clearly identifie describe below the measures to be implemented to achieve complian | | □ N/A | □Yes | □No | |
| Have all previous deficiencies been addressed? If not, describe the remaining deficiencies. Check if deficiencies/corrective measures have been reported on a previous form. | | | | □Yes | □No | |
| | | | | | | |
| Certif | Certification and Signature (must be signed by the certified inspector and the permittee per Sections 3.5.8.2 (g) and 7.7.2 of the CGP) | | | | | |
| I certify under penalty of law that this report and all attachments are, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. | | | | | | |
| | tor Name and Title (print or type): | Signature: | Date: | . 2014410113 | • | |
| Permittee Name and Title (print or type): Signature: Date | | | | | | |

CGP Inspection Worksheet for Twice-Weekly Inspections of Erosion Prevention and Sediment Controls

Purpose of this form/ Instructions

An inspection, as described in section 3.5.8.2.of the General Permit for Stormwater Discharges from Construction Activities ("Permit"), shall be performed at least twice every calendar week and documented on this form. Inspections shall be performed at least 72 hours apart. Where sites or portion(s) of construction sites have been temporarily stabilized, or runoff is unlikely due to winter conditions (e.g., site covered with snow or ice), such inspection only has to be conducted once per month until thawing results in runoff or construction activity resumes.

Inspectors performing the required twice weekly inspections must have an active certification by completing the "Fundamentals of Erosion Prevention and Sediment Control Level I" course. (http://www.tnepsc.org/). A copy of the certification or training record for inspector certification should be kept on site.

Qualified personnel, as defined in section 3.5.8.1 of the Permit (provided by the permittee or cooperatively by multiple permittees) shall inspect disturbed areas of the construction site that have not been finally stabilized, areas used for storage of materials that are exposed to precipitation, structural control measures, locations where vehicles enter or exit the site, and each outfall.

Disturbed areas and areas used for storage of materials that are exposed to precipitation shall be inspected for evidence of, or the potential for, pollutants entering the site's drainage system. Erosion prevention and sediment control measures shall be observed to ensure that they are operating correctly.

Outfall points (where discharges leave the site and/or enter waters of the state) shall be inspected to determine whether erosion prevention and sediment control measures are effective in preventing significant impacts to receiving waters. Where discharge locations are inaccessible, nearby downstream locations shall be inspected. Locations where vehicles enter or exit the site shall be inspected for evidence of offsite sediment tracking.


Based on the results of the inspection, any inadequate control measures or control measures in disrepair shall be replaced or modified, or repaired as necessary, before the next rain event if possible, but in no case more than 7 days after the need is identified.

Based on the results of the inspection, the site description identified in the SWPPP in accordance with section 3.5.1 of the Permit and pollution prevention measures identified in the SWPPP in accordance with section 3.5.2 of the Permit, shall be revised as appropriate, but in no case later than 7 days following the inspection. Such modifications shall provide for timely implementation of any changes to the SWPPP, but in no case later than 14 days following the inspection.

All inspections shall be documented on this Construction Stormwater Inspection Certification form. Alternative inspection forms may be used as long as the form contents and the inspection certification language are, at a minimum, equivalent to the division's form and the permittee has obtained a written approval from the division to use the alternative form. Inspection documentation will be maintained on site and made available to the division upon request. Inspection reports must be submitted to the division within 10 days of the request. If the division requests the Construction Stormwater Inspection Certification form to be submitted, the submitted form must contain the printed name and signature of the trained certified inspector and the person who meets the signatory requirements of section 7.7.2 of the Permit.

Trained certified inspectors shall complete inspection documentation to the best of their ability. Falsifying inspection records or other documentation or failure to complete inspection documentation shall result in a violation of this permit and any other applicable acts or rules.

(This page intentionally left blank)





STATE OF TENNESSEE DEPARTMENT OF TRANSPORTATION

ENVIRONMENTAL DIVISION

SUITE 900, JAMES K. POLK BUILDING 505 DEADERICK STREET NASHVILLE, TENNESSEE 37243-1402 (615) 741-3655

JOHN C. SCHROER
COMMISSIONER

BILL HASLAM
GOVERNOR

October 24, 2013

Mr. Jimmy Smith
Department of Environment and Conservation
Division of Water Resources
William R. Snodgrass Tennessee Tower
312 Rosa L. Parks Avenue, 11th Floor
Nashville, Tennessee 37243-1534

Subject: Project # 86950-1531-04

PIN 116409.00

Industrial Access Road serving Nuclear Fuel

Services (NFS) in Erwin

Unicoi County

Dear Mr. Smith:

In accordance with T.C.A. 69-3-108(b), this office is submitting form CN-1091; drawings; portions of the USGS quad map for Erwin, TN (199-NW) and Chestoa, TN (199-SW) showing the location of the wetland impacts; and a half-size set of plans with a location map on the plans cover sheet; where we believe a permit may be needed.

SECTIONS 8.1, 10, and 11

IARAP #1

Feature Name: WTL-1

Proposed Impact Type: Wetland Impact

Sta. 23+50 RT ± to Sta. 28+50 RT ±

Latitude 36.12744°, Longitude -82.44166°

Impact Description:

Temporary Impact: 0.00 ac. Permanent Impact: 0.11 ac.

Mitigation:

We propose to mitigate the permanent wetland impacts by debiting, at a 2:1 ratio, 0.22 acres from available wetland credits at the Lick Creek Wetland Mitigation Bank.

Alternatives:

Alternative 1: Build Alternative (Selected Alternative): The project will consist of removal and replacement of a majority of South Industrial Drive from Jackson Love Highway through the Riverview Industrial Park. A section between the area of about 300' from Jackson Love Highway to about 1,100' from Jackson Love Highway, may be adequate for overlay. The remaining length of South Industrial Drive will require removal and replacement. Complete reconstruction or overlay, as applicable, is the only option that will remedy the problem with the road and provide Erwin and Unicoi County with a much needed economic development component now and in the future.

Alternative 2: No-Build Alternative: The No Build Alternative is not selected as it will not meet the purpose of the project.

Total Wetland Impacts:

This project includes the permanent filling of 0.11 acres of wetland, and the temporary filling of 0.00 acre of wetland for construction. We propose to mitigate for permanent wetland impacts by debiting, at a 2:1 ratio, 0.22 acres from available wetland credits at the Lick Creek Wetland Mitigation Bank.

SECTION 5.0

The applicant proposes to construct 0.816 mi of a State Industrial Access road serving Nuclear Fuel Services in Erwin. The new construction will consist of 12 ft. lanes, and 4 ft. shoulders and varied guardrail. The existing alignment of South Industrial Drive will be modified for the proposed roadway.

SECTIONS 8.3 - 8.6

Please refer to the attached Environmental Boundary report for more information.

SECTION 9

This project is basically a "stand alone" facility that will provide adequate linkage from the Jackson Love Highway in Erwin to tenants in the Riverview Industrial Park. While the road will provide a link for 6 companies, it is not intended to be part of the Erwin transportation network. It will not be available for residential traffic and does not provide a connection through the Industrial Park. This project does however provide a much needed improvement for the users and tenants of the

Mr. Jimmy Smith October 24, 2013 Page 3

Industrial Park. Once completed the project will improve safety and increase the opportunity for the Town of Erwin and Unicoi County to attract additional manufacturing/industrial companies to the Park.

The Build and No-build alternatives were considered for this project. Please see the April 2012 Purpose and Need document for more details. The document is included as PDF file in the enclosed CD.

Efforts were made during the planning and design phases of this project to avoid impacts to waters of the U.S. and waters of the State to the extent practicable, and to minimize impacts that were not avoidable. Mitigation for these impacts has been proposed on the project site, where practicable.

SUPPLEMENTARY INFORMATION

A letter was sent from TDOT to the USFWS on May 22, 2013, requesting information on species that may be present in the vicinity of the proposed project. In a response letter dated June 11, 2013, the USFWS concluded that no federally listed or proposed species or designated critical habitat are known to exist within the project impact area. The USFWS believe the requirements of Section 7 of the Endangered Species Act of 1973, as amended, are fulfilled.

Due to the recent modification of the USFWS stance regarding the Indiana bat, specific consideration of the Indiana bat (Myotis sodalis) is required. Based on the fact that little potential habitat is present within the proposed impact area of the project, it is the opinion of the Tennessee Department of Transportation that this project is not likely to adversely affect the Indiana bat.

A search of the TDEC, Division of Natural Areas, database on May 22, 2013, indicated there are 38 records of threatened or endangered species within a 4-mile radius. Please refer to the attached Form N for more information. An email was sent from TDOT to the TWRA on May 22, 2013, requesting information on species that may be present in the vicinity of the proposed project. In a response email dated June 5, 2013 (enclosed), the TWRA stated that stringent adherence to the proposed BMP's should be maintained at all times to prevent impact to the adjacent river system.

It is the opinion of this office that all other aspects of the project not specifically mentioned in this letter meet the criteria for the General Permit for Wet Weather Conveyances. Please refer to the attached Form G for more information.

By copy of this letter, we request the concurrence of the Corps of Engineers that this project meets the criteria of one of the Nationwide Permits. We request approval of this project under Nationwide Permit 14 for Linear Transportation Projects. This project is modernizing the subject highway by widening the driving surface to ensure motorist safety. A copy of the approved Minor Tennessee Environmental Evaluation Report (TEER) is enclosed for your use in permit processing.

By copy of this letter, we are also applying for a Section 26a Permit from the Tennessee Valley Authority. Appropriate information is enclosed. This project will not cause any loss of flood storage or power storage volumes.

Typically the construction contractor shall make their own arrangements for obtaining borrow (fill material) and shall pay all the cost involved including archeological approval of source along with obtaining any required ecological investigation and permits. Frequently rock fill is obtained from an approved commercial location, but for common fill (unclassified borrow) it is up to the construction contractor to find an appropriate location that meets AASHTO specifications.

Mr. Jimmy Smith October 24, 2013 Page 4

Our office has checked the Flood Insurance Rate Map for the subject project. This project is not in a FEMA floodway, floodplain, or study area. The design of our roadway system is in compliance with the floodplain management criteria set forth in the National Flood Insurance Regulations of Title 44 of the Code of Federal Regulations (CFR). It is also consistent with requirements of floodplain management guidelines for implementing Executive Order 11988 and Federal Highway Administration guidelines 23 CFR 650A. Refer to attached FEMA map for additional information.

This project is currently scheduled for the January 22, 2014 turn-in. We would greatly appreciate your initial review and request for additional information needed and issuance of the public notice within 15 days of receipt of our application; and issuance of the permits as soon as possible.

If you have any questions or we can be of further assistance please contact Melanie Bumpus at (615) 253-2466 or Marshall Boyd at (615) 741-3809.

Sincerely,

Melanie Bumpus

Melanie Bumpus Environmental Permits Section

Enclosures

JLH: MBB: WMB: pc

CC:

Via Hardcopy

Mr. Jimmy Smith, TDEC Ms. Tammy Turley, USACE Ms. Kelly Baxter, TVA

Via Email

Mr. Jimmy Smith, TDEC

Ms. Jeanene Woodruff, TDEC

Ms. Kelly Baxter, TVA

Mr. Gary King, Design Manager

Mr. Dwight Armstrong, Project Manager

Mr. Brandon Crowley, HQ (Region 1) Construction Office

Mr. Clint Bane, Region 1 Construction Office

Ms. Mary Howard, Region 1 Construction Office

Mr. Mark Doty, Region 1 Environmental Coordinator

Mr. Keven Brown, Region 1 Biologist

Mr. Mike Williams

Mr. Ronnie Porter

Mr. N.E. Christianson

Mr. Baxter Wilson, TDOT Compliance

Mr. Hugh (Chip) Hannah, TDOT Compliance

Mr. John Hewitt, Natural Resources Office

Permit File



TENNESSEE DEPARTMENT OF ENVIRONMENT AND CONSERVATION DIVISION OF WATER POLLUTION CONTROL APPLICATION FOR AQUATIC RESOURCE ALTERATION PERMIT (ARAP)

Section 1: Applicant Information An application submitted by a corporation must be signed by a principal executive officer; from a partnership or

STATE §401 WATER QUALITY PERMIT

| proprietorship, by the partner or proprietor respectively; from a municipal, stat principal executive officer, ranking elected official or other duly authorized emp | | | | | |
|---|---|--|--|--|--|
| Name: Melanie Bumpus | Title or Position: Senior Transportation Proj. Specialist | | | | |
| Company Name: Tennessee Department of Transportation | tion | | | | |
| Mailing Address: 505 Deaderick Street Suite 900 J.K. Polk Bldg. | City: Nashville State: TN Zip: 37243 | | | | |
| Phone: 615-253-2466 Fax: 615-741-1098 | E-mail: Melanie.Bumpus@tn.gov | | | | |
| Section 2: Alternate contact within your organization (not re- | | | | | |
| Name: Marshall Boyd* | Title or Position: TDOT Consultant | | | | |
| Mailing Address: 505 Deaderick Street Suite 900 J.K. Polk Bldg. | City: Nashville State: TN Zip: 37243 | | | | |
| Phone: 615-741-3809 Fax: 615-741-1098 | E-mail: Marshall.Boyd@tn.gov | | | | |
| Section 3: Consultant Information (a consultant is not required | d) | | | | |
| Name: | Title or Position: | | | | |
| Company Name: | | | | | |
| Mailing Address: | City: State: Zip: | | | | |
| Phone: Fax: | E-mail: | | | | |
| → Place a * next to the individual's name listed above that sl | hould be the primary contact during the application process ← | | | | |
| Section 4: Fee (check appropriate box and submit appropriate fe | ee with application) | | | | |
| Amount of fee: | | | | | |
| □ \$50.00 □ \$1,000.00 | \$2,500.00 | | | | |
| application fee. Requests for Individual Permit alterations less than 1,0 | vidual Permit alterations on private farms and residences require a \$50.00 00 feet of stream or less than 10 acres of wetland require a \$1,000.00 greater than 10 acres of wetlands require a \$2,500.00 application fee. (Checks | | | | |
| | | | | | |
| Section 5: Project Details (fill in information and check approp | | | | | |
| Project / Site Name: SIA Serving Nuclear Fuel Services in Erwin | | | | | |
| Nearest City, Town or Major Landmark: Erwin | County: Unicoi | | | | |
| Stream | Line Launching Ramp Outfall Structure Bank Stabilization | | | | |
| Stream | or Wetland Restoration | | | | |
| Refer to Application Cover Letter | | | | | |

| Brief Project Description (a more detailed description is requested in Section 8): |
|---|
| Refer to Section 5 in Application Cover Letter |
| |
| |
| |
| Do any other alterations require approval from any other state, federal, or local government agency associated with the project site? If yes, provide brief description and status of approval. |
| project site. If yes, provide brief description and status of approval |
| Army Corps of Engineers |
| TVA |
| |
| |
| Section 6: Directions to Project Site |
| Section 6. Directions to 1 roject Site |
| |
| Refer to Quad Map/Location Map located on Roadway Plans |
| |
| |
| |
| |
| |
| Section 7: Project Schedule (fill in information and check appropriate boxes). |
| How long will it take to perform the proposed estivity? |
| 5 years +/- |
| Is any portion of the activity complete now? Yes No |
| If yes, describe the extent of the completed portion below: |
| |
| |
| The required information in sections 8 - 12 must be submitted on a separate sheet(s) and submitted in the same numbered |
| format as presented. If you believe that a certain request does not pertain to your project, explain the reason. |
| Tormus as presented. If you senere that a certain request does not pertain to your project, explain the reason. |
| Section 8: Project Description |

- 8.1 A narrative description of the scope of the project Refer to Application Cover Letter
- 8.2 USGS topographic map indicating the exact location of the project (can be photographic copy) Included in Application Package
- 8.3 Photographs of the resource(s) proposed for alteration with location description (photo locations should be noted on map)
- 8.4 A narrative description of the existing stream and/or wetland characteristics including, but not limited to, dimensions (e.g., depth, length, average width), substrate and riparian vegetation Refer to provided Ecology Information for Sections 8.4, 8.5, & 8.6
- 8.5 A narrative description of the proposed stream and/or wetland characteristics including, but not limited to, dimensions (e.g., depth, length, average width), substrate and riparian vegetation
- 8.6 In the case of wetlands, include a wetland delineation with delineation forms and site map denoting location of data points

Section 9: Purpose and Justification

9. Describe the purpose for the proposed activity and overall project Refer to Section 9 in Application Cover Letter

Section 10: Alternatives Refer to Section 10 in Application Cover Letter

10. Describe all practicable alternatives considered, including what has been done to avoid or minimize impacts to streams or wetlands. For activities not covered by General Permit, each alternative must include the following: (1) feasibility, (2) environmental consequences and (3) social and economic benefits of each alternative.

Section 11: Mitigation N/A

- 11.1 A detailed discussion of the proposed mitigation, if required
- 11.2 If you believe mitigation is not required, state the reason or cite the regulation to support this position
- 11.3 A detailed discussion of why you believe the mitigation would result in no net loss of resource value
- 11.4 A detailed description of the proposed monitoring plan for the mitigation site
- 11.5 A discussion of long term protection measures for the mitigation site

| G 4. | 10 7 | | | o 4 • |
|---------|------|----------|------|-----------|
| Section | 7. | Lechnica | l In | formation |
| | | | | |

- 12.1 Detailed plans, blueprints, or legible sketches of present site conditions and the proposed activity. Plans must be 8.5 x 11 inches. Additional larger plans may also be submitted to aid in application review. The detailed plans need to include dimensions of the existing and proposed stream or wetland such as depth, length, average width, substrate and riparian vegetation. As requested by TDEC, 11 x17 plans have been submitted in the place of the 8.5 x 11 plans
- 12.2 If mitigation is proposed, submit detailed plans, blueprints, or legible sketches of the proposed mitigation
- 12.3 For both the proposed activity and mitigation, provide a discussion regarding the sequencing of events
- 12.4 Location and type of erosion prevention and sediment control measures for the proposed alterations
- 12.5 A discussion on how the proposed activity will be performed (construction methods)
- 12.6 A copy of all hydrologic or jurisdictional determination documents issued for the water resources on the project site.

| Section 13: Certification and Signature: | | | | | |
|---|--|--|--------------------|--|--|
| | nt and all attachments were prepared at my reque | | | | |
| | perly gather and evaluate the information submit | | | | |
| persons directly responsible for gathering the i | nformation, the information submitted is, to the b | best of my knowledge and belief, true, accurate, | and complete. I am | | |
| aware that there are significant penalties for su | bmitting false information, including the possibi | lity of fine and imprisonment for knowing violat | ions. | | |
| | | | | | |
| Melanie Bumpus | Senior Transportation Proj. Specialist 10/21/2013 | | | | |
| Printed Name | Official Title | Signature | Date | | |

Section 14: Where do I send my application?

For General Permit coverage, submit the original completed and signed application to the local Environmental Field Office (EFO) for the county of your activity. Addresses of the EFOs are listed below. Mark the application ATTN: Water Pollution Control. Submit all applications for Individual ARAPs to the Natural Resources Section at the following address, and send a copy to the appropriate EFO.

Tennessee Department of Environment and Conservation
Water Pollution Control
Natural Resources Section
7th Floor L&C Annex
401 Church Street
Nashville, TN 37243

| Jackson EFO | Nashville EFO | Cookeville EFO | Johnson City EFO |
|---|---|--|--|
| 1625 Hollywood Drive 38305 Phone: 731-512-1300 Counties: Benton, Carroll, Chester, Crockett, Decatur, Dyer, Gibson, Hardeman, Hardin, Haywood, Henderson, Henry, Lake, Lauderdale, Madison, McNairy, Obion, Weakley | 711 R. S. Gass Boulevard 37243 Phone: 615-687-7000 Counties: Cheatham, Davidson, Dickson, Houston, Humphreys, Montgomery, Robertson, Rutherford, Stewart, Sumner, Trousdale, Williamson, Wilson | 1221 South Willow Ave. 38506 Phone: 931-432-4015 Counties: Cannon, Clay, Cumberland, Dekalb, Fentress, Jackson, Macon, Overton, Pickett, Putnam, Smith, Van Buren, Warren, White | 2305 Silverdale Road 37601 Phone: 423-854-5400 Counties: Carter, Greene, Hancock, Hawkins, Johnson, Sullivan, Union, Washington |
| Memphis EFO | Columbia EFO | Chattanooga EFO | Knoxville EFO |
| 2510 Mt. Moriah Road STE E-645 Perimeter Park 38115 Phone: 901-368-7939 Counties: Fayette, Shelby, Tipton | 2484 Park Plus Drive 38401 Phone: 931-380-3371 Counties: Bedford, Coffee, Franklin, Giles, Hickman, Lawrence, Lewis, Lincoln, Marshall, Maury, Moore, Perry, Wayne | 540 McCallie Avenue STE 550 State Office Building 37402 Phone: 432-634-5745 Counties: Bledsoe, Bradley, Grundy, Hamilton, Marion, McMinn, Meigs, Polk, Rhea, Sequatchie | 3711 Middlebrook Pike 37921 Phone: 865-594-6035 Counties: Anderson, Blount, Campbell, Claiborne, Cocke, Grainger, Hamblen, Jefferson, Knox, Loudon, Monroe, Morgan, Roane, Scott, Sevier, Union |

| Section 15: Adm | Section 15: Administrative Information (Official Use Only). | | | | | |
|-----------------|---|-----------|---|--|--|--|
| Date Received: | File# assigned | Fee paid: | e paid: Application administratively complete: Complete Application | | | |
| | _ | ☐Yes ☐ No | Yes No | | | |
| | | □ N/A | | | | |
| | | | | | | |
| | | Ck# | | | | |

CN-1091 (Rev. 12-2007) Page 3 of 3 RDAs 1017r, 2970, 2971

JOINT APPLICATION FORM Department of the Army/TVA

Paperwork Reduction Act Statement - Public reporting burden for this collection of information is estimated to average 1.5 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Agency Clearance Officer, Tennessee Valley Authority, 1101 Market Street, Chattanooga, Tennessee 37402; and to the Office of Management and Budget, Paperwork Reduction Project (3316-0060), Washington, D.C. 20503.

The Department of the Army (DA) permit program is authorized by Section 10 of the Rivers and Harbors Act of 1899 and Section 404 of the Clean Water Act (P.L. 95-217). These laws require permits authorizing structures and work in or affecting navigable waters of the United States and the discharge of dredged or fill material into waters of the United States. Section 26a of the Tennessee Valley Authority Act, as amended, prohibits the construction, operation, or maintenance of any structure affecting navigation, flood control, or public lands or reservations across, along, or in the Tennessee River or any of its tributaries until plans for such construction, operation, and maintenance have been submitted to and approved by the Tennessee Valley Authority (TVA).

| Name and Address of Applicant: | Name, Address, and Title of Authorized Agent: |
|--|--|
| Telephone Number: HomeOffice | Telephone Number: HomeOffice |
| Location where activity exists or will occur (include Stream Name a | nd Mile, if known): |
| Application submitted to DA TVA | |
| Date activity is proposed to commence: | Date activity is proposed to be completed: |
| Describe in detail the proposed activity, its purpose and intended us erected including those placed on fills, piles, or floating platforms. A discharged or placed in the water; the means of conveyance; and the sheets if needed. | Also describe the type, composition, and quantity of materials to be the source of discharge or fill material. Please attach additional |
| Application is hereby made for approval of the activities described hereby this application, and that to the best of my knowledge and belief such possess the authority to undertake the proposed activities. I agree the attached terms and conditions and any special conditions note the U.S. Army Corps of Engineers may impose additional | ch information is true, complete, and accurate. I further certify that e that, if this application is approved by TVA, I will comply with that may be imposed by TVA at the time of approval. Please |
| Date | Signature of Applicant |
| 18 U.S.C. Section 1001 provides that: Whoever, in any manner within the | e jurisdiction of any department or agency of The United States knowingly and |

willfully falsifies, conceals, or covers up by any trick, scheme, or device a material fact or makes any false, fictitious or fraudulent statements or representations or makes or uses any false writing or document knowing same to contain any false, fictitious or fraudulent statement or entry, shall be

fined not more than \$10,000 or imprisoned not more than five years, or both. The appropriate DA fee will be assessed when a permit is issued.

TV/A 17423 [9-2003] Page 1 of 2

| Names, addresses, and telephone numbers of adjoining property owners, lessees, etc., whose properties also join the waterway: | | | | | |
|---|--|---|--|--|--|
| | | | | | |
| | | | | | |
| | | | | | |
| List of previous DA/TVA permits/app | orovals DA _ | Permit Number | TVA | Date | |
| Is any portion of the activity for which Month and year the activity was com- | • | • | Yes | " attach explanation) Irawings. | |
| List all approvals or certifications rec discharges, deposits, or other activit | | | encies for any structures, o | construction, | |
| Issuing Agency | Type Approval | Identification No. | Date of Application | Date of Approval | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Has any agency denied approval for Yes No (If "Yes" at | the activity described here | in or for any activity dire | ectly related to the activity of | described herein? | |
| This is formed to be because of a discount | | cy Act Statement | ha faraharan afilia fara B | de la companya de la | |
| This information is being requested in a requested is voluntary; however, failure being denied a Section 26a permit. An the impact of the proposed project or application is made a matter of public rederal, state, or local agencies, and to to the program; to respond to a congruence corrective action, litigation or law enforces | to provide any required inform application that is not comple in TVA programs and the en- record through issuance of a consultants, contractors, etc., ressional inquiry concerning | nation or documents may rete will be returned for addivironment and to determinoublic notice if warranted for use in program evaluati | esult in a delay in processing itional information. TVA uses ne if the project can be appl. Routine uses of this inforrions, studies, or other matters | g your application or in your is this information to assess proved. Information in the mation include providing to is involving support services | |
| Project plans or drawings should acc 17 inches or contained on a 3-1/2 in Army Corps of Engineers offices. At | ch floppy computer disc in | "dxf" format, and should | be submitted to the appro | | |
| U.S.A.C.E. Offices | | TVA Office Location | | | |
| U.S. Army Corps of Engineers Eastern Regulatory Field Office P.O. Box 465 Lenoir City, Tennessee 37771-0465 (865) 986-7296 | U.S. Army Corps of E Savannah District The Plaza, Suite 130 1590 Adamson Parky Morrow, Georgia 302 (678) 422-2729 | way | Tennessee Valley Aut | Tennessee Valley Authority | |
| U.S. Army Corps of Engineers Nashville District | U.S. Army Corps of E Western Regulatory F | | | | |

2042 Beltline Road, SW, Bldg C, Suite 415

Decatur, Alabama 35602

U.S. Army Corps of Engineers

Asheville Regulatory Field Office

Asheville, North Carolina 28801-5006

151 Patton Avenue, Room 208

(256) 350-5620

(828) 271-4856

P.O. Box 1070

(615) 736-5181

Norfolk District

(276) 623-5259

P.O. Box 338

Nashville, Tennessee 37202-1070

U.S. Army Corps of Engineers

Abingdon, Virginia 24212



Section 26a Permit and Land Use Application Applicant Disclosure Form


By signing the Joint Application Form (Department of Army/TVA) or TVA's Land Use Application and again below, you agree to disclose any business, political, or financial interest that may present an actual or potential conflict of interest with TVA. If a new significant business, political, or financial interest is obtained during the period of the time that the application is under review, you agree to file an additional disclosure.

| Discl | ose if any of the following apply to you (check all that apply 🔽). I am: |
|---------------|---|
| | An elected government official |
| | A policy making level employee of an entity that regulates TVA or its activities |
| | A management level employee of a power customer of TVA |
| | A TVA Director |
| | A TVA employee |
| | An immediate family member of one of the above |
| | A representative of a corporation or entity submitting an application and one of the above applies to me. Print entity or corporation name, and identify which of the above applies to you. |
| | A representative of a corporation or entity submitting an application and the corporation or entity has partners, investors, or senior management that are one of the above. Print entity or corporation name, and identify the partner(s), investor(s), or senior manager(s) and which of the above applies. |
| | None of the above ou have any other business or personal relationships not covered in your answers above that could appear to be a conflict of est? (check one) Yes No lf yes, provide more detail here. |
| reque Plea | gning this form, you consent to this Applicant Disclosure Form being made available to the public in response to an appropriate est, including, without limitation, a request made under the Freedom of Information Act. se sign and return this form with your application package. Your application cannot be processed without receipt of this ed form. |
| Nam | e of applicant (Printed) |
| Sign | ature of Applicant Date |
| | |

All applications and communications that occur as part of the application process may be made public to the extent permitted by applicable law, including the Freedom of Information Act and the Privacy Act, and could be reviewed formally by the Office of Inspector General (OIG). All written correspondence regarding your request may be forwarded to the TVA Chief Ethics and Compliance Officer (CECO) and the OIG, and all oral communication between TVA and the applicant regarding this request may be documented and maintained by TVA. Inquiries concerning your application from any person who falls into one of the categories described above will be disclosed to the CECO and OIG.

Privacy Act Statement

This information is being requested in accordance with Sections 4(k), 15d, 26a, and/or 31 of the TVA Act; 40 U.S.C. § 1314; 30 U.S.C. § 185; 16 U.S.C. § 667b; and/or 40 U.S.C. § 483. Disclosure of the information requested is voluntary; however, failure to provide any required information or documents may result in a delay in processing your application or in your application being denied. An application that is not complete will be returned for additional information. TVA uses this information to assess the impact of the proposed project on TVA programs and the environment and to determine if the project can be approved. Information in the application is made a matter of public record through issuance of a public notice if warranted. Routine uses of this information include providing to federal, state, or local agencies, and to consultants, contractors, etc., for use in program evaluations, studies, or other matters involving support services to the program; to respond to a congressional inquiry concerning the application or the applicable program; and for oversight or similar purposes, corrective action, litigation, or law enforcement.

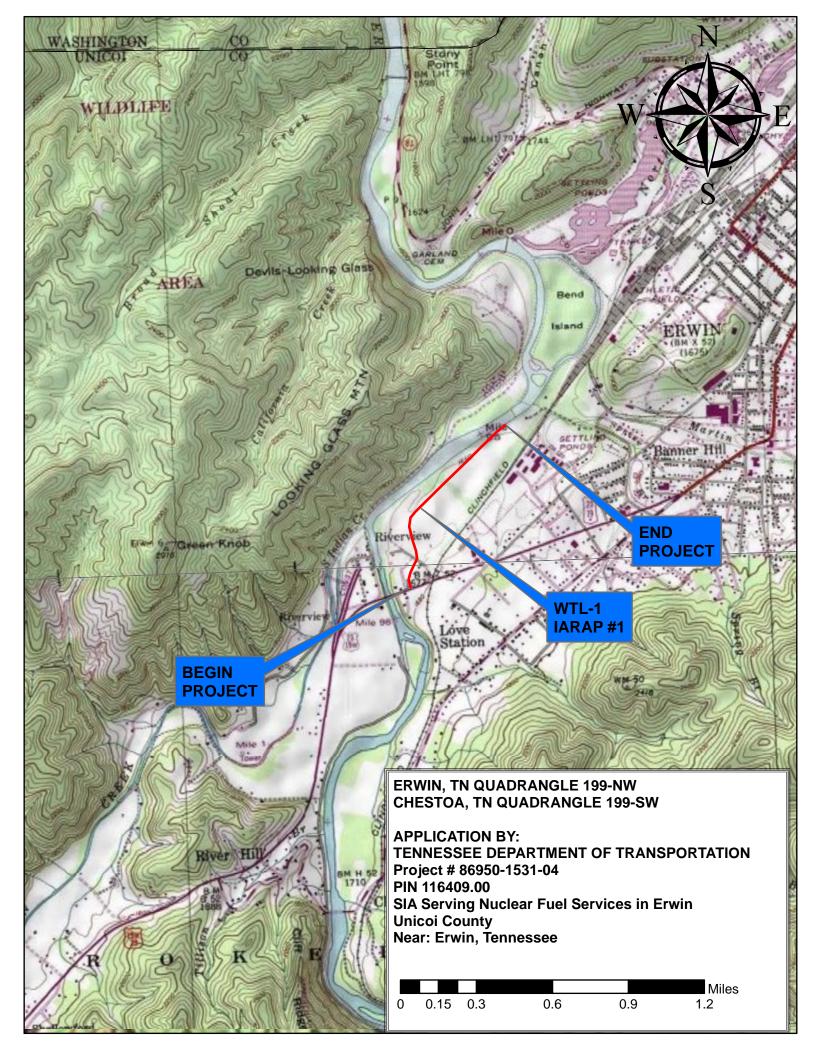





STATE OF TENNESSEE DEPARTMENT OF TRANSPORTATION

ENVIRONMENTAL DIVISION

SUITE 900. JAMES K. POLK BUILDING 505 DEADERICK STREET NASHVILLE, TENNESSEE 37243-1402 (615) 741-3655

JOHN C. SCHROER COMMISSIONER

BILL HASLAM GOVERNOR

MEMORANDUM

TO: Freddy Miller

Region 1 Design

FROM: Keven Brown

Keven A. Region 1 Ecology

Brown

Digitally signed by Keven A. Brown DN: cn=Keven A. Brown, o=TDOT. ou=Ecology Section, email=Keven.Brown@tn.gov, c=US Date: 2013.07.15 13:39:31 -04'00'

DATE: July 15, 2013

SUBJECT: **REVISED EBR**: SIA serving Nuclear Fuel Services in Erwin

Unicoi County, TN

PIN: 116409.00 P.E. # 86950-1531-04


An ecological evaluation of the subject project has been conducted with the following results:


| | No wetlands identified: |
|----------|--|
| <u>X</u> | Wetlands identified in project impact area: WTL-1 |
| <u>X</u> | No streams present: |
| | Streams present: |
| <u>X</u> | Protected species not present within project impact area |
| | Protected species identified within project impact area: |

Please incorporate this information into the project plans as needed. Thank you for your assistance with this project. If you have any questions or comments please contact me at Keven.Brown@tn.gov or 865-594-2437.

Copy: Ataur Rahman – w/attachment John Hewitt: - w/attachments Jon Zirkle - w/attachments

> Dennis McClure – w/attachments Ann Andrews – w/attachments Project File: - w/attachments

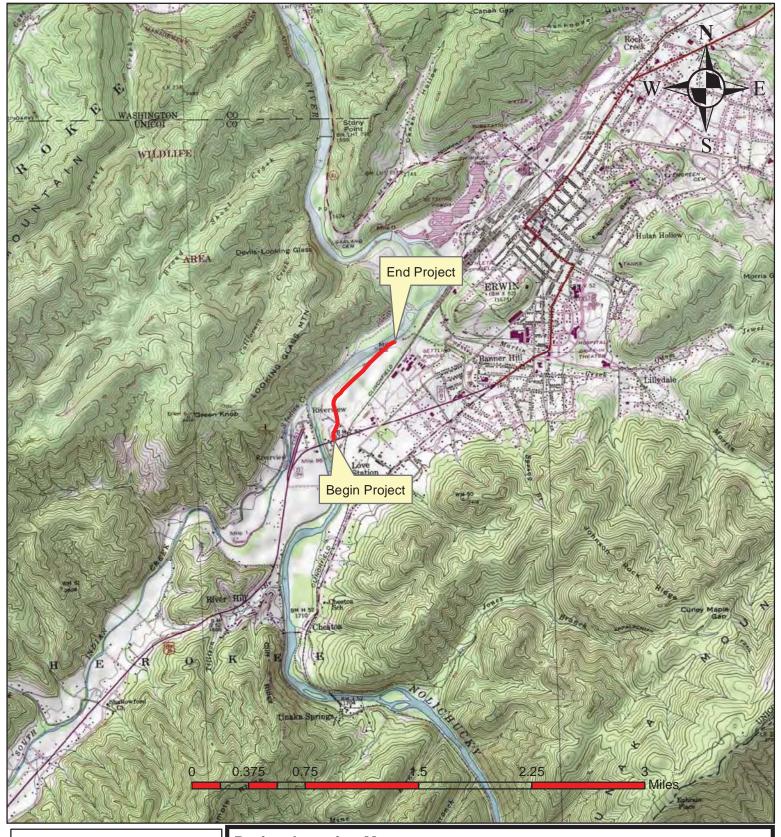




Project Location Map SIA Serving Nuclear Fuel Services Unicoi County, TN

Erwin, TN Quadrangle, 199-NW

Date 05/17/13



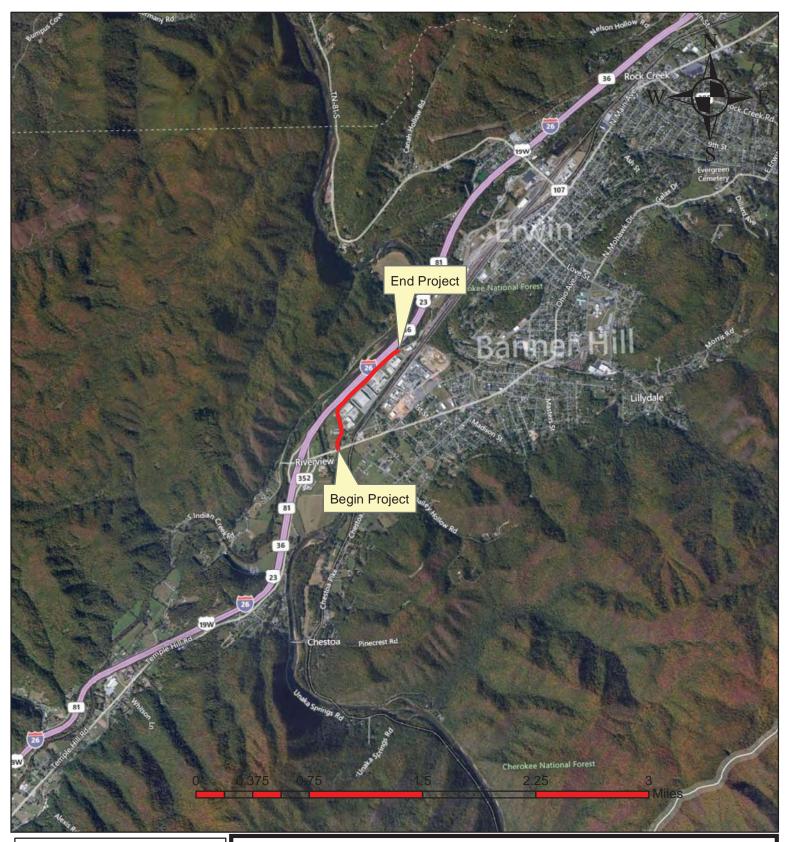




Project Location Map SIA Serving Nuclear Fuel Services Unicoi County, TN

Erwin, TN Quadrangle, 199-NW

Date 05/17/13



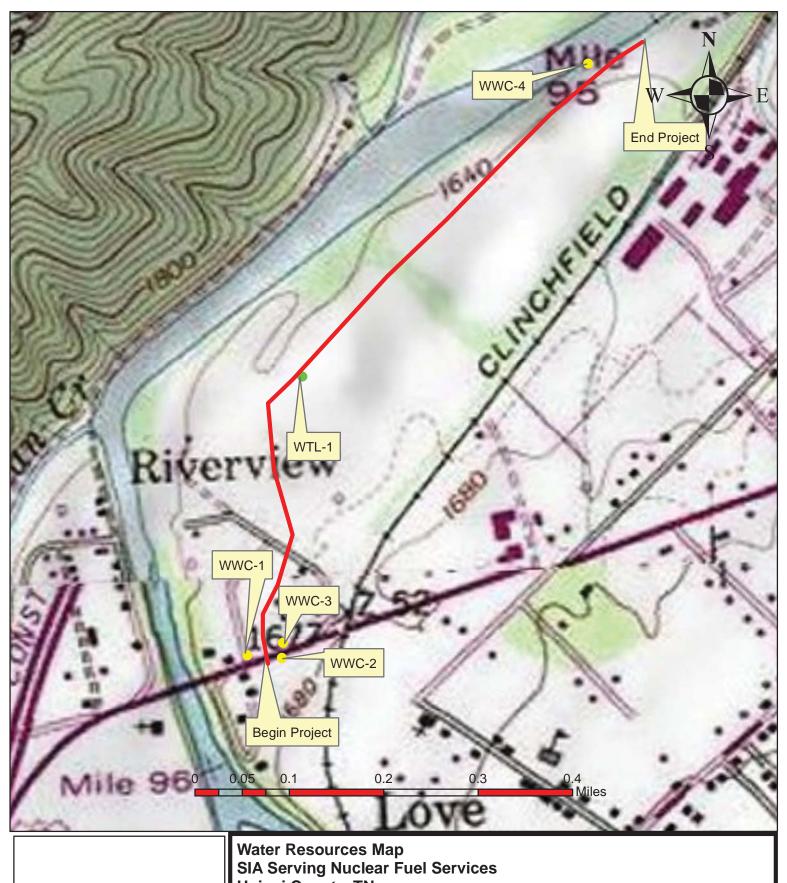




Unicoi County, TN

Erwin, TN Quadrangle, 199-NW

Date 05/17/13



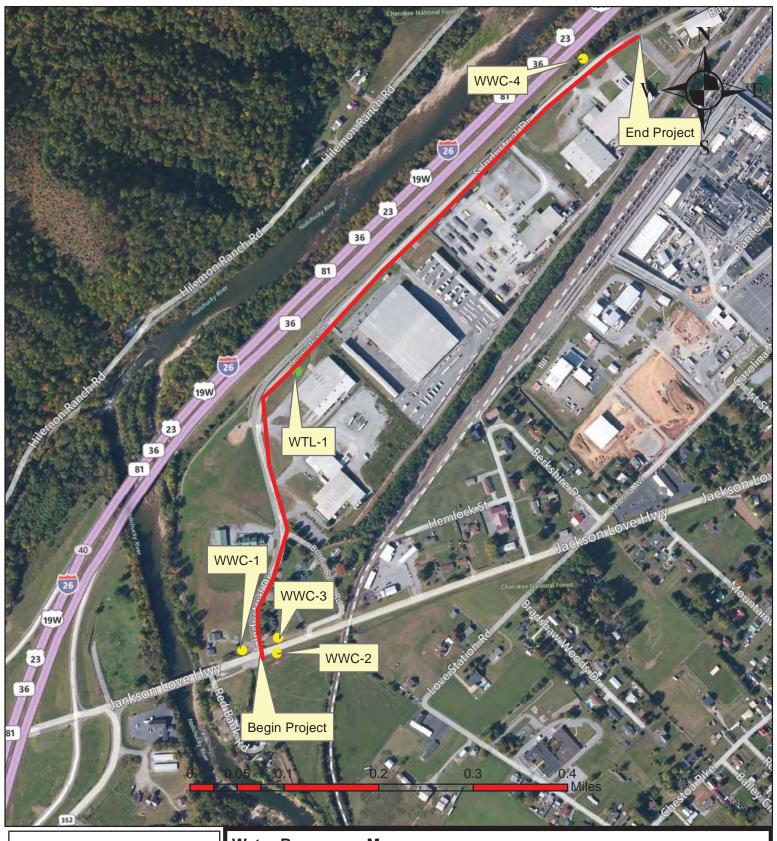



Water Resources Map SIA Serving Nuclear Fuel Services Unicoi County, TN

Erwin, TN Quadrangle, 199-NW

Date 05/17/13



Ecology Field Data Sheet: Water Resources

Project: (Unicoi Co.: SIA serving Nuclear Fuel Services PE No., 86950-1531-04 PIN 116409.00)

Date of survey: 05/24/13 Biologist: Matt Bowling Affiliation: AMEC

| 2-Map label and name V 3-Latitude/Longitude 3 | STA 101+25 RT to STA 101+25 LT WWC-1 | STA 101+25 RT to STA 103+00 RT WWC-2 | | | |
|--|---|---|--|--|--|
| 3-Latitude/Longitude 3 | VV VV C- I | I VV VV (/ | | | |
| | 00.100.10 | 36.1238 -82.44214 | | | |
| I ∕I_Dotontial impact | 36.12346 -82.44214 | | | | |
| • | encapsulation | encapsulation | | | |
| 5-Feature description: | | | | | |
| | Wet weather conveyance | Wet weather conveyance | | | |
| 1 7 | n | n | | | |
| defined channel (y/n) y | , | У | | | |
| | straight | straight | | | |
| | 2' | 2' | | | |
| 1 | 4' | 3' | | | |
| | 2", 1:1 | 6" | | | |
| | <5% | <5% | | | |
| | Soil-60% Rip rap-40% | Soil-100% | | | |
| | 50%, 25%, 25% | 0%, 100%, 0% | | | |
| width of buffer zone | LB-0' RB-0' | LB-0' RB-0' | | | |
| water flow y | | у | | | |
| ^ | 1-3" | 1-3" | | | |
| | 1' | 1' | | | |
| 2 . | fair | fair | | | |
| OHWM indicators V | Wrack lines | Wrack lines | | | |
| C | n | n | | | |
| bank stability: LB, RB | LB-good, RB-good | LB-good, RB-good | | | |
| dominant species: LB, RB | LB- fescue, RB-fescue | LB- fescue, RB-fescue | | | |
| overhead canopy (%) | 0% | 25% | | | |
| benthos | None observed | None observed | | | |
| fish | None observed | None observed | | | |
| algae or other aquatic life | None observed | None observed | | | |
| habitat assessment score | n/a | n/a | | | |
| photo number (s) | Photo 1 and 2 | Photo 3 | | | |
| | 05/22-0.20, 05/23-0.88 | 05/22-0.20, 05/23-0.88 | | | |
| 6- HUC code & name | 060101080606-Martin Creek-Nolichucky | 060101080606-Martin Creek-Nolichucky | | | |
| (12-digit) F | River | River | | | |
| 7-Confirmed by: | not needed-obvious | not needed-obvious | | | |
| 8-Mitigation | No X Yes : (include on Form J) | No X Yes : (include on Form J) | | | |
| | No_X Yes | No_X Yes | | | |
| | No X | No X | | | |
| (-) | Yes : Habitat | Yes : Habitat | | | |
| | Siltation | Siltation | | | |
| | No X Yes Fully supporting | No X Yes | | | |
| 12-Notes | tox roor any supporting | | | | |
| Estimate size (acres) of lake or | | | | | |
| pond if applicable; provide any | | | | | |
| pertinent information needed | | | | | |
| to better describe feature; | | | | | |
| indicate if hydrologic | | | | | |
| determination form was | | | | | |
| completed. | | | | | |

Ecology Field Data Sheet: Water Resources

Project: (Unicoi Co.: SIA serving Nuclear Fuel Services PE No., 86950-1531-04 PIN 116409.00)

Date of survey: 05/24/13 Biologist: Matt Bowling Affiliation: AMEC

| 1 Station: frame where | CTA 101 - 00 LT to CTA 102 - E0 LT | CTA 22 . E0 DT to CTA 20 . E0 DT |
|--|--------------------------------------|--|
| 1-Station: from plans | STA 101+00 LT to STA 102+50 LT | STA 23+50 RT to STA 28+50 RT |
| 2-Map label and name | WWC-3 | WTL-1 |
| 3-Latitude/Longitude | 36.12387 -82.44179 | 36.12744 -82.44166 |
| 4-Potential impact | encapsulation | fill |
| 5-Feature description: | | |
| what is it | Wet weather conveyance | wetland |
| blue-line on topo? (y/n) | n | n/a |
| defined channel (y/n) | у | n/a |
| straight or meandering | straight | n/a |
| channel bottom width | 2' | n/a |
| top of bank width | 3' | n/a |
| bank height and slope ratio | 6" | n/a |
| avg. gradient of stream (%) | <5% | n/a |
| substratum | Soil-100% | n/a |
| riffle/run/pool | 0%, 100%, 0% | n/a |
| width of buffer zone | LB-0' RB-0' | n/a |
| water flow | y 1 0" | n/a |
| water depth | 1-3" | n/a |
| water width | 1' | n/a |
| general water quality | fair Wrack lines | n/a |
| OHWM indicators | † | n/a |
| groundwater connection | n LB-good, RB-good | n/a n/a |
| bank stability: LB, RB | LB-good, NB-good | n/a |
| dominant species: LB, RB | LB- fescue, RB-fescue | II/a |
| overhead canopy (%) | 0% | 0% |
| benthos | None observed | None observed |
| fish | None observed | None observed |
| algae or other aquatic life | None observed | None observed |
| habitat assessment score | n/a | n/a |
| photo number (s) | Photo 4 | Photo 5 and Photo 6 |
| rainfall information | 05/22-0.20, 05/23-0.88 | 05/22-0.20, 05/23-0.88 |
| 6- HUC code & name | 060101080606-Martin Creek-Nolichucky | 060101080606-Martin Creek-Nolichucky |
| (12-digit) | River | River |
| 7-Confirmed by: | not needed-obvious | not needed-obvious |
| 8-Mitigation | No_X Yes: (include on Form J) | No_X Yes: (include on Form J) |
| 9-ETW | No_X Yes | NoX Yes |
| 10-303 (d) List | NoX | NoX |
| | Yes: Habitat | Yes: Habitat |
| | Siltation | Siltation |
| 11-Assessed | No_X YesFully supporting | No_X Yes |
| 12-Notes | | |
| Estimate size (acres) of lake or | | Mothered (MTL 4) is because in the |
| pond if applicable; provide any | | Wetland (WTL-1) is located in the |
| pertinent information needed | | roadway ditch adjacent to S. Industrial Drive. |
| to better describe feature; indicate if hydrologic | | Dilve. |
| determination form was | | |
| | | |
| completed. | | |

Ecology Field Data Sheet: Water Resources

Project: (Unicoi Co.: SIA serving Nuclear Fuel Services PE No., 86950-1531-04 PIN 116409.00)

Date of survey: 05/24/13 Biologist: Matt Bowling Affiliation: AMEC

| 1-Station: from plans | STA 51+25 LT to STA 52+00 LT | |
|----------------------------------|--------------------------------------|--|
| 2-Map label and name | WWC-4 | |
| • | | |
| 3-Latitude/Longitude | 36.12364 -82.4354 | |
| 4-Potential impact | runoff | |
| 5-Feature description: | | |
| what is it | Wet weather conveyance | |
| blue-line on topo? (y/n) | n | |
| defined channel (y/n) | У | |
| straight or meandering | straight | |
| channel bottom width | 2' | |
| top of bank width | 3' | |
| bank height and slope ratio | 6" | |
| avg. gradient of stream (%) | <5% | |
| substratum | Soil-50% Rip Rap-50% | |
| riffle/run/pool | 50%, 25%, 25% | |
| width of buffer zone | LB-10' RB-10' | |
| water flow | У | |
| water depth | 1-3" | |
| water width | 1' | |
| general water quality | fair | |
| OHWM indicators | Wrack lines | |
| groundwater connection | unknown | |
| bank stability: LB, RB | LB-good, RB-good | |
| dominant species: LB, RB | LB- boxelder, RB-boxelder | |
| overhead canopy (%) | 50% | |
| benthos | None observed | |
| fish | None observed | |
| algae or other aquatic life | None observed | |
| habitat assessment score | 61 | |
| photo number (s) | Photo 7 & Photo 8 | |
| rainfall information | 05/22-0.20, 05/23-0.88 | |
| 6- HUC code & name | 060101080606-Martin Creek-Nolichucky | |
| (12-digit) | River | |
| 7-Confirmed by: | Hydrologic Determination Score-17.5 | |
| 8-Mitigation | No X Yes : (include on Form J) | |
| 9-ETW | No X Yes | |
| 10-303 (d) List | No X | |
| (, | Yes : Habitat | |
| | Siltation | |
| 11-Assessed | No_XYesFully supporting | |
| 12-Notes | | |
| Estimate size (acres) of lake or | | |
| pond if applicable; provide any | | |
| pertinent information needed | | |
| to better describe feature; | | |
| indicate if hydrologic | | |
| determination form was | | |
| completed. | | |
| | | |

WETLAND DETERMINATION DATA FORM – Eastern Mountains and Piedmont

| Project/Site: Unicoi Co, SIA serving NFS | _ Map Label: WTL-1 |
|---|---------------------------|
| P.E. and PIN: 86950-1531-04 116409.00 Date: 02/07/13 S | |
| Investigator(s): MWB HUC 12 (code and name): 060101080606-Martin | n Creek |
| Landform (hillslope, terrace, etc.): Floodplain Local relief (concave, convex, none): none | Slope (%): n/a |
| Subregion (LRR or MLRA): Lat: 36.12744 Long:82.44166 | |
| Soil Map Unit Name: Toccoa NWI classification | |
| Are climatic / hydrologic conditions on the site typical for this time of year? Yes No (If no, explain in Rema | rks.) |
| Are Vegetation, Soil, or Hydrology significantly disturbed? Are "Normal Circumstances" prese | ent? Yes <u>√</u> No |
| Are Vegetation, Soil, or Hydrology naturally problematic? (If needed, explain any answers in | |
| SUMMARY OF FINDINGS – Attach site map showing sampling point locations, transects, im | nportant features, etc. |
| Hydrophytic Vegetation Present? Hydric Soil Present? Wetland Hydrology Present? Yes No Yes No Yes No | No |
| Remarks: | |
| Photos: 5 & 6 Confirmation (by, date): | |
| Buffer (ft.): Mitigation (to be included in design): Notes: | |
| Portion Affected (permanent) (ac.): Notes: | |
| Portion Affected (temporary) (ac.): | |
| HYDROLOGY | |
| Wetland Hydrology Indicators: Secondary Indicators | (minimum of two required) |
| Primary Indicators (minimum of one is required; check all that apply) Surface Soil Crace | cks (B6) |
| ✓ Surface Water (A1) | ed Concave Surface (B8) |
| High Water Table (A2) Hydrogen Sulfide Odor (C1) Drainage Pattern | s (B10) |
| ✓ Saturation (A3) Oxidized Rhizospheres on Living Roots (C3) Moss Trim Lines | , , |
| Water Marks (B1) Presence of Reduced Iron (C4) Dry-Season Water | |
| Sediment Deposits (B2) Recent Iron Reduction in Tilled Soils (C6) Crayfish Burrows | |
| Drift Deposits (B3) Thin Muck Surface (C7) Saturation Visible Algal Mat or Crust (B4) Other (Explain in Remarks) Stunted or Stress | e on Aerial Imagery (C9) |
| Iron Deposits (B5) Geomorphic Posi | ` , |
| Inundation Visible on Aerial Imagery (B7) Shallow Aquitard | |
| Water-Stained Leaves (B9) Microtopographic | |
| Aquatic Fauna (B13) FAC-Neutral Tes | t (D5) |
| Field Observations: | |
| Surface Water Present? Yes No Depth (inches): | |
| Water Table Present? Yes No Depth (inches): | , |
| Saturation Present? Yes No Depth (inches): Wetland Hydrology Present? | Yes No |
| (includes capillary fringe) Describe Recorded Data (stream gauge, monitoring well, aerial photos, previous inspections), if available: | |
| YTD Rainfall totals are greater than Normal | |
| Remarks: | |
| Wetland (WTL-1) is located in roadway ditch adjacent to S. Industrial Drive. | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

VEGETATION (Four Strata) – Use scientific names of plants.

| Tree Stratum (Plot size:) | Absolute % Cover | Dominant Species? | | Dominance Test worksheet: |
|---|------------------|-------------------|------------|---|
| | | | | Number of Dominant Species That Are OBL, FACW, or FAC: 3 (A) |
| | | | | Total Number of Dominant Species Across All Strata: 3 (B) |
| | | | | Percent of Dominant Species That Are ORL FACW or FAC: 100 (A/R) |
| | | | | That Are OBL, FACW, or FAC: 100 (A/B) |
| | | | | Prevalence Index worksheet: |
| | | | | Total % Cover of: Multiply by: |
| | | = Total Cov | | OBL species 2 x 1 = 2 |
| Sapling/Shrub Stratum (Plot size: 10' x10' | - / | ., | EACW/ | FACW species $\frac{1}{x^2}$ $x^2 = \frac{2}{x^2}$ |
| Boxelder (acer negundo) Green Ash (fraxinus pennsylvanica) | | У | FACW | FAC species x 3 = |
| * | | | | FACU species x 4 = |
| | | | | UPL species x 5 = |
| l | | | | Column Totals: (A) (B) |
| | | | | Prevalence Index = B/A = 1.3 |
| ò | | | | Hydrophytic Vegetation Indicators: |
| · | | | | 1 - Rapid Test for Hydrophytic Vegetation |
| J | | | | ✓ 2 - Dominance Test is >50% |
|) | | | | 3 - Prevalence Index is ≤3.0 ¹ |
| 0 | | = Total Cov | | 4 - Morphological Adaptations ¹ (Provide supporting data in Remarks or on a separate sheet) |
| <u>Herb Stratum</u> (Plot size:) Cattails (typha lattifolia) | | ., | OBL | Problematic Hydrophytic Vegetation ¹ (Explain) |
| | | | OBL n/a | |
| Polygonium sp. Carex sp. | | у | n/a | ¹ Indicators of hydric soil and wetland hydrology must be present, unless disturbed or problematic. |
| l. <u>·</u> | | | | Definitions of Four Vegetation Strata: |
| 5 | | | | Tree Mondy plants evaluating since 2 in (7.6 cm) or |
| S | | | | Tree – Woody plants, excluding vines, 3 in. (7.6 cm) or more in diameter at breast height (DBH), regardless of height. |
| 3 9 | | | | Sapling/Shrub – Woody plants, excluding vines, less than 3 in. DBH and greater than 3.28 ft (1 m) tall. |
| 0 1 | | | | Herb – All herbaceous (non-woody) plants, regardless of size, and woody plants less than 3.28 ft tall. |
| 2. | | | | Woody vine – All woody vines greater than 3.28 ft in |
| Noody Vine Stratum (Plot size:) | | = Total Cov | | height. |
| | | | | |
| D | | | | |
| 3. | | | | |
| ł | | | | Hydrophytic |
| 5 | | | | Vegetation |
| S | | | | Present? Yes No |
| | | = Total Cov | er er | |
| Remarks: (Include photo numbers here or on a sep | arate sheet.) | | | |
| Photo 5 & 6 | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Map Label: WTL-1

SOIL

| Profile Description: (Describe to the depth needed to document the indicator or confirm the absence of indicators.) | |
|---|-------------------------------|
| Depth Matrix Redox Features | |
| (inches) Color (moist) % Color (moist) % Type ¹ Loc ² Texture Remains | rks |
| 0-10" 7.5YR 4/1 sandy loam | |
| | |
| | |
| | |
| | |
| | _ |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| ¹ Type: C=Concentration, D=Depletion, RM=Reduced Matrix, MS=Masked Sand Grains. ² Location: PL=Pore Lining, M=Mat | rix. |
| Hydric Soil Indicators: Indicators for Problematic | c Hydric Soils ³ : |
| Histosol (A1) Dark Surface (S7) 2 cm Muck (A10) (MLF | RA 147) |
| Histic Epipedon (A2) Polyvalue Below Surface (S8) (MLRA 147, 148) Coast Prairie Redox (A | · · |
| Black Histic (A3) Thin Dark Surface (S9) (MLRA 147, 148) (MLRA 147, 148) | , |
| Hydrogen Sulfide (A4) Loamy Gleyed Matrix (F2) Piedmont Floodplain S | oils (F19) |
| Stratified Layers (A5) Depleted Matrix (F3) (MLRA 136, 147) | |
| 2 cm Muck (A10) (LRR N) Redox Dark Surface (F6) Red Parent Material (T | F2) |
| Depleted Below Dark Surface (A11) | |
| Thick Dark Surface (A12) Redox Depressions (F8) Other (Explain in Rema | arks) |
| Sandy Mucky Mineral (S1) (LRR N, Iron-Manganese Masses (F12) (LRR N, | |
| MLRA 147, 148) MLRA 136) | |
| Sandy Gleyed Matrix (S4) Umbric Surface (F13) (MLRA 136, 122) 3Indicators of hydrophytic | - |
| Sandy Redox (S5) Piedmont Floodplain Soils (F19) (MLRA 148) wetland hydrology mus | |
| Stripped Matrix (S6) unless disturbed or pro Restrictive Layer (if observed): | polematic. |
| | |
| Type: | / No |
| | NO |
| Remarks: | |
| Saile ayhihit hydric charactaristics | |
| Soils exhibit hydric characteristics. | |
| Julia extiluit fryutto characteriatica. | |
| John Garmon Hydric Characteristics. | |
| John Exhibit Hyung Characteristics. | |
| John Chimic Hydric Characteristics. | |
| John Exhibit Hyunic Characteristics. | |
| John Exhibit fryund Characteristics. | |
| Jones exhibit fryund characteristics. | |
| Colle exhibit flyuric characteristics. | |
| John Exhibit Hyune Characteristics. | |
| John Exhibit Hyuric Granacteristics. | |
| Cons exhibit flyuric characteristics. | |
| John Exhibit Hyuric Granacteristics. | |
| Cons exhibit flyuric criaracteristics. | |
| Colla Exhibit Hydric Granacteriatics. | |
| Cons exhibit flyuric characteristics. | |
| Colls exhibit flydric dialacteristics. | |
| Colla Gallion Hyuric Grianacieristics. | |
| Cons exhibit flydric driafacteristics. | |
| Colla Gallibit Hydric Gilaracteristics. | |
| Cons exhibit flyunc characteristics. | |
| Golis exhibit flyulic Granacteristics. | |

Hydrologic Determination Field Data Sheet see Division of Water Pollution Control, Version 1.4

| County: Unico; | | | | Date/Time: 7/1/13 | |
|--|---|--|----------------|------------------------------|-----------------|
| Assessors/Affiliation: | sessors/Affiliation: | | | Project ID: PE 86950-1531-04 | |
| Site Name/Description: SIA | Serving NFS | | | PIN: 1164 | 00. 100 |
| Site Location: | | | | | |
| USGS quad: Erwin TN | HUC (12 digit): 0601012 | 2000 | Lat/Lon | g: | |
| Previous Rainfall (7-days):6/24- | | 264 | | | |
| Precipitation this Season vs. Norm | drought | unknown | | | |
| Source of recent & seasonal precip data: | nal: very wet wet | average | dry | | |
| Watershed Size : | Photo | s: Yor N (c | ircle) Nu | imber: 7 | ‡ 8 |
| Soil Type(s) / Geology : | | | | Sour | ce: |
| Surrounding Land Use: Inde. | strial Paved Lawn. | 5 Grave | 1 60+ | 5 | |
| Degree of historical alteration to r Severe | | | | | lly in Notes) |
| | Primary Field Indicator | s Observ | ed | | |
| Primary Indicators | | | | NO | YES |
| Hydrologic feature exists solely | | | | | WWC |
| 2. Defined bed and bank absent, | | - | | 1 | WWC |
| Watercourse dry anytime during precipitation / groundwater con | ditions | | | NIA | WWC |
| Daily flow and precipitation rec to rainfall | ords showing feature only flows | in direct res | ponse | | WWC |
| Presence of multiple population aquatic phase | ns of obligate lotic organisms w | ith ≥ 2 month | 1 | | Stream |
| 6. Presence of fish (except Gamb | ousia) | | | ~ | Stream |
| Presence of naturally occurring | | | | unknown | Stream |
| 8. Flowing water in channel and 7 | | | hed | unknown | Stream |
| Evidence watercourse has been | en used as a supply of drinking i | water | | ~ | Stream |
| In the absence of a primary i | Indicators 1-9 = "Yes", then determination is andicator, or other definitive evid page 2 of this sheet, and prove and scoring of both the primary ance For Making Hydrologic Det | ence, complete. ence, complete vide score be & secondary | ete the selow. | econdary inc | licator table o |
| Overall Hydrologic Determ Secondary Indicator Score (if a | ination = | | | | |
| | from Wotors. Dom | | | | |
| dottilodtion / Hotes . | | | | | |
| Additional (17) | | | | | |
| astroution / Notes : | | | | | |
| astricution / Notes : | | | | | |

Secondary Field Indicator Evaluation

| A. Geomorphology (Subtotal = //) | Absent | Weak | Moderate | Strong |
|--|--------|------|----------|--------|
| Continuous bed and bank | 0 | 1 | (2) | 3 |
| 2. Sinuous channel | (0) | 1 | 2 | 3 |
| 3. In-channel structure: riffle-pool sequences | 0 | 1 | (2) | 3 |
| 4. Sorting of soil textures or other substrate | 0 | 1 | (2) | 3 |
| 5. Active/relic floodplain | 0 | 1 | 2 | 3 |
| 6. Depositional bars or benches | (0) | 1 | 2 | 3 |
| 7. Braided channel | (0) | 1 | 2 | 3 |
| Recent alluvial deposits | 0 | 0.5 | (1) | 1.5 |
| 9. Natural levees | 0 | (1) | 2 | 3 |
| 10. Headcuts | 0 | (1) | 2 | 3 |
| 11. Grade controls | 0 | 0.5 | (1) | 1.5 |
| 12. Natural valley or drainageway | 0 | 0.5 | (1) | 1.5 |
| At least second order channel on existing USGS or NRCS map | No | = 0 | Yes | = 3 |

| B. Hydrology (Subtotal = 4.5) | Absent | Weak | Moderate | Strong |
|--|--------|------|----------|--------|
| 14. Subsurface flow/discharge into channel | (0) | 1 | 2 | 3 |
| 15. Water in channel and >48 hours since sig. rain | 0 | (1) | 2 | 3 |
| 16. Leaf litter in channel (January – September) | 1.5 | (1) | 0.5 | 0 |
| 17. Sediment on plants or on debris | 0 | 0.5 | (1) | 1.5 |
| 18. Organic debris lines or piles (wrack lines) | 0 | 0.5 | 1 | (1.5) |
| 19. Hydric soils in stream bed or sides of channel | No: | = 0 | Yes = | 1.5 |

| C. Biology (Subtotal = Z) | Absent | Weak | Moderate | Strong |
|--|--------|------|----------|--------|
| 20. Fibrous roots in channel 1 | 3 | 2 | (1) | 0 |
| 21. Rooted plants in channel 1 | 3 | 2 | (1) | 0 |
| 22. Crayfish in stream (exclude in floodplain) | (0) | 0.5 | 1 | 1.5 |
| 23. Bivalves/mussels | (0) | 1 | 2 | 3 |
| 24. Amphibians | (0) | 0.5 | 1 | 1.5 |
| 25. Macrobenthos (record type & abundance) | (0) | 1 | 2 | 3 |
| 26. Filamentous algae; periphyton | 0 | 1 | 2 | 3 |
| 27. Iron oxidizing bacteria/fungus | (0) | 0.5 | 1 | 1.5 |
| 28.Wetland plants in channel 2 | 0 | 0.5 | 1 | 2 |

Focus is on the presence of upland plants. Focus is on the presence of aquatic or wetland plants.

| Total Points = 17.5 | |
|---|--|
| Under Normal Conditions, Watercourse is a Conveyance if Secondary Indicator Score < | |

| Notes : | | | | |
|---------|---|--|--|--|
| | | | | |
| | | | | |
| | _ | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |



Photo 1: STA 101+25LT, View of WWC-1 facing south.



Photo 2. STA 101+25LT, View of WWC-1 facing south.



Photo 3: STA 103+00RT, View of WWC-2 facing east.



Photo 4: STA 101+00 LT, View of WWC-3 facing north.



Photo 5: STA 23+50 RT, View of WTL-1 facing north.



Photo 6: STA 25+00 RT View of WTL-1facing northeast.



Photo 7: STA 52+00 LT, View of WWC-4 facing southwest.



Photo 8: STA 51+25 LT, View of WWC-4 facing southwest.

Index Of Sheets

| SHEET NO. | DESCRIPTION | | |
|-----------|-------------|---|--|
| 1 | TITLE SHEET | 1 | |

| | | | | | | | | | î | î | (111 | | |
|-----------------|----------------------------------|--------------------|--------------------|-----------|-----------------------------------|--------------------------------|---------------------|---------------------------|----------------|--|---|----------------------|--|
| | | | | | | | | | (PHASE | (PHASE | (PHASE | | |
| | | | | | | | | | PLANS | PLANS | PLANS | | |
| HEDOLE | | | | | | | | | CONTROL | CONTROL | CONTROL | | |
| VEMENI SC | N TABLE | | | | FILE | S | | | SEDIMENT | SEDIMENT | SEDIMENT | | |
| N PA | SITIO | | | | D PRO | DRIV | | IONS | AND | AND | AND | | |
| CAL SECTIONS AN | IT-OF-WAY ACQUIS | ERTY MAP | ENT LAYOUT | W. DETAIL | OSED LAYOUT AND | ILE OF PRIVATE | NAGE MAPS | ERT CROSS SECTI | ION PREVENTION | ION PREVENTION | ION PREVENTION | S SECTIONS | |
| 7 | RIG | PROF | PRES | 0 | PROF | PROF | DRAI | CULV | EROS | EROS | EROS | CROS | |
| Z-ZB | 3 RIGHT-OF-WAY ACQUISITION TABLE | 3A-3B PROPERTY MAP | 4-7 PRESENT LAYOUT | 4A-7A | 4B-7B PROPOSED LAYOUT AND PROFILE | 8-10 PROFILE OF PRIVATE DRIVES | 11-12 DRAINAGE MAPS | 13 CULVERT CROSS SECTIONS | 14-17 | 14A-17A EROSION PREVENTION AND SEDIMENT CONTROL PLANS (PHASE II) | 14B-17B EROSION PREVENTION AND SEDIMENT CONTROL PLANS (PHASE III) | 18-47 CROSS SECTIONS | |
| | | | | | | | | | | | | | |

STATE OF TENNESSEE DEPARTMENT OF TRANSPORTATION BUREAU OF ENGINEERING

TENN, 2013 sHET NO. FED. ALD FROD. NO. STATE PROD. NO. 86950-1531-04




S.I.A. SERVING NUCLEAR FUEL SERVICES IN ERWIN

UNICOI COUNTY

R.O.W.

STATE HIGHWAY NO. F.A.H.S. NO.

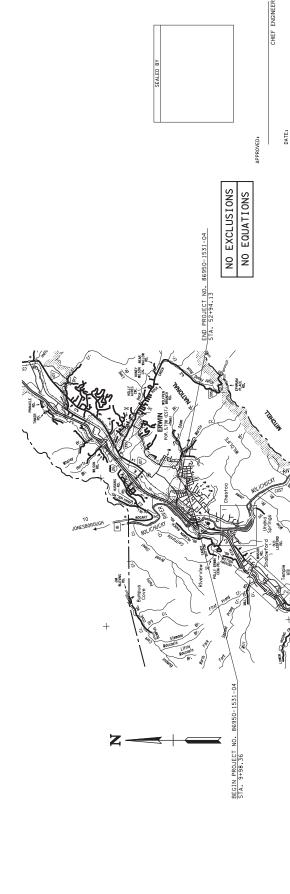

SPECIAL NOTES

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THE MEDIOUSLY UNBRAIANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST AMALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE ITENESSEE DEPEARMEN OF TRANSPORTATION DATED MARCH 1, 2006 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT

| | VE OF |
|-----------|-----------|
| INC. | CHECKED |
| PARTNERS, | |
| ∞ŏ | |
| HAMPTON | L A |
| YSINGER, | - COLFMAN |
| - | FIIGENE |
| B | |
| DESIGNED | DESTGNER |
| | |

P.E. NO. 86950-1531-04

PIN NO. 116409.00

ROADWAY LENGTH 0.813 M BRIDGE LENGTH 0.000 M BOX BRIDGE LENGTH 0.000 M PROJECT LENGTH 0.813 M

SCALE: 1"= 1 MILE

0.813 MILES 0.000 MILES 0.000 MILES 0.813 MILES

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION

COMMISSIONER


APPROVED:


FEDERAL HIGHWAY ADMINISTRA


R.O.W. FIELD APPROVED:


DIVISION ADMINISTRATOR DATE


REVIEW

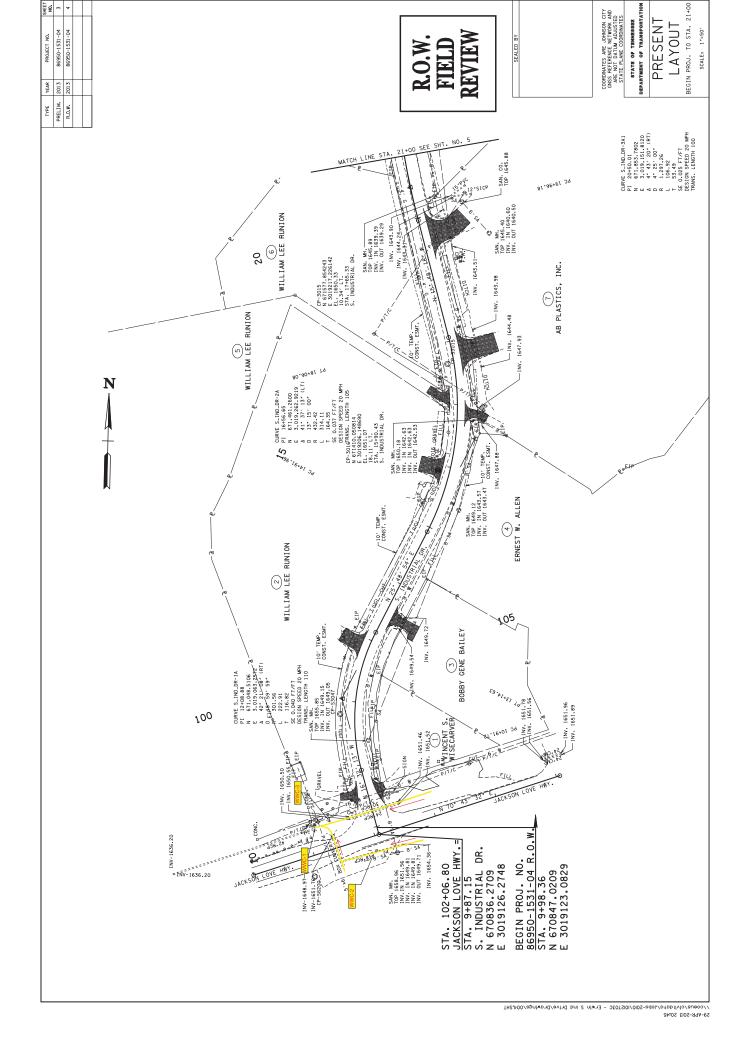


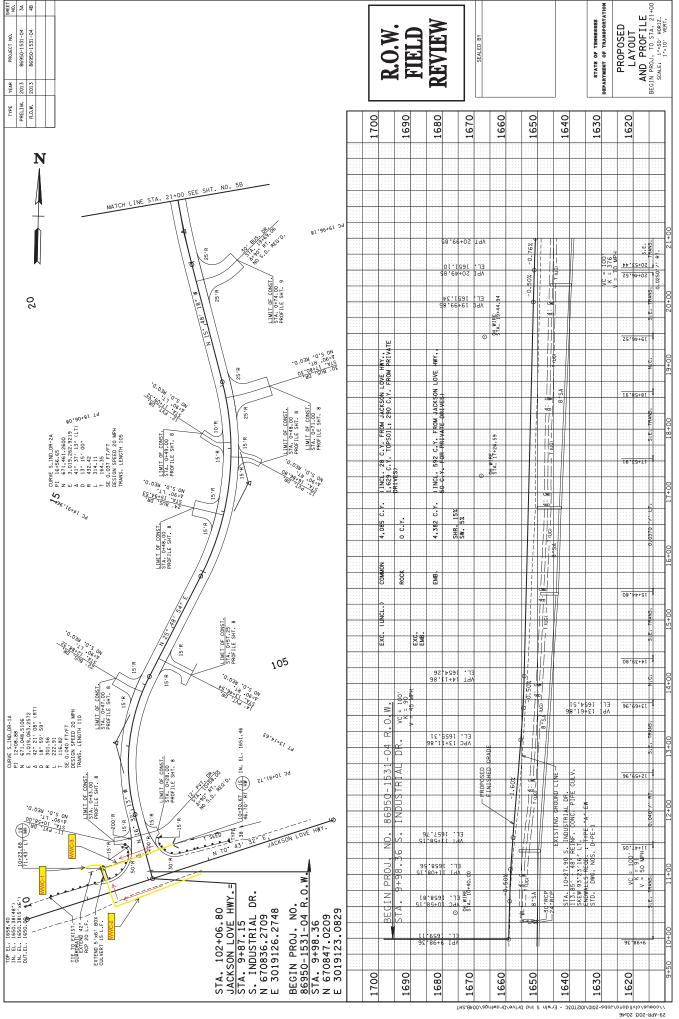


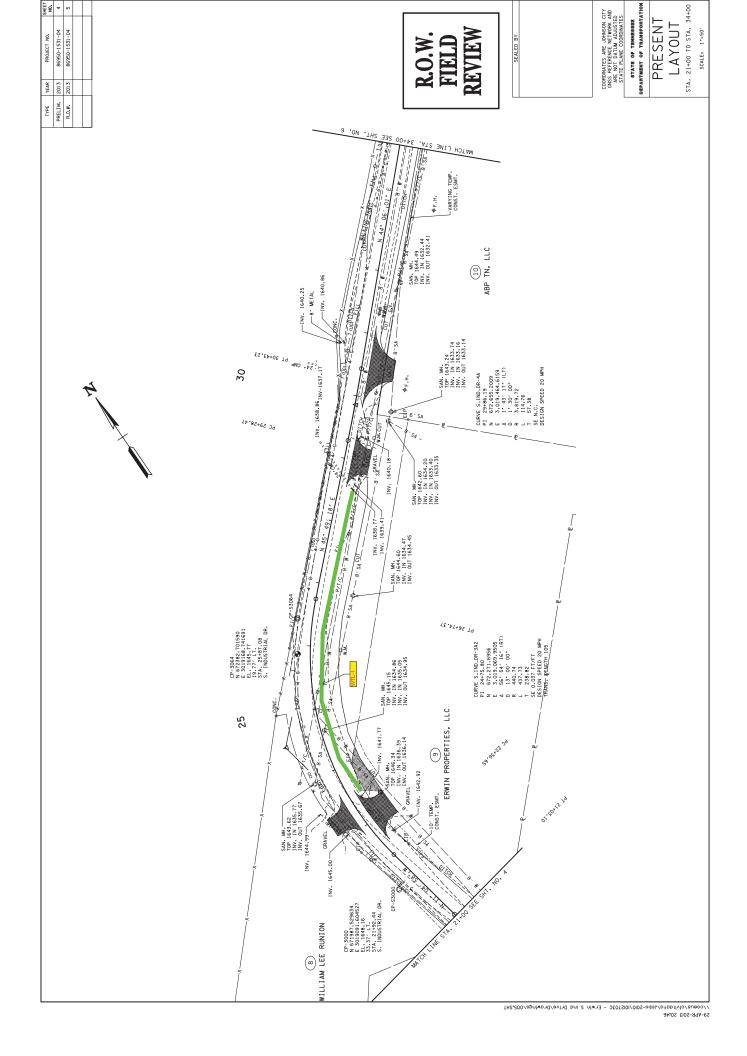


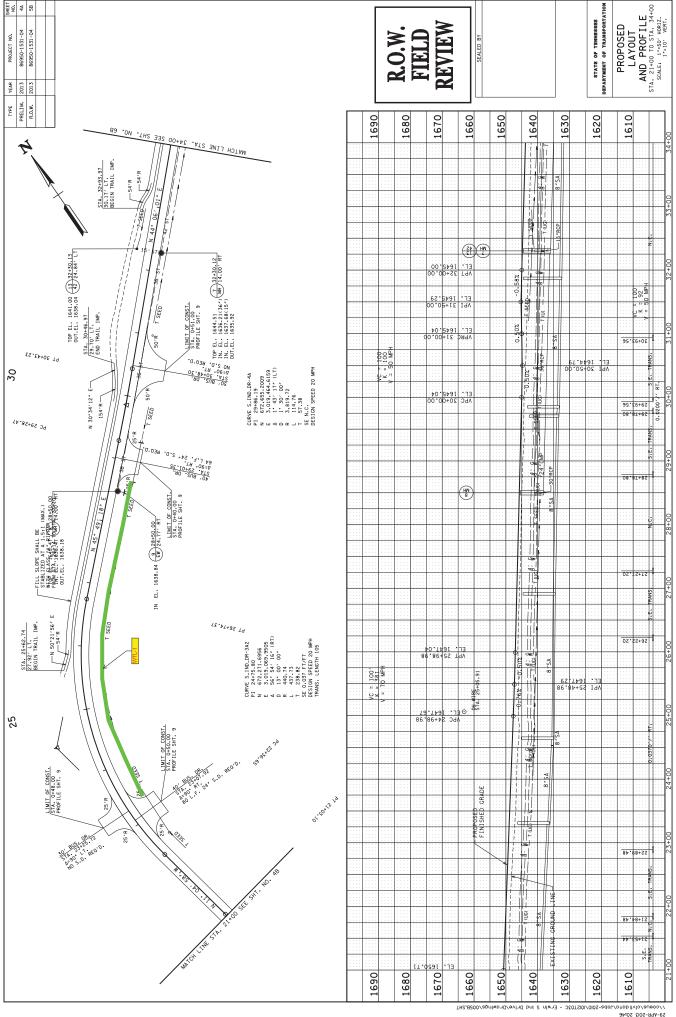

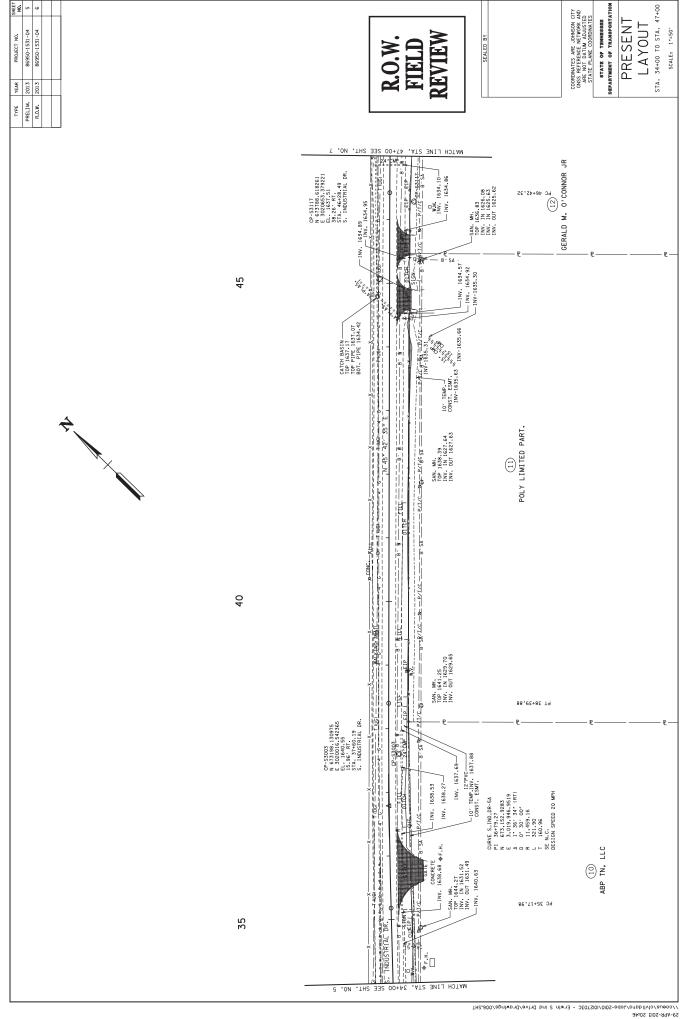

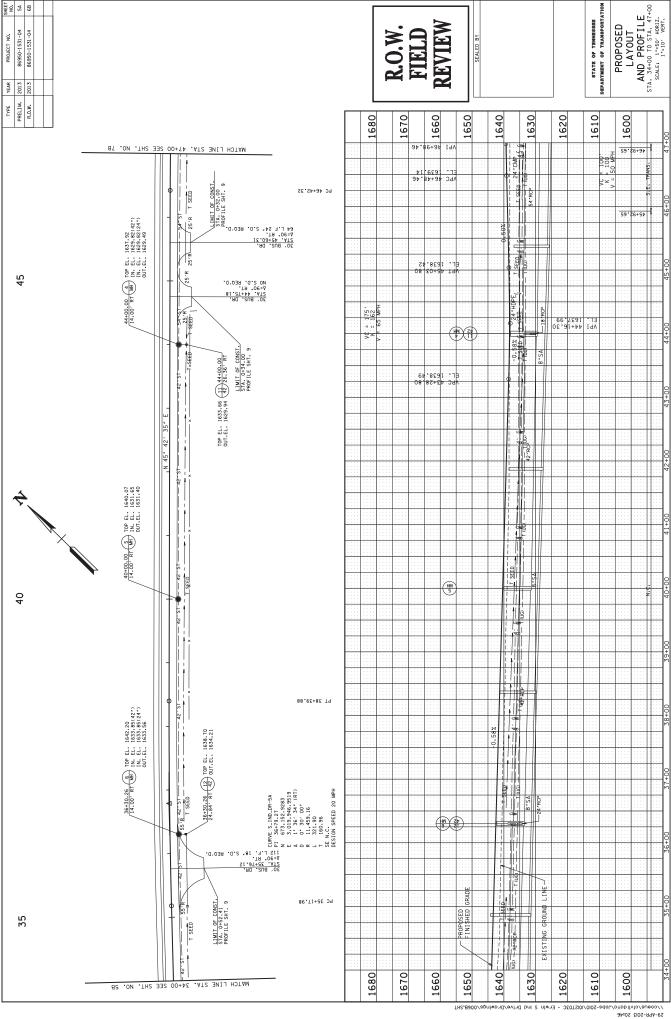

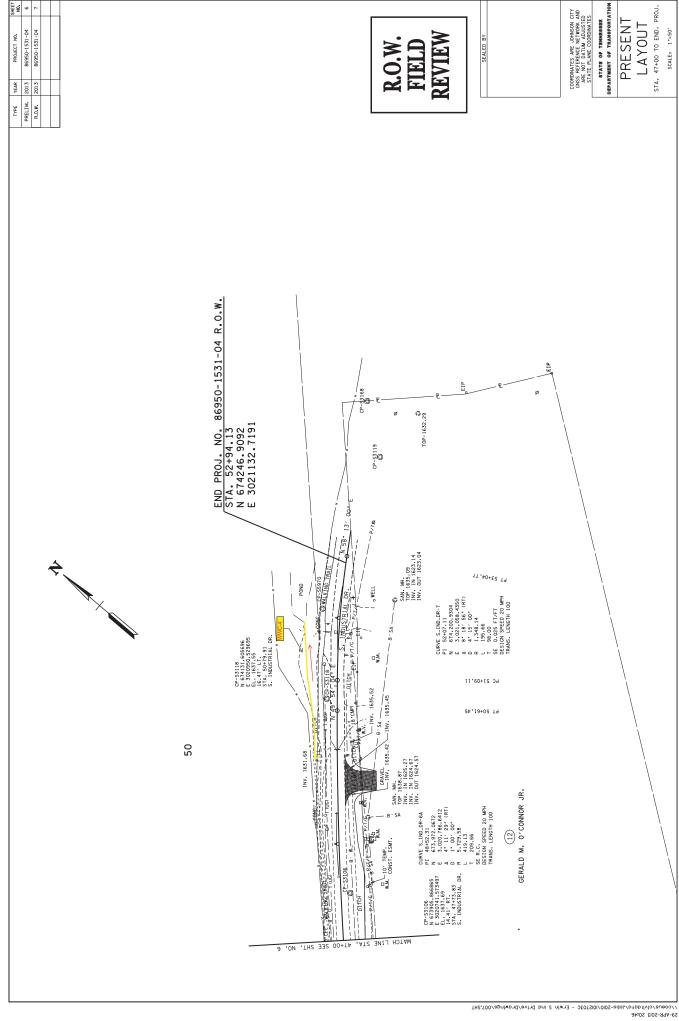

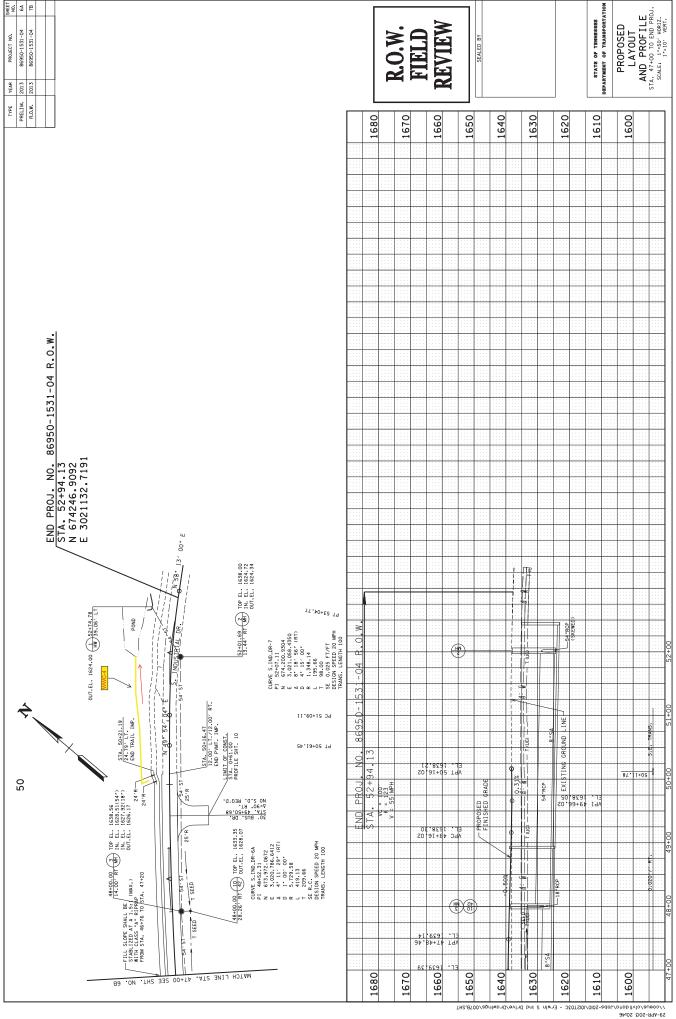



TRAINING CERTIFICATIONS

TO BE INSERTED BY THE CONSTRUCTION DIVISION



| NO TMDI | CONSULTATION IS | REQUIRED | FOR THIS | PROJECT |
|---------|------------------------|----------|-----------------|------------|
| | CONSOLIATION | ILMOHILD | | I INCOLCI. |