

TYPE	YEAR	PROJECT NO.	SHEET NO.
P.E.	2005	74010-123-14	1
CONST.	2007	STP-65 (10)	S-1

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# STORMWATER PREVENTION PLAN

2.12. IS ACID PRODUCING ROCK (APR) (i.e. PYRITE) LOCATED WITHIN THE PROJECT LIMITS?  YES  NO  
 2.12.1. IF YES TO SECTION 2.13, HAVE APR LOCATIONS BEEN IDENTIFIED WITHIN THE CONSTRUCTION PLANS AND/OR THE GEOTECHNICAL REPORT?  YES  NO  
 2.12.2. IF YES TO SECTION 2.12.1, HAS A SPECIAL HANDLING PLAN AND/OR ADAPTIVE MANAGEMENT PLAN (AMP) BEEN PREPARED FOR THE PROJECT?  YES  NO  
 2.12.3. PROJECT RUNOFF COEFFICIENTS AND AREA PERCENTAGES (0.5, 1.0):

AREA TYPE	AREA(A/C)	PERCENTAGE OF TOTAL AREA (%)	RUNOFF CN	C FACTOR
IMPERVIOUS	31.9	17.2		0.9
PERVIOUS(GRASS, FORESTS, ETC.)	154.2	82.8		0.37
WEIGHTED C-FACTOR = 0.46				

2.13. PROJECT RUNOFF COEFFICIENTS FOR POST-CONSTRUCTION CONDITIONS

AREA TYPE	AREA(A/C)	PERCENTAGE OF TOTAL AREA (%)	RUNOFF CN	C FACTOR
IMPERVIOUS	54.2	29.1		0.9
PERVIOUS(GRASS, FORESTS, ETC.)	131.9	70.9		0.4
WEIGHTED C-FACTOR = 0.54				

3. ORDER OF CONSTRUCTION ACTIVITIES (3.5.1.b, 3.5.2.a)

- CONSTRUCTION SHALL BE SEQUENCED AND STAGED TO: MINIMIZE THE EXPOSURE TIME OF GRADED OR DENUDED SOIL AREAS, PRESERVE TOPSOIL, AND MINIMIZE SOIL COMPACTION. NO WORK SHALL BE STARTED UNTIL THE CONTRACTOR'S PLAN FOR THE STAGING OF THEIR OPERATIONS, INCLUDING THE ORDER OF PAVING OF DRIVEWAYS AND PERMANENT EPSC AREAS, HAS BEEN REVIEWED AND APPROVED BY THE ENGINEER. THE ORDER OF CONSTRUCTION ACTIVITIES AND THE BASIC EPSC DEVICES DEPICTED ON THE EPSC PLAN CONTAINED WITHIN THE APPROVED SWPPP.
- SPECIAL SEQUENCING REQUIREMENTS (SEE SHEETS 23C)
- INSTALL STABILIZED CONSTRUCTION EXITS.
- INSTALL PERIMETER PROTECTION WHERE RUNOFF SHEET FLOWS FROM THE SITE.
- INSTALL INITIAL EPSC MEASURES BEFORE CLEARING, GRUBBING, EXCAVATION, GRADING, CULVERT OR BRIDGE CONSTRUCTION, CUTTING, OR GRUBBING. INITIAL EPSC MEASURES SHALL BE AS ACCEPTABLE AS SUCH WORK MAY BE NECESSARY TO INSTALL EPSC MEASURES.
- PERFORM CLEARING AND GRUBBING (NOT MORE THAN 14 DAYS PRIOR TO GRADING OR EARTH-MOVING. REFER TO THE STABILIZATION PRACTICES BELOW).
- REMOVE AND STORE TOPSOIL.
- STABILIZE DISTURBED AREAS WITHIN 14 DAYS OF COMPLETING ANY STAGE AND/OR PHASE OF ACTIVITY.
- INSTALL UTILITIES, STORM SEWERS, CULVERTS AND BRIDGE STRUCTURES.
- INSTALL INLET AND CULVERT PROTECTION ONCE STRUCTURES ARE IN PLACE AND GRABLE OF INTERCEPTING FLOW.
- PERFORM FINAL GRADING AND INSTALL BASE STONE.
- COMPLETE FINAL PAVING AND SEALING OF CONCRETE.
- INSTALL TRAFFIC CONTROL AND PROTECTION DEVICES.
- COMPLETE FINAL STABILIZATION (TOPSOIL, SEEDING, MULCH, EROSION CONTROL BLANKET, SOD, ETC.).
- REMOVE TEMPORARY EROSION CONTROLS AND ACCUMULATED SEDIMENT FROM AREAS THAT HAVE ESTABLISHED AT LEAST 70 PERCENT UNIFORM PERMANENT VEGETATIVE COVER.

2.6. TOTAL PROJECT AREA (3.5.1.c): 186.09 ACRES  
 2.7. TOTAL AREA TO BE DISTURBED (3.5.1.c): 156.42 ACRES  
 2.8. NO MORE THAN 50 ACRES OF ACTIVE SOIL DISTURBANCE IS ALLOWED AT ANY TIME DURING THE CONSTRUCTION OF THE PROJECT.  
 2.9. ARE THERE ANY SEASONAL LIMITATIONS ON WORK?  YES  NO  
 IF YES, LIST THE CORRESPONDING PLAN SHEET: \_\_\_\_\_

2.10. WAS FINALIZED PRIOR TO FEBRUARY 1, 2010 (4.1.2.2)?  
 YES (DATE)  NO  
 IF ROW WAS FINALIZED PRIOR TO FEBRUARY 1, 2010, THIS PROJECT IS CONSIDERED A PRE-APPROVED SITE (4.1.2.2)

2.11. SOIL PROPERTIES (3.5.1.1) (4.1.1).  
 SOIL PROPERTIES FOR THE PRIMARY SOILS ARE LISTED IN THE TABLE BELOW.

PRIMARY SOIL NAME	HSG	% OF SITE	ERODIBILITY (k value)
BbE - BAXTER CHERT SILT LOAM	B	1.7	0.28
Bc3 - BAXTER CHERT SILTY CLAY LOAM	B	5.9	0.24
Bd3 - BAXTER CHERT SILTY CLAY LOAM	B	4.4	0.24
Bd1 - BODINE CHERT SILT LOAM	B	3.9	0.28
Bf1 - BODINE CHERT SILT LOAM	B	5.1	0.28
Cc2 - CRIDER SILT LOAM	B	0.5	0.32
Dc2 - DEWEY SILT LOAM	B	0.1	0.32
Dm3 - DEWEY SILTY CLAY LOAM	B	1.5	0.28
Dm3 - DEWEY SILTY CLAY LOAM	B	0.3	0.28
D8b - DICKSON SILT LOAM	C	11.5	0.43
D8c2 - DICKSON SILT LOAM	C	3.1	0.43
Gc1 - GUTHRIE SILT LOAM	D	0.3	0.43
Hb - HAMBLEN SILT LOAM	C	2.6	0.32
Mb1 - MOUNTVIEW SILT LOAM	B	7.2	0.43
M6c2 - MOUNTVIEW SILT LOAM	B	9.5	0.43
M6c3 - MOUNTVIEW SILT LOAM	B	1.1	0.43
Nb - NEWARK SILT LOAM	C	0.1	0.43
Nb1 - NIXA CHERT SILT LOAM	C	0.5	0.32
Nc1 - NIXA CHERT SILT LOAM	C	1	0.32
Pb1 - PEMBROKE SILT LOAM	B	1	0.32
Pc2 - PEMBROKE SILT LOAM	B	2.4	0.32
Pc3 - PICKWICK SILTY CLAY LOAM	B	2.6	0.37
Sa - SANGO SILT LOAM	C	1.4	0.43
Sc - STASER CHERT SILT LOAM	B	1	0.24
Sc1 - SENGTON GRAVELLY SILT LOAM	B	18	0.17
Sd1 - SENGTON GRAVELLY SILT LOAM	B	12.1	0.17
Ss - STASER SILT LOAM	B	1.1	0.37
Ta - TAFT SILT LOAM	C	0.1	0.43

## SWPPP INDEX OF SHEETS

DESCRIPTION	SHT.
1. SWPPP REQUIREMENTS (3.0)	1
2. SITE DESCRIPTION (3.5.1)	1
3. ORDER OF CONSTRUCTION ACTIVITIES (3.5.1.b, 3.5.2.a)	1
4. STREAM, OUTFALL, WETLAND, TMDL AND ECOLOGY INFORMATION	2
5. EROSION PREVENTION AND SEDIMENT CONTROL (EPSC) MEASURES (3.5.3)	3
6. FLOODPLAINS (3.5.3.1.b)	3
7. UTILITY RELOCATION	4
8. MAINTENANCE AND INSPECTION	4
9. SITE ASSESSMENTS (3.1.2)	4
10. STORMWATER MANAGEMENT (3.5.4)	5
11. STORMWATER DRAINAGE (3.6.9)	5
12. SITE PREPARATION, MANAGEMENT AND NOTIFICATION (3.5.5.c, 5.1)	6
13. RECORD-KEEPING	6
14. SITE WIDEPERMITTEE CERTIFICATION (7.7.5)	7
15. SECONDARY PERMITTEE (OPERATOR) CERTIFICATION (7.7.6)	7
16. ENVIRONMENTAL PERMITS (6.0)	7
OUTFALL TABLE	8

NOTE: CITATIONS IN PARENTHESIS INDICATE SECTIONS OF THE CURRENT CGP.

## 1. SWPPP REQUIREMENTS (3.0)

- HAS THE SWPPP TEMPLATE BEEN PREPARED BY AN INDIVIDUAL THAT HAS THE FOLLOWING LICENSING AND/OR CERTIFICATIONS (3.1.1)?  
 YES (CHECK ALL THAT APPLY BELOW) OR  NO  
 CERTIFIED PROFESSIONAL IN EROSION AND SEDIMENT CONTROL (EPSC)  
 A TN LICENSED PROFESSIONAL ENGINEER OR LANDSCAPE ARCHITECT  
 HAS SUCCESSFULLY COMPLETED TDEC LEVEL II COURSE
- DO THE EPSC PLANS INVOLVE STRUCTURAL DESIGN, HYDRAULIC DESIGN, OR CALCULATIONS FOR TDEC STRUCTURAL MEASURES (E.G. SEDIMENT BASINS) (3.1.1)? YES  NO   
 IF YES, HAVE THE EPSC PLANS BEEN PREPARED, STAMPED AND CERTIFIED BY A TN LICENSED PROFESSIONAL ENGINEER OR LANDSCAPE ARCHITECT?  YES  NO
- DO THE PROJECT STORMWATER OUTFALLS DIRECTLY DISCHARGE INTO THE FOLLOWING (6.4.1)?  YES (CHECK ALL THAT APPLY BELOW)  NO  
 WATERS WITH UNAVAILABLE PARAMETERS (303d FOR SILTATION OR HABITAT ALTERATION)  
 EXCEPTIONAL TENNESSEE WATERS  
 IF YES TO SECTION 1.3, HAS THE SWPPP TEMPLATE BEEN PREPARED BY AN INDIVIDUAL THAT HAS THE FOLLOWING LICENSING AND/OR CERTIFICATIONS (5.4.1.9)?  
 YES (CHECK ALL THAT APPLY BELOW)  NO  
 CERTIFIED PROFESSIONAL IN EROSION AND SEDIMENT CONTROL (EPSC)  
 A TN LICENSED PROFESSIONAL ENGINEER OR LANDSCAPE ARCHITECT  
 HAS SUCCESSFULLY COMPLETED TDEC LEVEL II COURSE

## 2. SITE DESCRIPTION (3.5.1)

- PROJECT LIMITS (3.5.1.b): REFER TO TITLE SHEET
- PROJECT DESCRIPTION (3.5.1.a):  
 TITLE: STATE ROUTE 65 (US431), FROM OLD HIGHWAY 431 TO WALLING ROAD  
 COUNTY: ROBERTSON  
 PIN: 105765.00
- SITE MAP(S) (2.6.2): REFER TO TITLE SHEET
- DESCRIPTION OF EXISTING SITE TOPOGRAPHY (3.5.1.d): REFER TO EXISTING CONTOURS SHEET(S) 68-586, DRAINAGE MAP SHEET(S) 48-52, USGS QUAD MAP, AND THE OUTFALL TABLE IN SECTION 4.3.
- MAJOR SOIL DISTURBING ACTIVITIES (3.5.1.b) (CHECK ALL THAT APPLY):  
 CLEARING AND GRUBBING

RECEIVING WATERS OF THE STATE INFORMATION

TDOT STATE WATER LABEL FROM EBR	NAME OF RECEIVING STATE WATER	303d WITH UNAVAILABLE PARAMETERS FOR HABITAT ALTERATION (YES OR NO)	ETW (YES OR NO)	LOCATED WITHIN PROJECT LIMITS (YES OR NO)	LOCATED WITHIN 15-FT OF THE PROJECT LIMITS (YES OR NO)
STR-1	UNNAMED TRIBUTARY TO BEDNICO BRANCH	NO	NO	YES	YES
STR-2	UNNAMED TRIBUTARY TO BEDNICO BRANCH	NO	NO	YES	YES
STR-3	UNNAMED TRIBUTARY TO BEDNICO BRANCH	NO	NO	YES	YES
SPG-1/STR-4	UNNAMED TRIBUTARY TO BEDNICO BRANCH	NO	NO	YES	YES
STR-5	UNNAMED TRIBUTARY TO BEDNICO BRANCH	NO	NO	YES	YES
STR-10A	UNNAMED TRIBUTARY TO CARR CREEK	NO	NO	YES	YES
STR-7	UNNAMED TRIBUTARY TO CARR CREEK	NO	NO	YES	YES
STR-8	UNNAMED TRIBUTARY TO CARR CREEK	NO	NO	YES	YES
STR-9	UNNAMED TRIBUTARY TO CARR CREEK	NO	NO	YES	YES
STR-10	UNNAMED TRIBUTARY TO CARR CREEK	NO	NO	YES	YES
STR-11	UNNAMED TRIBUTARY TO CARR CREEK	NO	NO	YES	YES
STR-12	UNNAMED TRIBUTARY TO CARR CREEK	NO	NO	YES	YES
STR-13	UNNAMED TRIBUTARY TO CARR CREEK	NO	NO	YES	YES
STR-14	UNNAMED TRIBUTARY TO CARR CREEK	NO	NO	YES	YES
STR-15	CARR CREEK	NO	NO	NO	NO

RECEIVING WATERS OF THE STATE INFORMATION

TDOT WOTUS LABEL	LOCATED WITHIN PROJECT LIMITS (YES OR NO)	LOCATED WITHIN 15-FT OF THE PROJECT LIMITS (YES OR NO)
WWC-1/EPH-1	YES	YES
WWC-2/EPH-2	YES	YES
WWC-3/EPH-3	YES	YES
WWC-4/EPH-4	YES	YES
WWC-5/EPH-5	YES	YES
WWC-6/EPH-6	YES	YES
WWC-7/EPH-7	YES	YES
WWC-8/EPH-8	YES	YES

RECEIVING WATERS OF THE STATE INFORMATION

TDOT WOTUS LABEL	LOCATED WITHIN PROJECT LIMITS (YES OR NO)	LOCATED WITHIN 15-FT OF THE PROJECT LIMITS (YES OR NO)
WWC-9/EPH-9	YES	YES
WWC-10/EPH-10	YES	YES
WWC-11/EPH-11	YES	YES
WWC-12/EPH-12	YES	YES
WWC-13/EPH-13	YES	YES
WWC-14/EPH-14	YES	YES
WWC-15/EPH-15	YES	YES

4.1.5. ARE THERE ANY WATER QUALITY RIPARIAN BUFFER ZONES NOT REQUIRED FOR STATE WATERS DUE TO A TDEC ARAPI? (9.0)  
 YES  NO

4.1.6. ARE THERE WATER QUALITY RIPARIAN BUFFER ZONE EXEMPTIONS? (4.1.2.1)  YES  NO  
 IF YES, EXISTING CONDITIONS DESCRIPTION: \_\_\_\_\_

4.1.7. EVERY ATTEMPT SHOULD BE MADE FOR CONSTRUCTION ACTIVITIES NOT TO PLACE WITHIN A WATER QUALITY RIPARIAN BUFFER ZONE AND FOR EXISTING FORESTED AREAS TO BE PRESERVED. (5.4.2.)

4.1.8. BECAUSE OF HEAVY SEDIMENT LOAD ASSOCIATED WITH BUFFER ZONES, THE BEST MANAGEMENT PRACTICES (BMPs) PROVIDING EQUIVALENT PROTECTION AS THE NATURAL RIPARIAN ZONE MUST BE USED. A JUSTIFICATION FOR USE AND DESIGN EQUIVALENCY SHALL BE DOCUMENTED WITHIN THE SWPPP. BEFORE DISTURBANCE OF THE SITE PROCEEDS, UNLESS ARAPI/401 REQUIREMENTS WILL PREVAIL IF IN CONFLICT WITH THESE BUFFER ZONE REQUIREMENTS.

4.1.9. WHERE IT IS NOT PRACTICABLE TO MAINTAIN A FULL WATER QUALITY RIPARIAN BUFFER, BEST MANAGEMENT PRACTICES (BMPs) PROVIDING EQUIVALENT PROTECTION AS THE NATURAL RIPARIAN ZONE MUST BE USED. A JUSTIFICATION FOR USE AND DESIGN EQUIVALENCY SHALL BE DOCUMENTED WITHIN THE SWPPP. BEFORE DISTURBANCE OF THE SITE PROCEEDS, UNLESS ARAPI/401 REQUIREMENTS WILL PREVAIL IF IN CONFLICT WITH THESE BUFFER ZONE REQUIREMENTS.

4.2. RECEIVING WATERS OF THE UNITED STATES (WOTUS) (EPHEMERAL) WILL CONSTRUCTION AND/OR EROSION AND SEDIMENT CONTROLS IMPACT ANY WOTUS (EPHEMERAL)?  YES  NO

RECEIVING WATERS OF THE STATE INFORMATION

4.1.4. ARE THERE ANY WATER QUALITY RIPARIAN BUFFER ZONES REQUIRED FOR WATERS OF THE STATE? (4.1.2.5.4.2)  
 YES  NO

**BUFFER ZONE REQUIREMENTS ARE NOT REQUIRED FOR PRE-APPROVED SITES (4.1.2.2.)**  
 IF YES, THEY HAVE BEEN INCLUDED ON PLAN SHEET(S) \_\_\_\_\_.  
 IF YES, CHECK THE APPROPRIATE BOX BELOW FOR SIZE OF BUFFER.

60-FEET FOR WATERS WITH UNAVAILABLE PARAMETERS AND EXCEPTIONAL TENNESSEE WATERS (AVERAGE WIDTH PER SIDE WITH A MINIMUM OF 30-FEET).

A 60 FOOT NATURAL WATER QUALITY RIPARIAN BUFFER ZONE ADJACENT TO AND ON BOTH SIDES OF THE RECEIVING STATE STREAM WITH THIS DESIGNATION SHALL BE PRESERVED TO

RECEIVING WATERS OF THE STATE INFORMATION

THE MAXIMUM EXTENT PRACTICABLE DURING CONSTRUCTION ACTIVITIES AT THE SITE. THE 60 FOOT CRITERION FOR THE WIDTH OF THE BUFFER ZONE CAN BE ESTABLISHED ON AN AVERAGE WIDTH BASIS AT A PROJECT, AS LONG AS THE MINIMUM WIDTH OF THE BUFFER ZONE IS MAINTAINED THROUGHOUT THE PROJECT. CONSTRUCTION SITE ENCROACHES BOTH SIDES OF A STREAM, BUFFER AVERAGING CAN BE APPLIED TO BOTH SIDES, BUT MUST BE APPLIED INDEPENDENTLY.

30 FEET FOR ALL OTHER STREAMS (AVERAGE WIDTH PER SIDE WITH A MINIMUM OF 15-FEET).

A 30 FOOT NATURAL WATER QUALITY RIPARIAN BUFFER ZONE ADJACENT TO AND ON BOTH SIDES OF THE RECEIVING STATE STREAM SHALL BE PRESERVED TO THE MAXIMUM EXTENT PRACTICABLE DURING CONSTRUCTION ACTIVITIES AT THE SITE. THE 30 FOOT CRITERION FOR THE WIDTH OF THE BUFFER ZONE CAN BE ESTABLISHED ON AN AVERAGE WIDTH BASIS AT A PROJECT, AS LONG AS THE MINIMUM WIDTH OF THE BUFFER ZONE IS MAINTAINED THROUGHOUT THE PROJECT. CONSTRUCTION SITE ENCROACHES BOTH SIDES OF A STREAM, BUFFER AVERAGING CAN BE APPLIED TO BOTH SIDES, BUT MUST BE APPLIED INDEPENDENTLY.

4.2.1. ARE THERE ANY WATER QUALITY RIPARIAN BUFFER ZONES REQUIRED FOR STATE WATERS DUE TO A TDEC ARAPI? (9.0)  
 YES  NO

4.2.2. ARE THERE ANY WATER QUALITY RIPARIAN BUFFER ZONES NOT REQUIRED FOR WOTUS (EPHEMERAL) DUE TO A USAGE PERMIT?  YES  NO

4.3. OUTFALL INFORMATION

4.3.1. OUTFALL TABLE (3.5.1.6). SEE SWPPP SHEET S-8 FOR OUTFALL INFORMATION

4.3.2. HAVE ALL OUTFALLS BEEN LABELED ON THE EPSC PLAN SHEETS (3.5.1.1)?  YES  NO

4.3.3. HAVE ALL OUTFALLS BEEN LABELED ON A USGS TOPOGRAPHIC MAP INCLUDED IN THE 'DOCUMENTATION AND PERMITS' BINDER (2.6.2)?  YES  NO

4.3.4. WHERE POSSIBLE, HAS NON-PROJECT RUN-ON BEEN DIVERTED AROUND OR THROUGH THE PROJECT TO ELIMINATE CONTACT WITH DISTURBED AREAS OF THE PROJECT AND SEPARATE IT FROM PROJECT RUN-OFF THEREBY REDUCING THE DRAINAGE AREA OF THE OUTFALLS IN THIS AREA?  
 YES  NO  N/A

4.3.5. ARE EQUIVALENT MEASURES BEING SUBSTITUTED FOR A SEDIMENT BASIN?  YES  NO  N/A

4.3.6. A SEDIMENT BASIN OR EQUIVALENT MEASURE(S) WILL BE PROVIDED FOR ANY OUTFALL IN A DRAINAGE AREA THAT DOES NOT DISCHARGE TO A STATE STREAM WITH UNAVAILABLE PARAMETERS OR EXCEPTIONAL TENNESSEE WATERS. A TEMPORARY (OR PERMANENT) SEDIMENT BASIN OR EQUIVALENT CONTROL MEASURES THAT PROVIDES STORAGE FOR A CALCULATED VOLUME OF RUNOFF FROM A MINIMUM 2-YEAR/ 24-HOUR STORM EVENT, SHALL BE PROVIDED UNTIL FINAL STABILIZATION OF THE SITE. (3.5.3.3)

OR

OF FIVE ACRES OR MORE FOR AN OUTFALL(S) THAT DISCHARGES TO A STATE STREAM WITH UNAVAILABLE PARAMETERS OR EXCEPTIONAL TENNESSEE WATERS. A TEMPORARY (OR PERMANENT) SEDIMENT BASIN THAT PROVIDES STORAGE FOR A CALCULATED VOLUME OF RUNOFF FROM A 5-YEAR/ 24-HOUR STORM EVENT, SHALL BE PROVIDED UNTIL FINAL STABILIZATION OF THE SITE. (5.4.1.1g)

IN BOTH INSTANCES, THE ENVIRONMENTAL AND ROADWAY DESIGN DIVISIONS MAY BE CONTACTED TO REVIEW AND CONCUR WITH ANY REVISION OF THE SWPPP BEFORE DISTURBANCE OF THE OUTFALL PROCEEDS.

RECEIVING WATERS OF THE STATE INFORMATION

4.2. RECEIVING WATERS OF THE UNITED STATES (WOTUS) (EPHEMERAL) WILL CONSTRUCTION AND/OR EROSION AND SEDIMENT CONTROLS IMPACT ANY WOTUS (EPHEMERAL)?  YES  NO

RECEIVING WATERS OF THE STATE INFORMATION

4.2. RECEIVING WATERS OF THE UNITED STATES (WOTUS) (EPHEMERAL) WILL CONSTRUCTION AND/OR EROSION AND SEDIMENT CONTROLS IMPACT ANY WOTUS (EPHEMERAL)?  YES  NO

RECEIVING WATERS OF THE STATE INFORMATION

4.2. RECEIVING WATERS OF THE UNITED STATES (WOTUS) (EPHEMERAL) WILL CONSTRUCTION AND/OR EROSION AND SEDIMENT CONTROLS IMPACT ANY WOTUS (EPHEMERAL)?  YES  NO

RECEIVING WATERS OF THE STATE INFORMATION

4.2. RECEIVING WATERS OF THE UNITED STATES (WOTUS) (EPHEMERAL) WILL CONSTRUCTION AND/OR EROSION AND SEDIMENT CONTROLS IMPACT ANY WOTUS (EPHEMERAL)?  YES  NO

RECEIVING WATERS OF THE STATE INFORMATION

4.2. RECEIVING WATERS OF THE UNITED STATES (WOTUS) (EPHEMERAL) WILL CONSTRUCTION AND/OR EROSION AND SEDIMENT CONTROLS IMPACT ANY WOTUS (EPHEMERAL)?  YES  NO

RECEIVING WATERS OF THE STATE INFORMATION

4.2. RECEIVING WATERS OF THE UNITED STATES (WOTUS) (EPHEMERAL) WILL CONSTRUCTION AND/OR EROSION AND SEDIMENT CONTROLS IMPACT ANY WOTUS (EPHEMERAL)?  YES  NO

WELL VEGETATED OR LINED CHANNEL, SO THAT THE DISCHARGE DOES NOT CAUSE EROSION OR SEDIMENT TRANSPORT.

5.22 DISCHARGES FROM SEDIMENT BASINS AND IMPOUNDMENTS SHALL UTILIZE OUTLET STRUCTURES THAT ONLY WITHDRAW WATER FROM NEAR THE SURFACE OF THE BASIN OR IMPOUNDMENT. TREATED WATER MUST BE DISCHARGED THROUGH A PIPE, WELL, VEGETATED AND/OR LINED CHANNEL, SO THAT THE DISCHARGE DOES NOT CAUSE EROSION OR SEDIMENT TRANSPORT. (4.17.)

5.23 THE DEWATERING OF WORK AREAS, TRENCHES, FOUNDATIONS, EXCAVATIONS, ETC. THAT HAVE COLLECTED STORMWATER WATER FROM VEHICLE WASH AREAS OR GROUNDWATER SHALL BE HELD IN SETTLING BASINS OR TREATED BY FILTRATION AND/OR CHEMICAL TREATMENT PRIOR TO ITS DISCHARGE. ALL CHEMICAL TREATMENTS MUST BE APPLIED PER SECTION 6 FLOCCULANTS.

5.24 WATER DISCHARGED FROM DEWATERING ACTIVITIES SHALL NOT CAUSE AN OBJECTIONABLE COLOR CONTRAST WITHIN THE RECEIVING NATURAL RESOURCE. WATER MUST BE HELD WITHIN SETTLING BASINS UNTIL IT IS AT LEAST AS CLEAR AS THE RECEIVING WATERS.

5.25 DEWATERING STRUCTURES, SEDIMENT FILTER BAGS, SEDIMENT BASINS AND TRAPS SHALL NOT BE LOCATED CLOSER THAN 30 FEET (60 FEET DESIRABLE VEGETATIVE BUFFER) FOR WATERS WITH UNAVAILABLE VEGETATION. VEGETATIVE BUFFERS FOR ALL OTHER FEATURES (SOILS, FERTILIZABLE VEGETATIVE BUFFER) FOR ALL OTHER FEATURES FROM THE TOP BANK OF A STREAM, WOTUS (EPHEMERAL) WETLAND OR OTHER NATURAL RESOURCE AND SHALL BE PROPERLY DESIGNED PER THE SIZE OF THE DRAINAGE AREA OR VOLUME OF WATER TO BE TREATED.

5.26 STABILIZATION PRACTICES: PRE-CONSTRUCTION VEGETATIVE COVER WILL NOT BE DESTROYED, REMOVED OR DISTURBED MORE THAN 14 DAYS PRIOR TO GRADING OR EARTH MOVING UNLESS THE AREA WILL BE SEEDED AND/OR MULCHED OR OTHER TEMPORARY COVER IS INSTALLED (3.5.3.1h).

5.27 STABILIZATION MEASURES WILL BE INITIATED AS SOON AS POSSIBLE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED. TEMPORARY OR PERMANENT STABILIZATION WILL BE COMPLETED WITHIN 14 DAYS AFTER ACTIVITY HAS CEASED. TEMPORARY STABILIZATION MEASURES AS SOON AS STABILIZATION WILL REPLACE TEMPORARY MEASURES AS SOON AS PRACTICABLE (3.5.3.2).

5.28 PRIORITY SHALL BE GIVEN TO FINISHING OPERATIONS AND PERMANENT RESTORATION OF TEMPORARILY CEASED CONSTRUCTION. ALL PROJECTS UNPACKED GREAT CONTAINING FINES (SAND AND SMALL SIZED PARTICLES) OR CRUSHER-RUN WILL NOT BE CONSIDERED A NON-ERODIBLE SURFACE.

5.29 DELAYING THE PLANTING OF COVER VEGETATION UNTIL WINTER MONTHS OR DRY MONTHS SHOULD BE AVOIDED, IF POSSIBLE.

5.30 A SOIL ANALYSIS SHALL BE PERFORMED PRIOR TO THE APPLICATION OF FERTILIZERS TO ANY PORTION OF THE SITE. SOILS SHOULD BE ANALYZED FOR pH, BUFFER VALUE, PHOSPHORUS, POTASSIUM, CALCIUM AND NITROGEN. FERTILIZERS SHALL BE APPLIED TO THE PORTION OF THE SITE FOR WHICH FERTILIZER WILL BE APPLIED. SAMPLE TYPE SHOULD BE "SOIL TESTING" BROCHURE PB1061. (4.1.5.)

5.31 FERTILIZERS SHALL BE APPLIED ONLY IN THE AMOUNTS SPECIFIED FROM THE ANALYSIS. ONCE APPLIED, FERTILIZERS SHALL BE WORKED INTO THE SOIL TO LIMIT THE EXPOSURE TO STORMWATER.

5.32 STEEP SLOPES SHALL BE TEMPORARILY STABILIZED NOT LATER THAN 7 DAYS AFTER CONSTRUCTION ACTIVITY ON THE SLOPE HAS TEMPORARILY OR PERMANENTLY CEASED. (3.5.3.2).

**6. FLOCCULANTS (3.5.3.1b)**

IS ADDITIONAL PHYSICAL OR CHEMICAL TREATMENT OF STORMWATER RUNOFF NECESSARY (5.4.1.a)?  YES  NO  
 IF YES, THE FOLLOWING NOTES APPLY:

6.1. POLYACRYLAMIDES (PAM) SHALL BE OF THE ANIONIC OR NEUTRALLY CHARGED TYPE ONLY. PAM REQUIREMENTS ARE AS FOLLOWS:

6.1.1. CATIONIC PAM IS NOT ALLOWED BECAUSE OF ITS TOXICITY TO FISH AND AQUATIC LIFE.

6.1.2. ANIONIC AND NEUTRALLY CHARGED PAM SHALL MEET THE EPA FODACRYLAMIDE CRITERIA. PAM SHALL BE OF A MOLECULAR WEIGHT OF AT LEAST 100,000 AND NOT LESS THAN 0.05% BY WEIGHT ACRYLAMIDE MONOMER.

5.7. UNLESS OTHERWISE NOTED IN THE PLANS, THE CONTRACTOR SHALL NOT CLEAR OR DISTURB ANY AREA BEYOND 15 FEET FROM SLOPE LINES OR ROW EASEMENT LINE, WHICHEVER IS LESSER.

5.8. CLEARING, GRUBBING AND OTHER DISTURBANCE TO RIPARIAN VEGETATION SHALL BE LIMITED TO THE MINIMUM NECESSARY FOR SLOPE CONSTRUCTION AND EQUIPMENT OPERATIONS. EXISTING VEGETATION, INCLUDING STREAM AND WETLAND BUFFERS (UNLESS PERMITTED), SHOULD BE PRESERVED TO THE MAXIMUM EXTENT POSSIBLE. UNNECESSARY VEGETATION REMOVAL IS PROHIBITED.

5.9. HAVE STAGED EPSC PLANS BEEN PREPARED FOR THE PROJECT (3.5.2)?  
 YES  NO  (IF YES, CHECK ONE BELOW)

5.9.1.  PROJECT DISTURBED AREA IS SMALLER THAN 5 ACRES (MINIMUM OF TWO STAGES OF EPSC PLANS)

5.9.2.  PROJECT DISTURBED AREA IS GREATER THAN 5 ACRES (MINIMUM OF THREE STAGES OF EPSC PLANS)

5.10. STEEP SLOPES ARE DEFINED AS A NATURAL OR CREATED SLOPE OF 5% OR GREATER REGARDLESS OF HEIGHT. HAVE STEEP SLOPES BEEN MINIMALLY DISTURBED AND/OR PROTECTED BY CONVEYING RUNOFF NON-EROSIVELY AROUND OR OVER THE SLOPE (3.5.3.2) (10. "STEEP SLOPE"?  YES  NO  N/A

5.11. THE STRUCTURAL EPSC MEASURES HAVE BEEN INCLUDED IN THE TOTAL PROJECT IMPACTS AND HAVE BEEN INCLUDED IN THE AQUATIC RESOURCE ALTERATION (ARAP) PERMIT OR SECTION 401 CERTIFICATION (3.5.1.j). REFER TO THE LIST OF APPLICABLE ENVIRONMENTAL PERMITS LOCATED ON SWPPP SHEET 5Z. ALL PERMITS WILL BE MAINTAINED ON SITE WITHIN THE DOCUMENTATION AND PERMITS' BINDER.

5.12. THE EPSC CONTROL MEASURES LISTED IN THE QUANTITIES TABLE ON SHEET 22A HAVE BEEN SELECTED IN ACCORDANCE WITH TDOT STANDARD DRAWINGS AND GOOD ENGINEERING PRACTICES (3.5.3.1b).

5.13. EPSC MEASURES SHALL BE INSTALLED PER TDOT STANDARDS (i.e. STANDARD DRAWINGS) AND SHALL BE FUNCTIONAL PRIOR TO ANY EARTH MOVING OPERATIONS.

5.14. EPSC MEASURES WILL NOT BE INSTALLED WITHIN A STREAM WITHOUT FIRST OBTAINING APPROVAL FROM THE PERMITS SECTION.

5.15. TEMPORARY EPSC MEASURES MAY BE REMOVED AT THE BEGINNING OF WORK OR BEFORE A PRECIPITATION EVENT.

5.16. EPSC MEASURES LOCATED IN WOTUS (EPHEMERAL STREAMS) MUST BE CONSIDERED TEMPORARY AND SHALL BE REMOVED AT THE END OF CONSTRUCTION.

5.17. THE CONTRACTOR SHALL ESTABLISH AND MAINTAIN A PROACTIVE METHOD TO PREVENT THE OFF-SITE MIGRATION OR DEPOSIT OF SEDIMENT OFF THE PROJECT LIMITS (E.G. R.O.W., EASEMENTS, ETC.) INTO WATERS OTHER THAN THE STATEUHS OR ONTO HIGHWAYS USED BY THE PUBLIC. THE CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PREVENT ACCUMULATIONS OF SEDIMENT THAT HAVE NOT REACHED A STREAM FROM BEING REMOVED TO A LEVEL SUFFICIENT TO MINIMIZE OFF-SITE IMPACTS (E.G., FUGITIVE SEDIMENT THAT HAS ESCAPED THE CONSTRUCTION SITE AND HAS COLLECTED IN A STREET MUST BE REMOVED SO THAT IT IS NOT SUBSEQUENTLY WASHED INTO STORM DRAINAGE SYSTEMS OR INTO WATERS USED BY THE PUBLIC. STREETS NOT OPEN TO SAFETY HAZARDOUS TO USERS OF PUBLIC STREETS. ARRANGEMENTS CONCERNING REMOVAL OF SEDIMENT ON ADJOINING PROPERTY MUST BE SETTLED WITH THE ADJOINING PROPERTY OWNER BEFORE REMOVAL OF SEDIMENT. SEDIMENT THAT MIGRATES INTO WATERS OF THE STATEUHS SHALL NOT BE REMOVED WITHOUT GUIDANCE FROM TDOT ENVIRONMENTAL PERSONNEL.

5.18. OFF-SITE VEHICLE TRACKING OF SEDIMENTS AND THE GENERATION OF DUST SHALL BE MINIMIZED. A STABILIZED CONSTRUCTION EXIT (A POINT OF ENTRANCE/EXIT TO THE CONSTRUCTION PROJECT) SHALL BE PROVIDED TO REDUCE THE TRACKING OF MUD AND DIRT ONTO PUBLIC ROADS BY CONSTRUCTION VEHICLES.

5.19. THE QUANTITIES REQUIRED FOR STABILIZED CONSTRUCTION EXITS PER TDOT STANDARDS FROM DEWATERING ACTIVITIES ARE PROHIBITED UNLESS MANAGED BY APPROPRIATE CONTROLS THAT PROVIDE THE LEVEL OF TREATMENT (FILTRATION) NECESSARY TO COMPLY WITH PERMIT REQUIREMENTS. (4.14.)

5.20. DISCHARGES FROM DEWATERING ACTIVITIES ARE PROHIBITED UNLESS MANAGED BY APPROPRIATE CONTROLS THAT PROVIDE THE LEVEL OF TREATMENT (FILTRATION) NECESSARY TO COMPLY WITH PERMIT REQUIREMENTS. (4.14.)

5.21. SETTLING BASINS AND NECESSARY TRAPS SHALL BE PROPERLY DESIGNED PER THE SIZE OF THE DRAINAGE AREA OR VOLUME OF WATER TO BE TREATED. TREATED WATER MUST BE DISCHARGED THROUGH A PIPE OR

4.4. WETLAND INFORMATION  
 WILL CONSTRUCTION AND/OR EROSION AND SEDIMENT CONTROLS IMPACT ANY WETLANDS?  YES  NO  
 IF YES, THE STRUCTURAL EPSC MEASURES HAVE BEEN INCLUDED IN THE TOTAL PROJECT IMPACTS AND IN THE WATER QUALITY PERMITS.

WETLAND INFORMATION				
TDOT WETLAND LABEL	FROM STATION LT OR RT	TO STATION LT OR RT	TEMPORARY IMPACTS (AC)	PERMANENT IMPACTS (AC)
WTL-1	460+20 RT	462+50 RT	N/A	N/A
WTL-2	57+20 LT SHARON RD	57+30 LT SHARON RD	0.037	N/A
WTL-3	475+70 RT	476+50 RT	N/A	0.046
WTL-4	487+10 RT	487+90 RT	0.02	0.02
WTL-5	500+80 RT	501+90 RT	0.08	0.04
WTL-6	103+40 LT SR-257	105+00 LT SR-257	N/A	N/A
WTL-7	543+70 RT	547+20 RT	0.12	0.36
WTL-8	552+70 RT	553+40 RT	N/A	0.117

4.5. TOTAL MAXIMUM DAILY LOADS (TMDL) INFORMATION (3.5.10)

4.5.1. IS THIS PROJECT LOCATED IN A HUC-8 WATERSHED THAT MAINTAINS AN EPA APPROVED TMDL FOR SILTATION AND HABITAT ALTERATION?  
 YES  NO

4.5.2. IF YES, IS THIS PROJECT LOCATED WITHIN A HUC-12 SUBWATERSHED WITH A WASTE LOAD ALLOCATION (WLA)?  
 YES  NO

4.5.3. IF YES, DOES THE PROJECT HAVE A DIRECT DISCHARGE TO A 303(G) LISTED STREAM FOR SILTATION OR HABITAT ALTERATION?  
 YES  NO

4.5.4. IF YES, HAS A SUMMARY OF THE CONSULTATION LETTER BEEN SUBMITTED/RECEIVED?  
 YES  NO

4.6. ECOLOGY INFORMATION (3.5.5.g)  
 DOES THE TDOT ENVIRONMENTAL BOUNDARIES REPORT SPECIFY SPECIAL NOTES TO BE ADDED TO THE PLAN SHEETS?  
 YES  NO  
 IF YES, THEY HAVE BEEN INCLUDED ON PLAN SHEET(S) \_\_\_\_\_

4.7. ENVIRONMENTAL COMMITMENTS  
 ARE THERE ANY NOTES ON THE ENVIRONMENTAL COMMITMENT SHEET?  
 YES  NO  
 IF YES, THEY HAVE BEEN INCLUDED ON PLAN SHEET(S) I.C.

**5. EROSION PREVENTION AND SEDIMENT CONTROL EPSC MEASURES (3.5.3)**

5.1. EPSC MEASURES MUST BE DESIGNED, INSTALLED AND MAINTAINED TO CONTROL STORMWATER VOLUME AND VELOCITY WITHIN THE SITE TO MINIMIZE EROSION (4.1.1).

5.2. EPSC MEASURES MUST CONTROL STORMWATER DISCHARGES, INCLUDING BOTH PEAK FLOWS AND TOTAL STORMWATER VOLUME, TO MINIMIZE EROSION AT OUTLETS, STREAM CHANNELS, AND STREAM BANKS. (4.1.1)

5.3. HAVE THE CONTROL MEASURES BEEN DESIGNED PER THE SIZE AND SLOPE OF THE DISTURBED DRAINAGE AREA (3.5.3.3)?  
 YES  NO

5.4. THE CONTROL MEASURES HAVE AT A MINIMUM, BEEN DESIGNED FOR THE 5-YEAR, 24 HOUR STORM EVENT (3.5.3.3, 5.4.1.9).

5.5. ARE THE LIMITS OF DISTURBANCE CLEARLY MARKED ON THE EPSC PLANS (3.5.1.1b)?  YES  NO

5.6. AREAS TO BE UNDISTURBED SHALL BE CLEARLY MARKED IN THE FIELD BEFORE CONSTRUCTION ACTIVITIES BEGIN.

TYPE	YEAR	PROJECT NO.	DATE
P.E.	2005	74010-123-1-4	
CONST.	2007	STP-66 (10)	S-4

FILE NO.	DESIGN DIVISION	TENNESSEE D.O.T.
----------	-----------------	------------------

6.1.3. ANIONIC AND NEUTRALLY CHARGED PAM SHALL HAVE A DENSITY OF 10% TO 55% BY WEIGHT AND A MOLECULAR WEIGHT OF 19 TO 24 MG/MOLES.

6.1.4. PAM MIXTURES SHALL BE NON-COMBUSTIBLE.

6.1.5. PAM SHALL CONTAIN ONLY MANUFACTURER-RECOMMENDED ADDITIVES.

6.2. ALL PHYSICAL AND/OR CHEMICAL TREATMENT WILL BE RESEARCHED, APPLIED IN ACCORDANCE WITH MANUFACTURER'S GUIDELINES, AND FULLY DESCRIBED ON THE EPSC PLANS (3.5.3.1.b).

6.3. FLOCCULANTS SHALL BE HANDLED IN ACCORDANCE WITH ALL OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA) MATERIAL SAFETY DATA SHEET (MSDS) REQUIREMENTS AND SHALL BE APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS FOR THE SPECIFIED USE CONFORMING TO ALL FEDERAL, STATE AND LOCAL LAWS, RULES AND REGULATIONS.

6.4. ALL VENDORS AND SUPPLIERS OF FLOCCULANTS SHALL PRESENT OR SUPPLY A WRITTEN TOXICITY REPORT FOR BOTH ACUTE AND CHRONIC TOXICITY TESTS WHICH VERIFIES THAT THE FLOCCULANT EXHIBITS ACCEPTABLE TOXICITY PARAMETERS WHICH MEET OR EXCEED THE EPA REQUIREMENTS FOR USE AS FLOCCULANTS. WHOLE EFFLUENT TESTING DOES NOT MEET THIS REQUIREMENT AS PRIMARY REACTIONS HAVE OCCURRED AND TOXIC POTENTIALS HAVE BEEN REDUCED.

6.5. DO NOT APPLY FLOCCULANTS DIRECTLY TO OR WITHIN 60 FEET OF ANY STREAMS, WETLANDS, OR OTHER NATURAL WATER RESOURCE LOCATED ON OR ADJACENT TO THE CONSTRUCTION SITE. DO NOT APPLY FLOCCULANTS DIRECTLY INTO WATERS CONTAINED WITHIN SEDIMENT PONDS OR TO SLOPES THAT PRODUCE RUNOFF DIRECTLY INTO A STREAM, WETLAND, OR OTHER NATURAL WATER RESOURCE. DO NOT APPLY FLOCCULANTS IMMEDIATELY AT A STORMWATER OUTFALL WHERE RUNOFF LEAVES THE PROJECT LIMITS.

6.6. BEFORE FLOCCULANTS CAN BE USED ON A CONSTRUCTION PROJECT, SITE-SPECIFIC SOIL SAMPLES MUST BE OBTAINED AND TESTED BY THE MANUFACTURER OR THEIR REPRESENTATIVE TO IDENTIFY THE FLOCCULANT EFFICACY IS HIGHLY DEPENDENT ON SOIL TYPE. SOIL SAMPLES WILL NEED TO BE OBTAINED FROM EACH SOIL HORIZON THAT WILL BE ACCESSED DURING EXCAVATION. FLOCCULANTS SHOULD BE APPLIED ON A CONSTRUCTION SITE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDED APPLICATION OR DOSAGE RATE. TARGETED APPLICATION METHODS, SUCH AS FLOCCULANT FORMS, OR DIRECTLY TO STORMWATER RUNOFF OR TO STREAMS, WETLANDS, OR OTHER WATER RESOURCES DUE TO SURFACTANT TOXICITY.

6.7. FLOCCULANT POWDERS MAY BE APPLIED BY A HAND SPREADER OR A MECHANICAL SPREADER. APPROXIMATELY THE MANUFACTURER'S FLOCCULANT MAY BE MIXED WITH DRY SILICA SAND, FERTILIZER, SEED, OR OTHER SOIL AMENDMENTS TO AID IN SPREADING. FLOCCULANTS MAY ALSO BE APPLIED WITH A WATER TRUCK OR AS PART OF HYDRO-SEEDING. APPLICATION METHOD SHALL ENSURE UNIFORM COVERAGE TO THE TARGET AREA.

6.8. MANUFACTURER'S GUIDANCE SHOULD BE FOLLOWED FOR BLOCK LOG AND SOCK SPACING CONFIGURATIONS. BEFORE FLOCCULANTS CAN BE USED ON A CONSTRUCTION PROJECT, SITE-SPECIFIC SOIL SAMPLES MUST BE OBTAINED AND TESTED BY THE MANUFACTURER OR THEIR REPRESENTATIVE TO IDENTIFY THE FLOCCULANT EFFICACY IS HIGHLY DEPENDENT ON SOIL TYPE. SOIL SAMPLES WILL NEED TO BE OBTAINED FROM EACH SOIL HORIZON THAT WILL BE ACCESSED DURING EXCAVATION. FLOCCULANTS SHOULD BE APPLIED ON A CONSTRUCTION SITE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDED APPLICATION OR DOSAGE RATE.

7. **UTILITY RELOCATION**  
ARE UTILITIES INCLUDED IN THE CONTRACT?  YES  NO  
IF YES, THE FOLLOWING APPLY:

7.1. STORMWATER WHICH COLLECTS IN THE UTILITY TRENCH SHALL BE PUMPED INTO A DEWATERING STRUCTURE OR SEDIMENT FILTER BAG AND TREATED PRIOR TO DISCHARGE.

7.2. SILT FENCE SHALL BE INSTALLED ON THE DOWNGRADE SIDE OF STOCKPILED SOIL ANY TRENCHING ACROSS WET WEATHER CONVEYANCES SHALL BE DONE DURING DRY CONDITIONS, REMOVED AND STABILIZED BY THE END OF THE WORK DAY.

7.3. UTILITY CROSSINGS IN ENVIRONMENTAL FEATURES SHALL BE CONSTRUCTED IN ACCORDANCE WITH TDOT STANDARDS AND NO WORK SHALL BE CONDUCTED IN FLOWING WATERS. ENVIRONMENTAL PERMITS APPLY TO UTILITIES IN THIS PROJECT. THE STATE CONTRACTOR SHALL COMPLY WITH ALL REQUIREMENTS OF THE PERMITS.

7.4. IT IS THE RESPONSIBILITY OF THE STATE UTILITY CONTRACTOR TO PROTECT EXPOSED EARTH FROM EROSION AND TO PROVIDE FOR CONTAMINATION OF SEDIMENT THAT MAY RESULT FROM THEIR WORK. PRIOR TO BEGINNING WORK, ADEQUATE EPSC MEASURES MUST BE IN PLACE TO PREVENT EROSION AND SEDIMENTATION. IN THE EVENT OF RAIN, DURING THE PROGRESSION OF THEIR WORK, EXPOSED EARTH AREAS SHALL BE STABILIZED AS SOON AS POSSIBLE TO PREVENT EROSION. AT NO TIME SHALL EXPOSED EARTH RESULTING FROM THEIR OPERATIONS HAVE UNPROTECTED ACCESS TO FLOWING OFF-SITE AND ENTERING WATERS OF THE STATE/US.

7.5. FOR THE INSTALLATION OF BURIED UTILITIES (PIPES AND CABLES), TRENCHES SHALL BE BACKFILLED DAILY AS CONSTRUCTION PROCEEDS. BACKFILLED TRENCHES SHALL BE SEEDED AND MULCHED OR SOODED DAILY IF POSSIBLE, BUT NO LATER THAN FOURTEEN DAYS AFTER BEING BACKFILLED. ANY TEMPORARY MEASURES, SUCH AS EXPOSED EARTH SHALL BE BACKFILLED. IF TRENCHES ARE NOT BACKFILLED OVERNIGHT, APPROPRIATE EPSC MEASURES WILL BE INSTALLED BY THE STATE UTILITY CONTRACTOR UNTIL THE TRENCH IS BACKFILLED.

7.6. IN REGARDS TO EPSC, TDEC REGULATIONS APPLY TO THE STATE UTILITY CONTRACTORS ON THIS PROJECT. THE STATE CONTRACTOR IS RESPONSIBLE FOR EPSC MEASURES RELATED TO UTILITY CONSTRUCTION INCLUDED IN THE STATE CONTRACT.

7.7. TRENCHES FORMED FOR THE INSTALLATION OF BURIED UTILITIES MAY CAUSE STORMWATER RUNOFF TO CONCENTRATE AT THE TRENCH LINE. ADDITIONAL EPSC MEASURES MAY BE REQUIRED TO BE INSTALLED AS APPROVED BY THE TDOT PROJECT ENGINEER.

7.8. FOR THE INSTALLATION OF UNDERGROUND UTILITIES OUTSIDE OF THE TDOT RIGHT-OF-WAY, EPSC MEASURES SHALL BE INSTALLED PRIOR TO CLEARING (TRENCHING AND ASSOCIATED BLASTING) IN THOSE AREAS NECESSARY TO PREVENT SEDIMENT FROM LEAVING THE CONSTRUCTION AREA. THESE EPSC MEASURES SHALL REMAIN UNTIL THE BACKFILLED TRENCH IS STABILIZED WITH FINAL VEGETATIVE COVER.

7.9. THE UTILITY CONTRACTOR SHALL RESTORE ALL AFFECTED WET WEATHER CONVEYANCES TO THE EXISTING TOPOGRAPHIC CONDITIONS AS APPROVED BY THE TDOT RESPONSIBLE PARTY.

7.10. THE UTILITY CONTRACTOR WILL PROVIDE APPROPRIATE EPSC MEASURES TO REPLACE ON-SITE EPSC MEASURES REMOVED TO FACILITATE THE INSTALLATION OF UTILITIES. REPLACEMENT OF EPSC MEASURES WILL BE COORDINATED WITH THE TDOT ENGINEER BEFORE COMMENCING WORK.

7.11. FOR UTILITY CROSSINGS THAT UTILIZE HORIZONTAL DIRECTIONAL DRILLING THE FOLLOWING SHALL APPLY:

7.11.1. THE ENTRY AND EXIT POINTS SHALL BE AT LEAST 50 FEET FROM THE STREAM BANK OR WETLAND BOUNDARY.

7.11.2. THE DEPTH OF BORE BELOW THE STABILIZED FLOW, BASED ON THE PARENT MATERIAL.

7.11.3. A SITE-SPECIFIC CONTINGENCY AND CONTAINMENT PLAN FOR UNEXPECTED RELEASE OF DRILLING FLUID SHALL BE ESTABLISHED PRIOR TO COMMENCEMENT OF WORK. THIS PLAN SHALL SUBMIT TO THE TDOT ENVIRONMENTAL DIVISION FOR REVIEW AND APPROVAL. THE TDOT ENVIRONMENTAL DIVISION PERMITS AND/OR COMPLIANCE AND FIELD SERVICES OFFICE FOR REVIEW AND APPROVAL.

8. **MAINTENANCE AND INSPECTION**

8.1. INSPECTION PRACTICES (3.5.6)

8.1.1. PREVENT EPSC INSPECTORS AND ENGINEERS (INCLUDING TDOT STAFF, CONSULTANTS AND CONTRACTOR STAFF) RESPONSIBLE FOR THE CONSTRUCTION WORK, MAINTENANCE AND REPAIR OF EPSC MEASURES SHALL MEET ONE OF THE FOLLOWING REQUIREMENTS (3.5.6.1):

8.1.1.1. SUCCESSFULLY COMPLETED THE TDOT EPSC INSPECTOR TRAINING AND ANY RECERTIFICATION COURSE AS REQUIRED.

8.1.1.2. SUCCESSFULLY COMPLETED THE TDEC LEVEL I - FUNDAMENTALS OF EROSION PREVENTION AND SEDIMENTATION CONTROL COURSE AND ANY RECERTIFICATION COURSE AS REQUIRED.

8.1.1.3. BE A CURRENT TN LICENSED PROFESSIONAL ENGINEER OR LANDSCAPE ARCHITECT.

8.1.1.4. BE A CURRENT CERTIFIED PROFESSIONAL IN EROSION AND SEDIMENT CONTROL (CPESC).

8.1.1.5. SUCCESSFULLY COMPLETED TDEC LEVEL II - DESIGN PRINCIPLES FOR EROSION PREVENTION AND SEDIMENT CONTROL FOR CONSTRUCTION SITES COURSE AND ANY RECERTIFICATION COURSE AS REQUIRED.

8.1.2. THE TDOT CONSTRUCTION ENGINEER (OR THEIR DUTY AUTHORIZED REPRESENTATIVE) AND THE CONTRACTOR'S SUPERINTENDENT ARE RESPONSIBLE FOR INSPECTIONS. THE CONTRACTOR SHALL NOTIFY THE TDOT CONSTRUCTION ENGINEER OR THEIR DUTY AUTHORIZED REPRESENTATIVE SHALL COMPLETE THE EPSC INSPECTION REPORTS AND DISTRIBUTE COPIES PER THE CONTRACT.

8.1.3. THE INSPECTOR SHALL CONDUCT PRE-CONSTRUCTION INSPECTIONS TO VERIFY AREAS THAT ARE NOT TO BE DISTURBED HAVE BEEN MARKED IN THE SWPPP AND IN THE FIELD BEFORE LAND DISTURBANCE ACTIVITIES BEGIN AND INITIAL MEASURES HAVE BEEN INSTALLED (10" INSPECTOR) (3.5.1.9).

8.1.4. EPSC CONTROLS SHALL BE INSPECTED TO VERIFY MEASURES HAVE BEEN INSTALLED AND MAINTAINED IN ACCORDANCE WITH TDOT STANDARD DRAWINGS, SPECIFICATIONS, AND GOOD ENGINEERING PRACTICES. EPSC INSPECTIONS SHALL BE DOCUMENTED ON THE TDOT EPSC INSPECTION REPORT FORM (CONTRACTOR'S OWN TEMPLATE). INSPECTION CERTIFICATION (TWICE-WEEKLY INSPECTIONS) FORM.

8.1.5. OUTFALL POINTS SHALL BE INSPECTED TO ASCERTAIN WHETHER EPSC MEASURES ARE EFFECTIVE IN PREVENTING EROSION AND SEDIMENTATION. INSPECTIONS SHALL INCLUDE VISUAL IMPACTS TO SURROUNDING STATE WATERS, WOTUS (EPHEMERAL), WETLANDS, OTHER NATURAL RESOURCES AND ADJACENT PROPERTY OWNERS WHERE DISCHARGE LOCATIONS ARE INACCESSIBLE. NEARBY DOWN GRADIENT LOCATIONS SHALL BE INSPECTED. LOCATIONS WHERE VEHICLES ENTER AND EXIT THE SITE SHALL BE INSPECTED FOR EVIDENCE OF OFF-SITE ROADWAY SEDIMENT TRACKING.

8.1.6. INSPECTIONS WILL BE CONDUCTED AT LEAST TWICE EVERY CALENDAR WEEK AND AT LEAST 72 HOURS APART (3.5.8.2.a). A CALENDAR WEEK IS DEFINED AS SUNDAY THROUGH SATURDAY. INSPECTIONS SHALL BE CONDUCTED AT LEAST TWICE PER WEEK PER THE TDOT ENVIRONMENTAL DIVISION COMPLIANCE AND FIELD SERVICES OFFICE.

8.1.7. THE FREQUENCY OF EPSC INSPECTIONS MAY BE REDUCED TO ONCE A MONTH WHERE SITES OR PORTIONS OF SITES HAVE BEEN TEMPORARILY STABILIZED UNTIL CONSTRUCTION ACTIVITIES RESUME WITH WRITTEN NOTIFICATION BY THE TDOT REGIONAL ENGINEER TO TDEC NASHVILLE CENTRAL OFFICE AND SUBSEQUENT TDEC APPROVAL. WRITTEN NOTIFICATION MUST INCLUDE THE INTENT TO CHANGE FREQUENCY AND JUSTIFICATION (3.5.8.2.a).

8.1.8. ALL DISTURBED AREAS OF THE SITE THAT HAVE NOT BEEN FINALLY STABILIZED, AREAS USED FOR MATERIAL STORAGE THAT ARE EXPOSED TO PRECIPITATION, STRUCTURAL CONTROL MEASURES SHALL BE INSPECTED. INSPECTIONS SHALL BE CONDUCTED AT THE SITE, AND EACH OUTFALL WILL BE INSPECTED (3.5.8.2.b).

8.1.9. THE INSPECTOR WILL OVERSEE THE REQUIREMENTS OF OTHER CONSTRUCTION-RELATED WATER QUALITY PERMITS (I.E. TDEC PERMITS FOR CONSTRUCTION AND WATERS OF THE STATE (10" INSPECTOR)).

8.1.10. THE SWPPP WILL BE REVISED AS NECESSARY BASED ON THE RESULTS OF THE INSPECTIONS. REVISIONS WILL BE SUBMITTED WITHIN 14 DAYS OF THE INSPECTION (3.5.8.2.c AND 3.5.8.2.d).

8.1.11. DOCUMENTATION OF INSPECTIONS WILL BE MAINTAINED ON SITE IN THE DOCUMENTATION AND PERMITS BINDER. REPORTS WILL

TYPE	YEAR	PROJECT NO.	SHEET NO.
P.E.	2005	74010-1231-14	S-5
CONST.	2007	STP-65 (10)	

DESIGN DIVISION	FILE NO.
TENNESSEE D.O.T.	

STATE OF TENNESSEE DEPARTMENT OF TRANSPORTATION	
<b>STORMWATER PREVENTION PLAN</b>	

BE SUBMITTED TO THE TDOT PROJECT ENGINEER PER THE CONTRACT.

8.1.12. THESE INSPECTION REQUIREMENTS DO NOT APPLY TO DEFINABLE AREAS OF THE SITE THAT HAVE MET FINAL STABILIZATION REQUIREMENTS AND HAVE BEEN NOTED IN THE SWPPP.

8.1.13. TRAINED CERTIFIED INSPECTORS SHALL COMPLETE INSPECTION TO THE BEST OF THEIR ABILITY. FALSIFYING INSPECTION RECORDS OR OTHER DOCUMENTATION OR FAILURE TO COMPLETE INSPECTION DOCUMENTATION SHALL RESULT IN A VIOLATION OF THIS PERMIT AND ANY OTHER APPLICABLE ACTS OR RULES (3.5.8.2.h).

8.2. DULY AUTHORIZED REPRESENTATIVE (7.7.3)

THE PROJECT ENGINEER MAY DELEGATE AN INDIVIDUAL AND/OR CONSULTANT TO SIGN EPSC INSPECTION REPORTS. FOR SATISFYING INSPECTION REPORTS TO BE SIGNED BY THE PROJECT ENGINEER, THE PROJECT ENGINEER AND NEWLY AUTHORIZED INDIVIDUAL ACCEPTING RESPONSIBILITY MUST COMPLETE AND SIGN THE TDOT CONSTRUCTION DIVISION EPSC DELEGATION OF AUTHORITY.

8.3. MAINTENANCE PRACTICES (3.5.3.1 AND 3.5.7)

8.3.1. ALL CONTROLS WILL BE MAINTAINED IN GOOD AND EFFECTIVE OPERATING ORDER AND IN ACCORDANCE WITH TDOT STANDARD DRAWINGS AND GOOD ENGINEERING PRACTICES. (3.3.3.1.b)

8.3.2. MAINTENANCE AND REPAIR ACTIVITIES ARE THE RESPONSIBILITY OF THE CONTRACTOR.

8.3.3. UPON CONCLUSION OF THE INSPECTIONS, EPSC MEASURES FOUND TO BE INEFFECTIVE SHALL BE REPAIRED, REPLACED OR MODIFIED BEFORE THE NEXT RAIN EVENT, IF POSSIBLE, BUT IN NO CASE, MORE THAN 24 HOURS AFTER THE INSPECTION OR REPAIR. WHEN THE CONDITION IS IDENTIFIED, IF THE REPAIR, REPLACEMENT OR MODIFICATION IS NOT PRACTICAL WITHIN THE FOUR HOUR TIME FRAME, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE TDOT PROJECT ENGINEER BY PHONE AND IN WRITING. THE EPSC INSPECTION REPORT, AN ESTIMATED REPAIR REPLACEMENT OR MODIFICATION SCHEDULE SHALL BE DOCUMENTED WITHIN 24 HOURS AFTER IDENTIFICATION. (3.5.8.2.g)

8.3.4. SEDIMENT SHALL BE REMOVED FROM SEDIMENT CONTROL STRUCTURES (SEDIMENT TRAPS, SILT FENCE, SEDIMENT BASINS, OTHER CONTROLS, ETC.) WHEN THE DESIGN CAPACITY HAS BEEN REDUCED BY FIFTY PERCENT (50%). (3.5.3.1.e)

8.3.5. DURING SEDIMENT REMOVAL, THE CONTRACTOR SHALL TAKE MEASURES TO ENSURE THAT STRUCTURAL COMPONENTS OF EPSC MEASURES ARE NOT DAMAGED AND THIS MADE INEFFECTIVE. IF DAMAGE DOES OCCUR, THE CONTRACTOR SHALL REPAIR THE EPSC MEASURES AT THE CONTRACTOR'S OWN EXPENSE.

8.3.6. CHECK DAMS WILL BE INSPECTED FOR STABILITY. SEDIMENT WILL BE REMOVED WHEN DEPTH REACHES ONE-HALF (½) THE HEIGHT OF THE DAM.

8.3.7. SEDIMENT REMOVED FROM SEDIMENT CONTROL STRUCTURES SHALL BE PLACED AND TREATED IN A MANNER SO THAT THE SEDIMENT IS CONTAINED WITHIN THE PROJECT LIMITS. DOES NOT MIGRATE INTO FEATURES REMOVED FROM, AND DOES NOT MIGRATE ONTO ADJACENT PROPERTIES AND/OR INTO WATERS OF THE STATE/US.

8.3.8. LITTER, CONSTRUCTION DEBRIS, AND CONSTRUCTION CHEMICALS EXPOSED TO STORMWATER WILL BE PICKED UP AND REMOVED FROM STORMWATER EXPOSURE PRIOR TO ANTICIPATED STORM EVENTS OR BEFORE BEING CARRIED OFF SITE. LITTER AND DEBRIS WILL BE PLACED IN A CONTAINER WITH A POLLUTANT SOURCE FOR STORMWATER DISCHARGES AFTER USE. MATERIALS USED FOR EROSION CONTROL WILL BE REMOVED (3.5.3.1.f).

8.3.9. ALL SEEDED AREAS WILL BE CHECKED FOR BARE SPOTS, EROSION, WASHOUTS, AND VIGOROUS GROWTH. FREE OF SIGNIFICANT WEED INFESTATIONS.

9. **SITE ASSESSMENTS (3.1.2)**

QUALITY ASSURANCE SITE ASSESSMENTS OF EROSION PREVENTION AND SEDIMENT CONTROLS SHALL BE PERFORMED PER THE TDOT ENVIRONMENTAL DIVISION COMPLIANCE AND FIELD SERVICES OFFICE GUIDELINES.

10. **STORMWATER MANAGEMENT (3.5.4)**

10.1. STORMWATER MANAGEMENT WILL BE HANDLED BY TEMPORARY MEASURES THAT ARE NECESSARY TO MEET PERMANENT STORMWATER MANAGEMENT NEEDS IN THE POST CONSTRUCTION PERIOD. PERMANENT CONTROLS WILL BE DEPICTED ON THE PLANS AND NOTED AS PERMANENT.

10.2. DESCRIBE ANY SPECIFIC POST CONSTRUCTION MEASURES THAT WILL CONTROL VELOCITY, POLLUTANTS, AND/OR EROSION (3.5.4). CLASS "A", "B", AND "C" RIPRAP USED FOR ROADSIDE DITCH AND INLETOUTLET DITCH SLOPE STABILIZATION.

10.3. OTHER ITEMS NEEDING CONTROL (3.5.5)

CONSTRUCTION MATERIALS: THE FOLLOWING MATERIALS OR SUBSTANCES ARE EXPECTED TO BE PRESENT ON THE SITE DURING THE CONSTRUCTION PERIOD. (CHECK ALL THAT APPLY).

- LUMBER, GUARDRAIL, TRAFFIC CONTROL DEVICES
- CONCRETE WASHOUT
- PIPE CULVERTS (I.E. CONCRETE CORRUGATED METAL, HOPE ETC.)
- MINERAL AGGREGATES, ASPHALT
- EARTH
- LIQUID TRAFFIC STRIPING MATERIALS, PAINT
- ROCK
- CURING COMPOUND
- EXPLOSIVES
- OTHER \_\_\_\_\_

THESE MATERIALS WILL BE HANDLED AS NOTED IN THIS SWPPP.

10.4. WASTE MATERIALS (3.5.5.b)

WASTE MATERIAL (EARTH, ROCK, ASPHALT, CONCRETE, ETC.) NOT REQUIRED FOR THE CONSTRUCTION OF THE PROJECT WILL BE DISPOSED OF BY THE CONTRACTOR IN ACCORDANCE WITH THE TDOT CONSTRUCTION CONTRACT AND STATE REGULATIONS. IMPACTS TO WATERS OF THE STATE/US SHALL BE AVOIDED IF POSSIBLE. IF UNAVOIDABLE, THE CONTRACTOR WILL OBTAIN ALL NECESSARY PERMITS INCLUDING, BUT NOT LIMITED TO NPDES, AQUATIC NUISANCE PERMITS, AND TWA SECTION 26A PERMITS TO DISPOSE OF WASTE MATERIALS.

10.5. HAZARDOUS WASTE (3.5.5.c) (7.9)

ALL HAZARDOUS WASTE MATERIALS WILL BE DISPOSED OF IN A MANNER WHICH IS COMPLIANT WITH LOCAL OR STATE REGULATIONS. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS TO DISPOSE OF WASTE MATERIALS. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS TO DISPOSE OF HAZARDOUS MATERIAL.

10.6. SANITARY WASTE (3.5.5.b)

PORTABLE SANITARY FACILITIES WILL BE PROVIDED ON ALL CONSTRUCTION SITES. SANITARY WASTE WILL BE COLLECTED FROM THE PORTABLE UNITS IN A TIMELY MANNER BY A LICENSED WASTE MANAGEMENT CONTRACTOR OR AS REQUIRED BY ANY LOCAL REGULATIONS. THE CONTRACTOR WILL OBTAIN ALL NECESSARY PERMITS TO DISPOSE OF SANITARY WASTE.

10.7. OTHER MATERIALS

THE FOLLOWING MATERIALS OR SUBSTANCES ARE EXPECTED TO BE PRESENT ON THE SITE DURING THE CONSTRUCTION PERIOD. (CHECK ALL THAT APPLY).

- FERTILIZERS AND LIME
- PESTICIDES AND/OR HERBICIDES
- DIESEL AND GASOLINE
- MACHINERY LUBRICANTS (OIL AND GREASE)

THESE MATERIALS WILL BE HANDLED AS NOTED IN THIS SWPPP.

11. **NON-STORMWATER DISCHARGES (3.5.9)**

11.1. THE FOLLOWING NON-STORMWATER DISCHARGES ARE ANTICIPATED DURING THE CONSTRUCTION OF THIS PROJECT (CHECK ALL THAT APPLY):

- DEWATERING OF WORK AREAS OF COLLECTED STORMWATER AND GROUND WATER.

12. **SPILL PREVENTION, MANAGEMENT AND NOTIFICATION (3.5.5.c, 5.1)**

12.1. SPILL PREVENTION (3.5.5.c)

12.1.1. CONTRACTORS BULK FUEL AND PETROLEUM PRODUCTS STORED ON-SITE OR ADJACENT TO THE ROW, IN ABOVE GROUND STORAGE TANKS WITH AGGREGATE STORAGE CAPACITY IN EXCESS OF 1,320 GALLONS SHALL HAVE SECONDARY CONTAINMENT.

12.1.2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PREPARING A SPILL PREVENTION CONTROL AND COUNTERMEASURE (SPCC) PLAN AS REQUIRED BY TDOT SPECIAL PROVISION 107FP (REGARDING WATER QUALITY AND STORM WATER PERMITS) AND THE LAW.

12.1.3. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR OBTAINING ANY NECESSARY LOCAL, STATE, AND FEDERAL PERMITS. THE SPCC PLAN AND/OR PERMITS SHALL BE KEPT ON-SITE. A COPY PROVIDED TO THE TDOT CONSTRUCTION ENGINEER.

12.2. MATERIAL MANAGEMENT

12.2.1. HOUSEKEEPING

ONLY NEEDED PRODUCTS WILL BE STORED ON-SITE BY THE CONTRACTOR EXCEPT FOR BULK MATERIALS. THE CONTRACTOR WILL STORE ALL MATERIALS UNDER COVER AND IN APPROPRIATE CONTAINERS. PRODUCTS MUST BE STORED IN ORIGINAL CONTAINERS AND LABELED. MATERIAL MIXING WILL BE CONDUCTED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. WHEN POSSIBLE, ALL PRODUCTS WILL BE STORED IN ORIGINAL CONTAINERS. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS TO DISPOSE OF MATERIALS AND CONTAINERS WILL BE FOLLOWED. THE CONTRACTOR'S SITE SUPERINTENDENT WILL INSPECT MATERIALS STORAGE AREAS REGULARLY TO ENSURE PROPER USE AND DISPOSAL. DUST GENERATED WILL BE CONTROLLED IN ACCORDANCE WITH THE CONSTRUCTION PROJECT. ALL PRODUCTS WILL BE PRESERVED AND MAINTAINED AS NOTED ON THE PLANS.

12.2.2. HAZARDOUS MATERIALS

PRODUCTS WILL BE KEPT IN ORIGINAL CONTAINERS UNLESS THE CONTAINER IS NOT RE-SEALABLE. ORIGINAL LABELS AND MATERIAL SAFETY DATA SHEETS WILL BE RETAINED IN A SAFE PLACE TO RELAY IMPORTANT PRODUCT INFORMATION. IF SURPLUS PRODUCT MUST BE DISPOSED OF, MANUFACTURER'S LABEL DIRECTIONS FOR DISPOSAL WILL BE FOLLOWED.

12.2.3. HAZARDOUS MATERIALS

PRODUCTS WILL BE KEPT IN ORIGINAL CONTAINERS UNLESS THE CONTAINER IS NOT RE-SEALABLE. ORIGINAL LABELS AND MATERIAL SAFETY DATA SHEETS WILL BE RETAINED IN A SAFE PLACE TO RELAY IMPORTANT PRODUCT INFORMATION. IF SURPLUS PRODUCT MUST BE DISPOSED OF, MANUFACTURER'S LABEL DIRECTIONS FOR DISPOSAL WILL BE FOLLOWED.

TYPE	YEAR	PROJECT NO.	SCALE
P.E.	2005	74010-123-14	S-6
CONST.	2007	STP-65 (10)	

FILE NO.	DESIGN DIVISION	STATE OF TENNESSEE D.O.T.
----------	-----------------	---------------------------

# STORMWATER POLLUTION PREVENTION PLAN

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

12.3.3. PRODUCT SPECIFIC PRACTICES

12.3.1. PETROLEUM PRODUCTS: ALL ON-SITE VEHICLES WILL BE MONITORED FOR LEAKS AND RECEIVE REGULAR PREVENTIVE MAINTENANCE TO REDUCE THE CHANCE OF LEAKAGE. PETROLEUM PRODUCTS WILL BE STORED IN TIGHTLY SEALED CONTAINERS WHICH ARE CLEARLY LABELED.

12.3.2. FERTILIZERS: FERTILIZERS WILL BE APPLIED ONLY IN THE AMOUNTS SPECIFIED BY THE SOIL ANALYSIS OR TDO. ONCE APPLIED, FERTILIZERS WILL BE WORKED INTO THE SOIL TO LIMIT THE EXPOSURE TO STORMWATER. FERTILIZERS WILL BE STORED IN AN ENCLOSED AREA UNDER COVER. THE CONTENTS OF SEALSABLE CONTAINERS WILL BE TRANSPORTED TO SEALSABLE CONTAINERS TO AVOID SPILLS.

12.3.3. PAINTS: ALL CONTAINERS WILL BE TIGHTLY SEALED AND STORED WHEN NOT REQUIRED FOR USE. THE EXCESS WILL BE DISPOSED AT THE MANUFACTURER'S INSTRUCTIONS AND APPLICABLE STATE AND LOCAL REGULATIONS.

12.3.4. CONCRETE TRUCKS: CONTRACTORS WILL PROVIDE DESIGNATED TRUCK WASHOUT AREAS ON THE SITE. THESE AREAS MUST BE SELF-CONTAINED AND NOT CONNECTED TO ANY STORMWATER COLLECTION SYSTEM. CONCRETE TRUCKS WILL BE PROPERLY STABILIZED.

12.4. SPILL MANAGEMENT

IN ADDITION TO THE PREVIOUS HOUSEKEEPING AND MANAGEMENT PRACTICES, THE FOLLOWING PRACTICES WILL BE FOLLOWED FOR SPILL PREVENTION AND CLEANUP IF NECESSARY:

12.4.1. FOR ALL HAZARDOUS MATERIALS STORED ON SITE, THE MANUFACTURER'S RECOMMENDED METHODS FOR SPILL CLEAN UP WILL BE CLEARLY POSTED. SITE PERSONNEL WILL BE MADE AWARE OF THE PROCEDURES AND THE LOCATIONS OF THE INFORMATION AND CLEANUP SUPPLIES.

12.4.2. APPROPRIATE CLEANUP MATERIALS AND EQUIPMENT WILL BE MAINTAINED BY THE CONTRACTOR IN THE MATERIALS STORAGE AREA. ON-SITE AND UNDER COVER AS APPROPRIATE, INCLUDING: DUST PAN, MOPS, BAGS, GLOVES, GOGGLES, KITTY LITTER, SAND, SAWDUST, AND PLASTIC AND METAL TRASH CONTAINERS SPECIFICALLY FOR CLEANUP PURPOSES.

12.4.3. ALL SPILLS WILL BE CLEANED IMMEDIATELY AFTER DISCOVERY AND THE MATERIALS DISPOSED OF PROPERLY. THE SPILL AREA WILL BE KEPT WELL VENTILATED AND PERSONNEL WILL WEAR APPROPRIATE PROTECTIVE CLOTHING TO PREVENT INJURY FROM CONTACT WITH A HAZARDOUS SUBSTANCE.

12.4.4. THE CONTRACTOR'S RESPONSIBLE PARTY WILL BE THE SPILL PREVENTION AND CLEANUP COORDINATOR. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT THE SITE SUPERINTENDENT HAS HAD APPROPRIATE TRAINING FOR HAZARDOUS MATERIALS HANDLING, SPILL MANAGEMENT, AND CLEANUP.

12.4.5. IF SPILLS REPRESENT AN IMMINENT THREAT OF ESCAPING THE SITE AND ENTERING RECEIVING WATERS, PERSONNEL WILL RESPOND IMMEDIATELY TO CONTAIN THE RELEASE AND NOTIFY THE SUPERINTENDENT AFTER THE SITUATION HAS BEEN STABILIZED.

12.4.6. IF AN OIL SHEEN IS OBSERVED ON SURFACE WATER (E.G. SETTLING PONDS, DETENTION PONDS, SWALES), ACTION WILL BE TAKEN IMMEDIATELY TO REMOVE THE MATERIAL CAUSING THE SHEEN. THE CONTRACTOR WILL USE APPROPRIATE

MATERIALS TO CONTAIN AND ABSORB THE SPILL. THE SOURCE OF THE OIL SHEEN WILL ALSO BE IDENTIFIED AND REMOVED OR REPAIRED AS NECESSARY TO PREVENT FURTHER RELEASES.

12.4.7. IF A SPILL OCCURS, THE CONTRACTOR'S SITE SUPERINTENDENT SHALL BE RESPONSIBLE FOR COMPLETING THE SPILL REPORTING FORM AND FOR REPORTING THE SPILL TO THE TDO. THE CONTRACTOR ENGINEER AND/OR PROJECT ENGINEER, ALL SPILLS MUST BE REPORTED TO THE APPROPRIATE AGENCY. THE MEASURES SHALL BE TAKEN IMMEDIATELY TO PREVENT AND CONTROL THE SPILL AND THE STANDARDS, INCLUDING GROUNDWATER, SHOULD A SPILL OCCUR.

12.4.8. APPROPRIATE CLEANUP MATERIALS AND EQUIPMENT SHALL BE MAINTAINED BY THE CONTRACTOR IN THE MATERIALS STORAGE AREA. ON-SITE AND UNDER COVER AS APPROPRIATE, INCLUDING EQUIPMENT SHALL BE INSPECTED AND MAINTAINED BY THE CONTRACTOR AS NECESSARY TO REPLACE ANY MATERIALS USED IN SPILL RESPONSE ACTIVITIES.

12.5. SPILL NOTIFICATION (5.1)

WHERE A RELEASE CONTAINING A HAZARDOUS SUBSTANCE IN AN ENVIRONMENTAL FIELD OFFICE OR TDO FIELD OFFICE IS ESTABLISHED UNDER EITHER 40 CFR 117 OR 40 CFR 302 OCCURS DURING A 24-HOUR PERIOD:

12.5.1. THE TDO PROJECT ENGINEER IS RESPONSIBLE FOR NOTIFYING THE TDO PROJECT ENGINEER (E.G. ENVIRONMENTAL STUDIES SPECIALIST) AS SOON AS THE OR SHE HAS KNOWLEDGE OF THE DISCHARGE.

12.5.2. THE TDO REGIONAL PROJECT DEVELOPMENT OFFICE WILL NOTIFY THE TDO REGIONAL ENVIRONMENTAL FIELD OFFICE AND ANY OTHER APPLICABLE REGULATORY AGENCIES WITHIN 24 HOURS OF THE SPILL.

12.5.3. IN ADDITION TO ANY FOLLOW UP NOTIFICATIONS REQUIRED BY FEDERAL LAW, A WRITTEN DESCRIPTION OF THE RELEASE, RELEASE LOCATION, AND THE ACTIONS WERE TAKEN TO MITIGATE EFFECTS OF THE RELEASE, AND STEPS TAKEN TO MINIMIZE THE CHANCE OF FUTURE OCCURRENCES WILL BE SUBMITTED TO THE APPROPRIATE TDEC ENVIRONMENTAL FIELD OFFICE WITHIN 14 DAYS OF KNOWLEDGE OF THE RELEASE.

12.5.4. THE SWPPP MUST BE MODIFIED WITHIN 14 DAYS OF KNOWLEDGE OF THE RELEASE PROVIDING A DESCRIPTION OF THE RELEASE, CIRCUMSTANCES LEADING TO THE RELEASE, AND THE DATE OF RELEASE. THE SWPPP WILL BE REVIEWED AND MODIFIED AS NECESSARY TO IDENTIFY MEASURES TO PREVENT THE REOCCURRENCE OF SUCH RELEASES AND TO RESPOND TO SUCH RELEASES.

13. RECORD-KEEPING

13.1. REQUIRED RECORDS

TDO OR THEIR DULY AUTHORIZED REPRESENTATIVE WILL MAINTAIN AT THE SITE THE FOLLOWING RECORDS OF CONSTRUCTION ACTIVITIES (353.3.1.m)(4.1.5)(6.2.1):

13.1.1. THE DATES WHEN MAJOR GRADING ACTIVITIES OCCUR.

13.1.2. THE DATES WHEN CONSTRUCTION ACTIVITIES TEMPORARILY OR PERMANENTLY CEASE ON A PORTION OF THE SITE.

13.1.3. THE DATES WHEN STABILIZATION MEASURES ARE INITIATED.

13.1.4. RECORDS, EPSC INSPECTION REPORTS AND CORRECTIVE MEASURES.

13.1.5. RECORDS OF QUALITY ASSURANCE SITE ASSESSMENTS.

13.1.6. COPY OF SITE EPSC INSPECTOR'S CERTIFICATION AND/OR LICENSING

13.1.7. COPY OF REQUIRED SOIL ANALYSIS

13.1.8. A COPY OF ANY REGULATORY CORRESPONDENCE REGARDING THE EFFECTIVENESS OF THE SWPPP OR EPSC CONTROLS.

13.2. RAINFALL MONITORING PLAN (3.5.3.1.9):

13.2.1. EQUIPMENT

AT A MINIMUM, THE CONTRACTOR WILL INSTALL A FENCE POST TYPE RAIN GAUGE. THE GAUGE SHALL BE THE STANDARD GAUGE. FENCE POST RAIN GAUGE WILL BE A WEDGE-SHARED GAUGE THAT MEASURES UP TO 6 INCHES OF RAINFALL. AN ENGLISH

13.3. KEEPING PLANS CURRENT (3.4)

13.3.1. THE EPSC PLAN IS TO SERVE AS AN INITIAL GUIDE FOR SITE PERSONNEL AS THE CONSTRUCTION PROCESS DEVELOPS. IT MUST BE AMENDED, MODIFIED, AND UPDATED WHENEVER EPSC REGULATORY OFFICIALS DETERMINE EPSC MEASURES ARE PROVING INEFFECTIVE IN ELIMINATING OR SIGNIFICANTLY MINIMIZING POLLUTANT SOURCES OR ARE OTHERWISE NOT ACHIEVING THE GENERAL OBJECTIVES OF CONTROLLING POLLUTANTS IN STORMWATER DISCHARGES ASSOCIATED WITH THE CONSTRUCTION ACTIVITY.

13.3.2. THE STAGES DEPICTED WITHIN THE EPSC PLANS MAY NOT COINCIDE WITH THE ACTUAL STAGES OF CONSTRUCTION ESTABLISHED BY THE CONTRACTOR DURING CONSTRUCTION. THUS MODIFICATIONS WILL BE REQUIRED TO ENSURE THE EPSC PLANS ACCURATELY REFLECT THE ACTUAL STAGES OF CONSTRUCTION. THE MEASURES THAT ARE INSTALLED DURING THE VARIOUS STAGES OF CONSTRUCTION, IT IS IMPRACTICAL TO DETERMINE ALL THE INTERMEDIATE STAGES OF CONSTRUCTION THAT WILL OCCUR. THUS, THESE DOCUMENTS MUST BE UPDATED THROUGHOUT THE LIFE OF THE CONSTRUCTION PROJECT.

13.2.2. LOCATION

THE RAIN GAUGE WILL BE LOCATED AT OR ALONG THE PROJECT SITE, AS DEFINED IN THE NOI OF THE NPDES PERMIT, IN AN OPEN AREA THAT IS UNOCCUPIED BY OTHER STRUCTURES OR UNOCCUPIED BY OUTSIDE FACTORS (WEATHERING, LIGHTNING, TREES, ETC.) AT LEAST ONE RAIN GAUGE PER LINEAR MILE IS REQUIRED ALONG (AS MEASURED ALONG THE CENTERLINE OF THE PRIMARY ALIGNMENT) THE PROJECT WHERE CLEARING, GRUBBING, EXCAVATION, GRADING, CUTTING OR FILLING IS ACTIVELY PERFORMED, OR EXPOSED SOIL HAS NOT YET BEEN PERMANENTLY STABILIZED.

13.2.3. METHODS

RAINFALL MONITORING WILL BE INITIATED PRIOR TO CLEARING, GRUBBING, EXCAVATION, GRADING, CUTTING, OR FILLING, EXCEPT AS SUCH MINIMAL CLEARING MAY BE NECESSARY TO CONDUCT THE MONITORING. THE RAIN GAUGES WILL BE CHECKED FOR OPERATIONAL SOUNDNESS DAILY (DURING NORMAL BUSINESS HOURS) IN WET TIMES AND WEEKLY IN DRY TIMES. GAUGES WILL BE REPAIRED OR REPLACED ON THE SAME DAY IF FOUND TO BE NON-OPERATIONAL OR MISSING.

13.2.4. EACH RAIN GAUGE WILL BE READ (FOR DETAILED RECORDS OF RAINFALL) AND EMPTIED AFTER EVERY RAINFALL EVENT OCCURRING ON THE PROJECT SITE AT APPROXIMATELY THE SAME TIME OF THE DAY (DURING NORMAL BUSINESS HOURS). DURING PERIODS OF DRY CONDITIONS, IT WILL NOT BE NECESSARY TO READ THE RAIN GAUGE EVERY DAY. IN LIEU OF NECESSARY TO READ THE RAIN GAUGE EVERY DAY, IN LIEU OF THE RAIN GAUGES CAN BE EMPTIED THE NEXT BUSINESS DAY AND A REFERENCE SITE USED FOR A RECORD OF DAILY AMOUNT OF PRECIPITATION FOR THOSE DAYS. A REFERENCE SITE IS THE DOCUMENTATION FROM THE CLOSEST GAUGE WITHIN PROXIMITY OF THE PROJECT FROM A RECOGNIZED SOURCE SUCH AS THE NOAA NATIONAL WEATHER SERVICE.

13.2.5. DETAILED RECORDS WILL BE RECORDED OF RAINFALL EVENTS INCLUDE DATES, AMOUNTS OF RAINFALL, AND THE APPROXIMATE DURATION (OR THE STARTING AND ENDING TIMES). THE RAINFALL RECORDS WILL BE RECORDED ON THE TDO RAINFALL RECORD SHEET. THESE RECORDS SHALL BE MAINTAINED IN THE DOCUMENTATION AND PERMITS' BINDER.

13.2.6. IF THE RAINFALL EVENT IS STILL IN PROGRESS AT THE DAILY RECORDING TIME, THE GAUGE WILL BE EMPTIED AND THE PROGRESS WILL INDICATE THAT THE STORM EVENT WAS STILL IN PROGRESS.

13.2.7. RAIN GAUGE INFORMATION (DETAILED RECORDS), INCLUDING THE LOCATION OF THE NEAREST OUTFALL, WILL BE RECORDED IN INSPECTION REPORT FORMS AT THE TIME OF MEASUREMENT.

TYPE	YEAR	PROJECT NO.	SHEET NO.
P.E.	2005	74010-123-14	S-7
CONST.	2007	STP-85(10)	

**15. SECONDARY PERMITTEE (OPERATOR) CERTIFICATION (7.7.6)**

I CERTIFY UNDER PENALTY OF LAW THAT I HAVE REVIEWED THIS DOCUMENT, AND THAT I AM THE OPERATOR OF THE CONSTRUCTION SITE DESCRIBED ABOVE AND/OR MY INQUIRY OF THE PERSON DIRECTLY RESPONSIBLE FOR ASSEMBLING THIS NOI AND SWPPP, I BELIEVE THE INFORMATION SUBMITTED IS ACCURATE. I AM AWARE THAT THIS NOI, IF APPROVED, MAKES THE ABOVE-DESCRIBED CONSTRUCTION ACTIVITY SUBJECT TO NPDES PERMIT NUMBER WNR10000, AND THAT CERTAIN OF THE ACTIVITIES ON-SITE ARE THEREBY PROHIBITED. I AM AWARE OF THE CONSEQUENCES OF VIOLATING THESE PERMIT INCLUDING THE POSSIBILITY OF FINE AND IMPRISONMENT FOR KNOWINGLY FAILING TO COMPLY WITH THESE PERMIT REQUIREMENTS, AS SPECIFIED IN TENNESSEE CODE ANNOTATED SECTION 39-16-702(9)(4). THIS DECLARATION IS MADE UNDER PENALTY OF PERJURY.

AUTHORIZED TDOE PERSONNEL SIGNATURE (3.3.1)  
  
PRINTED NAME  
  
TITLE  
  
DATE

**16. ENVIRONMENTAL PERMITS (6.0)**

LIST ALL ENVIRONMENTAL PERMITS AND EXPIRATION DATES FOR PROJECT TO BE COMPLETED AT THE ENVIRONMENTAL PRECONSTRUCTION MEETING BY TDOE CONSTRUCTION OR THEIR DULY AUTHORIZED REPRESENTATIVE:

ENVIRONMENTAL PERMITS		
PERMIT	YES OR NO	EXPIRATION DATE*
TDEC ARAP		
CORPUS OF ENGINEERS (USACE)		
TVA 26A		
TDEC CGP		
OTHER:		

\*THE TDOE ENVIRONMENTAL DIVISION MUST BE NOTIFIED SIX MONTHS PRIOR TO PERMIT EXPIRATION DATE.

**13.5. NOTICE OF TERMINATION (8.0)**

13.5.1. WHEN ALL STORMWATER DISCHARGES FROM CONSTRUCTION ACTIVITIES THAT ARE AUTHORIZED BY THE PERMIT ARE ELIMINATED BY FINAL STABILIZATION, THE TDOE REGIONAL ENGINEER WILL SUBMIT A NOTICE OF TERMINATION (NOT THAT IS SIGNED IN ACCORDANCE WITH THE PERMIT TO THE TDEC CENTRAL OFFICE IN WASHINGTON, TN.

13.5.2. FOR THE PURPOSES OF THE CERTIFICATION REQUIRED BY THE NOT, THE ELIMINATION OF STORMWATER DISCHARGES ASSOCIATED WITH THE CONSTRUCTION ACTIVITY MEANS THE COMPLETION OF ALL EARTH-DISTURBING ACTIVITIES ON THE SITE ARE COMPLETED AND ALL DISTURBED SOILS AT THE OPERATOR HAD CONTROL HAVE BEEN FINALLY STABILIZED; AND

13.5.2.1. ALL CONSTRUCTION MATERIALS, WASTE AND WASTE HANDLING DEVICES, AND ALL EQUIPMENT, AND VEHICLES THAT WERE USED DURING CONSTRUCTION HAVE BEEN REMOVED AND PROPERLY DISPOSED; AND

13.5.2.2. ALL STORMWATER CONTROLS THAT WERE INSTALLED AND MAINTAINED DURING CONSTRUCTION, EXCEPT THOSE THAT ARE INTENDED FOR LONG-TERM USE FOLLOWING TERMINATION OF PERMIT COVERAGE, HAVE BEEN REMOVED; AND

13.5.2.3. ALL POTENTIAL POLLUTANTS AND POLLUTANT GENERATING ACTIVITIES ASSOCIATED WITH CONSTRUCTION HAVE BEEN REMOVED; AND

13.5.2.4. THE PERMITTEE HAS IDENTIFIED WHO IS RESPONSIBLE FOR ONGOING MAINTENANCE OF ANY STORMWATER CONTROLS LEFT ON THE SITE FOR LONG-TERM USE FOLLOWING TERMINATION OF PERMIT COVERAGE; AND

13.5.2.5. TEMPORARY EPSC MEASURES HAVE BEEN OR WILL BE REMOVED AT AN APPROPRIATE TIME TO ENSURE FINAL STABILIZATION IS MAINTAINED; AND

13.5.2.6. ALL STORMWATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITIES FROM THE IDENTIFIED SITE HAVE BEEN ELIMINATED FROM THE PORTION OF THE CONSTRUCTION SITE WHERE THE OPERATOR HAD CONTROL.

13.5.2.7. RETENTION OF RECORDS (6.2)  
TDOE WILL RETAIN COPIES OF THE SWPPP, ALL REPORTS REQUIRED BY THE PERMIT, AND RECORDS OF ALL DATA USED TO COMPLETE THE NOTICE OF INTENT FOR THE PROJECT FOR A PERIOD OF AT LEAST THREE (3) YEARS FROM THE DATE THE NOT WAS FILED.

**14. SITE WIDE PRIMARY PERMITTEE CERTIFICATION (7.7.5)**

I CERTIFY UNDER PENALTY OF LAW THAT THIS DOCUMENT AND ALL ATTACHMENTS WERE PREPARED BY ME OR UNDER MY DIRECTION OR SUPERVISION. THE SUBMITTED INFORMATION IS TO THE BEST OF MY KNOWLEDGE AND BELIEF, TRUE, ACCURATE, AND COMPLETE. I AM AWARE THAT THERE ARE SIGNIFICANT PENALTIES FOR SUBMITTING FALSE INFORMATION, INCLUDING THE POSSIBILITY OF FINE AND IMPRISONMENT, AS SPECIFIED IN TENNESSEE CODE ANNOTATED SECTION 39-16-702(a)(4). THIS DECLARATION IS MADE UNDER PENALTY OF PERJURY.

*John Z. Hewitt*  
JOHN HEWITT  
GE MANAGER 2  
  
PRINTED NAME  
09/06/2017  
DATE

**13.4. MAKING PLANS ACCESSIBLE**

13.4.1. TDOE WILL RETAIN A COPY OF THIS SWPPP (INCLUDING A COPY OF THE DOCUMENTATION AND PERMITS) BINDER AT THE CONSTRUCTION SITE (OR OTHER LOCATION ACCESSIBLE TO TDEC AND THE PUBLIC) FROM THE DATE CONSTRUCTION COMMENCES TO THE DATE OF FINAL STABILIZATION. TDOE WILL HAVE A COPY OF THE SWPPP AVAILABLE AT THE LOCATION WHERE WORK COMMENCES AND THOSE IDENTIFIED AS HAVING RESPONSIBILITIES UNDER THE SWPPP WHENEVER THEY ARE ON THE CONSTRUCTION SITE (6.2).

13.4.2. PRIOR TO THE INITIATION OF LAND DISTURBING ACTIVITIES AND UNTIL THE SITE HAS MET THE FINAL STABILIZATION CRITERIA, TDOE OR THEIR DULY AUTHORIZED REPRESENTATIVE WILL POST A NOTICE NEAR THE MAIN ENTRANCE OF THE CONSTRUCTION SITE WITH THE FOLLOWING INFORMATION (3.3.3) (6.2.1):

13.4.2.1. A COPY OF THE NOTICE OF COVERAGE (NOC) WITH THE NPDES PERMIT NUMBER FOR THE PROJECT;

13.4.2.2. THE INDIVIDUAL NAME, COMPANY NAME, EMAIL ADDRESS (IF APPLICABLE), AND PHONE NUMBER FOR THE LOCAL PROJECT SITE OWNER AND OPERATOR CONTACT;

13.4.2.3. A BRIEF DESCRIPTION OF THE PROJECT; AND

13.4.2.4. THE LOCATION OF THE SWPPP.

13.4.3. ALL INFORMATION DESCRIBED IN SECTION 13.4.2 MUST BE POSTED NEAR THE MAIN ENTRANCE TO THE PROJECT. DUE TO THIS SAFETY CONCERN, THE NOTICE SHALL BE POSTED IN A LOCAL BUILDING. THE NOTICE MUST BE PLACED IN A PUBLICLY ACCESSIBLE LOCATION WHERE CONSTRUCTION IS ACTIVELY UNDERWAY AND MOVED AS NECESSARY.

TYPE	YEAR	PROJECT NO.	SHEET NO.
P.E.	2005	74010-123-1-14	
CONST.	2007	STP-865 (10)	S-8

OUTFALL TABLE (3.5.1.4.5.4.1.g)

EPSC STAGE	OUTFALL LABEL	SUB OUTFALL	STATION POINT OR RT	SLOPE WITHIN ROW (%)	STAGE 1 DRAINAGE AREA (AC)	STAGE 2 DRAINAGE AREA (AC)	STAGE 3 DRAINAGE AREA (AC)	SEWERT BASIN OR EQUIPMENT MEASURE(S) (YES, NO OR N/A)	RECEIVING RESOURCE (TOOT EBR LABEL) OR OTHER	COMMENTS
1	OUT-1		399+95 RT	4.2	0.5			N/A	WWC-1/EPH-1	
1	OUT-2		407+20 RT	9.6	0.6			N/A	WWC-2/EPH-2	
1	OUT-3		411+35 RT	18.7	1.7			N/A	STR-2	
1	OUT-4		411+80 RT	15.8	1.8			N/A	STR-2	
1	OUT-5		411+20 RT	25.8	0.8			N/A	STR-2	
1	OUT-6		412+70 RT	20.7	0.8			N/A	STR-2	
1	OUT-7		411+20 LT	9.5	2.1			N/A	WWC-4/EPH-4	
1	OUT-8		411+50 LT	9.1	0.9			N/A	WWC-4/EPH-4	
1	OUT-9		428+20 RT	4.5	4.0			N/A	STR-3	
1	OUT-10		428+70 RT	5.7	0.7			N/A	STR-3	
1	OUT-11		425+30 RT	2.5	2.9			N/A	STR-3	
1	OUT-12		424+25 LT	4.9	3.8			N/A	STR-3	
1	OUT-13		424+85 LT	6.7	0.7			N/A	STR-3	
1	OUT-14		437+35 RT	11.7	1.5			N/A	STR-5	
1	OUT-15		437+90 RT	14.8	0.6			N/A	STR-5	
1	OUT-16		438+90 RT	5.7	2.9			N/A	STR-5	
1	OUT-17		439+40 RT	6.2	4.2			N/A	STR-5	
1	OUT-18		439+75 LT	7.3	4.6			N/A	STR-5	
1	OUT-19		441+10 LT	5.8	1.5			N/A	STR-5	
1	OUT-20		450+80 RT	2.3	0.5			N/A	WWC-6/EPH-6	
1	OUT-21		450+85 RT	2.8	3.2			N/A	WWC-6/EPH-6	
1	OUT-22		451+15 RT	2.8	2.1			N/A	WWC-6/EPH-6	
1	OUT-23		452+95 RT	14.4	0.1			N/A	WWC-6/EPH-6	
1	OUT-24		472+25 RT	7.0	0.9			N/A	STR-7	
1	OUT-25		472+70 LT	3.3	1.7			N/A	STR-7	
1	OUT-26		57+60 LT MT SHARON RD	3.9	3.3			N/A	STR-7	
1	OUT-27		478+05 RT	6.6	0.4			N/A	STR-8	
1	OUT-28		476+65 RT	2.1	3.6			N/A	STR-8	
1	OUT-29		488+05 RT	3.0	1.3			N/A	STR-9	
1	OUT-30		489+60 RT	5.0	0.1			N/A	STR-9	
1	OUT-31		489+95 RT	2.0	1.2			N/A	STR-9	
1	OUT-32		502+80 RT	0.8	2.6			N/A	WWC-9/EPH-9	
1	OUT-33		509+05 RT	0.8	1.4			N/A	WWC-9/EPH-9	
1	OUT-34		504+00 LT	1.1	1.8			N/A	WWC-9/EPH-9	
1	OUT-35		504+15 LT	1.0	0.1			N/A	WWC-9/EPH-9	
1	OUT-36		505+20 LT	1.4	1.6			N/A	WWC-9/EPH-9	

ALL UNUSED FIELDS WITHIN THE OUTFALL TABLE ARE TO BE SHADED, HATCHED, OR REMOVED TO INDICATE THEIR NON-USAGE.

TENNESSEE D.O.T.
DESIGN DIVISION
FILE NO.



TYPE	YEAR	PROJECT NO.	SHEET NO.
P.E.	2005	74010-123-1-14	
CONST.	2007	STP-66 (10)	S-9

OUTFALL TABLE (3.5.1.d, 5.4.1.g)

EPSC STAGE	OUTFALL LABEL	SUB OUTFALL	STATION CL LT OR RT	SLOPE WITHIN ROW (%)	STAGE 1 DRAINAGE AREA (AC)	STAGE 2 DRAINAGE AREA (AC)	STAGE 3 DRAINAGE AREA (AC)	SEDIMENT BASIN OR EQUIVALENT MEASURE(S) (YES, NO OR N/A)	RECEIVING RESOURCE (TOOT EBR LABEL) OR OTHER	COMMENTS
1	OUT-37		510+90 RT	1.5	1.4			N/A		
1	OUT-38		511+05 RT	1.0	3.8			N/A		
1	OUT-39		510+95 LT	1.0	2.8			N/A		
1	OUT-40		523+45 RT	1.5	1.0			N/A		
1	OUT-41		523+55 RT	4.0	0.7			N/A		
1	OUT-42		102+10 LT S.R. 297	6.7	3.8			N/A	WTL-6	
1	OUT-43		543+50 RT	11.1	0.3			N/A	WTL-3	
1	OUT-44		546+60 RT	4.6	0.4			N/A	WTL-3	
1	OUT-45		544+30 RT	2.6	2.6			N/A	WTL-3	
1	OUT-46		552+45 RT	3.3	1.6			N/A		
1	OUT-47		553+15 RT	4.0	1.8			N/A		
1	OUT-48		572+65 RT	6.2	1.6			N/A	WWC-6EPH-6	
1	OUT-49		573+05 RT	5.7	0.5			N/A	WWC-6EPH-6	
1	OUT-50		568+30 RT	5.6	2.2			N/A	WTL-5	
1	OUT-51		573+75 RT	4.5	4.1			N/A	WWC-6EPH-6	
1	OUT-52		589+40 RT	6.5	3.9			N/A	STR-14	
1	OUT-53		589+10 RT	25.9	0.4			N/A	STR-14	
1	OUT-54		589+20 RT	6.6	7.0			N/A	STR-14	
1	OUT-55		590+15 RT	9.0	2.2			N/A	STR-14	
1	OUT-56		609+55 LT	3.2	4.9			N/A	WWC-15/UDF-1	
1	OUT-57		619+40 RT	4.9	4.3			N/A	STR-15	
1	OUT-58		625+10 RT	5.0	3.6			N/A	STR-9	
2	OUT-59		394+05 LT	1.9		0.4		N/A		
2	OUT-60		393+75 RT	2.8		0.2		N/A		
2	OUT-61		394+10 RT	1.8		0.1		N/A		
2	OUT-62		398+60 RT	22.3		0.4		N/A	WWC-1EPH-1	
2	OUT-63		399+45 RT	5.6		0.7		N/A	WWC-1EPH-1	
2	OUT-64		400+00 RT	5.1		0.5		N/A	WWC-1EPH-1	
2	OUT-65		411+30 RT	21.6		1.7		N/A	STR-2	
2	OUT-66		411+75 RT	27.9		1.9		N/A	STR-2	
2	OUT-67		411+75 RT	16.3		1.5		N/A	STR-2	
2	OUT-68		411+20 RT	27.8		0.6		N/A	STR-2	
2	OUT-69		408+20 RT	15.0		2.0		N/A	WWC-2EPH-2	
2	OUT-70		426+25 RT	3.8		3.8		N/A	STR-3	
2	OUT-71		426+70 RT	7.1		1.4		N/A	STR-3	
2	OUT-72		423+55 LT	2.9		2.5		N/A	STR-3	

ALL UNUSED FIELDS WITHIN THE OUTFALL TABLE ARE TO BE SHADED, HATCHED, OR REMOVED TO INDICATE THEIR NON-USAGE.

TYPE	YEAR	PROJECT NO.	SHEET NO.
P.E.	2005	74010-123-1-14	
CONST.	2007	STP-85 (10)	S-10

OUTFALL TABLE (3.5.1.d, 5.4.1.g)

EPSC STAGE	OUTFALL LABEL	SUB OUTFALL	STATION CL LT OR RT	SLOPE WITHIN ROW (%)	STAGE 1 DRAINAGE AREA (AC)	STAGE 2 DRAINAGE AREA (AC)	STAGE 3 DRAINAGE AREA (AC)	SEDIMENT BASIN OR EQUIVALENT MEASURE(S) (YES, NO OR N/A)	RECEIVING RESOURCE (TOOT EBR LABEL) OR OTHER	COMMENTS
2	OUT-73		437+15 RT	11.9		1.0		N/A	STR-5	
2	OUT-74		437+85 RT	5.4		4.7		N/A	STR-5	
2	OUT-75		438+45 RT	18.8		4.1		N/A	STR-5	
2	OUT-76		438+80 RT	14.1		0.4		N/A	STR-5	
2	OUT-77		440+75 RT	9.6		0.8		N/A	STR-5	
2	OUT-78		442+10 LT	2.4		2.8		N/A	STR-5	
2	OUT-79		437+55 RT	14.1		0.3		N/A	STR-5	
2	OUT-80		436+15 LT	4.3		0.1		N/A	STR-5	
2	OUT-81		435+45 LT	2.7		0.6		N/A	STR-5	
2	OUT-82		433+50 LT	3.5		1.3		N/A	STR-5	
2	OUT-83		450+85 RT	3.2		0.5		N/A	WWC-6/EPH-6	
2	OUT-84		451+50 RT	8.0		0.1		N/A	WWC-6/EPH-6	
2	OUT-85		452+25 LT	3.3		1.9		N/A	WWC-6/EPH-6	
2	OUT-86		452+90 RT	12.5		0.2		N/A	WWC-6/EPH-6	
2	OUT-87		458+20 RT	2.1		0.8		N/A	WWC-6/EPH-6	
2	OUT-88		461+15 LT	2.0		5.4		N/A		
2	OUT-88		463+85 LT	4.0		0.1		N/A		
2	OUT-90		51+00 LT OLD US 433	4.0		1.7		N/A		
2	OUT-91		464+60 LT	2.1		2.4		N/A		
2	OUT-92		472+45 RT	8.9		0.9		N/A	STR-7	
2	OUT-93		476+70 RT	2.7		3.3		N/A	STR-8	
2	OUT-94		477+75 RT	1.3		1.5		N/A	STR-8	
2	OUT-95		485+15 RT	10.6		0.8		N/A	STR-9	
2	OUT-96		487+40 RT	7.0		1.3		N/A	STR-9	
2	OUT-97		488+20 RT	5.1		0.1		N/A	STR-9	
2	OUT-98		490+15 RT	3.2		1.2		N/A	STR-9	
2	OUT-99		83+00 RT CAVE SPRINGS RD	6.0		0.3		N/A		
2	OUT-100		83+00 LT CAVE SPRINGS RD	5.8		0.4		N/A		
2	OUT-101		502+85 RT	1.6		2.6		N/A	WWC-9/EPH-9	
2	OUT-102		502+95 RT	2.6		1.4		N/A	WWC-9/EPH-9	
2	OUT-103		511+00 LT	1.1		3.6		N/A		
2	OUT-104		523+40 RT	3.6		1.0		N/A		
2	OUT-105		523+50 RT	4.5		0.7		N/A		
2	OUT-106		525+35 RT	2.3		0.4		N/A		
2	OUT-107		101+50 RT S.R. 257	7.5		0.7		N/A		
2	OUT-108		531+40 RT	1.0		1.3		N/A		

ALL UNUSED FIELDS WITHIN THE OUTFALL TABLE ARE TO BE SHADED, HATCHED, OR REMOVED TO INDICATE THEIR NONUSAGE.

TENNESSEE D.O.T.
DESIGN DIVISION
FILE NO.

TYPE	YEAR	PROJECT NO.	SHEET NO.
P.E.	2005	74010-123-1-14	
CONST.	2007	STP-86(10)	S-11

OUTFALL TABLE (3.5.1.d, 5.4.1.g)

EPSC STAGE	OUTFALL LABEL	SUB OUTFALL	STATION CL LT OR RT	SLOPE WITHIN ROW (%)	STAGE 1 DRAINAGE AREA (AC)	STAGE 2 DRAINAGE AREA (AC)	STAGE 3 DRAINAGE AREA (AC)	SEDIMENT BASIN OR EQUIVALENT MEASURE(S) (YES, NO OR N/A)	RECEIVING RESOURCE (TOOT EBR LABEL) OR OTHER	COMMENTS
2	OUT-109		102+15 LT S.R. 257	1.3		3.4		N/A		
2	OUT-110		544+30 RT	3.5		3.2		N/A	WTL-7	
2	OUT-111		544+45 RT	3.6		1.7		N/A	WTL-7	
2	OUT-112		552+65 RT	4.3		1.6		N/A	STR-10	
2	OUT-113		552+85 RT	4.8		1.8		N/A	STR-10	
2	OUT-114		568+30 RT	5.3		2.2		N/A	STR-12	
2	OUT-115		572+65 RT	10.1		0.5		N/A	STR-12	
2	OUT-116		572+80 RT	4.2		7.9		N/A	STR-12	
2	OUT-117		576+30 LT	4.3		4.1		N/A	STR-12	
2	OUT-118		589+15 RT	4.7		7.5		N/A	STR-14	
2	OUT-119		589+45 RT	8.7		3.9		N/A	STR-14	
2	OUT-120		616+35 RT	1.4		2.4		N/A	STR-15	
2	OUT-121		625+60 RT	3.7		39.2		YES	STR-15	
3	OUT-122		393+85 RT	3.5			0.6	N/A		
3	OUT-123		393+90 LT	4.1			0.4	N/A	WWC-1/EPH-1	
3	OUT-124		399+70 RT	6.8			1.0	N/A	STR-2	
3	OUT-125		411+40 RT	32.6			1.5	N/A	STR-2	
3	OUT-126		411+65 RT	13.7			2.4	N/A	STR-2	
3	OUT-127		409+15 RT	33.0			1.0	N/A	WWC-2/EPH-2	
3	OUT-128		411+20 LT	8.3			2.0	N/A	WWC-4/EPH-4	
3	OUT-129		411+45 LT	13.1			1.0	N/A	WWC-4/EPH-4	
3	OUT-130		426+30 RT	4.5			2.8	N/A	STR-3	
3	OUT-131		426+70 RT	11.5			0.8	N/A	STR-3	
3	OUT-132		424+40 LT	4.0			3.2	N/A	STR-3	
3	OUT-133		424+65 LT	9.3			0.2	N/A	STR-3	
3	OUT-134		436+85 RT	7.4			2.9	N/A	STR-5	
3	OUT-135		437+50 RT	6.2			6.8	N/A	STR-5	
3	OUT-136		440+40 CL	2.3			1.8	N/A		
3	OUT-137		442+05 CL	6.7			1.2	N/A		
3	OUT-138		437+15 LT	3.7			7.9	N/A	PND-1	
3	OUT-139		442+20 LT	2.9			0.6	N/A	STR-5	
3	OUT-140		453+00 RT	3.7			1.8	N/A	WWC-6/EPH-6	
3	OUT-141		449+85 LT	2.6			0.3	N/A	WWC-6/EPH-6	
3	OUT-142		449+25 LT	4.7			1.3	N/A	WWC-6/EPH-6	
3	OUT-143		461+15 LT	4.7			5.4	N/A		
3	OUT-144		461+25 LT	2.8			2.3	N/A		

ALL UNUSED FIELDS WITHIN THE OUTFALL TABLE ARE TO BE SHADED, HATCHED, OR REMOVED TO INDICATE THEIR NON-USAGE.

TENNESSEE D.O.T.
DESIGN DIVISION
FILE NO.

TYPE	YEAR	PROJECT NO.	SHEET NO.
P.E.	2005	74010-123-1-14	
CONST.	2017	STP-86 (10)	S-12

OUTFALL TABLE (3.5.1.d, 5.4.1.g)

EPSC STAGE	OUTFALL LABEL	SUB OUTFALL	STATION CL LT OR RT	SLOPE WITHIN ROW (%)	STAGE 1 DRAINAGE AREA (AC)	STAGE 2 DRAINAGE AREA (AC)	STAGE 3 DRAINAGE AREA (AC)	SEDIMENT BASIN OR EQUIVALENT MEASURE(S) (YES, NO OR N/A)	RECEIVING RESOURCE (TOOT EBR LABEL) OR OTHER	COMMENTS
3	OUT-145		472+40 RT	18.9			0.6	N/A	STR-7	
3	OUT-146		476+75 RT	4.1			3.0	N/A	STR-8	
3	OUT-147		472+70 CL	1.5			0.6	N/A	STR-7	
3	OUT-148		477+65 CL	1.7			1.4	N/A	STR-8	
3	OUT-149		479+95 LT	3.2			3.6	N/A	WWC-7/EPH-7	
3	OUT-150		476+80 LT	5.4			0.7	N/A		
3	OUT-151		57+55 LT MT. SHARON RD	1.0			1.3	N/A	STR-7	
3	OUT-152		485+10 RT	9.3			0.7	N/A		
3	OUT-153		487+75 RT	8.1			4.7	N/A	WTL-4	
3	OUT-154		83+00 RT CAVE SPRINGS RD	2.7			0.3	N/A		
3	OUT-155		63+00 RT CAVE SPRINGS RD	2.4			0.4	N/A		
3	OUT-156		502+80 RT	2.5			1.4	N/A	WWC-9/EPH-9	
3	OUT-157		502+90 RT	5.9			1.0	N/A	WWC-9/EPH-9	
3	OUT-158		505+30 LT	1.9			2.0	N/A	WWC-9/EPH-9	
3	OUT-159		85+70 RT CHELSEA DR.	7.6			1.1	N/A		
3	OUT-160		89+70 LT CHELSEA DR.	7.4			1.0	N/A		
3	OUT-161		511+00 LT	2.4			5.2	N/A		
3	OUT-162		102+15 LT SR-257	5.1			2.5	N/A	WTL-6	
3	OUT-163		105+80 RT SR-257	2.8			0.9	N/A	PND-2	
3	OUT-164		84+20 RT SR-257	3.1			0.5	N/A		
3	OUT-165		541+50 RT	6.2			3.6	N/A		
3	OUT-166		544+40 RT	2.1			2.6	N/A	WTL-7	
3	OUT-167		544+50 RT	10.6			0.9	N/A	WTL-7	
3	OUT-168		552+75 RT	3.9			0.9	N/A	STR-10	
3	OUT-169		552+90 RT	4.6			2.3	N/A	STR-10	
3	OUT-170		568+40 RT	7.3			0.9	N/A	STR-11	
3	OUT-171		573+00 RT	9.4			2.9	N/A	STR-12	
3	OUT-172		575+80 LT	5.0			4.9	N/A	STR-12	
3	OUT-173		581+05 LT	5.5			0.3	N/A		
3	OUT-174		588+15 RT	5.4			9.4	N/A	STR-14	
3	OUT-175		588+35 RT	8.9			4.4	N/A	STR-14	
3	OUT-176		590+40 LT	7.5			0.5	N/A	STR-14	
3	OUT-177		105+65 RT W. COUNTY FARM RD.	7.9			1.2	N/A	STR-13	
3	OUT-178		105+65 LT W. COUNTY FARM RD.							
3	OUT-179		128+90 LT MARVIEW DR	4.4			1.6	N/A	WWC-14/EPH-14	

ALL UNUSED FIELDS WITHIN THE OUTFALL TABLE ARE TO BE SHADED, HATCHED, OR REMOVED TO INDICATE THEIR NONUSAGE.

OUTFALL TABLE (3.5.1.d, 5.4.1.g)

EPSC STAGE	OUTFALL LABEL	SUB OUTFALL	STATION CL LT OR RT	SLOPE WITHIN ROW (%)	STAGE 1 DRAINAGE AREA (AC)	STAGE 2 DRAINAGE AREA (AC)	STAGE 3 DRAINAGE AREA (AC)	SEDIMENT BASIN OR EQUIVALENT MEASURE(S) (YES, NO OR N/A)	RECEIVING RESOURCE (TOOT EBR LABEL) OR OTHER	COMMENTS
3	OUT-180		617+90 CL	3.8			0.1	N/A	STR-9	
3	OUT-181		618+30 RT	18.6			2.1	N/A	STR-9	
3	OUT-182		622+00 RT	8.7			0.5	N/A	STR-9	

ALL UNUSED FIELDS WITHIN THE OUTFALL TABLE ARE TO BE SHADED, HATCHED, OR REMOVED TO INDICATE THEIR NON-USAGE.

Index of Sheets

SHEET NO.	DESCRIPTION
1-2F	TITLE SHEET
3-3E	TYPICAL SECTIONS
4-21	PROPERTY MAPS & R.O.W. ACQUISITION TABLE
48-21A	PRESENT LAYOUTS
48-21B	PROPOSED LAYOUTS
48-21C	PROFILES
22-27	SIDE ROAD PROFILES
28-45	PRIVATE DRIVE PROFILES
51-62	CULVERT SECTIONS
63-118	EPSC PLAN
119-241	ROADWAY CROSS-SECTIONS
242-300	SIDE ROAD CROSS-SECTIONS

# STATE OF TENNESSEE DEPARTMENT OF TRANSPORTATION BUREAU OF ENGINEERING

## ROBERTSON COUNTY

State Route 65 (US 431), from  
Old Highway 431 to Walling Road  
**RIGHT-OF-WAY**


STATE HIGHWAY NO. 65 F.A.H.S. NO. 65

TENN.	YEAR	SHEET NO.
FED. AID PROJ. NO. STP-65(10)	2012	1
STATE PROJ. NO. 74010-1231-14		

STP-65(10)  
74010-1231-14



END ADJ. PROJ. STP/DEMO-65(8)  
NO. 74010-2230-14 R.O.W.

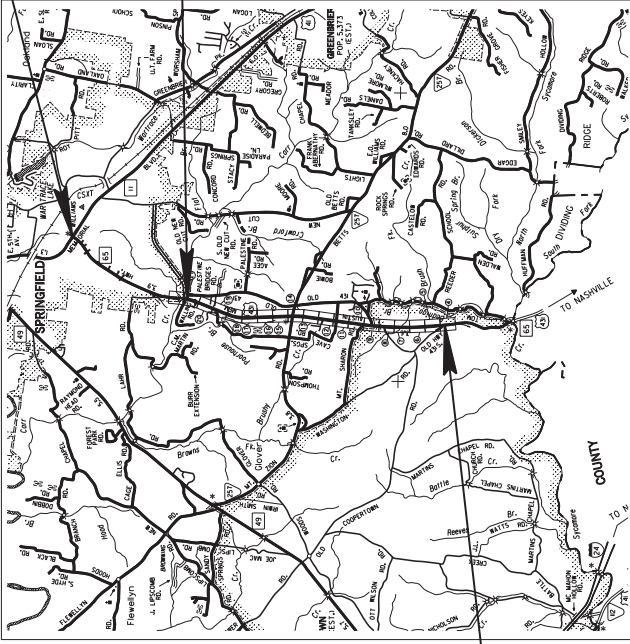

END PROJ. NO. STP-65(10), 74010-1231-14 R.O.W.  
STA. 624+17.73

NO EXCLUSIONS  
NO EQUATIONS

TRAFFIC DATA  
ADT (2013) 14,230  
ADT (2033) 25,610  
BHV (2033) 2,561  
D 70 - 30  
T (ADT) 9 X  
T (BHV) 6 X  
V TO MPH

R.O.W. FIELD REVIEW

BEGIN PROJ. NO. STP-65(10), 74010-1231-14 R.O.W.  
STA. 402+11.16

SPECIAL NOTES

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED MARCH 1, 2006 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT TRANS. MANAGER 1: LARRY JORDAN  
DESIGNED BY: DBS & ASSOCIATES ENGINEERING  
DESIGNER: MICHAEL W. MORRIS, PE CHECKED BY \_\_\_\_\_  
P.E. NO.: 74010-1231-14  
PIN: 105765\_00

SCALE: 1" = 5280'

R.O.W. LENGTH 4.206 MILES

ROAD TO BE CLOSED  
DURING CONSTRUCTION


APPROVED: PAUL D. DEGGES, CHIEF ENGINEER  
DATE: \_\_\_\_\_  
APPROVED: JOHN SCHRODER, COMMISSIONER

U.S. DEPARTMENT OF TRANSPORTATION  
FEDERAL HIGHWAY ADMINISTRATION  
APPROVED: \_\_\_\_\_  
DIVISION ADMINISTRATOR  
DATE \_\_\_\_\_

Index of Sheets  
SEE SHEET NO. 1A

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION  
BUREAU OF ENGINEERING

TENN.	YEAR	SHEET NO.
	2017	1
	FED. AID PROJ. NO.	STP-65 (10)
	STATE PROJ. NO.	74010-2231-14



**ROBERTSON COUNTY**

STATE ROUTE 65 (US431), FROM  
OLD HIGHWAY 431 TO WALLING ROAD  
GRADE, DRAIN, PAVE, SIGN, STRIPING AND SIGNALIZATION

**CONSTRUCTION**

STATE HIGHWAY NO. 65 F.A.H.S. NO. 431

ADJ. PROJ. STP/DEMO-65(8)  
NO. 74010-2230-14 R.O.W.  
END PROJ. NO. STP-65(10), 74010-3231-14 CONST.  
STA. 626+50.00  
END PROJ. NO. STP-65(10), 74010-2231-14 R.O.W.  
STA. 624+17.73



SURVEY DATE: 12/20/2007  
SURVEY UPDATE: 1/22/2015

NO EXCLUSIONS  
NO EQUATIONS



TRAFFIC DATA	
ADT (2017)	12,900
ADT (2037)	16,760
DHV (2037)	1,974
D	55 - 45
T (ADT)	8 %
T (DHV)	5 %
V	60 MPH

APPROVED: CHIEF ENGINEER  
DATE:  
APPROVED: COMMISSIONER

U.S. DEPARTMENT OF TRANSPORTATION  
FEDERAL HIGHWAY ADMINISTRATION  
APPROVED:  
DIVISION ADMINISTRATOR DATE

BEGIN PROJECT NO. STP-65 (10), 74010-2231-14 R.O.W.  
STA. 402+11.16

BEGIN PROJECT NO. STP-65 (10), 74010-3231-14 CONST.  
STA. 393+50.00

**SPECIAL NOTES**

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.  
THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED JANUARY 1, 2015 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT C.E. MANAGER 1 OR  
TDOT TRANSPORTATION MANAGER 1: LARRY JORDAN  
DESIGNED BY: DBS & ASSOCIATES ENGINEERING  
DESIGNER: JACQUELYN SMITH P.E.  
CHECKED BY: DAVID EAST P.E.  
P.E. NO. 74010-1231-14  
PIN NO. 105765.00

ROADWAY LENGTH 4.413 MILES  
BRIDGE LENGTH 0.000 MILES  
BOX BRIDGE LENGTH 0.000 MILES  
PROJECT LENGTH 4.413 MILES



# INDEX

## SHEET NAME SHEET NO.

TITLE SHEET.....	1
ROADWAY INDEX AND STANDARD DRAWINGS INDEX.....	1A-1B
PROJECT COMMITMENT SHEET.....	1C
ESTIMATED ROADWAY QUANTITIES.....	2-2A
ESTIMATED SIGNAL QUANTITIES.....	2B
ESTIMATED UTILITY QUANTITIES.....	2C
TYPICAL SECTIONS AND PAVING SCHEDULE.....	2D-2J
GENERAL NOTES.....	2K-2N
SPECIAL NOTES.....	2O
TABULATED QUANTITIES.....	2P-2S
PROPERTY MAPS AND RIGHT-OF-WAY ACQUISITION TABLES.....	3, 3A-3E
PRESENT LAYOUTS.....	4-14, 14D, 15-21
R.O.W. DETAILS.....	4A-4A, 14E, 15A-21A
PROPOSED LAYOUTS.....	4B-14B, 14F, 15B-21B
PROPOSED PROFILES.....	4C-21C
PUBLIC SIDE ROADS AND RAMP PROFILES.....	22-27
PRIVATE DRIVE AND FIELD RAMP PROFILES.....	28-47
DRAINAGE MAPS.....	48-52
CULVERT SECTIONS.....	53-64
EROSION PREVENTION AND SEDIMENT CONTROL (EPSC) PLANS.....	65-124
TRAFFIC CONTROL PLANS.....	125, 125A-125B
SIGNING AND PAVEMENT MARKING PLANS.....	126, 126A-126R
SIGN SCHEDULE SHEETS.....	127, 127A-127E
SIGNAL LAYOUTS.....	128-128A
SOILS SHEETS.....	128, 129A-129AU
ROADWAY CROSS SECTIONS.....	130-257
SIDE ROAD CROSS SECTIONS.....	258-318
UTILITIES INDEX.....	U1-1
STORM WATER POLLUTION PREVENTION PLAN (SWPPP) INDEX.....	S-1

# STANDARD ROADWAY DRAWINGS

## DWG. NO. REV. DESCRIPTION

<b>STANDARD BRIDGE DRAWINGS</b>			
RD-9-1	10-07-08	REINFORCING BAR SUPPORT DETAILS FOR CONCRETE SLABS	
RD-10-1	4-08-05	MISCELLANEOUS ABUTMENT AND DRAINAGE DETAILS	
<b>BRIDGE APPURTENANCES ENGLISH (BOX CULVERTS)</b>			
RD-15-1	11-06-08	INDEX OF DRAWINGS AND TERMINOLOGY	
RD-15-2	3-28-08	GENERAL NOTES	
RD-15-3	2-28-03	DESIGN SECTION LIMITS	
RD-15-4	12-07-01	TYPICAL SECTION AND DETAILS	
RD-15-5	2-28-03	TYPICAL ELEVATION	
RD-15-6	3-28-08	CURB AND RAIL DETAILS - SKEW NOT LESS THAN 45 DEG.	
RD-15-7	3-02-02	STANDARD EDGE BEAM DETAILS FOR FILLS GREATER THAN 3' - 8"	
RD-15-9	2-28-03	TYPICAL WINGWALL DETAILS AND NOTES	
RD-15-10	11-06-08	WINGWALL DIMENSIONS AND QUANTITIES	
RD-15-11		WINGWALL DIMENSIONS AND QUANTITIES	
RD-15-12	3-28-08	WINGWALL & SPECIAL RETAINING WALL DESIGN SECTION	
RD-15-13		WINGWALL DESIGN SECTION	
RD-15-14	8-01-11	BACKFILL AND DRAINAGE DETAILS	
RD-15-15		BACKFILL AND DRAINAGE DETAILS	
RD-15-19		SIDEWALK AND MISCELLANEOUS DETAILS	
RD-15-20		WARPED SLOPE DETAIL	
RD-15-22	2-28-03	EXTENSION DETAILS	
RD-15-24	12-07-01	END SECTION DETAILS	
RD-15-25	11-01-10	PRECAST BOX CULVERT DETAILS	
RD-15-27		PRECAST BOX CULVERT DETAILS	
RD-15-97		SLAB BRIDGE, 1 BARREL AT 8', CLEAR HTS. 5' - 8", 0 - 60' FILL	
<b>ROADWAY DESIGN STANDARDS</b>			
RD-A-1	12-18-99	STANDARD ABBREVIATIONS	
RD-L-1	10-26-94	STANDARD LEGEND	
RD-L-2	09-05-01	STANDARD LEGEND FOR UTILITY INSTALLATIONS	
RD-L-3	04-15-04	STANDARD LEGEND FOR SIGNALIZATION AND LIGHTING	
RD-L-4	04-15-04	STANDARD LEGEND FOR SIGNALIZATION AND LIGHTING	
RD-L-5	05-01-08	STANDARD LEGEND FOR EROSION PREVENTION AND SEDIMENT CONTROL	
RD-L-6	03-30-10	STANDARD LEGEND FOR EROSION PREVENTION AND SEDIMENT CONTROL	
RD-L-7	05-24-12	STANDARD LEGEND FOR EROSION PREVENTION AND SEDIMENT CONTROL	
RD-UD-3	09-05-96	UNDERDRAIN DETAILS	
RD-UD-4	01-25-16	UNDERDRAIN LATERAL DETAILS	
RD-UD-6	12-18-94	LATERAL UNDERDRAIN ENDWALL DETAIL FOR 1:1 & 2:1 SLOPES	
RD-UD-7	12-18-94	LATERAL UNDERDRAIN ENDWALL DETAIL FOR 3:1 & 4:1 SLOPES	
RD-UD-8		LATERAL UNDERDRAIN ENDWALL DETAIL FOR 5:1 SLOPES	

## DWG. NO. REV. DESCRIPTION

RD-UD-9	12-18-94	LATERAL UNDERDRAIN ENDWALL DETAIL FOR 6:1 SLOPES	
RD01-S-11	04-04-03	DESIGN AND CONSTRUCTION DETAILS FOR ROADSIDE SLOPE DEVELOPMENT	
RD01 S-11A	10-16-02	ROADSIDE DITCH DETAILS FOR DESIGN AND CONSTRUCTION	
RD01-SD-1		INTERSECTION SIGHT DISTANCE DESIGN AND GENERAL NOTES	
RD01-SD-2		INTERSECTION SIGHT DISTANCE LANDSCAPE AND OBSTRUCTION	
RD01-SD-3		INTERSECTION SIGHT DISTANCE 2-LANE ROADWAYS	
RD01-SD-4		INTERSECTION SIGHT DISTANCE 5-LANE AND 4-LANE UNDIVIDED ROADWAYS	
RD01-SD-5		INTERSECTION SIGHT DISTANCE 4-LANE DIVIDED HIGHWAYS	
RD01-SE-3	10-15-02	RURAL SUPERELEVATION DETAILS	
RD01-TS-1	02-05-16	DESIGN STANDARDS FOR LOCAL ROADS AND STREETS	
RD01-TS-1A	02-05-16	DESIGN STANDARDS FOR LOW-VOLUME LOCAL ROADS (ADT <= 400)	
RD01-TS-2	10-15-02	DESIGN STANDARDS FOR COLLECTOR ROADS AND STREETS	
RD01-TS-3	10-15-02	DESIGN STANDARD FOR 2-LANE ARTERIAL HIGHWAYS	
RD01-TS-3A	10-15-02	DESIGN STANDARDS 4 AND 6 LANE ARTERIAL HIGHWAYS WITH DEPRESSED MEDIANS	
<b>DRAINAGE - CULVERTS AND ENDWALL</b>			
D-PB-1	01-02-13	STANDARD DETAILS CLASS 'B' BEDDING AND CULVERT EXCAVATION	
D-PB-2	01-29-14	STANDARD DETAILS FOR PLASTIC PIPE INSTALLATION	
D-PB-3		INDUCED TRENCH SOIL EMBANKMENT FOR PIPE CULVERT INSTALLATION	
D-PE-1	02-12-76	TYPE 'A' CONCRETE ENDWALL 2:1 SLOPE, 36" TO 78"	
D-PE-4	10-10-16	STRAIGHT CONCRETE ENDWALL	
D-PE-5	05-27-01	STANDARD WINGWALLS HORIZONTAL OVAL CONCRETE PIPES	
D-PE-15A	06-14-13	15" CONCRETE ENDWALL CROSS DRAIN	
D-PE-15B		15" CONCRETE ENDWALL CROSS DRAIN	
D-PE-18A	01-06-15	18" CONCRETE ENDWALL CROSS DRAIN	
D-PE-18B		18" CONCRETE ENDWALL CROSS DRAIN	
D-PE-24A	01-21-16	24" CONCRETE ENDWALL CROSS DRAIN	
D-PE-24B		24" CONCRETE ENDWALL CROSS DRAIN	
D-PE-30A	10-10-16	30" CONCRETE ENDWALL CROSS DRAIN WITH STEEL PIPE GRATE	
D-PE-30B		30" CONCRETE ENDWALL CROSS DRAIN WITH STEEL PIPE GRATE	
D-PE-36A	06-14-13	36" CONCRETE ENDWALL CROSS DRAIN WITH STEEL PIPE GRATE	
D-PE-36B		36" CONCRETE ENDWALL CROSS DRAIN WITH STEEL PIPE GRATE	
D-PE-42A	06-14-13	42" CONCRETE ENDWALL CROSS DRAIN WITH STEEL PIPE GRATE	
D-PE-42B		42" CONCRETE ENDWALL CROSS DRAIN WITH STEEL PIPE GRATE	
D-PE-47B		47" CONCRETE ENDWALL CROSS DRAIN WITH STEEL PIPE GRATE	
D-PE-48A	06-14-13	48" CONCRETE ENDWALL CROSS DRAIN WITH STEEL PIPE GRATE	

YEAR	PROJECT NO.	SHEET NO.
2017	SIP-6510.0	1A



STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION


INDEX  
AND  
STANDARD  
DRAWINGS



TYPE	YEAR	PROJECT NO.	SHEET NO.
CONST.	2017	SIP-6510.0	1B

D-PE-48B	11-01-13	48" CONCRETE ENDWALL CROSS DRAIN WITH STEEL PIPE GRATE	T-S-7	02-12-91	HIGHWAY SHIELDS USED ON INTERSTATE AND U.S. NUMBERED ROUTES	T-WZ-42	03-05-17	CENTER LANE CLOSURES AT NEAR SIDE OF INTERSECTIONS
D-PE-89	04-15-97	PIPE GRATE & SKEWED CONNECTION DETAILS FOR 'U' ENDWALL/CONCRETE ENDWALL CROSS DRAIN WITH STEEL PIPE GRATE	T-S-8	07-15-91	HIGHWAY SHIELDS USED ON STATE NUMBERED ROUTES AND ARROWS	T-WZ-51	04-02-12	TRAFFIC CONTROL FOR SIGNALS ONLY PROJECTS ON 4 OR 5 LANE MAJOR ROUTES
D-PG-3	06-14-13	FERROUS AND ALUMINUM CORRUGATED METAL PIPE	T-S-9	06-10-14	STANDARD LAYOUT GROUND MOUNTED SIGNS	T-WZ-53	04-02-12	TRAFFIC CONTROL FOR SIGNALS ONLY PROJECTS ON 4 OR MORE LANE DIVIDED MAJOR ROUTES
D-SEW-1A	06-14-13	SIDE DRAIN CONCRETE ENDWALL WITH STEEL PIPE GRATE	T-S-10	04-04-12	STANDARD MOUNTING DETAILS FLAT SHEET SIGNS ALUMINUM/STEEL DESIGN			
D-SEW-12D	06-14-13	CONCRETE ENDWALL TYPE "SD" WITH STEEL PIPE GRATE FOR 15" AND 18" PIPES - 12" SLOPE	T-S-11	06-06-11	DELINEATOR AND MILEPOST DETAILS			
			T-S-12	07-02-15	STANDARD STEEL GROUND MOUNTED SIGNS, BREAK-AWAY TYPE POST FOOTING DETAILS, SQUARE TUBES			
			T-S-13	07-20-12	STANDARD STEEL GROUND MOUNTED SIGNS, BREAK-AWAY TYPE POST FOOTING DETAILS, I-BEAMS			
			T-S-16	07-02-15	GROUND MOUNTED ROADSIDE SIGN AND DETAILS			
			T-S-17	07-02-15	STANDARD GROUND MOUNTED SIGN USING PERFORATED/KNOCKOUT SQUARE TUBE			
			T-S-18	02-14-14	END OF ROADWAY AND DEAD END SIGNS, METAL BARRICADES (TYPE III) & WORK ZONE SPEED SIGNS			
			T-S-19	07-19-15	STANDARD STEEL SIGN SUPPORTS			
			T-S-20	11-01-11	SIGN DETAILS			
			T-S-23A	07-02-15	MULTI-DIRECTIONAL SLIP BASE BREAKAWAY SQUARE TUBE SIGN SUPPORT			
			T-S-23B	07-19-13	MULTI-DIRECTIONAL SLIP BASE BREAKAWAY STRUCTURAL PIPE SIGN SUPPORT			
			T-S-23C	07-02-15	BREAKAWAY U-POST SIGN SUPPORTS			
			T-SG-2	06-27-16	LOOP LEAD-INS, CONDUIT AND PULL BOXES			
			T-SG-3	06-27-16	STANDARD NOTES AND DETAILS OF INDUCTIVE LOOPS			
			T-SG-4	06-27-16	SPAN WIRE AND MESSENGER CABLE DETAILS			
			T-SG-7	06-27-16	CONTROLLER CABINET DETAILS			
			T-SG-7A	06-27-16	SIGNAL HEAD ASSEMBLIES			
			T-SG-7C		TYPICAL SIGNAL HEAD PLACEMENT - APPROACHES WITH NO THROUGH MOVEMENTS			
			T-SG-7D		TYPICAL SIGNAL HEAD PLACEMENT - ONE-LANE AND TWO-LANE APPROACHES			
			T-SG-7E		TYPICAL SIGNAL HEAD PLACEMENT - THREE-LANE APPROACHES			
			T-SG-7J		TYPICAL SIGNAL HEAD PLACEMENT - FOUR-LANE APPROACHES			
			T-SG-8	06-27-16	STRAIN POLE DETAILS FOR SPAN MOUNTED SIGNALS			
			T-SG-9A	06-27-16	MISCELLANEOUS SIGNAL DETAILS			
			T-SG-10	06-27-16	MAST ARM POLE AND STRAIN POLES FOUNDATION DETAILS			
			T-SG-11	06-27-16	MAINTENANCE OF EXISTING SIGNALS DURING HIGHWAY CONSTRUCTION			
			T-SG-12	06-27-16	TYPICAL WIRING FOR SIGNAL HEADS AND DETECTION LOOPS			
			T-WZ-10	04-02-12	ADVANCE ROAD WORK SIGNING ON HIGHWAYS AND FREEWAYS			
			T-WZ-16	03-05-17	LANE SHIFT UNDIVIDED HIGHWAYS AND FREEWAYS			
			T-WZ-18	03-05-17	SHOULDER CLOSURE DETAIL FOR FREEWAYS AND DIVIDED HIGHWAYS			
			T-WZ-21	03-05-17	LANE CLOSURE WITH LEFT HAND MERGE AND LANE SHIFT			
			T-WZ-36	03-05-17	LANE CLOSURE ON LOW-VOLUME 2-LANE HIGHWAY			
			T-WZ-40	03-05-17	RIGHT LANE CLOSURES AT NEAR SIDE OF INTERSECTIONS			
			T-WZ-41	03-05-17	LEFT LANE CLOSURES AT NEAR SIDE OF INTERSECTIONS			

DRAINAGE-CATCH BASINS AND MANHOLES	D-CB-38R8	03-11-14	STANDARD PRECAST CIRCULAR NO. 38 CATCH BASIN					
MISCELLANEOUS DETAILS FOR RECTANGULAR STRUCTURES	D-CB-99	05-20-14						
MISCELLANEOUS DETAILS FOR ROUND STRUCTURES	D-CB-99R	03-11-14						
BILL OF STEEL FOR ROUND CATCH BASIN LIDS	D-CB-99RA	02-02-16						
STANDARD MASONRY & PRECAST NO. 3 MANHOLE	D-MH-2	02-02-16						
STANDARD PRECAST CIRCULAR LID DETAILS FOR NO. 3 MANHOLE	D-MH-3	04-21-14						
STANDARD NO. 3 MANHOLE CASTINGS AND STEPS	D-MH-4	04-01-14						
STANDARD PRECAST RISER	D-RF-1	02-02-16						
ROADWAY AND PAVEMENT APPURTENANCES	RP-DHO-1	10-26-83	MEDIAN OPENINGS ON 4-LANE DIVIDED HIGHWAY					
STANDARD RAMPS TO SIDE ROADS	RP-R-1	05-27-01						
SAFETY APPURTENANCES AND FENCE	S-F-1	05-24-12	HIGH VISIBILITY FENCE					
STANDARD CONCRETE RIGHT-OF-WAY MARKERS	S-RP-2	02-08-16						
CLEAR ZONE CRITERIA	S-CZ-1							
SAFETY PLAN AT ROADSIDE HAZARDS	S-PL-1							
SAFETY PLAN AT SIDE ROADS OR PRIVATE DRIVES	S-PL-2							
SAFETY PLAN SAFETY HARDWARE PLACEMENT	S-PL-6							
CRASH CUSHION	S-CC-1	03-28-17						
GATING BARREL ARRAY	S-CC-2							
W-BEAM GUARDRAIL	S-GR31-1	03-28-17						
TYPE 38 GUARDRAIL END TERMINAL	S-GR-2	03-28-17						
EARTH PAD FOR TYPE 38 TERMINAL	S-GR-2P							
GUARDRAIL ANCHOR FOR TYPE 12 TERMINAL	S-GRA-1							
GUARDRAIL ANCHOR FOR TYPE 12 TERMINAL (ALTERNATIVE)	S-GRA-1A							
TYPE 13 GUARDRAIL ANCHOR	S-GRA-3	03-28-17						
TRAFFIC CONTROL APPURTENANCES	T-FAB-1	05-27-97	FLASHING YELLOW ARROW BOARD					
DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS AND MARKING ABBREVIATIONS	T-M-1	07-24-14						
DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS	T-M-2	10-10-16						
MARKING STANDARDS FOR TRAFFIC ISLANDS, MEDIANS & PAVED SHOULDERS ON CONVENTIONAL ROADS	T-M-3	07-24-14						
STANDARD INTERSECTION PAVEMENT MARKINGS	T-M-4	10-10-16						
ASPHALT SHOULDER RUMBLE STRIP INSTALLATION DETAILS FOR NON-ACCESSED ROUTES	T-M-15A	01-30-15						
ASPHALT SHOULDER RUMBLE STRIP INSTALLATION DETAILS FOR NON-ACCESS CONTROLLED ROUTES	T-M-16	01-30-15						



STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION  
**I** N D E X  
A N D  
S T A N D A R D  
D R A W I N G S

TYPE	YEAR	PROJECT NO.	SHEET NO.
CONST.	2017	STP-65100	1C

PROJECT COMMITMENTS			
COMMITMENT ID	SOURCE DIVISION	DESCRIPTION	STA. LOCATION
EDHS021	ENVIRONMENTAL DIVISION, HISTORIC	<p>THIS COMMITMENT OVERRIDES COMMITMENTS EDHS016 THROUGH EDHS020. GREENFIELD FARM WILL BE LABELED AS "HISTORIC" WITH THE NATIONAL REGISTER BOUNDARIES DELINEATED ON ALL PROJECT PLANS. THE GREENFIELD FARM HISTORIC PROPERTY WILL BE PROTECTED BY CONSTRUCTION. NO ADDITIONAL TEMPORARY OR PERMANENT RIGHT-OF-WAY OR EASEMENTS WILL BE TAKEN FROM GREENFIELD FARM. IF ANY BLASTING IS PROPOSED IN THE VICINITY OF GREENFIELD FARM, THE CONTRACTOR WILL TAKE INTO CONSIDERATION THE HISTORIC PROPERTY AND WILL TAKE ALL NECESSARY MEASURES TO AVOID ANY IMPACTS TO THE HISTORIC PROPERTY. ANY DRIVEWAY WORK AT THE HISTORIC PROPERTY WILL BE AS MINIMAL AS POSSIBLE.</p>	525+00.00



STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

PROJECT  
COMMITMENTS

YEAR	PROJECT NO.	SHEET NO.
CONST. 2017	SIP-6510.0	2

**ESTIMATED ROADWAY QUANTITIES**

ITEM NO.	DESCRIPTION	UNIT	QUANTITY
411-01.07	ACS MIX (PG64-22) GRADING E SHOULDER	TON	5849
411-01.10	ACS MIX(PG64-22) GRADING D	TON	1024
411-02.10	ACS MIX(PG70-22) GRADING D	TON	10110
411-12.01	SCORING SHOULDERS (CONTINUOUS) (16IN WIDTH)	L.M.	72
411-12.02	SCORING SHOULDERS (NON-CONTINUOUS) (19IN WIDTH)	L.M.	86
41H-01.02	COLD PLANING BITUMINOUS PAVEMENT	S.Y.	1142
60-01.01	CLASS A CONCRETE (ROADWAY)	C.Y.	707
60-01.02	STEEL BAR REINFORCEMENT (ROADWAY)	LB.	89889
60-02.02	15" CONCRETE PIPE CULVERT(CLASS III)	L.F.	8
60-03.30	16" PIPE CULVERT	L.F.	2331
60-05.30	24" PIPE CULVERT	L.F.	795
60-06.30	30" PIPE CULVERT	L.F.	385
60-07.30	36" PIPE CULVERT	L.F.	531
60-08.30	42" PIPE CULVERT	L.F.	892
60-09.30	48" PIPE CULVERT	L.F.	824
60-39.02	18" PIPE CULVERT (SIDE DRAIN)	L.F.	244
60-39.03	24" PIPE CULVERT (SIDE DRAIN)	L.F.	1805
60-39.04	30" PIPE CULVERT (SIDE DRAIN)	L.F.	178
60-39.05	36" PIPE CULVERT (SIDE DRAIN)	L.F.	51
60-39.06	42" PIPE CULVERT (SIDE DRAIN)	L.F.	117
61-01.02	MANHOLES, > 4' - 8' DEPTH	EACH	1
61-01.03	MANHOLES, > 8' - 12' DEPTH	EACH	1
61-07.02	CLASS A CONCRETE (PIPE ENDWALLS)	C.Y.	45
61-07.01	STEEL BAR REINFORCEMENT (PIPE ENDWALLS)	LB.	1066
61-07.31	18IN ENDWALL (SIDE DRAIN)	EACH	18
61-07.51	18IN ENDWALL (CROSS DRAIN) 3:1	EACH	1
61-07.54	18IN ENDWALL (CROSS DRAIN) 3:1	EACH	1
61-07.55	18IN ENDWALL (CROSS DRAIN) 4:1	EACH	4
61-07.56	18IN ENDWALL (CROSS DRAIN) 6:1	EACH	1
61-07.57	24IN ENDWALL (CROSS DRAIN) 3:1	EACH	3
61-07.58	24IN ENDWALL (CROSS DRAIN) 4:1	EACH	4
61-07.60	30IN ENDWALL (CROSS DRAIN) 3:1	EACH	2
61-07.66	42IN ENDWALL (CROSS DRAIN) 3:1	EACH	1
61-07.69	48IN ENDWALL (CROSS DRAIN) 3:1	EACH	2
61-07.70	48IN ENDWALL (CROSS DRAIN) 4:1	EACH	1
61-07.73	18IN ENDWALL (MEDIAN DRAIN)	EACH	21
61-38.01	CATCH BASINS, TYPE 38, 0' - 4' DEPTH	EACH	5
61-38.02	CATCH BASINS, TYPE 38, > 4' - 8' DEPTH	EACH	5
61-38.03	CATCH BASINS, TYPE 38, > 8' - 12' DEPTH	EACH	8
61-38.04	CATCH BASINS, TYPE 38, > 12' - 16' DEPTH	EACH	1
61-38.05	CATCH BASINS, TYPE 38, > 16' - 20' DEPTH	EACH	3
61-38.06	CATCH BASINS, TYPE 38, > 20' - 24' DEPTH	EACH	1
61-38.08	CATCH BASINS, TYPE 38, > 28' - 32' DEPTH	EACH	1
62-03.06	42" TEMPORARY DRAINAGE PIPE	L.F.	135
62-03.07	48" TEMPORARY DRAINAGE PIPE	L.F.	104
70-02	CONCRETE DRIVEWAY	S.F.	31970
70-02.02	SINGLE GUARDRAIL (TYPE 2)	L.F.	8621
70-04.03	GUARDRAIL TERMINAL (TYPE 13)	EACH	11
70-04.05	GUARDRAIL TERMINAL (TYPE IN-LINE)	EACH	6
70-04.07	TAN ENERGY ABSORBING TERM (NCHRP 350, TL3)	EACH	11
70-08.11	HIGH-VISIBILITY CONSTRUCTION FENCE	L.F.	20076
70-02.01	MARKERS (CONCRETE R.O.W. POSTS)	EACH	122
70-05.06	MACHINED RIP-RAP (CLASS A-1)	TON	14304
70-05.08	MACHINED RIP-RAP (CLASS B)	TON	9099
70-05.09	MACHINED RIP-RAP (CLASS C)	TON	3801

(8)

**ESTIMATED ROADWAY QUANTITIES**

ITEM NO.	DESCRIPTION	UNIT	QUANTITY
105-01	CONSTRUCTION STAKES, LINES AND GRADES	LS	1
201-01	CLEARING AND GRUBBING	LS	1
202-01	REMOVAL OF STRUCTURES AND OBSTRUCTIONS	LS	1
202-03.01	REMOVAL OF ASPHALT PAVEMENT	S.Y.	984
202-06.01	REMOVAL OF BUILDINGS (TRACT NO. 82)	LS	1
202-06.02	REMOVAL OF BUILDINGS (TRACT NO. 86)	LS	1
202-06.03	REMOVAL OF BUILDINGS (TRACT NO. 87)	LS	1
202-06.04	REMOVAL OF BUILDINGS (TRACT NO. 81/91A)	LS	1
202-06.05	REMOVAL OF BUILDINGS (TRACT NO. 89)	LS	1
202-06.06	REMOVAL OF BUILDINGS (TRACT NO. 96)	LS	1
202-06.07	REMOVAL OF BUILDINGS (TRACT NO. 101)	LS	1
203-01	ROAD & DRAINAGE EXCAVATION (UNCLASSIFIED)	C.Y.	511541
203-02.01	BORROW EXCAVATION (GRADED SOLID ROCK)	TON	54139
203-03	BORROW EXCAVATION (UNCLASSIFIED)	C.Y.	395420
203-04	PLACING AND SPREADING TOPSOIL	C.Y.	87223
203-05	UNDERCUTTING	C.Y.	20288
203-06	WATER	M.G.	4675
203-08	CHANNEL EXCAVATION (UNCLASSIFIED)	C.Y.	508
204-08	FOUNDATION FILL MATERIAL	C.Y.	104
204-08.01	BACKFILL MATERIAL (FLOWABLE FILL)	C.Y.	10
209-02.05	12" TEMPORARY SLOPE DRAIN	L.F.	1185.7
209-02.07	18" TEMPORARY SLOPE DRAIN	L.F.	342.8
209-03.20	FILTER SOCK (8 INCH)	L.F.	4301
209-03.22	FILTER SOCK (18 INCH)	L.F.	910
209-05	SEDIMENT REMOVAL	C.Y.	8299
209-08.02	TEMPORARY SILT FENCE (WITH BACKING)	L.F.	29327
209-08.03	TEMPORARY SILT FENCE (WITHOUT BACKING)	L.F.	14471
209-08.04	TEMPORARY ENHANCED SILT FENCE	L.F.	515
209-08.07	ROCK CHECK DAM PER	EACH	643
209-08.08	ENHANCED ROCK CHECK DAM	EACH	186
209-09.01	SANDBAGS	BAG	500
209-09.03	SEDIMENT FILTER BAG (15' X 15')	EACH	5
209-09.22	POLYACRYLAMIDE POWDER	LB.	625
209-09.23	POLYACRYLAMIDE LIQUID	GAL.	65
209-10.20	TEMPORARY SEDIMENT TRAP	C.Y.	3164
209-40.42	CATCH BASIN FILTER ASSEMBLY (TYPE 2)	EACH	1
209-40.43	CATCH BASIN FILTER ASSEMBLY (TYPE 3)	EACH	21
209-45.03	TEMPORARY DIVERSION CHANNEL	L.F.	873
209-45.04	TEMPORARY IN-STREAM DIVERSION	L.F.	156
303-01	MINERAL AGGREGATE, TYPE A BASE, GRADING D	TON	263233
303-01.01	GRANULAR BACKFILL (ROADWAY)	TON	3589
303-10.01	MINERAL AGGREGATE (SIZE 57)	TON	108
303-10.04	MINERAL AGGREGATE (SIZE 35/1)	TON	215
307-01.01	ASPHALT CONCRETE MIX (PG64-22) (BPWB-HM) GRADING A	TON	802
307-01.08	ASPHALT CONCRETE MIX (PG64-22) (BPWB-HM) GRADING B-M2	TON	1450
307-01.21	ASPHALT CONCRETE MIX (PG70-22) (BPWB-HM) GR. A-S	TON	20601
307-02.01	ASPHALT CONCRETE MIX (PG70-22) (BPWB-HM) GRADING A	TON	25048
307-02.08	ASPHALT CONCRETE MIX (PG70-22) (BPWB-HM) GRADING B-M2	TON	17244
310-10.03	MINERAL AGGREGATE (SIZE 68)	TON	136
402-01	BITUMINOUS MATERIAL FOR PRIME COAT (PC)	TON	325
402-02	AGGREGATE FOR COVER MATERIAL (PC)	TON	1435
403-01	BITUMINOUS MATERIAL FOR TASK COAT (TC)	TON	205
407-20.05	SAW CUTTING ASPHALT PAVEMENT	L.F.	390

(1)

(2)

(3)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)

(4)



TYPE	YEAR	PROJECT NO.	SHEET NO.
CONST.	2017	SIP-6510.0	2A

### ESTIMATED ROADWAY QUANTITIES

ITEM NO.	DESCRIPTION	UNIT	QUANTITY
710-02	AGGREGATE UNDERDRAINS (WITH PIPE)	L.F.	47383
710-05	LATERAL UNDERDRAIN	L.F.	11846
710-06.15	LATERAL UNDERDRAIN ENDWALL (6:1)	EACH	237
712-01	TRAFFIC CONTROL	LS	1
712-04.01	FLEXIBLE DRUMS (CHANNELIZING)	EACH	327
712-05.01	WARNING LIGHTS (TYPE A)	EACH	24
712-05.03	WARNING LIGHTS (TYPE C)	EACH	20
712-06	SIGNS (CONSTRUCTION)	S.F.	601
712-07.03	TEMPORARY BARRICADES (TYPE III)	L.F.	132
712-08.03	ARROW BOARD (TYPE C)	EACH	1
712-09.01	REMOVABLE PAVEMENT MARKING LINE	L.F.	8440
(9)			
(10)			
(11)			
(12)			
(13)			
(14)			
713-11.01	"U" SECTION STEEL POSTS	LB.	1523
(15)	PERFORATED KNOCKOUT SQUARE TUBE POST	LB.	2939
(16)	FLAT SHEET ALUMINUM SIGNS (0.080" THICK)	S.F.	550
	FLAT SHEET ALUMINUM SIGNS (0.100" THICK)	S.F.	458
	REMOVAL OF SIGNS, POSTS AND FOOTINGS	LS	1
	CHANGEABLE MESSAGE SIGN UNIT	EACH	5
716-01.21	Smopshible Paint Mixrs (BI-Dir)1 Color)	EACH	242
716-01.22	Smopshible Paint Mixrs (Mono-Dir)1 Color)	EACH	21
716-01.23	Smopshible Paint Mixrs (BI-Dir)2 Colors)	EACH	770
716-02.04	PLASTIC PAVEMENT MARKING (CHANNELIZATION STRIPING)	S.F.	1039
716-02.05	PLASTIC PAVEMENT MARKING (STOP LINE)	L.F.	451
716-02.06	PLASTIC PAVEMENT MARKING (TURN LANE ARROW)	EACH	35
716-02.08	PLASTIC PAVEMENT MARKING (8" DOTTED LINE)	L.F.	4285
716-05.01	PAINTED PAVEMENT MARKING (4" LINE)	L.M.	28
(11)	PAINTED PAVEMENT MARKING (STOP LINE)	L.F.	902
(12)	PAINTED PAVEMENT MARKING (6" LINE)	L.M.	2
716-12.02	ENHANCED FLA LINE THERMO PVMT MKNG (8IN LINE)	L.M.	31
716-13.01	SPRAY THERMO PVMT MKNG (60mm) (4IN LINE)	L.M.	1
717-01	MOBILIZATION	LS	1
(7)			
(8)			
(9)			
(10)			
(11)			
(12)			
(13)			
(14)			
740-06.01	GEOMEMBRANE	S.Y.	50
740-10.03	GEOTEXTILE (TYPE II)EROSION CONTROL)	S.Y.	25949
740-10.04	GEOTEXTILE (TYPE IV)STABILIZATION)	S.Y.	57311
740-11.02	TEMPORARY SEDIMENT TUBE 12IN (DESCRIPTION)	L.F.	2971
740-11.03	TEMPORARY SEDIMENT TUBE 18IN (DESCRIPTION)	L.F.	32519
740-11.05	TEMPORARY SEDIMENT TUBE 24IN (DESCRIPTION)	L.F.	2201
801-01	SEEDING (WITH MULCH)	UNIT	4978
801-01.02	CROWN VETCH MIXTURE (WITH MULCH)	UNIT	922
801-01.07	TEMPORARY SEEDING (WITH MULCH)	UNIT	8756
801-02	SEEDING (WITHOUT MULCH)	UNIT	7
801-02.15	FERTILIZER	TCN	131
801-03	WATER (SEEDING & SOODING)	M.G.	1313
802-11.02	ACER RUBRUM (RED MAPLE 2-SH 1 CNTRK GRWIN) GRATAEGUS PHENOPHYRUM (WSPRINGIN HAW THORN) 2-SFT CNTNR GRWIN)	EACH	22
802-11.13	LIQUIDAMBER STYRACIFLUA (SWEETGUM 2-SFT CNTNR GRWIN)	EACH	22
802-11.18	PLATANUS OCCIDENTALIS (SYCAMORE 2-SFT CNTNR GRWIN)	EACH	21
802-11.26	VIBURNUM RUFIFOLIUM (RUSTY BLACKHAW 2-SFT C.G.)	EACH	22
802-11.57	ACER RUBRUM (RED MAPLE SEED NG B.R.)	EACH	22
802-12.02	LIQUIDAMBER STYRACIFLUA (SWEETGUM SEEDLING B.R.)	EACH	35
802-12.18	PLATANUS OCCIDENTALIS (SYCAMORE SEEDLING B.R.)	EACH	21
802-12.26	QUERCUS NIGRA (WATER OAK SEEDLING B.R.)	EACH	13
802-12.35	QUERCUS PALUSTRIS (PIN OAK SEEDLING B.R.)	EACH	13
802-13.37	SALIX NIGRA (BLACK WILLOW SEEDLING B.R.)	EACH	13
802-14.40	CORNUS ANOMOLUM (SILKY DOGWOOD 2-SFT CNTNR GRWIN)	EACH	21
805-12.02	EROSION CONTROL BLANKET (TYPE II)	S.Y.	2257
806-02.03	PROJECT MOWING	CYCL	6

### FOOT NOTES:

- (1) ITEM INCLUDES 6023 CUBIC YARDS FOR EROSION CONTROL.
- (2) ITEM INCLUDES 1125 TONS FOR SINKHOLE TREATMENT.
- (3) ITEM INCLUDES 5797 CUBIC YARDS FOR SINKHOLE TREATMENT.
- (4) SEE SUBSECTION 209.07 OF THE STANDARD SPECIFICATIONS FOR MAINTENANCE REPLACEMENT. ALL QUANTITIES ARE TO BE USED AS DIRECTED BY THE ENGINEER.
- (5) ITEM INCLUDES 466 TONS FOR EROSION CONTROL.
- (6) ITEM INCLUDES 11 TONS FOR SINKHOLE TREATMENT.
- (7) ITEM IS FOR SINKHOLE REPAIR.
- (8) ITEM INCLUDES 5348 TONS FOR EROSION CONTROL.
- (9) ITEM TO BE USED AT NORTH END OF PROJECT FOR TEMPORARY TRAFFIC CONTROL FROM THE ADJACENT PROJECT.
- (10) CONTRACTOR MAY ELECT TO SUBSTITUTE PERFORMED PLASTIC FOR THERMOPLASTIC. PERFORMED PLASTIC SHALL BE PAID FOR AT THE SAME UNIT PRICE AS BID TO THERMOPLASTIC.
- (11) ITEM INCLUDES TEMPORARY TRAFFIC CONTROL MARKING ON INTERMEDIATE LAYERS OF PAVEMENT AND PERMANENT MARKING FOR ALL LOCAL ROADS WITH AN ADT OF LESS THAN 1000 PER SECTION FOUR, CONSTRUCTION PLANS, TABLE 4-3, IN THE ROADWAY DESIGN GUIDELINES.
- (12) TO BE USED IN CONJUNCTION WITH EROSION CONTROL BLANKETS AND AS DIRECTED BY THE ENGINEER.
- (13) ITEM INCLUDES 686 M.G. FOR EROSION CONTROL.
- (14) ITEM INCLUDES LITTER AND TRASH REMOVAL. THIS WORK WILL NOT BE MEASURED AND PAID FOR DIRECTLY BUT WILL BE INCLUDED IN THE COST OF ITEM NO. 806-02.03, PROJECT MOWING, CYCL.
- (15) THE PRICE FOR THE SIGNS THAT ARE NOT INCLUDED IN THE PLANS OR SIGNING SCHEDULE SHEETS BUT ARE REQUESTED BY THE COOPER TOWN CITY AND OR THE CITY OF SPRINGFIELD NEED TO BE INCLUDED IN THE PRICE OF THE SIGNING ITEMS.
- (16) INCLUDE REMOVING OF ALL THE EXISTING SIGNS THAT ARE REPLACED IN THE SIGN SCHEDULE WITHIN THE PROJECT OR AS DIRECTED BY THE ENGINEER AND RESTORING OF GROUND TO ORIGINAL CONDITIONS.



STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# ESTIMATED QUANTITIES

TYPE	YEAR	PROJECT NO.	SHEET NO.
CONST.	2017	STP-6510.0	28

**SPECIAL NOTES REGARDING SIGNAL HEADS**

- (1) ALL CIRCULAR AND ARROW INDICATIONS WITHIN ALL VEHICULAR SIGNAL HEADS PROPOSED FOR THIS PROJECT SHALL CONSIST OF AN LED (LIGHT EMITTING DIODE) SIGNAL MODULE UNLESS OTHERWISE NOTED IN THE PLANS. EXPANDED/EXTENDED VIEW.
- (2) CIRCULAR INDICATIONS SHALL MEET THE VTC5H-3 LED ARROW SPECIFICATION FOR EXPANDED/EXTENDED VIEW. ARROW INDICATIONS SHALL MEET THE VTC5H-3 LED ARROW SPECIFICATION FOR EXPANDED/EXTENDED VIEW.
- (3) INCANDESCENT OR SCREW-IN MODULES ARE NOT ACCEPTABLE.
- (4) COMPATIBILITY WITH CONFLICT MONITORS AND LOAD SWITCHES SHALL BE TESTED AND CONFIRMED.
- (5) MANUFACTURER SHALL PROVIDE A MINIMUM FIVE-YEAR WARRANTY FOR OPERATION OF THE UNIT.
- (6) ALL SIGNAL HEADS WITH LED LENSES SHALL INCLUDE SWIVEL BALANCE ADJUSTERS TO MAINTAIN THE PROPER VISIBILITY. COSTS OF ADJUSTERS TO BE INCLUDED IN COSTS OF SIGNAL HEADS.
- (7) THE ATTACHMENT OF THE TETHER WIRE TO THE POLE SHALL BE LOCATED BELOW THE LOWEST ELEVATION OF THE SIGNAL HEADS.
- (8) SIGNAL HEADS SHALL INCLUDE LOUVERED BACKPLATES WITH A 1" MINIMUM 3" MAXIMUM YELLOW RETRO REFLECTIVE BORDER AROUND THE PERIMETER OF THE FACE OF THE BACKPLATE. THE RETRO REFLECTIVE BORDER IS TO BE MADE OF A TYPE III PRISMATIC OR BETTER MATERIAL.

ESTIMATED SIGNAL QUANTITIES			
ITEM NO.	DESCRIPTION	UNIT	QUANTITY
(1) 730-14.22	STREET NAME SIGN (SUSPENDED 0.100IN THICK)	SF	56
(2) 730-01.02	REMOVAL OF SIGNAL EQUIPMENT	EACH	1
730-02.09	SIGNAL HEAD ASSEMBLY (130 WITH BACKPLATE)	EACH	6
730-02.17	SIGNAL HEAD ASSEMBLY (150 A2H WITH BACKPLATE)	EACH	2
730-02.30	SIGNAL HEAD ASSEMBLY (130 A3 WITH BACKPLATE)	EACH	2
730-03.20	INSTALL PULL BOX (TYPE A)	EACH	8
730-03.21	INSTALL PULL BOX (TYPE B)	EACH	9
(3) 730-06.01	ELECTRICAL SERVICE CONNECTION	EACH	1
730-08.02	SIGNAL CABLE - 5 CONDUCTOR	L.F.	444
730-08.03	SIGNAL CABLE - 7 CONDUCTOR	L.F.	900
730-09.01	SPAN WIRE ASSEMBLY (20, 100 LBS. MIN. BRK. STRENGTH)	L.F.	677
730-10.01	TETHER WIRE ASSEMBLY - 1/4" DIAMETER	L.F.	677
730-12.01	CONDUIT 1" DIAMETER (PVC)	L.F.	1875
730-12.02	CONDUIT 2" DIAMETER (PVC)	L.F.	85
730-12.03	CONDUIT 3" DIAMETER (PVC)	L.F.	31
730-13.03	VEHICLE DETECTOR (4 - CHANNEL, RACK MOUNT)	EACH	3
730-14.01	SHIELDED DETECTOR CABLE	L.F.	4832
730-14.02	SAW SLOT	L.F.	1363
730-14.03	LOOP WIRE	L.F.	3778
730-15.32	CABINET (EIGHT PHASE BASE MOUNTED)	EACH	1
730-16.02	EIGHT PHASE ACTUATED CONTROLLER	EACH	1
(4) 730-23.01	STEEL STRAIN POLE (SIGNAL SUPPORT)	EACH	3
(5) 730-23.02	STEEL STRAIN POLE (SIGNAL SUPPORT)	EACH	1
(6) 730-40	TEMPORARY TRAFFIC SIGNAL SYSTEM	EACH	1

- FOOTNOTES**
- (1) TO INCLUDE 6 STREET NAME SIGNS AND ALL NECESSARY HARDWARE. SIGNS TO BE INSTALLED ON THE SPAN WIRE BY THE CONTRACTOR. SEE SHEET 128 FOR LOCATION OF SIGNS. SEE SIGN SCHEDULE SHEET FOR SIGN DETAILS.
  - (2) INCLUDES THE REMOVAL OF ALL SIGNAL POLES, SIGNAL HEADS, SIGNAL CABLES, CONTROLLER AND ANY OTHER SIGNAL RELATED EQUIPMENT AT THIS INTERSECTION.
  - (3) THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONTACTING THE LOCAL UTILITY TO OBTAIN THE ESTIMATE FOR ANY CHARGES BY THE UTILITY FOR PROVIDING ELECTRICAL SERVICE TO THE SIGNAL CONTROLLER. THESE CHARGES SHALL BE INCLUDED IN THE PRICE BID FOR THIS ITEM FOR PAYMENT BY THE CONTRACTOR.
  - (4) FOR STRAIN POLES #2, #3, AND #4:  
MOMENT CAPACITY: 484,000 FT-LBS  
FOOTING DEPTH: 25'-0"  
FOOTING DIAMETER: 4'-0"
  - (5) FOR STRAIN POLE #1:  
MOMENT CAPACITY: 652,000 FT-LBS  
FOOTING DEPTH: 29'-0"  
FOOTING DIAMETER: 4'-0"
  - (6) INCLUDES 4 WOOD POLES, GUYING DEVICES, SPAN WIRE, CONDUIT RISERS AND ANY OTHER SIGNAL RELATED EQUIPMENT NEEDED FOR A FULLY OPERATIONAL TRAFFIC SIGNAL SYSTEM.

SEALED BY \_\_\_\_\_

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**ESTIMATED  
SIGNAL  
QUANTITIES  
AND  
SPECIAL NOTES**

# GENERAL NOTES

## GRADING

- (1) ANY AREA THAT IS DISTURBED OUTSIDE LIMITS OF CONSTRUCTION DURING THE LIFE OF THIS PROJECT SHALL BE REPAIRED BY THE CONTRACTOR AT HIS EXPENSE.
- (2) CERTIFICATION FOR ALL BORROW PITS MUST BE OBTAINED IN ACCORDANCE WITH SUBSECTION 167.06 OF THE STANDARD SPECIFICATIONS.
- (3) THE CONTRACTOR SHALL NOT DISPOSE OF ANY MATERIAL EITHER ON OR OFF STATE-OWNED R.O.W. IN A REGULATORY FLOOD WAY AS DEFINED BY THE FEDERAL EMERGENCY MANAGEMENT AGENCY WITHOUT APPROVAL BY SAME. ALL MATERIAL SHALL BE DISPOSED OF IN UPLAND (NON-AGRICULTURAL) AREAS. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY WATER COURSE PERMITS AND SHALL BE RESPONSIBLE FOR OBTAINING ANY OTHER LICENSES OR PERMITS THAT MAY BE REQUIRED BY ANY OTHER FEDERAL, STATE OR LOCAL AGENCY.

## SEEDING AND SODDING

- (1) ALL EXISTING ROADS WITHIN THE RIGHT-OF-WAY AND NOT IN THE RIGHT-OF-WAY SHALL BE SEEDING, SOAKING, SCARIFYING AND OBLITERATING OBLITERATED TOPSOIL AND SEEDING. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE COST OF SEEDING AND SODDING. TOPSOIL SHALL BE MEASURED AND PAID FOR DIRECTLY, BUT THE COST WILL BE INCLUDED IN THE COST OF OTHER ITEMS. TOPSOIL, IN ACCORDANCE WITH SECTION 203 OF THE STANDARD SPECIFICATIONS, WILL BE MEASURED AND PAID FOR UNDER ITEM 203-04. SEEDING, IN ACCORDANCE WITH SECTION 801 OF THE STANDARD SPECIFICATIONS, WILL BE MEASURED AND PAID FOR UNDER ITEM 801-01.
- (2) SOD SHALL BE PLACED AT LOCATIONS SHOWN ON THE PLANS TO PREVENT DAMAGE TO ADJACENT FACILITIES AND PROPERTY DUE TO EROSION ON ALL NEWLY GRADED CUT AND FILL SLOPES AS WORK PROGRESSES.
- (3) ITEM NO. 801-01 SHALL BE USED ON SLOPES 3:1 OR STEEPER AND OTHER AREAS AS INDICATED IN THE PLANS THAT ARE INACCESSIBLE FOR MOWING.
- (4) ITEM NO. 801-01, SEEDING (WITH MULCH), SHALL BE USED WHERE EROSION CONTROL BLANKET OR SOD ARE NOT APPLIED.
- (5) ITEM NO. 801-02, SEEDING (WITHOUT MULCH) AND EROSION CONTROL BLANKET, SHALL BE PLACED AT LOCATIONS SHOWN ON THE PLANS AS WELL AS LOCATIONS DIRECTED BY THE ENGINEER.

## GUARDRAIL

- (1) THE CONTRACTOR SHALL NOT REMOVE ANY SECTIONS OF EXISTING GUARDRAIL TO REWORK SHOULDERS OR FLATTEN SLOPES UNTIL THE CONSTRUCTION REQUIREMENTS AND THE APPROVAL OF THE ENGINEER DEVICES ARE INSTALLED. THE PROPOSED GUARDRAIL, INCLUDING ANY ANCHOR SYSTEM, SHALL BE INSTALLED QUICKLY TO MINIMIZE TRAFFIC EXPOSURE TO ANY HAZARD. NO PAYMENT WILL BE MADE FOR A SECTION OF PROPOSED GUARDRAIL, INCLUDING ANCHORS, UNTIL IT IS COMPLETE IN PLACE.
- (2) THE PROPOSED GUARDRAIL, INCLUDING ANY ANCHOR SYSTEM, SHALL BE INSTALLED QUICKLY TO MINIMIZE TRAFFIC EXPOSURE TO ANY HAZARD. NO PAYMENT WILL BE MADE FOR A SECTION OF PROPOSED GUARDRAIL, INCLUDING ANCHORS, UNTIL IT IS COMPLETE IN PLACE.
- (3) IF ANY APPROACH END OF A SECTION OF GUARDRAIL OR BRIDGE RAIL MUST TEMPORARILY BE LEFT INCOMPLETE AND EXPOSED TO TRAFFIC, THE CONTRACTOR SHALL USE TWO (2) TEMPORARY BARRICADES OR GUARDRAIL SECTIONS TO PROTECT TRAFFIC FROM THE HAZARD OF EXPOSED END. ALL COST OF FURNISHING AND INSTALLING A TEMPORARY GUARDRAIL SHALL BE INCLUDED IN THE COST OF THE GUARDRAIL.
- (4) GUARDRAIL IS TO BE COMPLETE IN PLACE BEFORE THE MAINLINE ROADWAY IS OPENED TO TRAFFIC.

## DRAINAGE

- (1) THE CONTRACTOR SHALL SHAPE DITCHES TO THE SPECIFIED DESIGN. THIS WORK WILL NOT BE MEASURED AND PAID FOR DIRECTLY, BUT THE COST WILL BE INCLUDED IN THE COST OF OTHER ITEMS.

- (2) EXCAVATION FOR CATCHBASINS, MANHOLES, PIPE CULVERTS, PIPE CULVERT ENDWALLS, SIDE DRAINS, AND MEDIAN DRAINS WILL NOT BE MEASURED AND PAID FOR DIRECTLY, BUT WILL BE INCLUDED IN THE PRICE BID PER LINEAR FOOT OF PIPE (PIPE CULVERTS, STORM SEWERS, CONDUITS, ALL OTHER CULVERTS AND MINOR STRUCTURES).
- (3) CULVERT EXCAVATION FOR CONCRETE BOX OR SLAB TYPE CULVERTS OR ENDWALLS WILL NOT BE MEASURED AND PAID FOR DIRECTLY, BUT THE COST WILL BE INCLUDED IN THE COST OF OTHER ITEMS.
- (4) THE CUTTING OF INLET AND OUTLET DITCHES WHERE SHOWN ON PLANS OR AS DIRECTED BY THE ENGINEER WILL BE MEASURED AND PAID FOR AS ITEM NO. 203-01 ROAD AND DRAINAGE EXCAVATION (UNCLASSIFIED).
- (5) WHERE A CULVERT (PIPE, SLAB OR BOX) IS MOVED TO A NEW LOCATION OTHER THAN THAT SHOWN ON THE PLANS, INCREASING OR DECREASING THE AMOUNT OF CULVERT EXCAVATION, NO INCREASE OR DECREASE IN THE AMOUNT OF PAYMENT WILL BE MADE DUE TO SUCH CHANGE.
- (6) DURING CONSTRUCTION OF DRAINAGE STRUCTURES ALL COST ASSOCIATED WITH MAINTAINING THE FLOW OF WATER AND TRAFFIC, AT THESE STRUCTURES, DURING THE PHASED CONSTRUCTION OF THIS PROJECT ARE TO BE INCLUDED IN THE UNIT PRICE OF THE DRAINAGE STRUCTURES AND TRAFFIC CONTROL ITEMS.
- (7) ALL EXISTING PIPES AS SHOWN ON PLANS OR AS DIRECTED BY THE ENGINEER THAT ARE TO BE LEFT IN PLACE AND ABANDONED MUST BE BACKFILLED AND PLUGGED. ALL COST FOR THIS WORK SHALL BE INCLUDED IN THEIR NO. 204-08.01, BACKFILL MATERIAL (FLOWABLE FILL), C.Y.

## FENCING

- (1) LOCATION OF THE FENCE SHALL BE ONE FOOT INSIDE THE RIGHT-OF-WAY EXCEPT WHERE SHOWN ON THE PLANS.
- (2) FENCES SHALL BE TURNED IN AT DRAINAGE STRUCTURES, STOCK PASSES AND BRIDGES WHERE DIRECTED BY THE ENGINEER SO AS TO AVOID WINGWALLS AND/OR ABUTMENTS.
- (3) THE CONTRACTOR SHALL GIVE THE AFFECTED PROPERTY OWNERS TWO WEEKS NOTICE PRIOR TO CUTTING FENCES.
- (4) THE CONTRACTOR SHALL BE REQUIRED TO INSTALL ACCESS CONTROL FENCES PRIOR TO CUTTING EXISTING STOCK FENCES IN AREAS UTILIZED BY DOMESTIC LIVESTOCK OR OTHER AREAS AS DIRECTED BY THE ENGINEER.

## MISCELLANEOUS

- (1) ALL DETOUR, ACCESS, SERVICE AND FRONTAGE ROADS SHALL BE CONSTRUCTED WITH A MINIMUM OF ONE (1) COURSE OF BASE MATERIAL BEFORE TRAFFIC IS INTERRUPTED ON EXISTING ROADS.
- (2) THE CONTRACTOR SHALL BE REQUIRED TO REMOVE AND RESET MAILBOXES WHERE AND AS DIRECTED BY THE ENGINEER.
- (3) NOTHING IN THE GENERAL NOTES OR SPECIAL PROVISIONS SHALL RELIEVE THE CONTRACTOR FROM HIS RESPONSIBILITIES TOWARD THE SAFETY AND CONVENIENCE OF THE GENERAL PUBLIC AND THE RESIDENTS ALONG THE PROPOSED CONSTRUCTION AREA.

## ROAD CLOSURE

- (1) NO LESS THAN SEVEN (7) DAYS PRIOR TO THE CLOSURE OF THE ROAD, THE CONTRACTOR SHALL NOTIFY THE FOLLOWING INDIVIDUALS OR AGENCIES COMPLETELY DESCRIBING THE AFFECTED ROADS AND THE APPROXIMATE DURATION OF THE CONSTRUCTION. THESE PARTIES INCLUDE, BUT ARE NOT LIMITED TO: (1) LOCAL LAW ENFORCEMENT OFFICE, (2) LOCAL FIRE DEPARTMENT, (3) AMBULANCE SERVICE, (4) LOCAL POST OFFICE, (5) UNITED STATES POSTAL SERVICE, AND (6) LOCAL ROAD SUPERINTENDENT.

## RIGHT OF WAY

(SEE SHEET NO. 3)

## PAVEMENT MARKINGS

- (1) TEMPORARY PAVEMENT LINE MARKINGS ON INTERMEDIATE LAYERS OF PAVEMENT SHALL BE REFLECTIVE TAPE OR REFLECTORIZED PAINT.

- (2) TEMPORARY PAVEMENT LINE MARKINGS ON INTERMEDIATE LAYERS OF PAVEMENT SHALL BE REFLECTIVE TAPE OR REFLECTORIZED PAINT. THESE MARKINGS WILL BE MEASURED AND PAID FOR UNDER ITEM NO. 716-05.01, PAINTED PAVEMENT MARKING (4" LINE), L.M.
- (3) TEMPORARY PAVEMENT LINE MARKINGS ON INTERMEDIATE LAYERS OF PAVEMENT SHALL BE REFLECTIVE TAPE OR REFLECTORIZED PAINT. THESE MARKINGS WILL BE MEASURED AND PAID FOR UNDER ITEM NO. 716-05.02, PAINTED PAVEMENT MARKING (6" LINE), L.M.

## FINAL PAVEMENT MARKING

- (3) PERMANENT PAVEMENT LINE MARKINGS SHALL BE 6" ENHANCED FLATLINE THERMOPLASTIC INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK. SHORT UNMARKED SECTIONS SHALL NOT BE ALLOWED. PAVEMENT MARKINGS WILL BE MEASURED AND PAID FOR UNDER ITEM NO. 716-12.02, ENHANCED FLATLINE THERMO P/MT MKNGS (6IN LINE), L.M. THE CONTRACTOR SHALL HAVE THE OPT ON OF USING REFLECTORIZED PAINT INSTALLED TO PERMANENT STANDARDS AT THE END OF EACH DAY'S WORK AND THEN INSTALLING THE PERMANENT MARKINGS AFTER THE PAVING OF PAVEMENT IS COMPLETED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE COSTS OF THE MARKINGS TO BE MEASURED AND PAID FOR DIRECTLY, BUT THE COSTS ARE TO BE INCLUDED IN THE PRICE BID FOR THE PERMANENT MARKINGS.

## PAVEMENT

### PAVING

- (4) THE CONTRACTOR SHALL BE REQUIRED TO COLD PLANE AND PAVE IN THE DIRECTION OF TRAFFIC.
- (5) THE CONTRACTOR SHALL ATTACH A DEVICE TO THE SCREED OF THE PAVER SUCH THAT MATERIAL IS CONFINED AT THE END GATE AND EXTRUDES THE ASPHALT MATERIAL IN SUCH A WAY THAT RESULTS IN A CONSOLIDATED WEDGE-SHAPE PAVEMENT EDGE OF APPROXIMATELY 25 PERCENT OF THE PAVEMENT WIDTH. THE DEVICE SHALL BE ADJUSTED PARALLEL TO THE PAVEMENT SURFACE. THE DEVICE SHALL MEET THE REQUIREMENTS THAT ARE CURRENTLY SET FORTH IN SPECIAL PROVISION 407SE.

### RESURFACING


- (6) WHERE DIRECTED BY THE TOOT ENGINEER, THE CONTRACTOR SHALL BE REQUIRED TO SHAPE PUBLIC SIDE ROADS, BUSINESS ENTRANCES, AND PRIVATE DRIVES, AS WELL AS CLEANING OF EXISTING DRAINS BEFORE PLACING MATERIALS. ALL COSTS ARE TO BE INCLUDED IN THE PRICE BID FOR OTHER ITEMS OF CONSTRUCTION.
- (7) ALL PUBLIC SIDE ROADS SHALL BE PAVED ONE PAVEMENT WIDTH THROUGH THE PAVED PORTION OF THE EXISTING ROAD. THE PAVEMENT TO BE PLACED FROM THE PUBLIC ROAD OR BUSINESS ENTRANCE SHALL BE PROVIDED. SHOULD THE PAVEMENT OF THE INTERSECTING PUBLIC ROAD BE DISTRESSED, THE RESURFACING WIDTH MAY BE INCREASED TO THE NORMAL RIGHT OF WAY LINE.
- (8) PRIVATE DRIVEWAYS, FIELD ENTRANCES, AND BUSINESS ENTRANCES SHALL BE RESURFACED TO THE FULL WIDTH OF THE ROAD. A PAVED SHOULDER TRANSITION WITH THE NEW PAVEMENT AT SHALL BE REQUIRED. IT SHALL BE BASED ON AN ADDITIONAL ONE FOOT OF WIDTH PER ONE INCH DEPTH OF PAVEMENT. IF THE SHOULDER IS NARROW ENOUGH THAT THE SUM OF THE SHOULDER AND THE TRANSITION ARE LESS THAN A PAVEMENT WIDTH, THE TRANSITION SHALL OCCUR WITHIN THE PAVEMENT WIDTH. IF THE SUM OF THE SHOULDER AND THE TRANSITION IS GREATER THAN A PAVEMENT WIDTH (LANE WIDTH), THE TRANSITION SHALL OCCUR OUTSIDE OF THE PAVEMENT WIDTH.
- (9) IN ALL CASES, THE LENGTH OF THE PAVEMENT TRANSITION, THE THICKNESS AND WIDTH OF THE RESURFACING AND ANY ADDITIONAL PAVEMENT MATERIALS SHALL BE AS DIRECTED BY THE TOOT ENGINEER.

## GRADED SOLID ROCK

- (1) THE ROCK FILL (GRADED SOLID ROCK) MATERIAL SHALL CONSIST OF SOUND, NONDEGRADABLE LIMESTONE OR SANDSTONE WITH A MAXIMUM SIZE OF 3'-0". AT LEAST 50% (BY WEIGHT) OF THE ROCK SHALL BE UNIFORMLY DISTRIBUTED BETWEEN 1'-0" AND 3'-0" IN DIAMETER AND NO GREATER THAN 10% (BY WEIGHT) SHALL BE LESS THAN 2" IN DIAMETER. THE MATERIAL SHALL BE ROUGHLY EQUI-DIMENSIONAL; THIN, SLABBY MATERIALS WILL NOT BE ACCEPTED. THE CONTRACTOR SHALL BE

GENERAL NOTES

STATE OF TENNESSEE  
DEPARTMENT OF  
TRANSPORTATION



SEALED BY  
DAVID PAST

SHEET NO.	PROJECT NO.
2K	SIP-45(10)
YEAR	TYPE
2017	CONST.

TYPE	YEAR	PROJECT NO.	SHEET NO.
CONST.	2017	STP-65110	2L

WITHIN THIRTY (30) FEET OF AN OPEN TRAFFIC LANE AT ANY TIME UNLESS PROTECTED AS DESCRIBED ABOVE FOR ROADWAYS WITH CURRENT ADT'S LESS THAN 1500 AND DESIGN SPEED OF LESS THAN 60 MPH. THIS DISTANCE SHALL BE INCREASED TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEEDS OF 60 MPH OR GREATER. THE CONTRACTOR SHALL MAINTAIN A CURVE WHERE THERE IS INSUFFICIENT RIGHT-OF-WAY TO PROVIDE FOR THIS REQUIRED SETBACK. THE CONTRACTOR SHALL DETERMINE THE ALTERNATE LOCATIONS AND REQUEST THE ENGINEER'S APPROVAL TO USE THEM.

THE ENGINEER, NEW SUPPORTS AND SIGN FACE FOR FINAL LOCATION WILL BE PAID FOR UNDER OTHER ITEMS OF CONSTRUCTION

**SIGNALIZATION**

- (1) EQUIPMENT AND INSTALLATION OF TRAFFIC SIGNALS SHALL COMPLY WITH TDOT STANDARD SPECIFICATIONS, SECTION 730.
- (2) SALVAGEABLE EQUIPMENT SHALL BECOME THE PROPERTY OF THE COUNTY AND SHALL BE STOCKPILED AT A LOCATION DESIGNATED BY THE ENGINEER FOR PICKUP BY THE COUNTY.
- (3) IF RESURFACING IS INCLUDED IN THE PROJECT, SIGNAL DETECTION LOOPS SHALL BE INSTALLED BEFORE THE FINAL SURFACE IS APPLIED.
- (4) ANY SIGNAL HEADS, WHEN VISIBLE TO DRIVERS BUT NOT OPERATIONAL, SHALL BE COMPLETELY COVERED.
- (5) THE PROJECT ENGINEER SHALL NOTIFY THE LOCAL GOVERNMENTAL AGENCY RESPONSIBLE FOR TRAFFIC CONTROL MAINTENANCE AT LEAST ONE DAY IN ADVANCE OF THE COLD PLACING ACTIVITY AT SIGNALIZED LOCATIONS. THE LOCAL GOVERNMENTAL AGENCY SHALL BE RESPONSIBLE FOR DISCONNECTING THE LOOP DETECTORS AND MAKING ANY NECESSARY TIMING ADJUSTMENTS IN THE SIGNAL CONTROLLER PRIOR TO THE CONSTRUCTION.
- (6) THE CONTRACTOR SHALL CONTACT MELISSA SHULL WITH TDDT AT 615-741-5370 A MINIMUM OF THIRTY (30) DAYS PRIOR TO ACTIVATION OF THE SIGNAL TO OBTAIN THE INITIAL SIGNAL TIMINGS.
- (7) LOOPS SHALL BE INSTALLED IN THE LEVELING COURSE IF A LEVELING COURSE IS PROVIDED.
- (8) LOOP REPLACEMENT SHALL BE IN ACCORDANCE WITH SECTION 720 OF THE STANDARD SPECIFICATIONS.

- (1) REQUIRED TO PROCESS THE MATERIAL WITH AN ACCEPTABLE MECHANICAL MEANS (A SCREENING PROCESS CAPABLE OF PRODUCING THE REQUIRED GRADATION). THE ROCK SHALL BE APPROVED BY A REPRESENTATIVE OF THE DIVISION OF MATERIALS AND TESTS BEFORE USE.
- (2) THIS GRADED SOLID ROCK MATERIAL SHALL BE PLACED IN LAYERS NOT EXCEEDING FIVE FEET IN DEPTH.

**RIPRAP**

- (1) MACHINED RIPRAP SHALL BE IN ACCORDANCE WITH SECTION 709 OF THE STANDARD SPECIFICATIONS.

**SIGNING**

- (1) THE LETTERS, DIGITS, ARROWS, BORDERS, AND ALPHABET ACCESSORIES ON ALL FLAT SHEET SIGNS SHALL BE APPLIED BY SILK SCREENING PROCESS. EXCEPT THAT CUT-OUT DIRECT APPLIED COPY SHALL BE USED ON ALL FLAT SHEET SIGNS WITH A GREEN BACKGROUND. THE LETTERS, DIGITS, ARROWS, BORDERS, AND ALPHABET ACCESSORIES ON ALL EXTRUDED PANEL SIGNS SHALL BE DEMOUNTABLE AND ATTACHED TO THE SIGN FACE. AS OUTLINED IN THE STANDARD SPECIFICATIONS. ALL SHIELDS ON GUIDE SIGNS SHALL BE DEMOUNTABLE AND ATTACHED TO THE SIGN FACE AS OUTLINED IN THE STANDARD SPECIFICATIONS.
- (2) THE LENGTHS OF ALL SIGN SUPPORTS SHOWN ON THE SIGN SCHEDULE ARE APPROXIMATE AND ARE FOR ESTIMATING PURPOSES ONLY. THE LENGTHS WERE COMPUTED FROM THE CROSS-SECTIONS CONTAINED IN THE CONSTRUCTION PLANS. IN THE EVENT THE SUPPORT LENGTHS ARE 2 FEET SHORTER OR LONGER THAN SHOWN ON THE PLANS, THE CONTRACTOR SHALL VERIFY ALL SUPPORT LENGTHS AT THE SITE PRIOR TO ORDERING MATERIAL.
- (3) THE TOP OF THE SIGN FOOTINGS SHALL BE PLACED LEVEL WITH THE GROUND LINE.
- (4) AFTER THE SIGN LOCATIONS HAVE BEEN STAKED, BUT PRIOR TO ORDERING ANY MATERIAL FOR THE SUPPORTS, THERE SHALL BE A FIELD INSPECTION AND APPROVAL BY THE REGIONAL CONSTRUCTION OFFICE.
- (5) THE CONTRACTOR SHALL BE REQUIRED TO FURNISH LAYOUT DRAWINGS (3 SETS) OF ALL EXTRUDED PANEL SIGNS WITH SPACING OF ALL LETTERS, NUMERALS, SHIELDS, AND ARROWS. THE LAYOUT DRAWINGS SHALL BE SENT TO THE TRAFFIC OPERATIONS DIVISION, SIGNING SECTION, SUITE 1200, J. K. POLK BUILDING, NASHVILLE, TN 37243-1402.
- (6) ALL SIGNS MARKED "TO BE REMOVED" ARE TO BE REMOVED BY THE CONTRACTOR AND PAID FOR UNDER ITEM 713-15 AND BECOME THE PROPERTY OF THE CONTRACTOR.
- (7) THE EXISTING FOOTINGS ARE TO BE REMOVED 6 INCHES BELOW GROUND LINE.
- (8) THE LETTERS, DIGITS, ARROWS, BORDERS, AND ALPHABET ACCESSORIES ON ALL FLAT SHEET SIGNS SHALL BE APPLIED BY SILK SCREENING PROCESS. EXCEPT THAT CUT-OUT DIRECT APPLIED COPY SHALL BE USED ON ALL FLAT SHEET SIGNS WITH A GREEN BACKGROUND, OR BROWN BACKGROUND.
- (9) THE LENGTHS OF ALL SIGN SUPPORTS SHOWN ON THE SIGN SCHEDULE ARE APPROXIMATE AND ARE FOR ESTIMATING PURPOSES ONLY. THE CONTRACTOR SHALL VERIFY ALL SUPPORT LENGTHS AT THE SITE PRIOR TO ERECTION.
- (10) THE LETTERS, DIGITS, ARROWS, BORDERS, AND ALPHABET ACCESSORIES ON ALL FLAT SHEET SIGNS SHALL BE APPLIED BY SILK SCREENING PROCESS.

**CONSTRUCTION WORK ZONE & TRAFFIC CONTROL**

- (1) ADVANCED WARNING SIGNS SHALL NOT BE DISPLAYED MORE THAN FORTY-EIGHT (48) HOURS BEFORE PHYSICAL CONSTRUCTION BEGINS. SIGNS MAY BE ERRECTED UP TO ONE WEEK BEFORE NEEDED, IF THE SIGN FACE IS FULLY COVERED.
- (2) IF THE CONTRACTOR MOVES OFF THE PROJECT, HE SHALL COVER OR REMOVE ALL SIGNS, AS WELL AS THE TRAFFIC CONTROL DEVICES OF REMOVAL, COVERING, AND REINSTALLING SIGNS SHALL NOT BE MEASURED AND PAID FOR SEPARATELY, BUT ALL COSTS SHALL BE INCLUDED IN THE ORIGINAL UNIT PRICE BID FOR ITEM NO 712-06, SIGNS (CONSTRUCTION) PER SQUARE FOOT.
- (3) A LONG TERM BUT SPOADIC USE WARNING SIGN, SUCH AS A FLAGGER SIGN, MAY REMAIN IN PLACE WHEN NOT REQUIRED PROVIDED THE SIGN FACE IS FULLY COVERED.
- (4) TRAFFIC CONTROL DEVICES SHALL NOT BE DISPLAYED OR ERRECTED UNLESS RELATED CONDITIONS ARE PRESENT NECESSITATING WARNING.
- (5) USE OF BARRICADES, PORTABLE BARRIER RAILS, VERTICAL PANELS, AND DRUMS SHALL BE LIMITED TO THE IMMEDIATE AREAS OF CONSTRUCTION WHERE A HAZARD IS PRESENT. THESE DEVICES SHALL NOT BE STORED ALONG THE ROADWAY WITHIN THIRTY (30) FEET OF THE EDGE OF THE TRAVELED WAY BEFORE OR AFTER USE UNLESS PROTECTED BY GUARDRAIL, BRIDGE RAIL, AND/OR BARRIERS INSTALLED FOR OTHER PURPOSES. ADVANCED WARNING SIGNS SHALL BE PLACED AT LEAST 100 FEET FROM THE ROADWAY WITHIN THIRTY (30) FEET OF THE EDGE OF THE TRAVELED WAY. THIS DISTANCE SHALL INCREASE TO FORTY-FIVE (45) FEET FOR ROADWAYS WITH CURRENT ADT'S OF 1500 OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. THESE DEVICES SHALL BE REMOVED FROM THE CONSTRUCTION WORK ZONE WHEN THE ENGINEER DETERMINES THEY ARE NO LONGER NEEDED, WHERE THERE IS INSUFFICIENT RIGHT-OF-WAY TO PROVIDE FOR THIS REQUIRED SETBACK, THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE SETBACK LOCATIONS AND REQUEST THE ENGINEER'S APPROVAL TO USE THEM.
- (6) THE CONTRACTOR SHALL NOT BE PERMITTED TO PARK ANY VEHICLES OR CONSTRUCTION EQUIPMENT DURING PERIODS OF INACTIVITY, WITHIN THIRTY (30) FEET OF THE EDGE OF PAVEMENT WHEN THE LANE IS OPEN TO TRAFFIC. UNLESS PROTECTED BY BARRIERS, BRIDGE RAIL, AND/OR BARRIERS, ALL VEHICLES SHALL BE PARKED IN THE SHOULDER OF THE ROADWAY WITH A DESIGN SPEED OF LESS THAN 60 MPH OR GREATER AND DESIGN SPEED OF 60 MPH OR GREATER OR ON THE OUTSIDE OF A HORIZONTAL CURVE. PRIVATELY OWNED VEHICLES SHALL NOT BE ALLOWED TO PARK

**TRAFFIC CONTROL DIRECTIONAL SIGNING**

- (1) ALL EXISTING "EMERGENCY REFERENCE MARKERS" AND "HOSPITAL SIGNS" SHALL BE MAINTAINED WITH FULL VIEW OF THE MOTORING PUBLIC THROUGHOUT ALL PHASES OF CONSTRUCTION. ALL WORK IN MOVING AND TEMPORARY SUPPORTS SHALL BE PAID FOR UNDER ITEM NO. 712-01.
- (2) WHEN EXISTING "TOURIST ORIENTED DIRECTIONAL SIGNS" (TODS) ARE ON NON-ACCESS CONTROLLED CONSTRUCTION PROJECTS, THE CONTRACTOR SHALL BE RESPONSIBLE FOR KEEPING THESE SIGNS IN FULL VIEW TO THE MOTORING PUBLIC DURING ALL PHASES OF CONSTRUCTION. ALL WORK IN MOVING THESE "TODS" AND TEMPORARY SUPPORTS ARE TO BE PAID FOR UNDER ITEM NO. 712-01, AS DIRECTED BY

- (7) ALL DETOUR AND CONSTRUCTION SIGNING SHALL BE IN STRICT ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
- (8) ALL PANELS SHALL BE PAVED, STRIPED, SIGNED AND THE VERTICAL DISTANCE SHALL BE IN PLACE BEFORE IT IS OPENED TO TRAFFIC.

**EROSION PREVENTION AND SEDIMENT CONTROL DISTURBED AREA**

- (9) AREAS TO BE UNDISTURBED SHALL BE CLEARLY MARKED IN THE FIELD BEFORE CONSTRUCTION ACTIVITIES BEGIN.
- (10) ALL DISTURBED AREAS SHALL BE PROPERLY STABILIZED AS SOON AS PRACTICABLE. PRIORITY SHALL BE GIVEN TO FINISHING OPERATIONS AND PERMANENT EPSC MEASURES OVER TEMPORARY EPSC MEASURES ON ALL PROJECTS.
- (11) CONSTRUCTION SHALL BE SEQUENCED AND STAGED TO MINIMIZE THE EXPOSURE TIME OF GRADED OR DENuded SOIL AREAS. PRESERVE TOPSOIL, AND MINIMIZE SOIL COMPACTION.
- (12) NO MORE THAN 50 ACRES OF ACTIVE SOIL DISTURBANCE IS ALLOWED AT ANY TIME DURING THE CONSTRUCTION OF THE PROJECT. OFF-SITE BORROW OR WASTE AREAS ARE TO BE INCLUDED IN THE TOTAL DISTURBED AREA IF THE BORROW OR WASTE AREA IS EXCLUSIVE TO THE PROJECT PER TDDT'S WASTE AND BORROW MANUAL.
- (13) PRE-CONSTRUCTION VEGETATIVE GROUND COVER SHALL NOT BE REMOVED UNLESS NECESSARY FOR OPERATIONS. VEGETATION INITIATED MORE THAN 15 CALENDAR DAYS PRIOR TO GRADING OR EARTH MOVING ACTIVITIES UNLESS THE AREA IS MULCHED, SEEDED WITH MULCH, OR OTHER TEMPORARY COVER IS APPLIED.
- (14) CLEARING, GRUBBING, AND OTHER DISTURBANCE TO RIPARIAN VEGETATION SHALL BE LIMITED TO THE MINIMUM NECESSARY FOR SLOPE STABILIZATION AND OTHER OPERATIONS. VEGETATION, INCLUDING STREAM AND WETLAND BUFFERS UNLESS PERMITTED, SHOULD BE PRESERVED TO THE MAXIMUM EXTENT POSSIBLE. UNNECESSARY VEGETATION REMOVAL IS PROHIBITED.

**SEDIMENT CONTROL**

- (15) EPSC MEASURES SHALL BE INSTALLED AND FUNCTIONAL PRIOR TO ANY EARTH MOVING OPERATIONS, AND SHALL BE MAINTAINED THROUGHOUT THE CONSTRUCTION PERIOD EXCEPT AS SUCH WORK MAY BE NECESSARY TO INSTALL EPSC MEASURES.
- (16) TEMPORARY EPSC MEASURES MAY BE REMOVED AT THE BEGINNING OF THE WORKDAY, BUT MUST BE REINSTALLED AT THE END OF THE WORKDAY OR BEFORE DURING A PRECIPITATION EVENT.
- (17) THE CONTRACTOR SHALL ESTABLISH AND MAINTAIN A PROACTIVE SEDIMENT CONTROL PROGRAM FOR ALL OFF-SITE OPERATIONS (E.G., EROSION CONTROL MEASURES ON STATEWAYS, OR ON TO ROADWAYS USED BY THE GENERAL PUBLIC, IF SEDIMENT ESCAPES THE CONSTRUCTION SITE OFFSITE ACCUMULATIONS OF SEDIMENT THAT HAVE NOT REACHED A STREAM MUST BE REMOVED AT A FREQUENCY SUFFICIENT TO MINIMIZE OFFSITE IMPACTS (E.G., FUGITIVE SEDIMENT THAT HAS ESCAPED THE CONSTRUCTION SITE AND HAS COLLECTED IN A STREET MUST BE REMOVED SO THAT IT IS NOT SUBSEQUENTLY WASHED INTO STORM DRAINAGE SYSTEMS). THE CONTRACTOR SHALL MAINTAIN ARRANGEMENTS CONCERNING REMOVAL OF SEDIMENT ON ADJOINING PROPERTY MUST BE NEGOTIATED WITH THE ADJOINING PROPERTY OWNER BEFORE REMOVAL OF SEDIMENT.
- (18) CHECK DAMS SHALL BE USED WHERE RUNOFF IS CONCENTRATED. CLEAN ROCK, BRUSH, GABION, OR SANDBAG CHECK DAMS SHALL BE PROPERLY CONSTRUCTED TO REDUCE VELOCITY AND CONTROL EROSION.



STATE OF TENNESSEE  
TRANSPORTATION

GENERAL NOTES

SHEET NO.	PROJECT NO.	YEAR	TYPE
24	STP-65110	2017	CONST.

SEAL BY: DAVID EAST



STATE OF TENNESSEE  
TRANSPORTATION

GENERAL NOTES

- (19) FOR AN OUTFALL IN A DRAINAGE AREA OF 10 ACRES OR MORE, A TEMPORARY (OR PERMANENT) SEDIMENT BASIN OR FOULWATER CONTROL MEASURES THAT PROVIDES STORAGE FOR A CALCULATED VOLUME OF RUNOFF FROM A MINIMUM 2-YEAR/ 24-HOUR STORM EVENT, SHALL BE PROVIDED UNTIL FINAL STABILIZATION OF THE SITE. THE BASIN SHALL BE DESIGNED TO ACCOMMODATE THE VOLUME OF SEDIMENT TO BE REMOVED TO REVIEW AND CONCUR WITH ANY REVISION OF THE SWPPP BEFORE DISTURBANCE OF THE OUTFALL PROCEEDS.
- (20) IF PERMANENT OR TEMPORARY VEGETATION IS TO BE USED AS AN EPSC MEASURE, THEN THE TIMING OF PLANTING OF VEGETATION SHALL BE SHOWN IN THE SWPPP. DELAYING PLANTING OF COVER VEGETATION UNTIL SEVERAL MONTHS OR DRY MONTHS SHOULD BE AVOIDED, IF POSSIBLE.
- (21) OFFSITE TRACKING OF SEDIMENTS AND THE GENERATION OF DUST SHALL BE MINIMIZED. A STABILIZED CONSTRUCTION EXIT (A POINT OF ENTRANCE/EXIT TO THE CONSTRUCTION PROJECT) SHALL BE PROVIDED TO REDUCE THE TRACKING OF MUD AND DIRT ONTO PUBLIC ROADS BY CONSTRUCTION VEHICLES.
- (22) THE DEWATERING OF WORK AREAS, TRENCHES, FOUNDATIONS, EXCAVATIONS, ETC. THAT HAVE COLLECTED STORMWATER, WATER FROM VEHICLE WASH AREAS, OR GROUNDWATER SHALL BE EITHER HELD IN SETTLING BASINS OR TREATED BY FILTRATION AND/OR CHEMICAL TREATMENT PRIOR TO ITS DISCHARGE. ALL PHYSICAL AND/OR CHEMICAL TREATMENT WILL BE APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S GUIDELINES AND FULLY DESCRIBED IN THE EPSC PLANS. WATER DISCHARGED SHALL NOT CAUSE AN OBJECTIONABLE COLOR OR TASTE IN RECEIVING WATERS. SETTLING BASINS SHALL BE LOCATED CLOSER TO RECEIVING WATERS. SETTLING BASINS SHALL NOT BE LOCATED CLOSER THAN 20 FEET FROM THE TOP BANK OF A STREAM, SETTLING BASINS AND SEDIMENT TRAPS SHALL BE PROPERLY DESIGNED ACCORDING TO THE SIZE OF THE DRAINAGE AREAS OR VOLUME OF WATER TO BE TREATED. TREATED WATER MUST BE DISCHARGED THROUGH A PIPE OR WELL-VEGETATED OR LINED CHANNEL, SO THAT THE DISCHARGE DOES NOT CAUSE EROSION OR SEDIMENT TRANSPORT. DISCHARGES FROM BASINS SHALL BE COLLECTED IN A DRAINAGE CHANNEL AND ONLY WITHDRAWN WATER FROM NEAR THE SURFACE OF THE BASIN OR IMPOUNDMENT. DISCHARGES MUST NOT CAUSE AN OBJECTIONABLE COLOR CONTRAST WITH THE RECEIVING STREAM.
- NATURAL RESOURCES**
- (23) SOIL MATERIALS MUST BE PREVENTED FROM ENTERING WATERS OF THE STATE'S EPSC MEASURES TO PROTECT NATURAL RESOURCES AND WATER QUALITY SHALL BE MAINTAINED THROUGHOUT THE CONSTRUCTION PERIOD. APPROPRIATE EPSC MEASURES MUST BE INSTALLED ALONG THE BASE OF ALL FILLS AND CUTS, ON THE DOWNHILL SIDE OF STOCKPILED SOIL, AND ALONG NATURAL RESOURCES IN WETLANDS AND OTHER NATURAL FEATURES IN ACCORDANCE WITH TDD STANDARDS. EPSC MEASURES SHALL BE INSTALLED ON THE CONTOUR, ENTRENCHED AND STAKED, AND EXTEND THE WIDTH OF THE AREA TO BE CLEARED.
- (24) NEW CHANNEL CONSTRUCTION SHALL BE COMPLETED IN THE DRY AND STABILIZED FOR AT LEAST 72 HOURS PRIOR TO DIVERTING WATER FROM THE EXISTING AND/OR TEMPORARY CHANNEL.
- (25) INSTREAM EPSC DEVICES REQUIRE THE TDD ENVIRONMENTAL DIVISION PERMITS SECTION REVIEW AND MUST BE PROCESSED BY THE PERMITS SECTION TO OBTAIN WATER QUALITY PERMITS.
- (26) THE OPERATIONS OF EQUIPMENT IN WATERS OF THE STATE'S INCLUDING WETLANDS, SHALL BE ONLY AS SHOWN ON THE PROJECT PERMITS(S) AND AS SPECIFIED IN THE ARAP/401, SECTION 404 PERMITS(S) AND/OR TVA/36(A), IF APPLICABLE. ANY ADDITIONAL PERMITS REQUIRE BY THE CONTRACTOR'S METHOD OF OPERATION SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN, AFTER RECEIVING THE APPROVAL OF TDD ENVIRONMENTAL DIVISION.
- (27) THE WIDTH OF THE FILL ASSOCIATED WITH TEMPORARY CROSSINGS SHALL BE LIMITED TO THE MINIMUM NECESSARY FOR THE ACTUAL CROSSING, NOT TO EXCEED THE WIDTH SPECIFIED IN THE STANDARD DRAWING.
- (28) STREAM BEDS SHALL NOT BE USED AS TRANSPORTATION ROUTES FOR CONSTRUCTION EQUIPMENT. TEMPORARY CULVERT CROSSINGS SHALL BE LIMITED TO ONE POINT PER STREAM AND EPSC MEASURES SHALL BE USED WHERE THE STREAM BANKS ARE DISTURBED, WHERE THE
- STREAMBED IS NOT COMPOSED OF BEDROCK, A PAD OF CLEAN ROCK SHALL BE USED AT THE CROSSING POINT AND CULVERTED TO PREVENT THE IMPOUNDMENT OF WATER FLOW. CLEAN ROCK IS ROCK OF VARIOUS TYPES, SIZES, OR OTHER WASTES OR CONTAMINANTS. OTHER MATERIALS SUCH AS BRICKS, CONCRETE, OR OTHER WASTES ARE NOT ALLOWED. THEIR ENTRY AFTER THE WORK IS COMPLETED AND THE AFFECTED AREAS RETURNED TO PREEXISTING ELEVATIONS. ALL TEMPORARY CROSSINGS SHALL BE CONSTRUCTED IN ACCORDANCE WITH STD. DWG. EC-STR-23 UNLESS SPECIFICALLY ADDRESSED IN THE EPSC PLANS. ALTERNATIVELY, PLACING A TEMPORARY BRIDGE (E.G. BAILEY BRIDGE OR EQUIVALENT, TIMBERS, ETC.) FROM TOP OF BANK TO TOP OF BANK OR THE APPROPRIATE USE OF BARGES AT THE CROSSING TO AVOID DISTURBANCE OF THE STREAMBED IS AN ACCEPTABLE OPTION.
- (29) HEAVY EQUIPMENT WORKING IN WETLANDS WITH PERMITTED TEMPORARY IMPACTS SHALL BE PLACED ON MATS, OR OTHER MEASURES MUST BE TAKEN TO MINIMIZE SOIL DISTURBANCE AND COMPACTION UNLESS SPECIFICALLY ADDRESSED IN THE CONSTRUCTION PLANS. ANY MATS AND OTHER MEASURES USED FOR HEAVY EQUIPMENT SHALL BE MAINTAINED AND REPAIRED AS NECESSARY TO PREVENT AFFECTED AREAS SHOULD BE RETURNED TO PRE-EXISTING CONDITIONS.
- (30) WETLANDS SHALL NOT BE USED AS EQUIPMENT STORAGE, STAGING, OR TRANSPORTATION AREAS, UNLESS SPECIFICALLY PROVIDED FOR IN THE CONSTRUCTION PLANS AND PERMITS.
- (31) THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS PRIOR TO ANY CONSTRUCTION AND MAINTENANCE ACTIVITIES TO ENSURE THAT ENVIRONMENTAL FEATURES (E.G., STREAMS, WETLANDS, SPRINGS, ETC.) ARE NOT IMPACTED BEYOND PERMITTED LOCATIONS. IF THE CONTRACTOR OR TDD INSPECTOR IS UNSURE OF THE IDENTITY OF AN ENVIRONMENTAL FEATURE, THE INSPECTOR SHALL CONTACT THE TDD REGION ENVIRONMENTAL TECH GROUP IMMEDIATELY.
- SPECIES**
- (32) NO ACTIVITY MAY SUBSTANTIALLY DISRUPT THE MOVEMENT OF THOSE SPECIES OF AQUATIC LIFE INDEGENOUS TO THE WATER BODY, INCLUDING THOSE SPECIES THAT NORMALLY MIGRATE THROUGH THE AREA.
- (33) SHOULD CLIFF SWALLOW OR BARN SWALLOW NESTS, EGGS, OR BIRDS (YOUNG AND ADULTS) BE PRESENT, THE CONTRACTOR SHALL CONTACT THE REGIONAL ECOLOGY OFFICE TO DETERMINE IF SEASONAL RESTRICTIONS WILL BE APPLICABLE. NESTS, EGGS, AND BIRDS SHOULD BE PROTECTED AND NOT REMOVED PRIOR TO AUGUST 11 TO APRIL 14. NESTS CAN BE REMOVED OR DESTROYED SO LONG AS BIRDS OR EGGS ARE NOT PRESENT, AND MEASURES IMPLEMENTED TO PREVENT FUTURE NEST BUILDING AT THE SITE (I.E., CLOSING OFF AREA USING NETTING).
- (34) IF THE REMOVAL OF ANY TREES WITH A DIAMETER AT BREAST HEIGHT (DBH) OF 4 INCHES OR MORE IS DETERMINED NECESSARY BY THE SUPERVISOR SHALL CONTACT THE TDD ENVIRONMENTAL DIVISION, ECOLOGY SECTION IMMEDIATELY.
- INSPECTION, MAINTENANCE & REPAIR**
- (35) REFER TO THE STORM WATER POLLUTION AND PREVENTION PLAN SHEETS (S\_) FOR SWPPP PERMITS, AND RECORDS NOTES.
- (36) THE TDD CONSTRUCTION SUPERVISOR (OR THEIR DESIGNEE) AND THE CONTRACTOR'S RESPONSIBLE PARTY ARE RESPONSIBLE FOR THE INSPECTIONS, MAINTENANCE AND REPAIR ACTIVITIES FOR THE SUPERVISOR OR THEIR DESIGNEE SHALL COMPLETE THE EPSC INSPECTION REPORTS AND DISTRIBUTE COPIES PER THE CONTRACT.
- (37) TDD CONSULTANTS AND CONTRACTOR STAFF RESPONSIBLE FOR THE INSPECTION, IMPLEMENTATION, MAINTENANCE AND/OR REPAIR OF EPSC MEASURES SHALL BE TRAINED AND CERTIFIED IN THE TDD STANDARDS, FUNDAMENTALS OF EROSION PREVENTION AND SEDIMENT CONTROL, FOR CONSTRUCTION SITES' COURSE AND ANY REFRESHER COURSES AS REQUIRED TO MAINTAIN CERTIFICATION. TDD STAFF AND SUPERVISORS RESPONSIBLE FOR THE INSPECTION, IMPLEMENTATION, MAINTENANCE AND/OR REPAIR OF EPSC MEASURES SHALL SUCCESSFULLY COMPLETE THE TDD 'FUNDAMENTALS OF EROSION AND SEDIMENT CONTROL' CLASS AND ANY REFRESHER COURSES AS REQUIRED TO MAINTAIN CERTIFICATION.
- (38) EPSC CONTROL SHALL BE INSPECTED ACCORDING TO PERMIT REQUIREMENTS TO VERIFY MEASURES HAVE BEEN INSTALLED AND MAINTAINED IN ACCORDANCE WITH TDD STANDARD DRAWINGS, SPECIFICATIONS, AND GOOD ENGINEERING PRACTICES. EPSC
- INSPECTIONS SHALL BE DOCUMENTED ON THE TDD EPSC INSPECTION REPORT.
- (39) DISCHARGE POINTS SHALL BE INSPECTED TO ASCERTAIN WHETHER EPSC MEASURES ARE EFFECTIVE IN PREVENTING EROSION AND SLOPE FAILURE, SEDIMENT INCLUDING SIGNIFICANT IMPACTS TO SURROUNDING NATURAL RESOURCES AND ADJACENT PROPERTY OWNERS. WHERE DISCHARGE LOCATIONS ARE INACCESSIBLE, NEARBY DOWN GRADIENT LOCATIONS SHALL BE INSPECTED, LOCATIONS WHERE VEHICLES ENTER AND EXIT THE SITE SHALL BE INSPECTED FOR EVIDENCE OF OFFSITE ROADWAY SEDIMENT TRACKING.
- (40) UPON CONCLUSION OF THE INSPECTIONS, EPSC MEASURES FOUND TO BE INEFFECTIVE SHALL BE REPAIRED, REPLACED, OR MODIFIED BEFORE THE NEXT RAIN EVENT, IF POSSIBLE, BUT IN NO CASE MORE THAN 24 HOURS AFTER THE INSPECTION OR WHEN THE CONDITION IS IDENTIFIED. IF THE REPAIR, REPLACEMENT OR MODIFICATION IS NOT PRACTICAL WITHIN THE 24 HOUR TIMEFRAME, WRITTEN DOCUMENTATION SHALL BE PROVIDED IN THE EPSC PLAN AND MODIFICATION SCHEDULE SHALL BE DOCUMENTED WITHIN 24 HOURS AFTER IDENTIFICATION.
- (41) INSPECTION, REPAIR, AND MAINTENANCE OF EPSC MEASURES SHALL BE PERFORMED ON A REGULAR BASIS. SEDIMENT SHALL BE REMOVED FROM SEDIMENT CONTROL STRUCTURES WHEN THE DESIGN CAPACITY HAS BEEN REACHED. THE CONTRACTOR SHALL TAKE STEPS TO ENSURE THAT STRUCTURAL COMPONENTS OF EPSC MEASURES ARE NOT DAMAGED AND THUS MADE INEFFECTIVE. IF DAMAGE DOES OCCUR, THE CONTRACTOR SHALL REPAIR THE EPSC MEASURES AT THE CONTRACTOR'S OWN EXPENSE.
- (42) THE EPSC PLAN SHALL BE UPDATED WHENEVER EPSC INSPECTIONS INDICATE OR WHERE STATE OR FEDERAL OFFICIALS DETERMINE EPSC MEASURES ARE PROVIDING INEFFECTIVE IN ELIMINATING OR SIGNIFICANTLY MINIMIZING POLLUTANT SOURCES OR ARE OTHERWISE NOT ACHIEVING THE GENERAL OBJECTIVES OF CONTROLLING POLLUTANTS IN STORM WATER DISCHARGES ASSOCIATED WITH THE CONSTRUCTION ACTIVITY.
- (43) SEDIMENT REMOVED FROM SEDIMENT CONTROL STRUCTURES SHALL BE PLACED AND TREATED IN A MANNER SO THAT THE SEDIMENT IS CONTAINED WITHIN THE PROJECT LIMITS AND DOES NOT MIGRATE ONTO ADJACENT PROPERTIES AND INTO WATERS OF THE STATE'S. COST FOR THIS TREATMENT SHALL BE INCLUDED IN PRICE BID FOR ITEM NO. 208-05 SEDIMENT REMOVAL, C.Y.
- EROSION PREVENTION**
- (44) CONSTRUCTION SHALL BE SEQUENCED AND STAGED TO MINIMIZE THE EXPOSURE TIME OF GRADED OR DENUDED SOIL AREAS. PRESERVE TOPSOIL, AND MINIMIZE SOIL COMPACTION.
- (45) THE ACCEPTED EPSC PLAN SHALL REQUIRE THAT EPSC MEASURES BE IN PLACE BEFORE CLEARING, GRUBBING, EXCAVATION, GRADING, CULVERT OR BRIDGE CONSTRUCTION, CUTTING, FILLING, OR ANY OTHER EARTHWORK OCCURS, EXCEPT AS SUCH WORK MAY BE NECESSARY TO INSTALL EPSC MEASURES.
- (46) NO WORK SHALL BE STARTED UNTIL THE CONTRACTOR'S PLAN FOR THE STAGING OF OPERATIONS, INCLUDING THE PLAN FOR STAGING OF TEMPORARY AND PERMANENT EPSC MEASURES, HAS BEEN ACCEPTED BY THE TDD RESPONSIBLE PARTY. THE CONTRACTOR'S EPSC PLAN SHALL INCORPORATE AND SUPPLEMENT, AS ACCEPTABLE, THE BASIC EPSC DEVICES ON THE EPSC PLAN.
- (47) TEMPORARY STABILIZATION SHALL BE INITIATED WITHIN 14 CALENDAR DAYS WHEN CONSTRUCTION ACTIVITIES ON A PORTION OF THE SITE ARE TEMPORARILY CEASED AND EARTH DISTURBING ACTIVITIES WILL NOT RESUME UNTIL AFTER 14 CALENDAR DAYS. PERMANENT STABILIZATION MEASURES IN DISTURBED AREAS SHALL BE INITIATED WITHIN 14 CALENDAR DAYS AFTER FINAL GRADING OF ANY PHASE OF CONSTRUCTION.
- (48) STEEP SLOPES SHALL BE TEMPORARILY STABILIZED NOT LATER THAN 7 DAYS AFTER CONSTRUCTION ACTIVITY ON THE SLOPE HAS TEMPORARILY OR PERMANENTLY CEASED. STEEP SLOPES ARE DEFINED AS A NATURAL OR CREATED SLOPE OF 35% GRADE OR GREATER REGARDLESS OF HEIGHT.
- (49) PERMANENT STABILIZATION WILL REPLACE TEMPORARY MEASURES AS SOON AS PRACTICABLE. PRIORITY SHALL BE GIVEN TO FINISHING OPERATIONS AND PERMANENT EPSC MEASURES OVER TEMPORARY EPSC MEASURES ON ALL PROJECTS.



SHEET NO.	PROJECT NO.	YEAR	TYPE
2N	STP-651101	2017	CONST.



STATE OF TENNESSEE  
DEPARTMENT OF  
TRANSPORTATION

GENERAL  
NOTES

- (50) TEMPORARY OR PERMANENT STABILIZATION MUST BE FREE OF FINES (SILT AND CLAY SIZED PARTICLES). UNPACKED GRAVEL CONTAINING FINES OR CRUSHER-RUN WILL NOT BE CONSIDERED SUFFICIENT STABILIZATION.
- (51) DELAYING THE PLANTING OF COVER VEGETATION UNTIL WINTER MONTHS OR DRY MONTHS SHOULD BE AVOIDED.
- PERMITS, PLANS & RECORDS**
- (52) THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR OBTAINING ANY NECESSARY ENVIRONMENTAL PERMITS OR APPROVALS, INCLUDING BUT NOT LIMITED TO ARCHAEOLOGY, ECOLOGY, HISTORICAL, HAZARDOUS MATERIALS, AIR AND NOISE, TDEC ARAFP/401, USACE SECTION 404, TVA SECTION 26A, AND TDEC NPDES PERMITS, FROM FEDERAL, STATE AND/OR LOCAL AGENCIES REGARDING ANY MATERIAL AND STAGING AREAS AND THE OPERATION OF ANY PROJECT-DEDICATED ASPHALT AND/OR CONCRETE PLANTS TO BE USED. ANY SUCH PERMITS SHALL BE SUPPLIED TO THE TDOT PROJECT RESPONSIBLE PARTY PRIOR TO THE USE OF THE PERMITTED AREAS).
- (53) ANY DISAGREEMENT BETWEEN THE CONSTRUCTION PLANS, THE PROJECT AS CONSTRUCTED, AND THE PERMITS(S) ISSUED FOR THE PROJECT, SHALL BE BROUGHT TO THE ATTENTION OF THE TDOT PROJECT RESPONSIBLE PARTY. THE ENVIRONMENTAL DIVISION, DESIGN DIVISION, AND HEADQUARTERS' CONSTRUCTION OFFICE SHALL BE CONTACTED IN THESE INSTANCES AND DECIDE WHICH HAS PRECEDENCE AND WHETHER PERMITS OR PLANS ARE NEEDED. IN GENERAL, PERMIT CONDITIONS WILL PREVAIL.
- (54) IF A CHANGE IN PROJECT SCOPE OCCURS DURING CONSTRUCTION, INCLUDING VALUE ENGINEERING, THE TDOT PERMIT SECTION SHALL BE CONTACTED TO DETERMINE WHETHER PERMIT REVISIONS ARE NEEDED. THE ROADWAY DESIGN DIVISION SHALL BE CONTACTED TO DETERMINE IF ANY PLAN REVISIONS ARE NEEDED.
- (55) THE CONTRACTOR SHALL REVIEW ALL EXISTING PERMITS TO ENSURE THAT WORK AT PERMITTED SITES DOES NOT EXCEED EXPIRATION DATE. IF WORK IS GOING TO BE CONTINUED AFTER EXPIRATION DATES, THE CONTRACTOR SHALL CONTACT THE TDOT PROJECT RESPONSIBLE PARTY TO COMMENCE PERMIT RENEWAL PROCESS.
- (56) ALL WATER QUALITY PERMITS SHALL BE POSTED NEAR THE MAIN ENTRANCE OF THE CONSTRUCTION SITE ACCESSIBLE TO THE PUBLIC. THE NAME, COMPANY NAME, EMAIL ADDRESS, TELEPHONE NUMBER AND ADDRESS OF THE PROJECT SITE OWNER, OPERATOR, OR A LOCAL CONTACT PERSON WITH A BRIEF DESCRIPTION OF THE PROJECT SHALL ALSO BE POSTED. IF POSTING THIS INFORMATION NEAR A MAIN ENTRANCE IS FEASIBLE, THE INFORMATION SHALL BE PLACED IN A PUBLICLY ACCESSIBLE LOCATION NEAR WHERE THE CONSTRUCTION IS OCCURRING. PERMITS SHALL BE POSTED AT THE CONSTRUCTION SITE. ALL POSTINGS SHALL BE MAINTAINED IN LEGIBLE CONDITION.
- (57) THE EPSC PLAN IS TO SERVE AS AN INITIAL GUIDE FOR SITE PERSONNEL AS THE CONSTRUCTION PROCESS DEVELOPS. IT MUST BE AMENDED, MODIFIED, AND UPDATED WHENEVER A CHANGE IN THE DESIGN OR CONSTRUCTION OF THE PROJECT OCCURS. THE STAGES DESCRIBED IN THIS PLAN MAY OCCUR IN ANY ORDER. THE STAGES OF CONSTRUCTION ESTABLISHED BY THE CONTRACTOR DURING CONSTRUCTION, THUS MODIFICATIONS WILL BE REQUIRED TO ENSURE THE EPSC PLAN IS MAINTAINED TO DEPECT CURRENT SITE CONDITIONS. IT SHOULD BE MAINTAINED SUCH THAT IT WILL ALWAYS REFLECT THE MEASURES THAT ARE INSTALLED DURING THE VARIOUS PHASES OF CONSTRUCTION. IT IS IMPRACTICAL TO DETERMINE ALL THE INTERMEDIATE PHASES OF CONSTRUCTION THAT WILL OCCUR, THUS THESE DOCUMENTS WILL HAVE TO BE UPDATED THROUGHOUT THE LIFE OF THE CONSTRUCTION PROJECT.
- GOOD HOUSEKEEPING MEASURES & WASTE DISPOSAL**
- (58) THE CONTRACTOR SHALL ESTABLISH AND MAINTAIN A PROACTIVE METHOD TO PREVENT LITTER AND CONSTRUCTION WASTES FROM ENTERING WATERS OF THE STATEU.S. THESE MATERIALS SHALL BE REMOVED FROM OR BEFORE BEING CARRIED OFFSITE BY WIND, OR OTHERWISE PREVENTED FROM BECOMING A POLLUTANT SOURCE FOR STORMWATER DISCHARGES. AFTER USE, MATERIALS USED FOR EPSC SHALL BE REMOVED FROM THE SITE.
- (59) THE CONTRACTOR SHALL TAKE APPROPRIATE STEPS TO ENSURE THAT PETROLEUM PRODUCTS OR OTHER CHEMICAL POLLUTANTS ARE PREVENTED FROM ENTERING WATERS OF THE STATE U.S. EQUIPMENT REFUELING, SERVICING, AND STAGING AREAS SHALL COMPLY WITH ALL LOCAL, STATE, AND FEDERAL LAWS, RULES, REGULATIONS, AND ORDINANCES, INCLUDING THOSE OF THE NATIONAL FIRE PROTECTION ASSOCIATION. APPROPRIATE CONTAINMENT MEASURES FOR THESE AREAS SHALL BE USED.
- (60) CONTRACTORS SHALL PROVIDE DESIGNATED TRUCK WASHOUT AREAS ON THE SITE. THESE AREAS MUST BE SELF-CONTAINED, NOT CONNECTED TO ANY STORMWATER OUTLET OF THE SITE, AND PROPERLY SIGNED. WASH DOWN OR WASTE DISCHARGE OF CONCRETE TRUCKS SHALL NOT BE PERMITTED ON SITE UNLESS PROPER SETTLEMENT AREAS HAVE BEEN PROVIDED IN ACCORDANCE WITH BOTH STATE AND FEDERAL REGULATIONS.
- (61) WHEEL WASH WATER SHALL BE COLLECTED AND ALLOWED TO SETTLE OUT SUSPENDED SOLIDS PRIOR TO DISCHARGE. WHEEL WASH WATER SHALL NOT BE DISCHARGED DIRECTLY INTO ANY STORMWATER SYSTEM OR STORMWATER TREATMENT SYSTEM.
- (62) IF PORTABLE SANITARY FACILITIES ARE PROVIDED ON CONSTRUCTION SITES, SANITARY WASTE SHALL BE COLLECTED FROM THE PORTABLE UNITS IN A TIMELY MANNER BY A LICENSED WASTE MANAGEMENT CONTRACTOR OR AS REQUIRED BY ALL REGULATIONS. THE CONTRACTOR SHALL OBTAIN ANY AND ALL NECESSARY PERMITS TO DISPOSE OF SANITARY WASTE.
- (63) ONLY CONSTRUCTION PRODUCTS NEEDED SHALL BE STORED ONSITE BY THE CONTRACTOR. THE CONTRACTOR SHALL STORE ALL MATERIALS UNDER COVER AND IN APPROPRIATE CONTAINERS. PRODUCTS MUST BE STORED IN ORIGINAL CONTAINERS AND LABELED. MATERIAL MIXERS SHALL BE CONDUCTED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. THE CONTRACTOR'S RESPONSIBLE PARTY SHALL INSPECT MATERIALS STORAGE AREAS REGULARLY TO ENSURE PROPER USE AND DISPOSAL.
- (64) WHEN POSSIBLE, ALL PRODUCTS SHALL BE USED COMPLETELY BEFORE PROPERLY DISPOSING OF THE CONTAINER OFFSITE. THE MANUFACTURER'S DIRECTIONS FOR DISPOSAL OF MATERIALS AND CONTAINERS SHALL BE FOLLOWED.
- (65) ALL PAINT CONTAINERS SHALL BE TIGHTLY SEALED AND STORED WHEN NOT REQUIRED FOR USE. EXCESS PAINT SHALL BE DISPOSED OF ACCORDANCE TO THE MANUFACTURER'S INSTRUCTIONS AND APPLICABLE STATE AND LOCAL REGULATIONS.
- (66) ALL HAZARDOUS WASTE MATERIALS SHALL BE DISPOSED OF IN A MANNER WHICH IS COMPLIANT WITH LOCAL OR STATE REGULATIONS. SITE PERSONNEL SHALL BE INSTRUCTED IN THESE PRACTICES, AND THE INDIVIDUAL DESIGNATED AS THE CONTRACTOR'S RESPONSIBLE PARTY SHALL BE RESPONSIBLE FOR SEEING THAT THESE PRACTICES ARE PERMITTED TO DISPOSE OF HAZARDOUS MATERIAL.
- (67) OPEN BURNING IS PROHIBITED UNLESS IT IS SPECIFICALLY ALLOWED BY LAW. IF ALLOWED, NATURAL VEGETATION, TREES, AND UNTREATED LUMBER SHALL BE THE ONLY MATERIALS THAT CAN BE OPEN BURNED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL APPLICABLE STATE AND LOCAL PERMITS PRIOR TO ANY BURNING.
- (68) DISPOSAL OF ONSITE VEGETATION AND TREES BY CHIPPING THEM INTO MULCH IS PREFERABLE TO OPEN BURNING. THIS MULCH MAY BE USED AS AN ONSITE SOIL STABILIZATION MEASURE WHERE APPROPRIATE.
- (69) WASTE MATERIAL (EARTH, ROCK, ASPHALT, CONCRETE, ETC.) NOT REQUIRED FOR THE CONSTRUCTION OF THE PROJECT WILL BE DISPOSED OF BY THE CONTRACTOR. IMPACTS TO WATERS OF THE STATEU.S. SHALL BE AVOIDED IF POSSIBLE. IF UNAVOIDABLE, THE CONTRACTOR WILL OBTAIN ANY AND ALL NECESSARY PERMITS INCLUDING, BUT NOT LIMITED TO NPDES, AQUATIC RESOURCES ALTERATION PERMITS(S), CORPS OF ENGINEERS SECTION 404 PERMITS, AND TVA SECTION 26A PERMITS TO DISPOSE OF WASTE MATERIALS.
- SUPPORT ACTIVITIES**
- (70) MATERIALS AND STAGING AREAS SHALL NOT AFFECT ANY WATERS OF THE STATEU.S. UNLESS THESE AREAS ARE SPECIFICALLY COVERED BY ENVIRONMENTAL PERMITS. OBTAINED SOLELY BY THE CONTRACTOR. THE CONTRACTOR SHALL REVIEW ALL EXISTING PERMITS TO ENSURE THAT WORK AT PERMITTED SITES DOES NOT EXCEED EXPIRATION DATES. IF WORK IS GOING TO BE CONTINUED AFTER EXPIRATION DATES, THE CONTRACTOR SHALL CONTACT THE TDOT PROJECT RESPONSIBLE PARTY TO COMMENCE PERMIT RENEWAL PROCESS.
- (71) OFFSITE BORROW AND WASTE AREAS BECOME NECESSARY DURING THE LIFE OF THE PROJECT, THIS SUPPORT ACTIVITY SHALL BE ADDRESSED PER THE TDOT WASTE AND BORROW MANUAL.
- (72) MATERIALS AND STAGING AREAS SHALL BE LOCATED IN NON-WETLAND AREAS AND ABOVE THE 100-YEAR, FEDERAL EMERGENCY MANAGEMENT AGENCY FLOODPLAIN.
- (73) IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO SUPPLY EPSC PLANS FOR THE MATERIAL AND STAGING AREAS TO THE ENVIRONMENTAL DIVISION COMPLIANCE AND FIELD SERVICES OFFICE FOR REVIEW.
- SPILL PREVENTION, MANAGEMENT & NOTIFICATION**
- (74) ALL ONSITE VEHICLES SHALL BE MONITORED FOR LEAKS AND RECEIVE REGULAR PREVENTIVE MAINTENANCE TO REDUCE THE CHANCE OF LEAKAGE AND SPILLS.
- (75) FOR ALL HAZARDOUS MATERIALS STORED ONSITE, THE MANUFACTURER'S RECOMMENDED METHODS FOR SPILL CLEAN UP SHALL BE CLEARLY POSTED. SITE PERSONNEL SHALL BE MADE AWARE OF THE SPILLS AND THE LOCATIONS OF THE INFORMATION AND CLEANUP SUPPLIES.
- (76) APPROPRIATE CLEANUP MATERIALS AND EQUIPMENT SHALL BE MAINTAINED BY THE CONTRACTOR IN THE MATERIALS STORAGE AREA ONSITE AND UNDER COVER. SPILL RESPONSE EQUIPMENT SHALL BE INSPECTED AND MAINTAINED BY THE CONTRACTOR AS NECESSARY TO REPLACE ANY MATERIALS USED IN SPILL RESPONSE ACTIVITIES.
- (77) ALL SPILLS SHALL BE CLEANED IMMEDIATELY AFTER DISCOVERY AND THE MATERIALS DISPOSED OF PROPERLY. THE SPILL AREA SHALL BE KEPT WELL VENTILATED AND PERSONNEL WILL WEAR APPROPRIATE PROTECTIVE CLOTHING TO PREVENT INJURY FROM CONTACT WITH A HAZARDOUS SUBSTANCE.
- (78) THE CONTRACTOR'S RESPONSIBLE PARTY SHALL BE THE SPILL PREVENTION AND CLEANUP COORDINATOR. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT THE SITE SUPERINTENDENT HAS HAD APPROPRIATE TRAINING FOR HAZARDOUS MATERIALS HANDLING, SPILL MANAGEMENT, AND CLEANUP.
- (79) IF AN OIL SHEEN IS OBSERVED ON SURFACE WATER (E.G. SETTLING PONDS, DETENTION PONDS, SWALES), ACTION SHALL BE TAKEN IMMEDIATELY TO REMOVE THE MATERIAL CAUSING THE SHEEN. THE CONTRACTOR SHALL USE APPROPRIATE MATERIALS TO CONTAIN AND ABSORB THE SPILL. THE SOURCE OF THE OIL SHEEN WILL ALSO BE IDENTIFIED AND REMOVED OR REPAIRED AS NECESSARY TO PREVENT FURTHER RELEASES.
- (80) FERTILIZERS SHALL BE APPLIED ONLY IN THE AMOUNTS SPECIFIED. ONCE APPLIED, FERTILIZERS SHALL BE WORKED INTO THE SOIL TO LIMIT THE EXPOSURE TO STORMWATER.
- (81) IF A SPILL OCCURS THE CONTRACTOR'S RESPONSIBLE PARTY SHALL BE RESPONSIBLE FOR COMPLETING THE SPILL REPORTING FORM AND FOR REPORTING THE SPILL TO THE TDOT PROJECT RESPONSIBLE PARTY. ALL MEASURES SHALL BE TAKEN IMMEDIATELY TO PREVENT THE POLLUTION OF WATERS OF THE STATEU.S., INCLUDING GROUNDWATER, SHOULD A SPILL OCCUR.
- (82) WHERE A RELEASE CONTAINING A HAZARDOUS SUBSTANCE IN AN AMOUNT EQUAL TO OR IN EXCESS OF A REPORTABLE QUANTITY ESTABLISHED UNDER EITHER 40 CFR 117 OR 40 CFR 302 OCCURS DURING CONSTRUCTION, THE CONTRACTOR SHALL REPORT THE RELEASE TO THE TNR 100000 STORMWATER DISCHARGES FROM CONSTRUCTION ACTIVITIES SECTION 611 FOR REPORTING REQUIREMENTS.
- (83) CONTRACTOR'S BULK FUEL AND PETROLEUM PRODUCTS STORED ONSITE OR ADJACENT TO THE R.O.W. IN ABOVE GROUND STORAGE CONTAINERS WITH A COMBINED CAPACITY OF 1320 GALLONS OR MORE SHALL HAVE SECONDARY CONTAINMENT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING SECONDARY CONTAINMENT. THE CONTRACTOR SHALL OBTAIN ANY NECESSARY LOCAL, STATE, AND FEDERAL PERMITS FOR STORAGE OF BULK STORAGE AND BE SOLELY RESPONSIBLE FOR SPCC PLAN AND/OR PERMITS SHALL BE KEPT ONSITE AND A COPY PROVIDED TO THE TDOT PROJECT RESPONSIBLE PRIOR TO STORING 1320 GALLONS ON SITE.

## SPECIAL NOTES

### GRADING

- (1) THE GRADING TABULATIONS AND RESULTING EARTHWORK ASSOCIATED BID QUANTITIES WERE PREPARED UTILIZING AVAILABLE GEOTECHNICAL INFORMATION FROM REPORTS PREPARED FOR THIS PROJECT. THIS INFORMATION IS PROVIDED FOR GENERAL INFORMATION AND ESTIMATION GUIDANCE ONLY.
- (2) BORING DEPTHS SHOWN ON THE FOUNDATION DATA SHEETS, SOILS SHEETS, PLANS, AND CROSS-SECTIONS INDICATE SOIL AND ROCK CONDITIONS AT THE SPECIFIC BORING LOCATIONS. ANY SOIL PROFILE INFORMATION IS PROVIDED FOR GENERAL INFORMATION AND ESTIMATION GUIDANCE ONLY. THE INFORMATION IS BASED ON THE GEOTECHNICAL ENGINEERING LOGS. THE TRANSITION BETWEEN BORINGS AND LAYERS MAY VARY SIGNIFICANTLY DEPENDING ON THE GEOLOGIC FORMATIONS ENCOUNTERED.
- (3) THE CONTRACTOR SHALL UTILIZE ALL INFORMATION PROVIDED IN THE PLANS, CROSS-SECTIONS AND CONTRACT DOCUMENTS INCLUDING ANY NOTES AND SPECIFICATIONS TO PREPARE AND CONSTRUCT ALL PROJECTS OF SIMILAR NATURE, SCOPE AND LOCATION IN PREPARATION OF HIS BID FOR EARTHWORK ITEMS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE AND PROVIDE EQUIPMENT AND MEANS NECESSARY TO CONDUCT THE EXCAVATION ACTIVITIES IN ACCORDANCE WITH PLANS AND SPECIFICATIONS.
- (4) EARTHWORK IS PAID FOR UNDER ITEM 203.01, ROAD AND DRAINAGE EXCAVATION (UNO ASSURED). NO ADDITIONAL PAYMENT WILL BE MADE FOR EARTHWORK QUANTITIES BASED SOLELY ON A CLAIM THAT THE QUANTITIES SHOWN IN THE GRADING TABULATION OR ELSEWHERE IN THE PLANS ARE INACCURATE WITH RESPECT TO THE TYPE OF MATERIALS ENCOUNTERED DURING CONSTRUCTION, EXCEPT AS PROVIDED FOR BY SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION OR AS AMENDED IN SUPPLEMENTAL SPECIFICATIONS.
- (5) TOPSOIL TO BE REMOVED FROM ALL AREAS OF TEMPORARY WETLAND IMPACT AND STOCKPILED PRIOR TO CONSTRUCTION. UPON COMPLETION OF CONSTRUCTION ACTIVITIES, TEMPORARY HAUL ROADS ARE TO BE RESTORED TO ORIGINAL CONDITIONS. TEMPORARY WETLAND AREAS TO BE DISPOSED OF AS DIRECTED BY THE ENGINEER. UPON COMPLETION OF CONSTRUCTION ACTIVITIES, ALL TEMPORARY WETLAND IMPACT AREAS ARE TO BE RESTORED TO PRE-CONSTRUCTION CONTOURS AND THE STOCKPILED WETLAND TOPSOIL SPREAD TO RESTORE THESE AREAS TO PRE-CONSTRUCTION ACTIVITIES.

### DRAINAGE

- (1) THE CONTRACTOR IS TO CONSTRUCT THE PROPOSED MEDIAN DRAINS IN STAGES AS CONSTRUCTION PROGRESSES TO PREVENT PONDING STORM WATER FROM ENCRoACHING ON THE EXISTING ROADWAY PAVEMENT.

### PAVEMENT

#### RESURFACING

- (1) TRAFFIC WILL BE ALLOWED TO TEMPORARILY DRIVE ON THE MILLED SURFACE OF THE ROADWAY UNDER THE FOLLOWING CONDITIONS ONLY:
  - a. THE MILLED SURFACE IS FINE TEXTURED, THE FINE TEXTURE SHALL BE OBTAINED BY A MILLING MACHINE UTILIZING A MILLING HEAD WITH TEETH SPACING 3/8" OR LESS OPERATING AT LESS THAN 80 FEET PER MINUTE.
  - b. THE SURFACE SHALL BE SWEEPED AND CLEANED OF ALL LOOSE MATERIALS.
  - c. THE DIFFERENCE IN ELEVATION BETWEEN THE MILLED SURFACE AND THE ADJACENT LANE SHALL NOT EXCEED 1 1/2 INCHES.
  - d. THE MILLED SURFACE SHALL BE PAVED WITHIN 48 HOURS.
  - e. RAIN OR INCLEMENT WEATHER IS NOT EXPECTED OR FORECASTED WITHIN 48 HOURS AFTER MILLING.
  - f. ALL APPLICABLE SIGNING IS INSTALLED IN ACCORDANCE WITH THE MUTCD SIGNING SHALL INCLUDE MOTORCYCLE WARNING SIGNS (TN-64) PLACED IN ADVANCE OF ANY MILLED AREAS.
  - g. IF PAVELING OR DETERIORATION OF THE MILLED SURFACE IS OBSERVED WHILE TRAFFIC IS DRIVING ON THE MILLED SURFACE, THE CONTRACTOR SHALL STOP MILLING AND PAVING SHALL BE COMPLETED IMMEDIATELY AFTER MILLING.

- h. ONLY ONE LANE IN EACH DIRECTION SHALL HAVE A MILLED SURFACE AT ONE TIME.

#### SIGNALIZATION

- (1) THE DESIGN OF TRAFFIC SIGNAL SUPPORT POLES, MAST ARMS, STRAIN POLES, ETC. SHALL BE IN CONFORMANCE WITH THE AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES AND TRAFFIC SIGNALS, CURRENT EDITION. OVERHEAD CANTILEVERED AND TRAFFIC SIGNAL STRUCTURES SHALL BE DESIGNED FOR FATIGUE CATEGORY 1.

#### EROSION PREVENTION AND SEDIMENT CONTROL

##### NPDES

- (1) REFER TO THE EROSION PREVENTION AND SEDIMENT CONTROL PLAN, SHEET 205.01, FOR THE NPDES PERMIT NUMBER, WORK LIMITATION OR LIMITATION ON THE TOTAL AREA OF EXPOSED SOIL.

##### ENVIRONMENTAL

##### ECOLOGY

- (1) STAFF FROM THE TDOT ENVIRONMENTAL DIVISION OR A DESIGNEE SHALL ADVISE THE CONTRACTOR DURING THE PRE-CONSTRUCTION MEETING WHEN ENVIRONMENTAL DIVISION PERSONNEL OR A DESIGNATED CONSULTANT WILL NEED TO BE ON SITE FOR WORK BEING DONE WHICH COULD AFFECT WATERS OF THE STATE U.S. OR SPECIES.
- (2) STAFF FROM THE TDOT ENVIRONMENTAL DIVISION OR A DESIGNEE SHALL ATTEND THE PRE-CONSTRUCTION MEETING FOR ALL PROJECTS WHICH HAVE THREATENED OR ENDANGERED SPECIES OR CRITICAL HABITAT PROXIMAL TO SCHEDULED WORK. THIS WILL PROVIDE THE OPPORTUNITY TO ENSURE THAT PERSONNEL INCLUDING THE CONTRACTOR'S PERSONNEL AND SUBCONTRACTORS ARE MADE AWARE OF THE NECESSARY PRECAUTIONS THAT MUST BE FOLLOWED.
- (3) ALL PROJECTS WITH LEGALLY PROTECTED SPECIES OR CRITICAL HABITAT IDENTIFIED SHALL HAVE MEASURES IN PLACE TO CONTAIN CONCRETE DUST, CEMENT DUST AND ALL OTHER MATERIALS. THESE MATERIALS ARE NOT ALLOWED TO ENTER WATERS OF THE STATE/U.S.

##### STREAM RELOCATION

- (1) ONCE WATER IS DIVERTED INTO A NEWLY CONSTRUCTED AND STABILIZED RELOCATED STREAM / CHANNEL, THE ECOLOGY SECTION MUST BE NOTIFIED, THE STREAM NAME, STREAM NUMBER, AND DATE THE WATER WAS DIVERTED INTO THE STREAM / CHANNEL IS TO BE SUPPLIED WITH THE NOTIFICATION.

##### CHANNEL RELOCATION SEQUENCE AND IMPLEMENTATION

- (1) THE NEW CHANNEL SHALL BE EXCAVATED AND STABILIZED DURING A SINGLE CONSTRUCTION PERIOD. THE EXCAVATION SHALL BE COMPLETED IMMEDIATELY FOLLOWING CHANNEL COMPLETION. TREES SHALL BE INSTALLED IN THE FIRST PLANTING SEASON FOLLOWING CHANNEL EXCAVATION. WATER SHALL BE DIVERTED INTO THE NEW CHANNEL ONLY AFTER IT IS COMPLETELY STABILIZED, AND ONLY DURING A LOW-WATER PERIOD. STABILIZED MEANS THAT ALL SPECIFIED ROCK AND EROSION CONTROL BLANKET OR FLEXIBLE CHANNEL LINER IS IN PLACE, AND SEEDING AND SOIL ARE IN PLACE AND ESTABLISHED.
  - a. FLAG EDGE OF THE NEW CHANNEL TOP BANK PRIOR TO CLEARING DO NOT EXCEED 12 INCHES FROM EXISTING POSITIONS. THE CHANNEL SHALL LEAVE AS MANY TREES AND SHRUBS AS POSSIBLE BETWEEN TOE OF THE NEW HIGHWAY SLOPE AND THE STREAM.
  - b. EXCAVATE THE NEW CHANNEL "IN THE DRY" BY LEAVING AREAS OF UNDISTURBED EARTH (DIVERSION BERMS) IN PLACE AT BOTH ENDS.
  - c. SHAPE CHANNEL TO SPECIFICATIONS SHOWN. REMOVE LOOSE SOIL AND DEBRIS.
  - d. PLACE TOPSOIL, EROSION CONTROL BLANKET OR FLEXIBLE CHANNEL LINER, SEED, AND SOIL AS SPECIFIED.
  - e. REMOVE DIVERSION BERMS, BEGINNING WITH THE MOST DOWN STREAM, BANKS AND BOTTOM ELEVATION OF THE OLD CHANNEL.
- (2) CHANNEL RELOCATION SEQUENCE
  - a. FLAG EDGE OF THE NEW CHANNEL TOP BANK PRIOR TO CLEARING DO NOT EXCEED 12 INCHES FROM EXISTING POSITIONS. THE CHANNEL SHALL LEAVE AS MANY TREES AND SHRUBS AS POSSIBLE BETWEEN TOE OF THE NEW HIGHWAY SLOPE AND THE STREAM.
  - b. EXCAVATE THE NEW CHANNEL "IN THE DRY" BY LEAVING AREAS OF UNDISTURBED EARTH (DIVERSION BERMS) IN PLACE AT BOTH ENDS.
  - c. SHAPE CHANNEL TO SPECIFICATIONS SHOWN. REMOVE LOOSE SOIL AND DEBRIS.
  - d. PLACE TOPSOIL, EROSION CONTROL BLANKET OR FLEXIBLE CHANNEL LINER, SEED, AND SOIL AS SPECIFIED.
  - e. REMOVE DIVERSION BERMS, BEGINNING WITH THE MOST DOWN STREAM, BANKS AND BOTTOM ELEVATION OF THE OLD CHANNEL.

SHEET NO.	PROJECT NO.	YEAR	TYPE
20	STP-65110	2017	CONST.

- f. INSTALL TREES ACCORDING TO STANDARD SPECIFICATIONS SECTION 802.
  - (3) ONLY RIP RAP SHOWN ON PLANS SHOULD BE USED IN THE RELOCATED CHANNEL. REACH ANY OTHER PROPOSED RIP-RAP SHOULD BE COORDINATED WITH THE ENVIRONMENTAL DIVISION THROUGH THE TDOT HEADQUARTERS CONSTRUCTION OFFICE.
  - (4) REQUESTS BY ANY AGENCY THAT WOULD REQUIRE THE MODIFICATION OF PLANS OR SPECIFICATIONS FOR THE RELOCATION OF CHANNELS SHALL BE REFERRED TO THE TDOT ENVIRONMENTAL DIVISION VIA THE HEADQUARTERS CONSTRUCTION OFFICE FOR COORDINATION WITH ALL INVOLVED AGENCIES AND TDOT DIVISIONS.

##### TREES

- (1) NO SUBSTITUTIONS OF TREE SPECIES OR SIZES SHALL BE ALLOWED WITHOUT THE WRITTEN APPROVAL OF TDOT ENVIRONMENTAL DIVISION. CONCERNING STREAM MITIGATION, TREES SHALL BE OF THE VARIETY REQUESTED AND FIRST QUALITY. CONCERNING TEMPORARY WETLAND MITIGATION, TREES SHALL BE OF THE VARIETY REQUESTED, WELL BRANCHED, BARE ROOT ROOTS MUST BE KEPT MOIST AT ALL TIMES. TREES SHALL BE PLANTED IN THE MANNER REQUESTED AND ACCEPTED. ANY TIME PRIOR TO TERMINATION OF THE CONTRACT SHALL BE REMOVED AND REPLACED AT THE CONTRACTOR'S EXPENSE. STAKES AND WIRES SHALL BE REMOVED IMMEDIATELY PRIOR TO CONTRACT TERMINATION, UNLESS OTHERWISE DIRECTED BY THE ENGINEER.
- (2) THE CONTRACTOR SHOULD ARRANGE SEVERAL MONTHS AHEAD OF TIME TO OBTAIN THE CORRECT TREE SPECIES, AS SOME MAY REQUIRE TIME TO LOCATE.
- (3) ALL TREES PLANTED SHALL BE WRAPPED AS PER SECTION 802.07 OF TDOT STANDARD SPECIFICATIONS FOR THE ROAD AND BRIDGE CONSTRUCTION.
- (4) TREES SHALL BE WATERED AS REQUIRED THROUGH THE PERIOD OF ESTABLISHMENT TO ENSURE SURVIVAL.



STATE OF TENNESSEE  
DEPARTMENT OF  
TRANSPORTATION

SPECIAL  
NOTES

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65101	3E
CONST.	2017	STP-65101	3E

REV. 08-15-13: ADDED TRACT NO. 154 DUE TO SELL OFF FROM TRACT NO. 15.  
 REV. 08-30-13: UPDATED PROPERTY OWNER AND COUNTY RECORDS FOR TRACT NO. 93.  
 REV. 05-02-14: EXTENDED BEGIN NOS. TO BEGIN LIMIT. ADDED TRACT NOS. 112-117.  
 REV. 02-24-15: ADDED TRACT NO. 104 TO SELL OFF FROM TRACT NO. 14.  
 REV. 05-28-15: ADDED TRACT NO. 2A  
 REV. 03-03-16: REVISED TRACT NO. 101 AREA TO BE ACQUIRED AND AREA REMAINING.  
 REV. 02-01-17: ADDED CONSTRUCTION EASEMENT TO TRACT NOS. 93 & 98.



STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION  
 RIGHT-OF-WAY  
 ACQUISITION  
 TABLE

TRACT NO.	PROPERTY OWNERS	COUNTY RECORDS				TOTAL AREA ACRES			AREA TO BE ACQUIRED ACRES			AREA REMAINING ACRES			EASEMENT (SQUARE FEET)		
		TAX MAP NO.	PARCEL NO.	DEED DOCUMENT REFERENCE		LEFT	RIGHT	TOTAL	LEFT	RIGHT	TOTAL	LEFT	RIGHT	PERM. DRAINAGE	SLOPE	CONST.	
				BK.	PAGE												
93	NANCY M. DORRIS	102	181	1511	607	0	1.330	0.925	0.405	1.330	0.405	0.925	0.405	0.405	3011		
94	JAMES R. GARR & WIFE, NANA M. GARR	104	18	604	604	0	0.606	0.606	0.606	0.606	0.606	0.606	0.606	0.606	0.606		
95	JOHN W. SPAHR & WIFE, KARLA SPAHR	102	185	300	807	0	0.813	1.685 S.F.	0.813	1.685 S.F.	0.813	1.685 S.F.	0.813	1.685 S.F.	0.813		
96	JOSEPH W. OSBERG	102	184	304	800	1.365	1.365	2.730	1.365	2.730	1.365	2.730	1.365	2.730	1.365		
97	JOSEPH W. OSBERG, AS TRUSTEE OF THE MARY C. HUTCHERSON REVOCABLE LIVING TRUST	102	185	352	941	1.272	1.272	2.544	1.272	2.544	1.272	2.544	1.272	2.544	1.272		
98	HUTCHERSON REVOCABLE LIVING TRUST	102	183	971	345	0	2.351	1.073	1.278	1.073	1.278	1.073	1.278	1.073	0.104 AC		
99	ELISE WILLIAMS	104	43-13	802	566	0	0.624	0.624	0.624	0.624	0.624	0.624	0.624	0.624	0.624		
100	JERRY K. GAINE	104	43-13	206	43	0	0.820	0.820	0.820	0.820	0.820	0.820	0.820	0.820	0.820		
101	STEVEN A. HUTCHERSON & WIFE, CONNIE D. HUTCHERSON	104	181	603	633	0	1.890	1.890	1.890	1.890	1.890	1.890	1.890	1.890	1.890		
102	THOMAS L. ALDSTADT & WIFE, DELIA A. ALDSTADT	104	46-08	364	264	0	8.364	8.364	8.364	8.364	8.364	8.364	8.364	8.364	8.364		
103	JOSEPH ELLIOTT WIFE, MARY K. EDEN	104	46	434	434	0	0.606	0.606	0.606	0.606	0.606	0.606	0.606	0.606	0.606		
104	CHARLES M. NORRIS ETUX, HELEN M. NORRIS	102	185	848	375	0	0.713	559 S.F.	0.713	559 S.F.	0.713	559 S.F.	0.713	559 S.F.	0.713		
105	TERESA WILLIAMS	122	110.03	1313	238	0	20.500	0.107	20.393	0.107	20.393	0.107	20.393	0.107	0.107		
112	LAWRENCE G. WARD, JR.	130	21	667	438	0	3.400	3.400	3.400	3.400	3.400	3.400	3.400	3.400	3.400		
113	CHARLES O. WILBUR AND WIFE, SHERYL L. WILBUR	130	20	644	717	0	3.460	3.460	3.460	3.460	3.460	3.460	3.460	3.460	3.460		
114	SHAWNEE ROSSER	130	20	644	717	0	3.460	3.460	3.460	3.460	3.460	3.460	3.460	3.460	3.460		
115	SAMUEL L. ALDRIDGE AND WIFE, PAULA R. ALDRIDGE	130	45	124	388	0	3.470	3.470	3.470	3.470	3.470	3.470	3.470	3.470	3.470		
116	KULTARS, SUMRA AND AMANOT GEL	130	10	163	62	0	2.820	2.820	2.820	2.820	2.820	2.820	2.820	2.820	2.820		
117	DALE LINGGILLER AND WIFE, DEBRA LINGGILLER	130	18	504	813	0	3.820	3.820	3.820	3.820	3.820	3.820	3.820	3.820	3.820		
14A	KIRK JOHNSON AND WIFE, SHEILA JOHNSON	122	112.01	1555	711	0	4.020	3054 S.F.	3.950	3054 S.F.	3.950	3054 S.F.	3.950	3054 S.F.	3.950		
2A	JOHN SAMUEL CHILDS AND WIFE, ALICE D. CHILDS	130	46	358	835	0	7.500	2756 S.F.	7.437	2756 S.F.	7.437	2756 S.F.	7.437	2756 S.F.	7.437		

DISTURBED AREA		
IN BETWEEN SLOPE LINES	134.67 (AC)	
15-FOOT WIDE STRIP (OUTSIDE SLOPE LINES)	22.66 (AC)	
TOTAL DISTURBED AREA	157.33 (AC)	

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65H101	46
CONST.	2017	STP-65H101	48




UNNAMED TRIBUTARY TO BEDNIGO BRANCH (STR-5)

**DRAINAGE DATA FOR PIPE STATION 439+58.56**  
 DIRECTION OF FLOW RIGHT  
 DRAINAGE AREA 2700.00 SQ. FT. (0.061 MI<sup>2</sup>)  
 PRESENT STRUCTURE 24" x 24" x 36" R.C.C. & G.P.  
 EXISTING STRUCTURE CONDITION: GOOD  
 REMARKS: SEE SHEET 47 FOR DETAILS

**DRAINAGE DATA FOR PIPE STATION 425+33.37**  
 DIRECTION OF FLOW RIGHT  
 DRAINAGE AREA 3220.00 SQ. FT. (0.074 MI<sup>2</sup>)  
 PRESENT STRUCTURE 24" x 24" x 36" R.C.C. & G.P.  
 EXISTING STRUCTURE CONDITION: GOOD  
 REMARKS: SEE SHEET 47 FOR DETAILS

**DRAINAGE DATA FOR PIPE STATION 411+34.80**  
 DIRECTION OF FLOW RIGHT  
 DRAINAGE AREA 2420.00 SQ. FT. (0.055 MI<sup>2</sup>)  
 PRESENT STRUCTURE 24" x 24" x 36" R.C.C. & G.P.  
 EXISTING STRUCTURE CONDITION: GOOD  
 REMARKS: SEE SHEET 47 FOR DETAILS

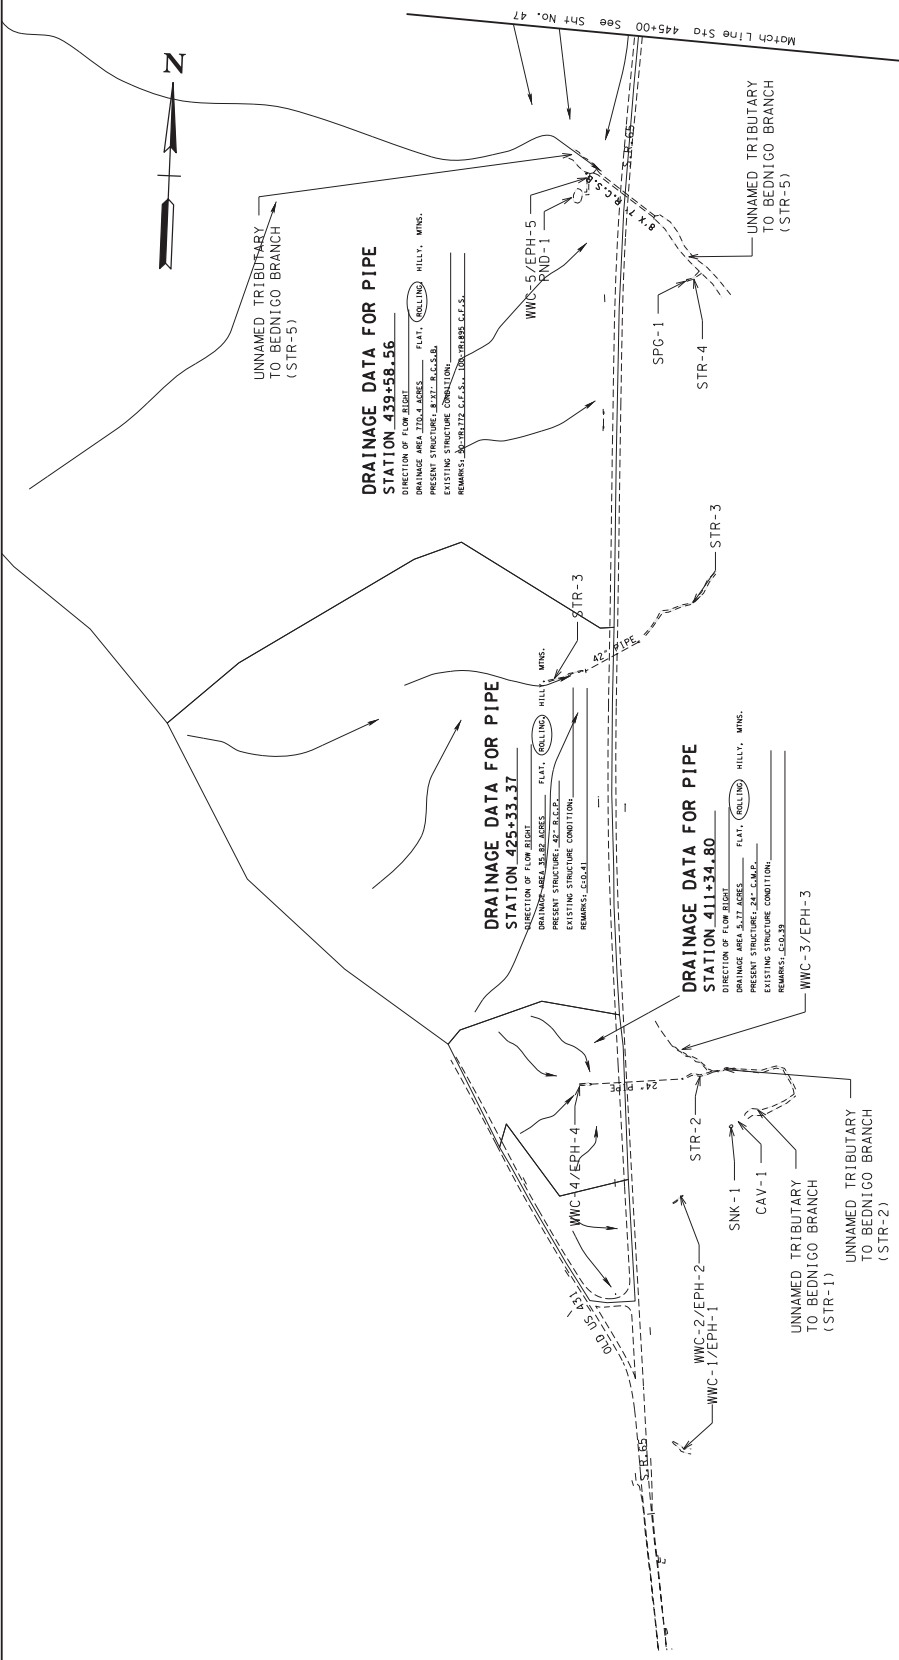


COORDINATES ARE UTM 84N UTM ZONE 18Q. ALL ELEVATIONS ARE IN FEET AND TIED TO THE TOPNA. ALL ELEVATIONS ARE REFERENCED TO THE NAVD 83.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

# DRAINAGE MAP

STA. 400+00 TO STA. 445+00  
 SCALE: 1"=200'

TYPE	YEAR	PROJECT NO.	SHEET NO.
CONST.	2017	STP-65101	47
CONST.	2017	STP-65101	49

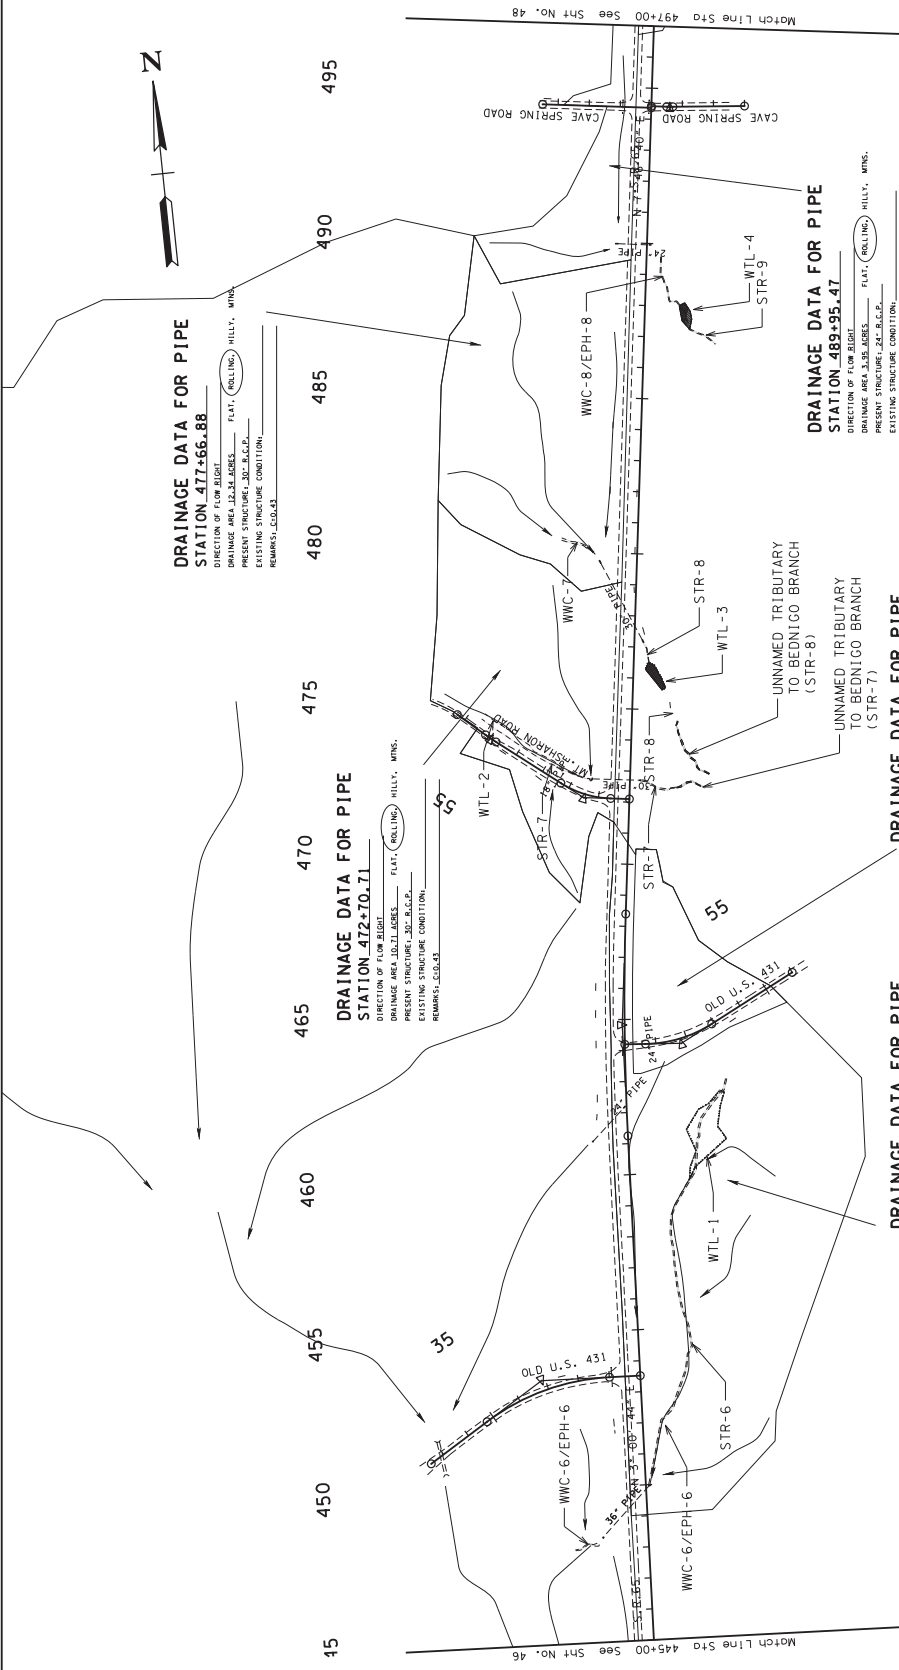

**DRAINAGE DATA FOR PIPE**  
**STATION 477+66.88**  
 DIRECTION OF FLOW RIGHT  
 DRAINAGE AREA 1.02 A.C.  
 PRESENT STRUCTURE 30" R.C.P.  
 EXISTING STRUCTURE CONDITION:  
 REMARKS: C.O.B. 51

**DRAINAGE DATA FOR PIPE**  
**STATION 472+70.71**  
 DIRECTION OF FLOW RIGHT  
 DRAINAGE AREA 1.02 A.C.  
 PRESENT STRUCTURE 30" R.C.P.  
 EXISTING STRUCTURE CONDITION:  
 REMARKS: C.O.B. 51

**DRAINAGE DATA FOR PIPE**  
**STATION 449+86.24**  
 DIRECTION OF FLOW LEFT  
 DRAINAGE AREA 1.14 A.C.  
 PRESENT STRUCTURE 30" R.C.P.  
 EXISTING STRUCTURE CONDITION:  
 REMARKS: C.O.B. 51

**DRAINAGE DATA FOR PIPE**  
**STATION 462+24.91**  
 DIRECTION OF FLOW LEFT  
 DRAINAGE AREA 1.03 A.C.  
 PRESENT STRUCTURE 24" R.C.P.  
 EXISTING STRUCTURE CONDITION:  
 REMARKS: C.O.B. 51

**DRAINAGE DATA FOR PIPE**  
**STATION 489+95.47**  
 DIRECTION OF FLOW RIGHT  
 DRAINAGE AREA 1.30 A.C.  
 PRESENT STRUCTURE 30" R.C.P.  
 EXISTING STRUCTURE CONDITION:  
 REMARKS: C.O.B. 46




COORDINATES ARE UTM 84 UZS82.  
 COORDINATE SYSTEM IS UTM 84 UZS82.  
 FACTOR OF 1000000 AND TIED TO  
 THE TORN. ALL ELEVATIONS ARE  
 REFERENCED TO THE 1985 B.S.M.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

**DRAINAGE  
 MAP**

STA. 445+00 TO STA. 497+00  
 SCALE: 1"=200'

SHEET NO.	PROJECT NO.	YEAR	TYPE
48	STP-65101	2012	R.O.W.
50	STP-65101	2017	CONST.

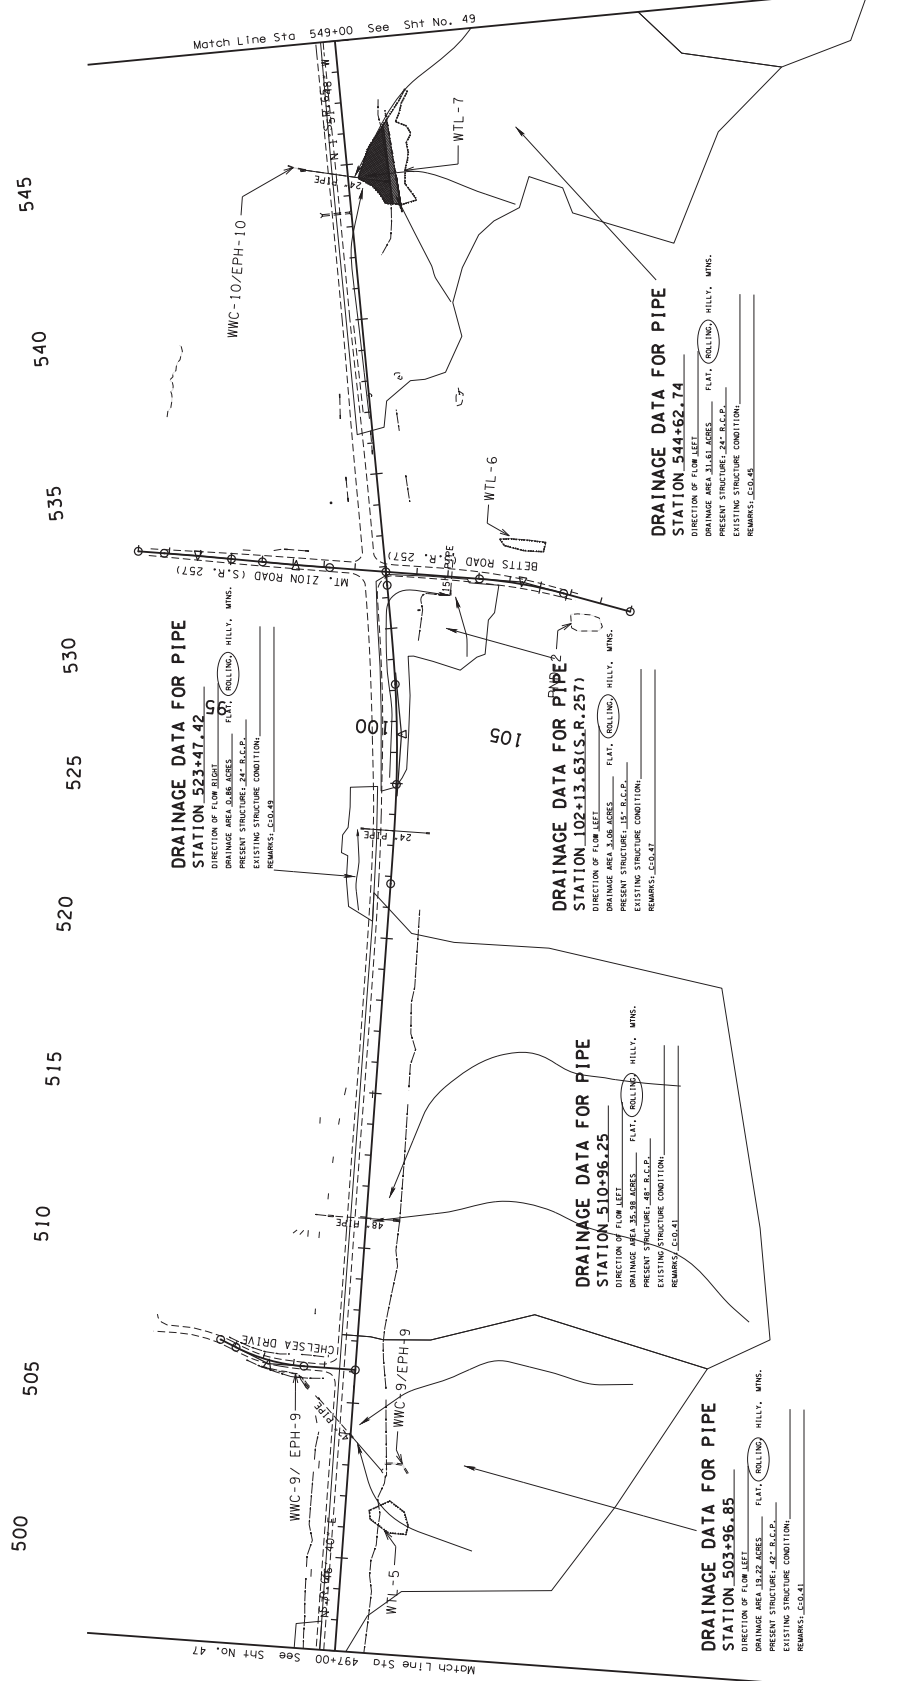

**DRAINAGE DATA FOR PIPE**  
**STATION\_523+47.42**  
 DIRECTION OF FLOW LEFT  
 DRAINAGE AREA 3.06 ACRES  
 PRESENT STRUCTURE 24" R.C.P.  
 EXISTING STRUCTURE CONDITION  
 REMARKS 500-51

**DRAINAGE DATA FOR PIPE**  
**STATION\_102+13.63(S.R.257)**  
 DIRECTION OF FLOW LEFT  
 DRAINAGE AREA 3.06 ACRES  
 PRESENT STRUCTURE 24" R.C.P.  
 EXISTING STRUCTURE CONDITION  
 REMARKS 500-51

**DRAINAGE DATA FOR PIPE**  
**STATION\_510+96.25**  
 DIRECTION OF FLOW LEFT  
 DRAINAGE AREA 38.38 ACRES  
 PRESENT STRUCTURE 48" R.C.P.  
 EXISTING STRUCTURE CONDITION  
 REMARKS 500-51

**DRAINAGE DATA FOR PIPE**  
**STATION\_503+96.85**  
 DIRECTION OF FLOW LEFT  
 DRAINAGE AREA 13.82 ACRES  
 PRESENT STRUCTURE 48" R.C.P.  
 EXISTING STRUCTURE CONDITION  
 REMARKS 500-51

**DRAINAGE DATA FOR PIPE**  
**STATION\_544+62.74**  
 DIRECTION OF FLOW LEFT  
 DRAINAGE AREA 3.16 ACRES  
 PRESENT STRUCTURE 24" R.C.P.  
 EXISTING STRUCTURE CONDITION  
 REMARKS 500-51




COORDINATES ARE UTM 84N UTM ZONE 18N  
 DATUM IS AN ADJUSTED  
 FACTOR OF 1.000000 AND TIED TO  
 THE TOPN. ALL ELEVATIONS ARE  
 REFERENCED TO THE 1988 B.S.M.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

# DRAINAGE MAP

STA. 497+00 TO STA. 549+00  
 SCALE: 1"=200'

TYPE	YEAR	PROJECT NO.	SHEET NO.
		STP-651(0)	49
		STP-651(0)	51

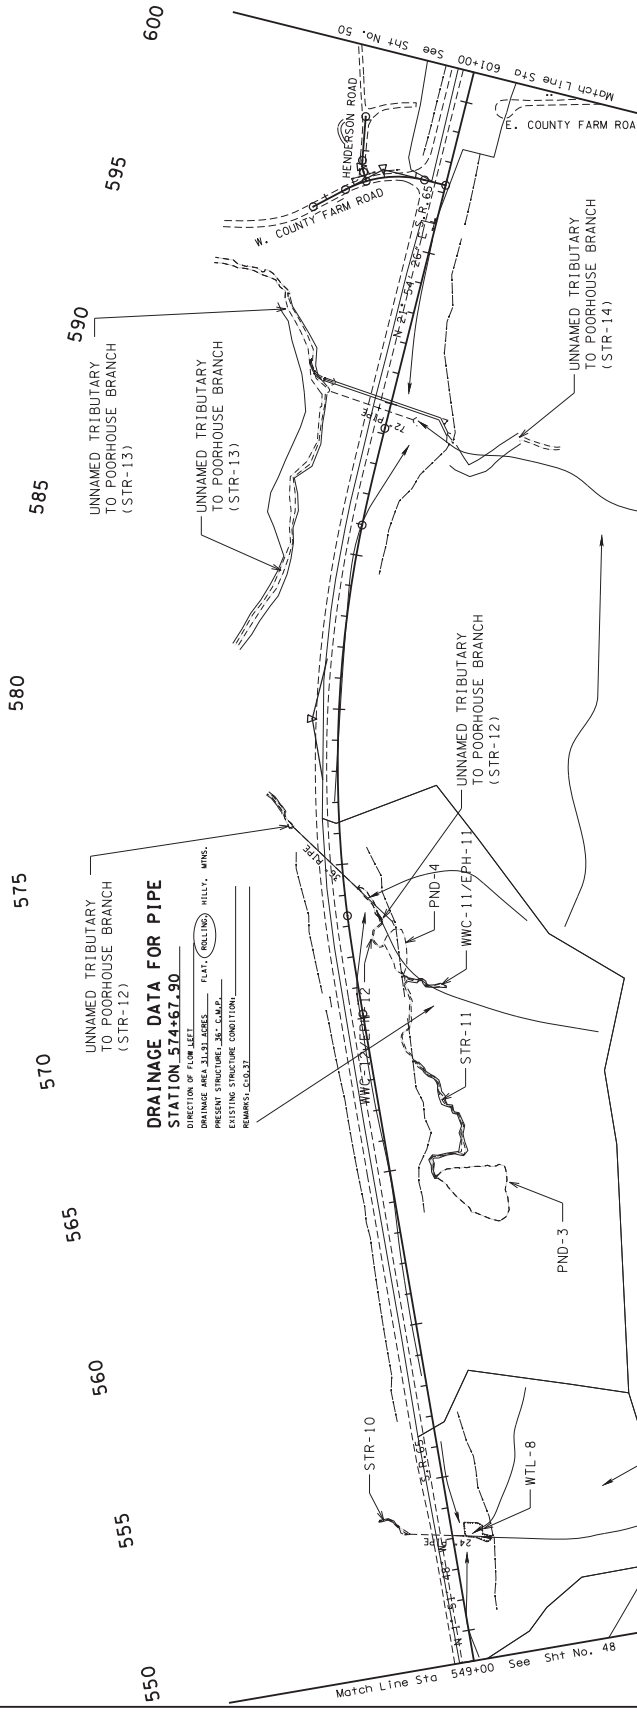

**DRAINAGE DATA FOR PIPE STATION 574+67.30**  
 DIRECTION OF FLOW LEFT  
 DRAINAGE AREA 312.24 ACRES  
 EXISTING STRUCTURE CONDITION: \_\_\_\_\_  
 REMARKS: 5/20/27


FLAT, (ROLLING) HILLS, MING.

**DRAINAGE DATA FOR PIPE STATION 553+09.67**  
 DIRECTION OF FLOW LEFT  
 DRAINAGE AREA 312.24 ACRES  
 EXISTING STRUCTURE CONDITION: \_\_\_\_\_  
 REMARKS: 5/20/27

FLAT, (ROLLING) HILLS, MING.

**DRAINAGE DATA FOR PIPE STATION 589+78.17**  
 DIRECTION OF FLOW LEFT  
 DRAINAGE AREA 202.06 ACRES  
 EXISTING STRUCTURE CONDITION: \_\_\_\_\_  
 REMARKS: 5/20/27

FLAT, (ROLLING) HILLS, MING.




COORDINATES ARE UTM 84N UTM ZONE 18Q UTM ELEVATION FACTOR OF 1.000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE NAD 83 EB.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

**DRAINAGE MAP**

STA. 549+00 TO STA. 601+00  
 SCALE: 1"=200'

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65(10)	50
CONST.	2017	STP-65(10)	52

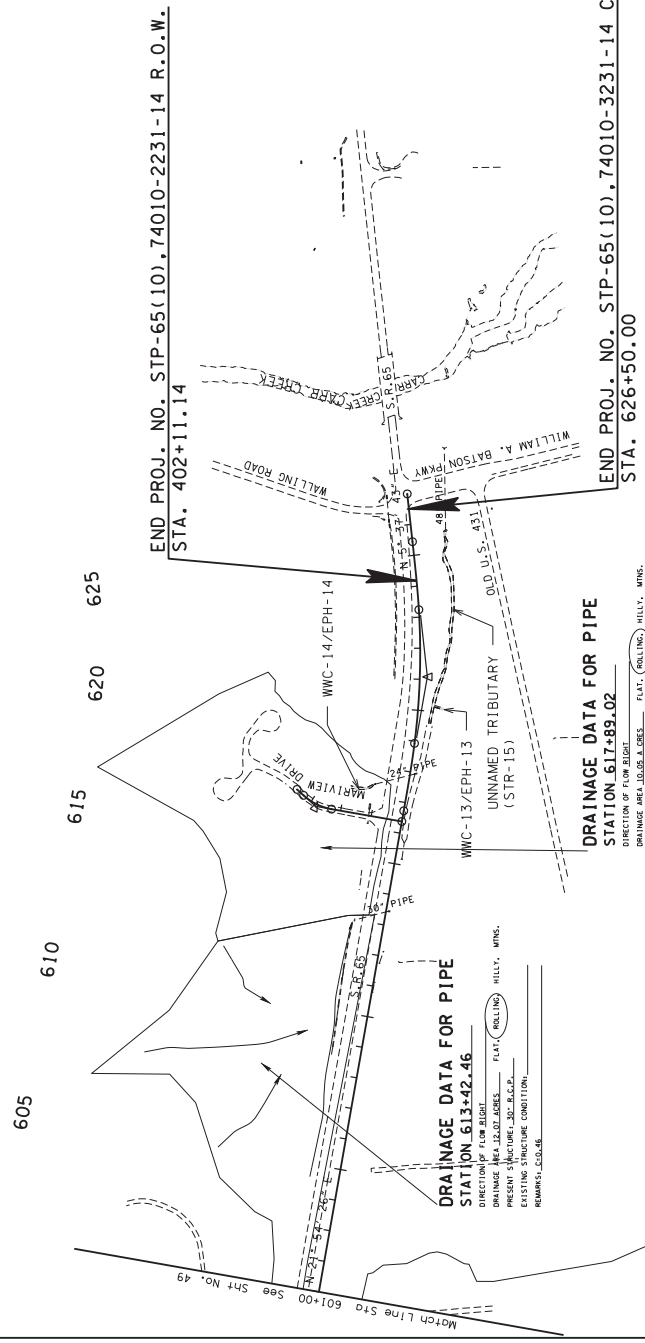

**DRAINAGE DATA FOR PIPE**  
**STATION 617+89.02**  
 DIRECTION OF FLOW: \_\_\_\_\_  
 PRESENT STRUCTURE: \_\_\_\_\_  
 EXISTING STRUCTURE CONDITION: \_\_\_\_\_  
 REMARKS: E.C.O. 49

**DRAINAGE DATA FOR PIPE**  
**STATION 613+42.46**  
 DIRECTION OF FLOW: \_\_\_\_\_  
 PRESENT STRUCTURE: \_\_\_\_\_  
 EXISTING STRUCTURE CONDITION: \_\_\_\_\_  
 REMARKS: E.C.O. 46

END PROJ. NO. STP-65(10), 74010-2231-14 R.O.W.  
 STA. 402+11.14

END PROJ. NO. STP-65(10), 74010-3231-14 CONST.  
 STA. 626+50.00



COORDINATES ARE UTM ZONE 18N, ELEVATIONS ARE IN FEET. SCALE FACTOR OF 1.000000 AND TIED TO THE TOPN. ALL ELEVATIONS ARE REFERENCED TO THE 1988.


STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

**DRAINAGE MAP**

STA. 601+00 TO STA. 626+81  
 SCALE: 1"=200'



SHEET NO.	PROJECT NO.	YEAR	TYPE
51	STP-6510	2012	R.O.W.
53	STP-6510	2017	CONST.

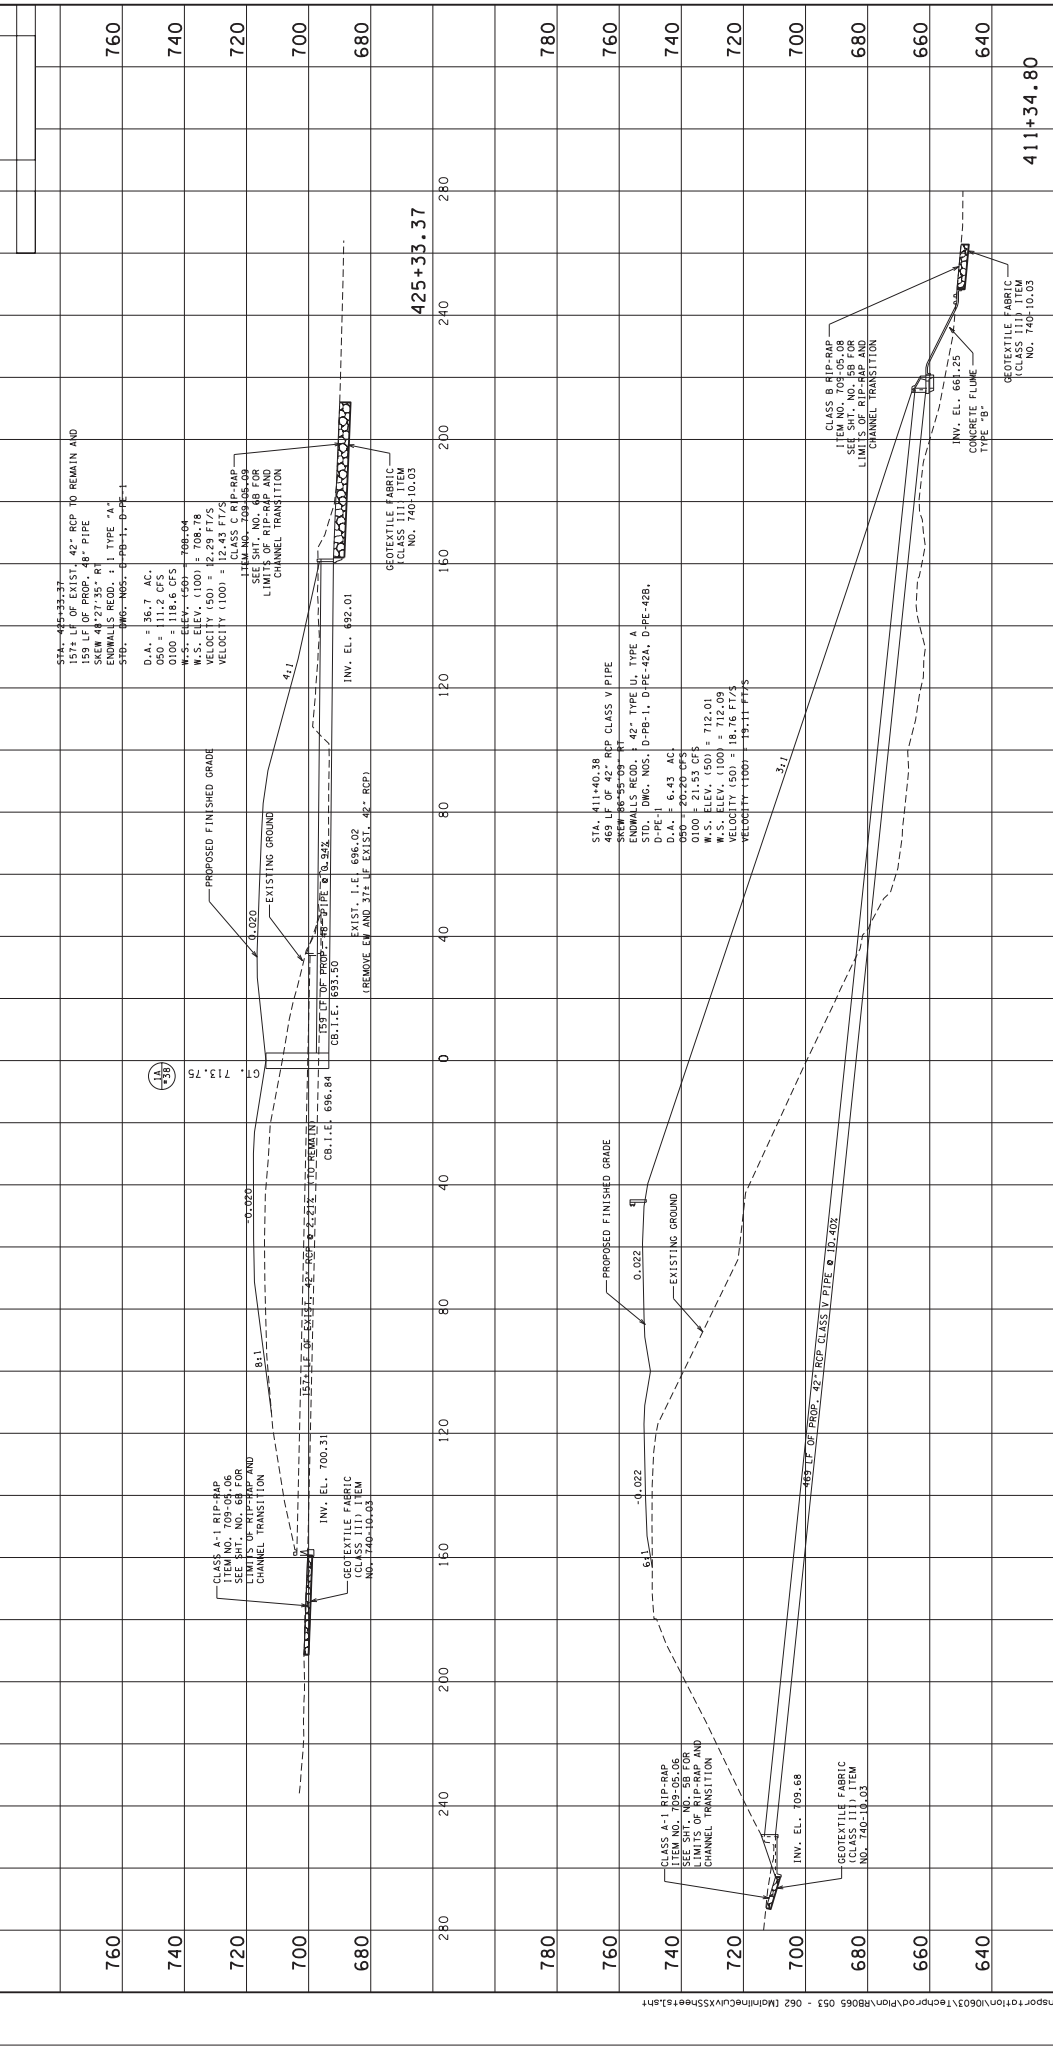


SEAL BY: \_\_\_\_\_

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION


**CULVERT CROSS-SECTIONS**  
STA. 411+34.80  
STA. 425+33.37  
SCALE: 1"=20' VERT.

SHEET NO.	PROJECT NO.	YEAR	TYPE
52	STP-651(1)	2012	R.O.W.
54	STP-651(1)	2017	CONST.

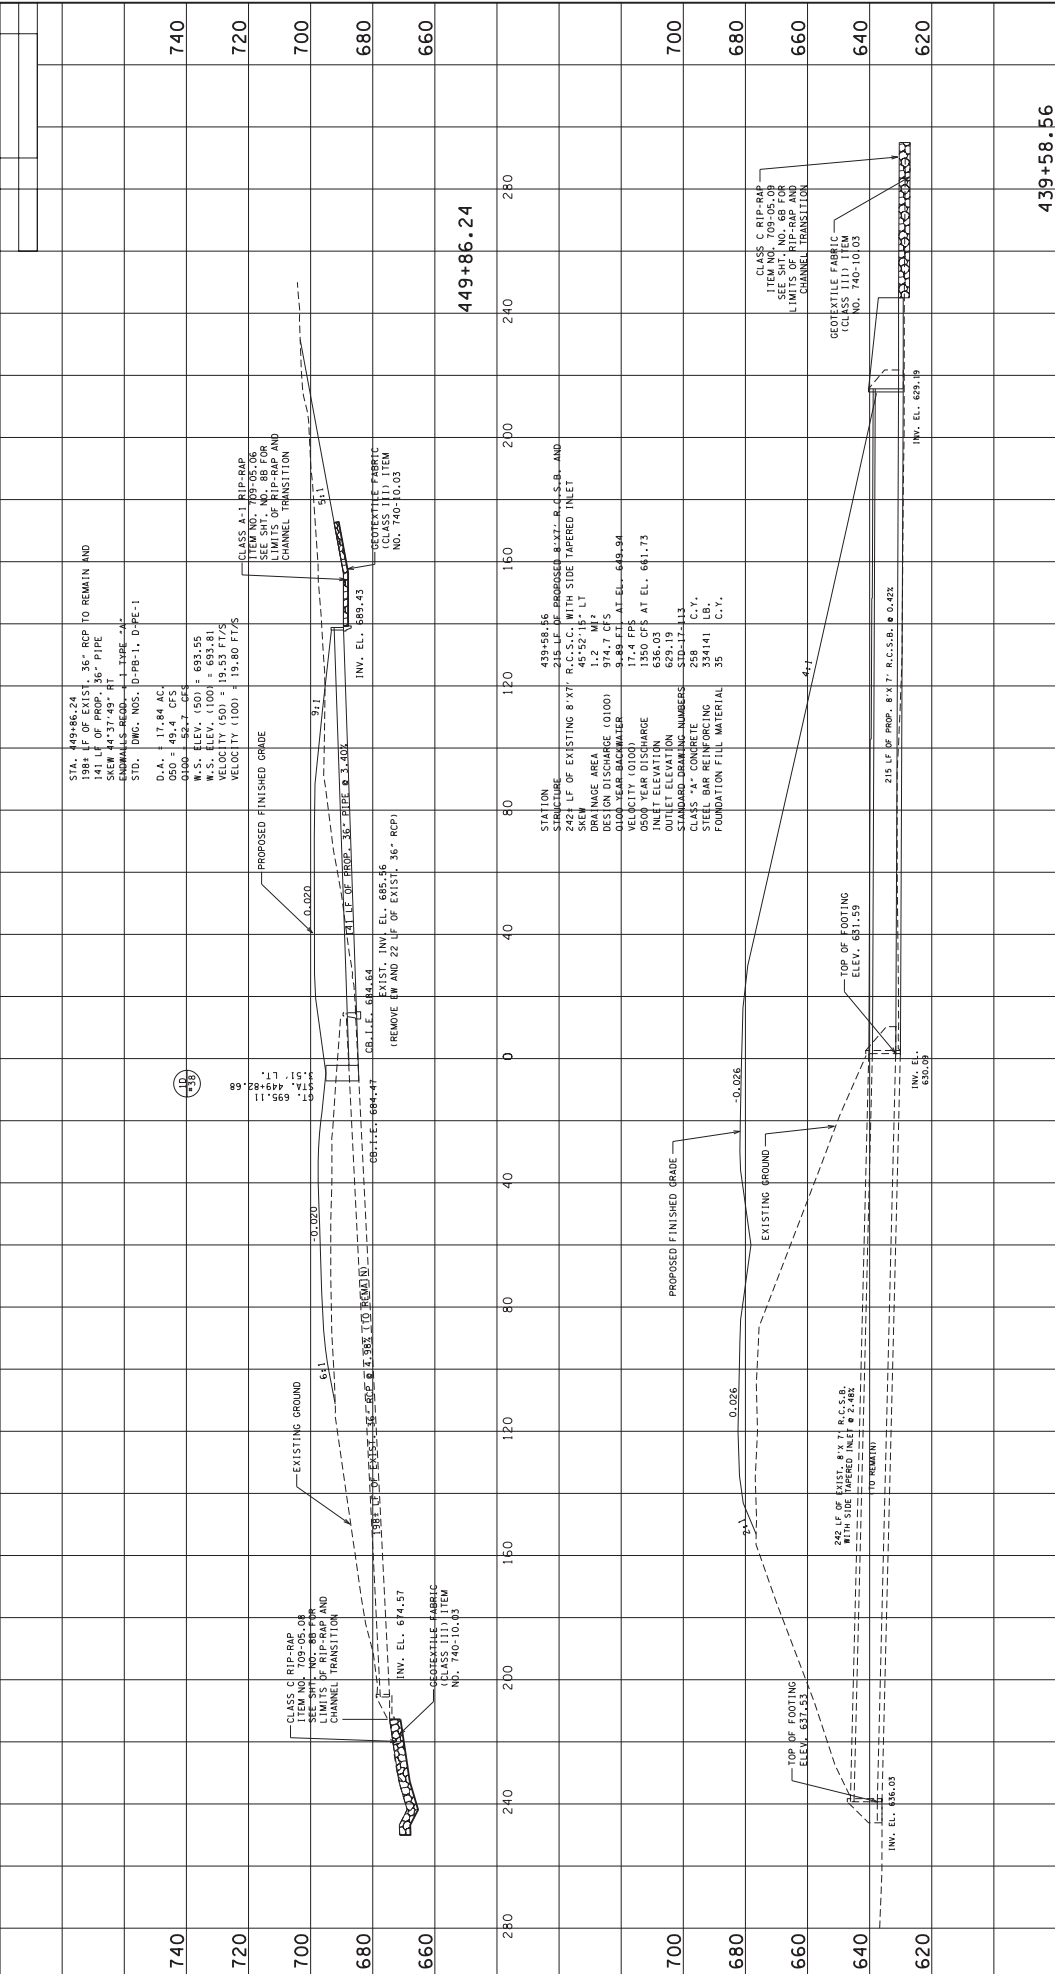

**439+58.56**

SEALED BY




DAVID PAST

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**CULVERT  
CROSS-SECTIONS**

STA. 439+58.56  
STA. 449+86.24  
SCALE: 1"=20' VERT.

PROJECT NO.	YEAR	TYPE	SHEET NO.
STP-6510	2012	R.O.W.	53
STP-6510	2017	CONST.	55

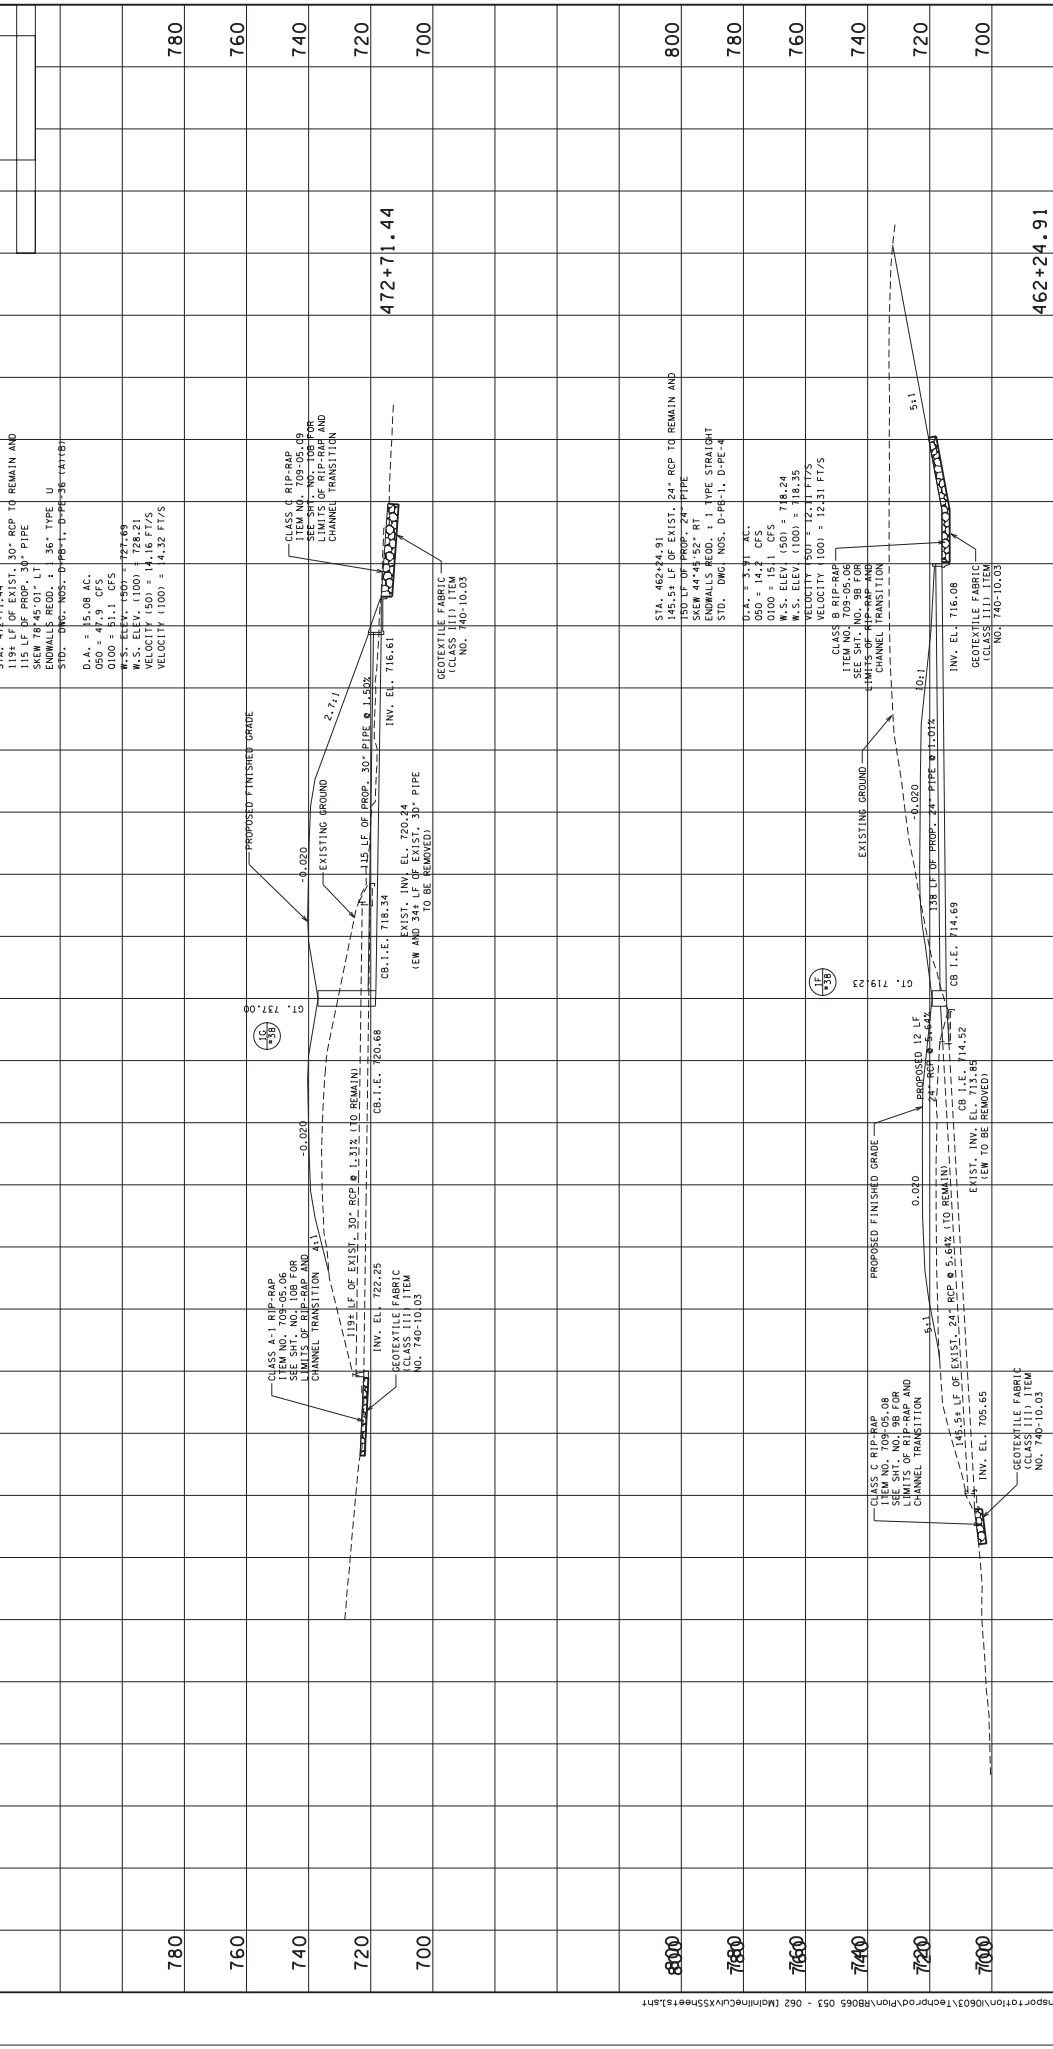

780 760 740 720 700 800 780 760 740 720 700

472+71.44

462+24.91

SEAL BY

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION


DAVID PAST

CULVERT  
CROSS-SECTIONS

STA. 462+24.91  
STA. 472+71.44  
SCALE: 1"=20' VERT.

SHEET NO.	PROJECT NO.
54	STP-6510
56	STP-6510

TYPE	YEAR
R.O.W.	2012
CONST.	2017

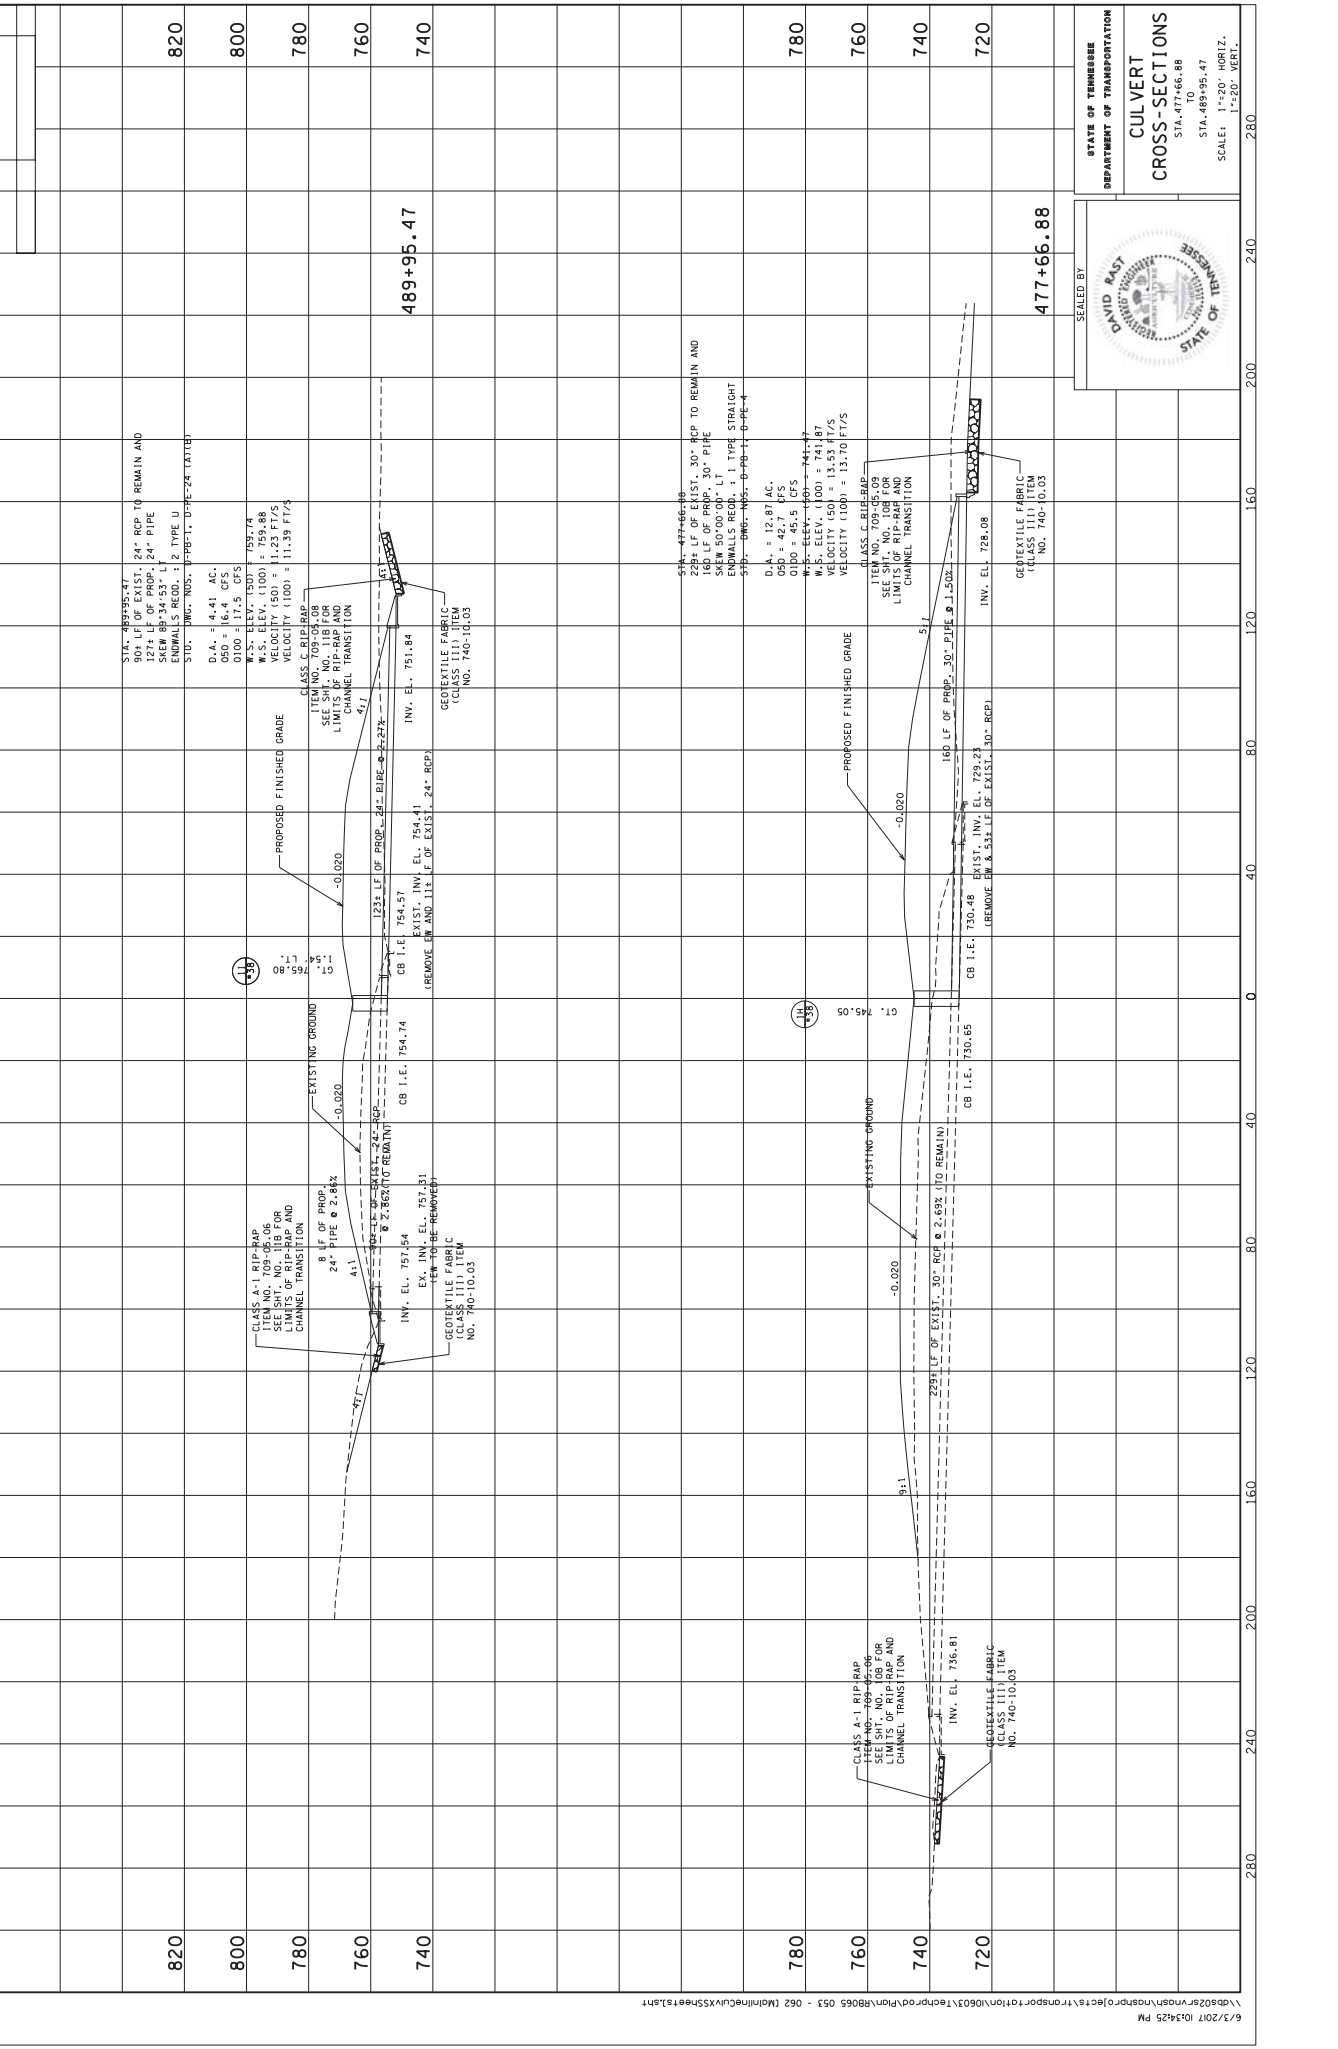


STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

DAVID PAST  
SEAL BY

CULVERT  
CROSS-SECTIONS  
STA. 489+95.47  
STA. 477+66.88  
SCALE: 1"=20' VERT.

SHEET NO.	PROJECT NO.	YEAR	TYPE
55	STP-6510	2012	R.O.W.
51	STP-6510	2017	CONST.

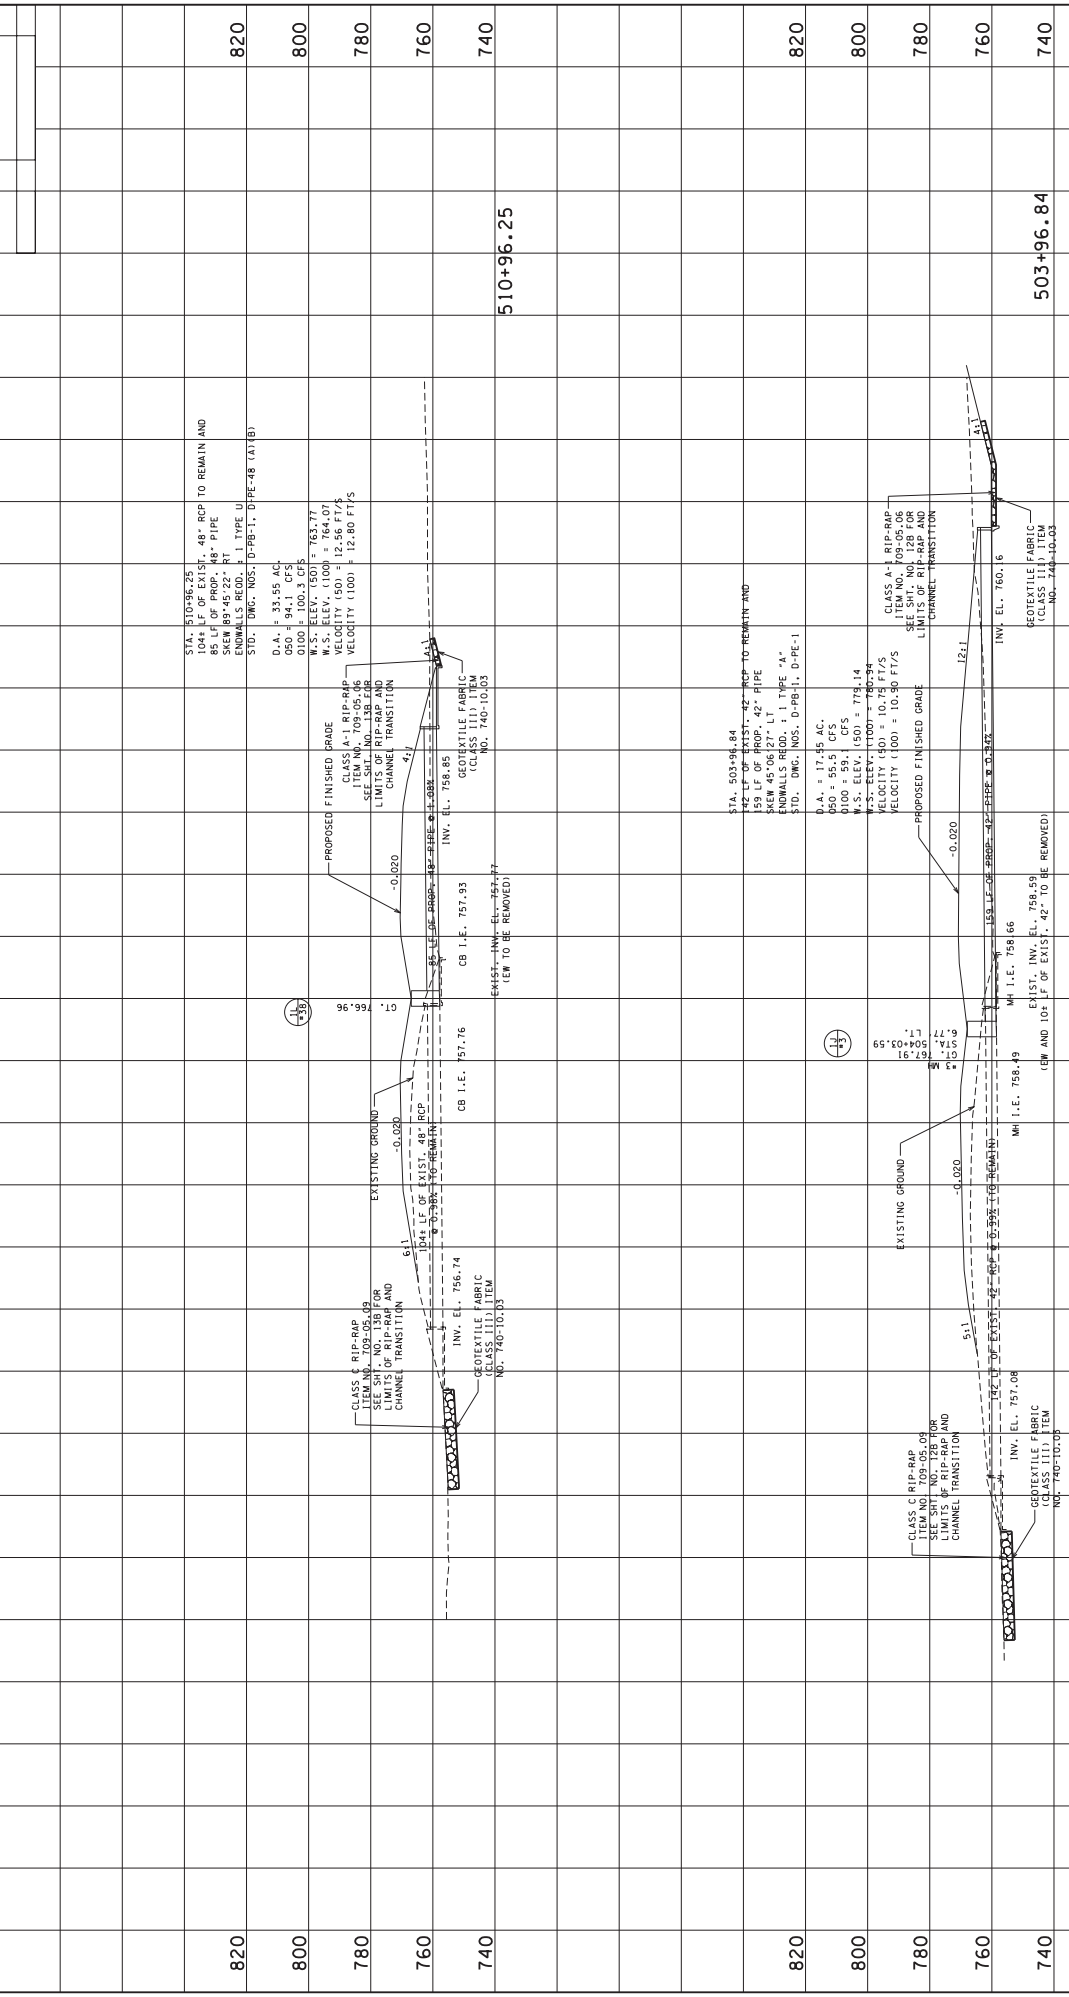

820	820	800	800	780	780	760	760	740	740
								510+96.25	503+96.84

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

DAVID PAST  
SEAL


CULVERT  
CROSS-SECTIONS

STA. 510+96.25  
STA. 503+96.84

SCALE: 1"=20' VERT.  
1"=20' HORIZ.



SHEET NO.		PROJECT NO.		TYPE	YEAR
57		STP-6510			
R.O.W. 2012					
CONST. 2017		STP-6510			59

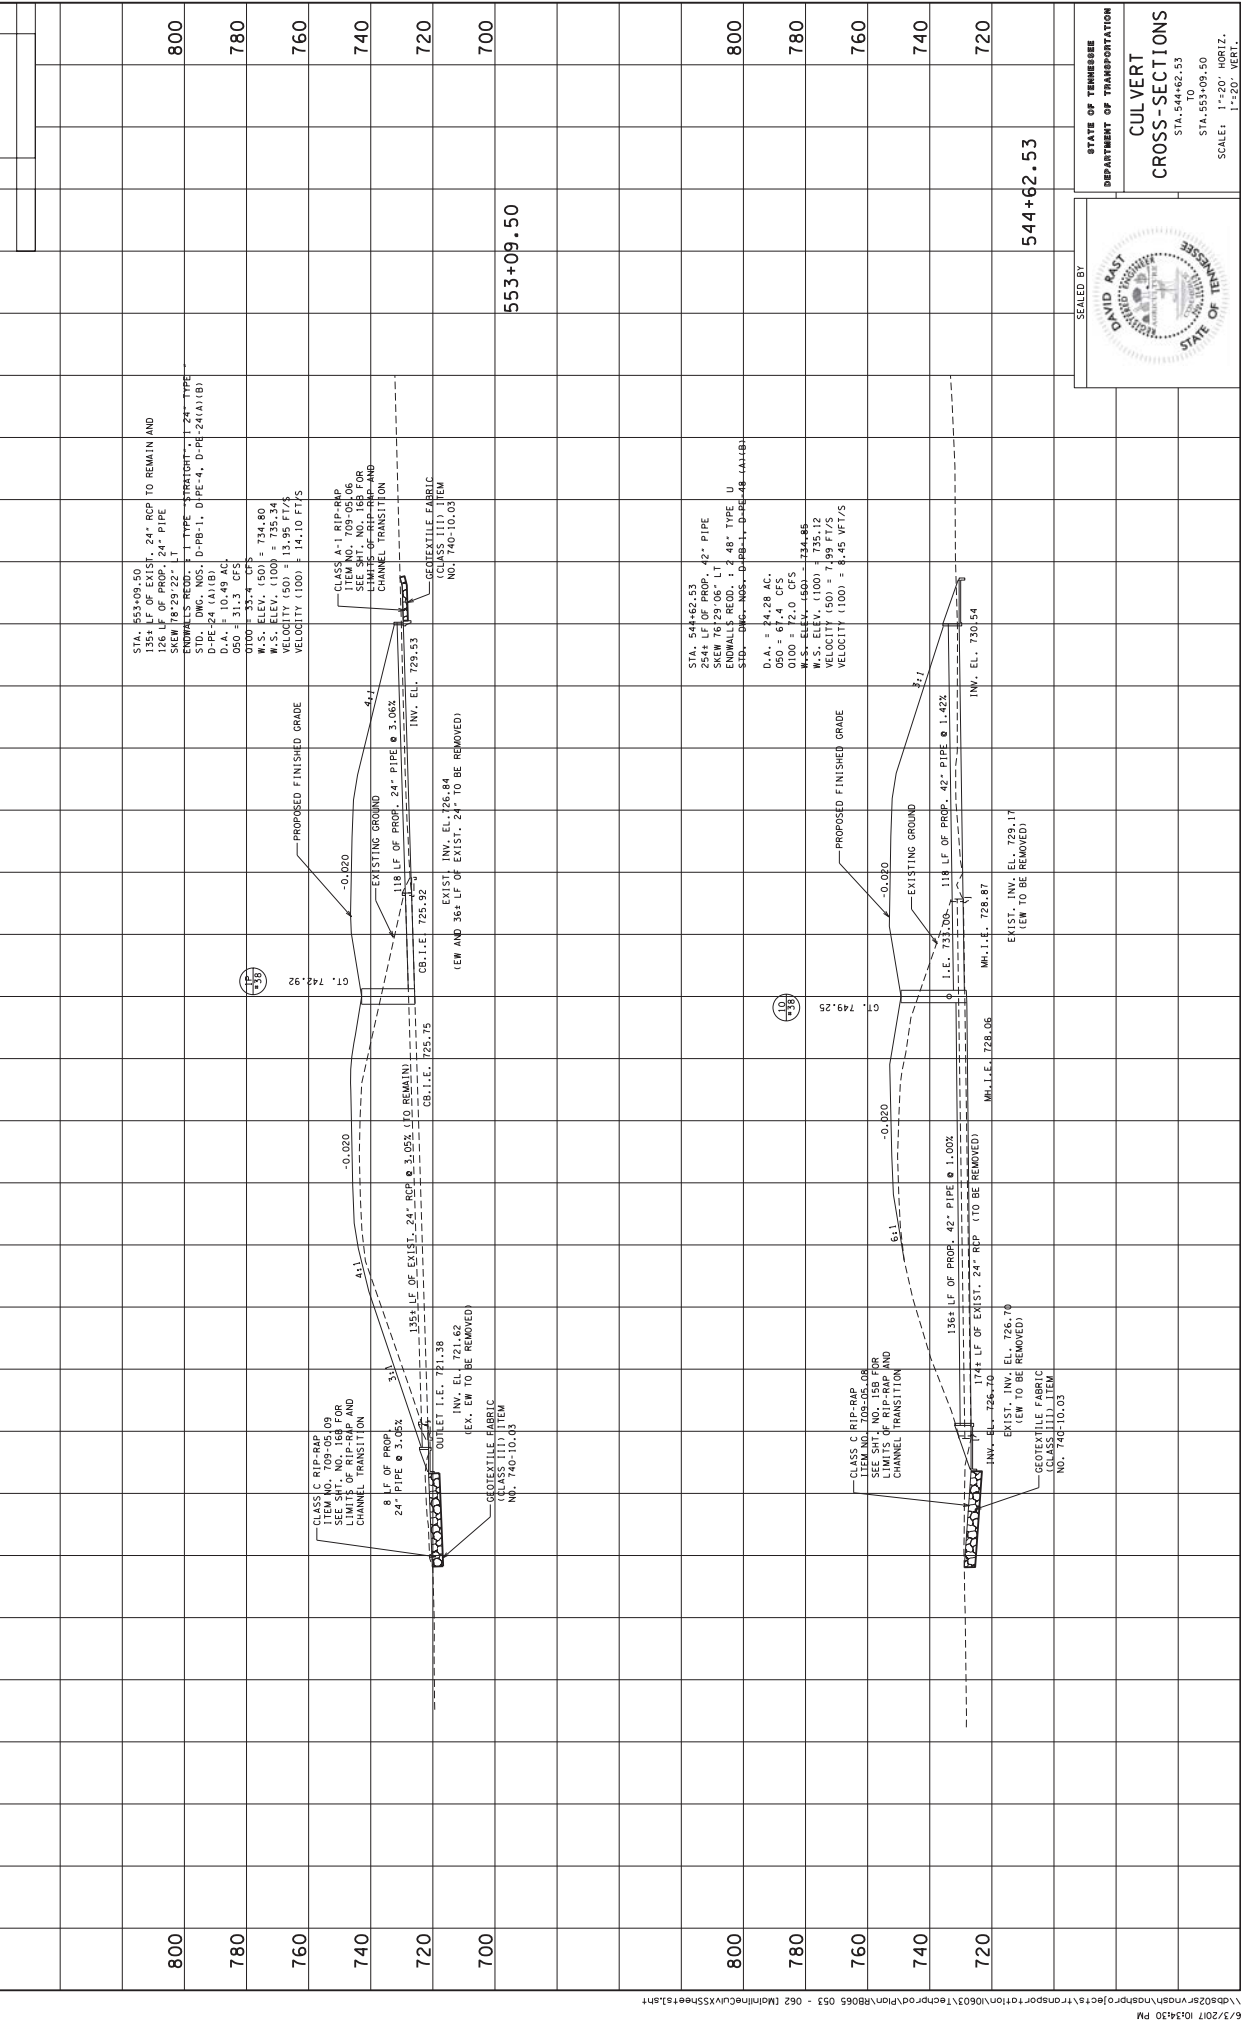


SEALED BY

DAVID PAST  
REGISTERED PROFESSIONAL ENGINEER  
STATE OF TENNESSEE  
No. 18087

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**CULVERT CROSS-SECTIONS**  
STA. 544+62.53  
STA. 553+09.50  
SCALE: 1" = 20' VERT.

PROJECT NO.	STP-6510
YEAR	2012
TYPE	CONST.
R.O.W.	2017
SHEET NO.	58
	60

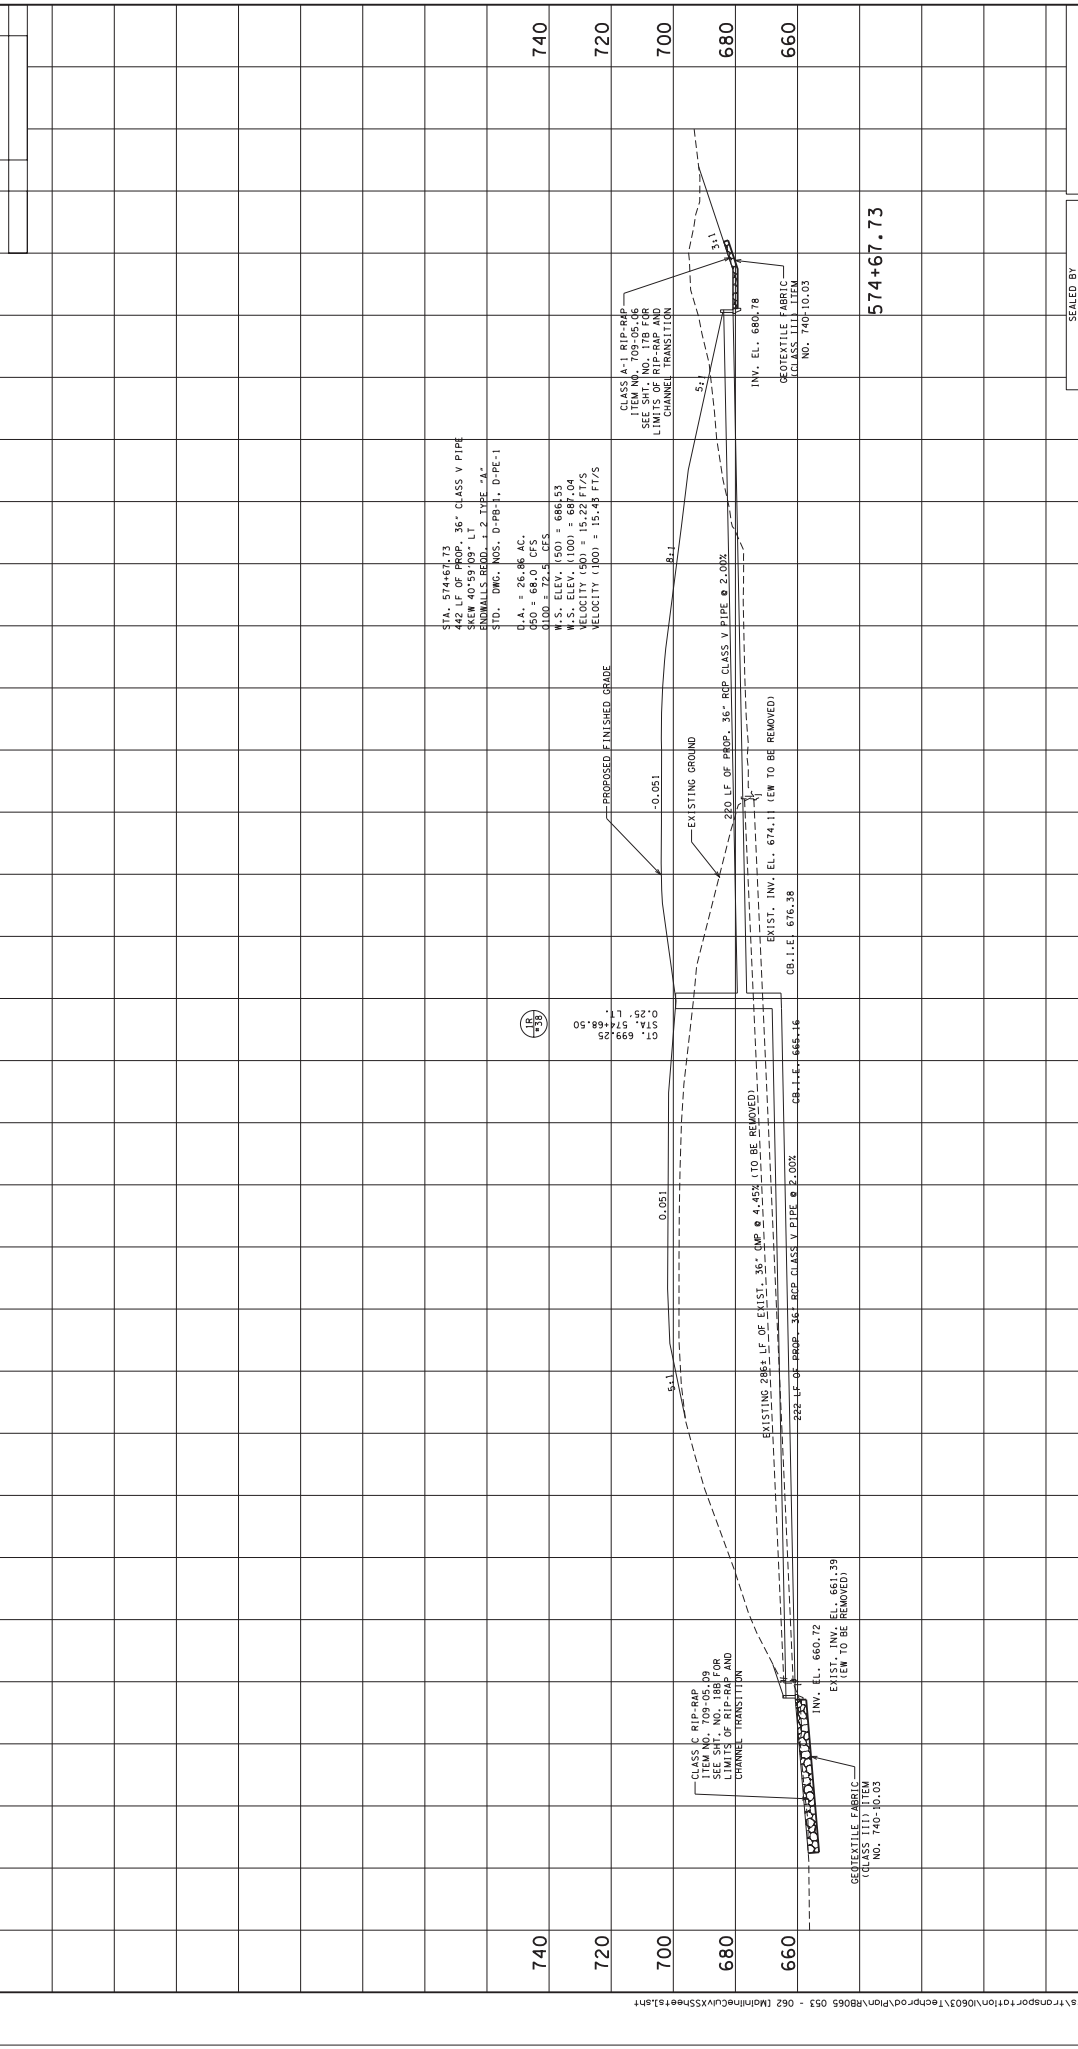

STA. 574+67.73  
 442 LF OF PROP. 36" CLASS V PIPE  
 SKEW 40°59'09" LT  
 ENDWALLS BEDD. 1-2 TYPE "A"  
 STD. DMG. NOS. D-PB-1, D-PE-1  
 D.A. = 26.86 AC.  
 Q50 = 68.0 CFS  
 Q100 = 72.5 CES  
 W.S. ELEV. 1000.88  
 W.S. ELEV. 1000.88  
 VELOCITY (50) = 15.22 FT/S  
 VELOCITY (100) = 15.48 FT/S

CLASS A RIP-RAP  
 ITEM NO. 709-05-09  
 LIMITS OF RIP-RAP AND  
 CHANNEL TRANSITION  
 INV. EL. 680.78  
 GEOTEXTILE FABRIC  
 (CLASS 111) ITEM  
 NO. 740-10.03


PROPOSED FINISHED GRADE  
 -0.051  
 EXISTING GROUND  
 0.051  
 280 LF OF PROP. 36" RCP CLASS V PIPE @ 2.00%  
 EXIST. INV. EL. 674.11 (EN TO BE REMOVED)  
 CB.I.E. 676.38

CLASS C RIP-RAP  
 ITEM NO. 709-05-09  
 LIMITS OF RIP-RAP AND  
 CHANNEL TRANSITION  
 INV. EL. 660.72  
 EXIST. INV. EL. 661.39  
 (EN TO BE REMOVED)  
 GEOTEXTILE FABRIC  
 (CLASS 111) ITEM  
 NO. 740-10.03

EXISTING 280' LF OF EXIST. 36" DM @ 4.45% (TO BE REMOVED)  
 282 LF OF PROP. 36" RCP CLASS V PIPE @ 2.00%  
 CB.I.E. 665.16

574+67.73


SEALED BY



STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION  
**CULVERT  
 CROSS-SECTIONS**  
 STA. 574+67.73  
 STA. 574+67.73  
 SCALE: 1"=20' VERT.



PROJECT NO.	STP-6510
YEAR	2012
TYPE	CONST.
R.O.W.	2017
SHEET NO.	61

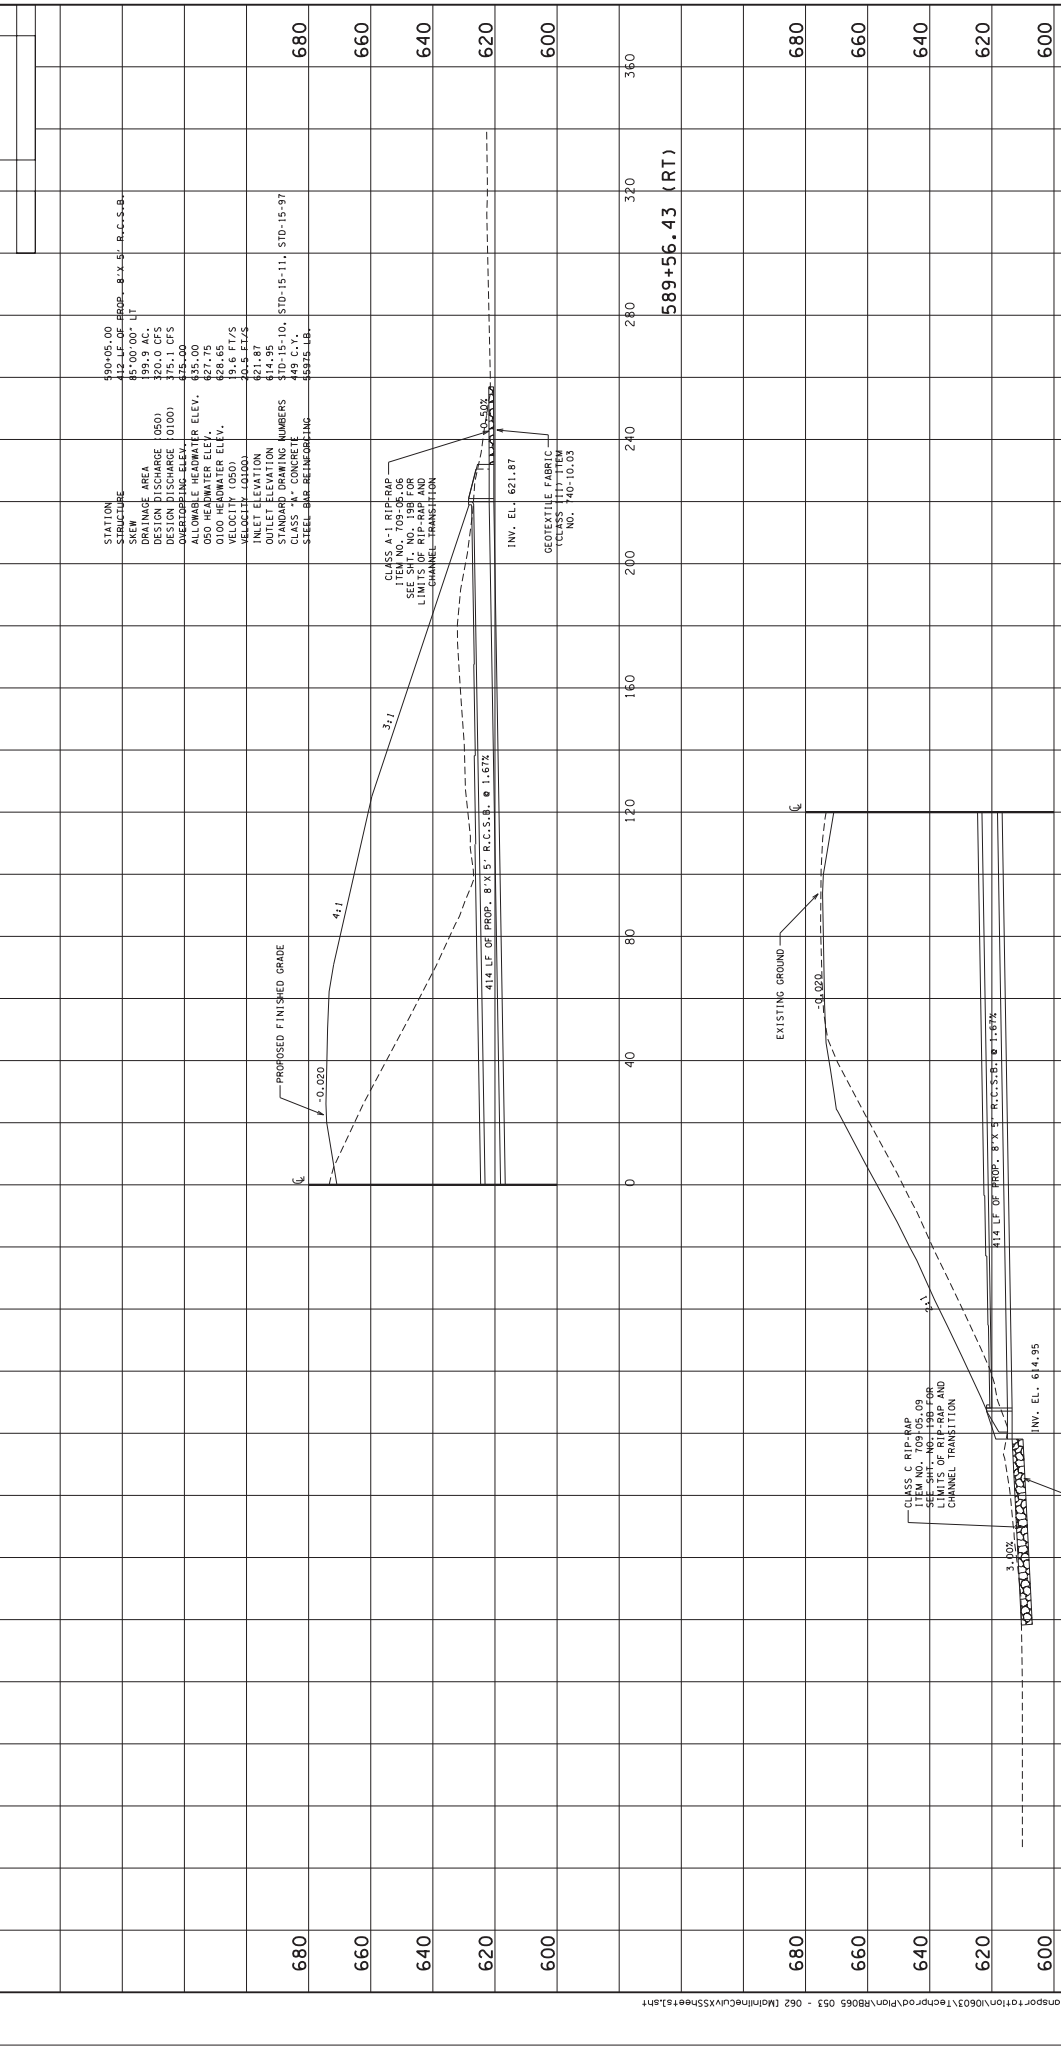

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

DAVID PAST  
REGISTERED PROFESSIONAL ENGINEER  
STATE OF TENNESSEE


SEALED BY

589+56.43 (LT)

589+56.43 (RT)

CULVERT  
CROSS-SECTIONS  
STA. 613+42.29  
STA. 613+42.29  
SCALE: 1"=20' VERT.

SHEET NO.	60
PROJECT NO.	STP-6510
YEAR	2012
TYPE	CONST.
R.O.W.	2017
CONST.	2017
	62

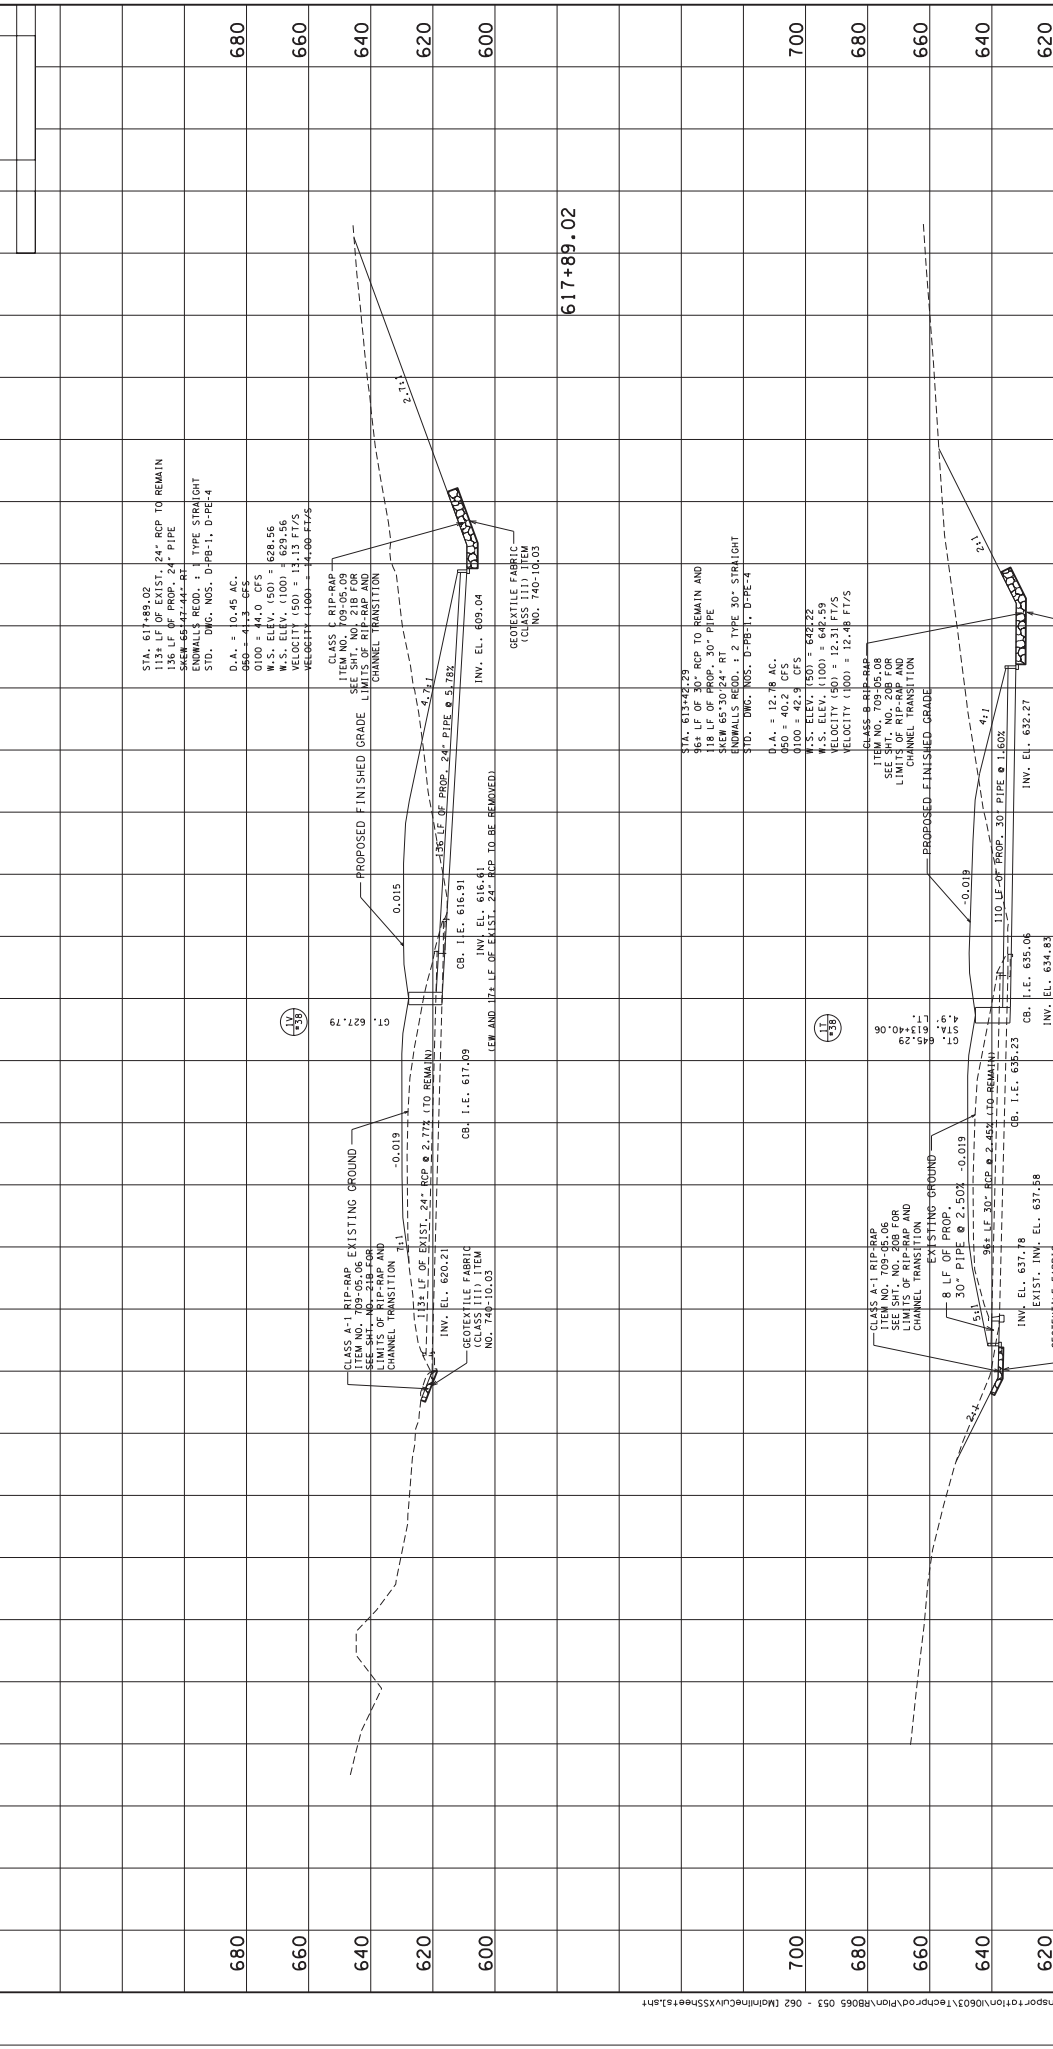


680	STA. 611+89.02 136 LF OF EXIST. 24" RCP TO REMAIN 136 LF OF PROP. 24" PIPE ITEM NO. 709-05-08 CLASS A-1 RIP-RAP LIMITS OF RIP-RAP AND CHANNEL TRANSITION STD. DWG. NOS. D-PB-1, D-PEL-4 D.A. = 10.45 AC. 0100 = 44.0 CFS W.S. ELEV. (50) = 628.56 W.S. ELEV. (100) = 629.56 VELOCITY (50) = 13.13 FT/S VELOCITY (100) = 14.06 FT/S	680
660	CLASS E RIP-RAP ITEM NO. 740-10-03 LIMITS OF RIP-RAP AND CHANNEL TRANSITION INV. EL. 609.04 GEOTEXTILE FABRIC (CLASS III) ITEM NO. 740-10-03	660
640	PROPOSED FINISHED GRADE LIMITS OF RIP-RAP AND CHANNEL TRANSITION ITEM NO. 709-05-08 CLASS A-1 RIP-RAP LIMITS OF RIP-RAP AND CHANNEL TRANSITION STD. DWG. NOS. D-PB-1, D-PEL-4 D.A. = 12.78 AC. 0100 = 42.3 CFS W.S. ELEV. (50) = 642.22 W.S. ELEV. (100) = 643.22 VELOCITY (50) = 12.31 FT/S VELOCITY (100) = 12.48 FT/S	640
620	CLASS B RIP-RAP ITEM NO. 709-05-08 LIMITS OF RIP-RAP AND CHANNEL TRANSITION STD. DWG. NOS. D-PB-1, D-PEL-4 D.A. = 12.78 AC. 0100 = 42.3 CFS W.S. ELEV. (50) = 642.22 W.S. ELEV. (100) = 643.22 VELOCITY (50) = 12.31 FT/S VELOCITY (100) = 12.48 FT/S	620
600	CLASS A-1 RIP-RAP ITEM NO. 709-05-08 LIMITS OF RIP-RAP AND CHANNEL TRANSITION STD. DWG. NOS. D-PB-1, D-PEL-4 D.A. = 12.78 AC. 0100 = 42.3 CFS W.S. ELEV. (50) = 642.22 W.S. ELEV. (100) = 643.22 VELOCITY (50) = 12.31 FT/S VELOCITY (100) = 12.48 FT/S	600
700	STA. 613+42.29 46 LF OF 30" RCP TO REMAIN AND 8 LF OF PROP. 30" PIPE ITEM NO. 740-10-03 ENDWALLS RECD. 1:2 TYPE 30" STRAIGHT STD. DWG. NOS. D-PB-1, D-PEL-4 D.A. = 12.78 AC. 0100 = 42.3 CFS W.S. ELEV. (50) = 642.22 W.S. ELEV. (100) = 643.22 VELOCITY (50) = 12.31 FT/S VELOCITY (100) = 12.48 FT/S	700
680	CLASS A-1 RIP-RAP ITEM NO. 709-05-08 LIMITS OF RIP-RAP AND CHANNEL TRANSITION STD. DWG. NOS. D-PB-1, D-PEL-4 D.A. = 12.78 AC. 0100 = 42.3 CFS W.S. ELEV. (50) = 642.22 W.S. ELEV. (100) = 643.22 VELOCITY (50) = 12.31 FT/S VELOCITY (100) = 12.48 FT/S	680
660	CLASS B RIP-RAP ITEM NO. 709-05-08 LIMITS OF RIP-RAP AND CHANNEL TRANSITION STD. DWG. NOS. D-PB-1, D-PEL-4 D.A. = 12.78 AC. 0100 = 42.3 CFS W.S. ELEV. (50) = 642.22 W.S. ELEV. (100) = 643.22 VELOCITY (50) = 12.31 FT/S VELOCITY (100) = 12.48 FT/S	660
640	CLASS A-1 RIP-RAP ITEM NO. 709-05-08 LIMITS OF RIP-RAP AND CHANNEL TRANSITION STD. DWG. NOS. D-PB-1, D-PEL-4 D.A. = 12.78 AC. 0100 = 42.3 CFS W.S. ELEV. (50) = 642.22 W.S. ELEV. (100) = 643.22 VELOCITY (50) = 12.31 FT/S VELOCITY (100) = 12.48 FT/S	640
620	CLASS B RIP-RAP ITEM NO. 709-05-08 LIMITS OF RIP-RAP AND CHANNEL TRANSITION STD. DWG. NOS. D-PB-1, D-PEL-4 D.A. = 12.78 AC. 0100 = 42.3 CFS W.S. ELEV. (50) = 642.22 W.S. ELEV. (100) = 643.22 VELOCITY (50) = 12.31 FT/S VELOCITY (100) = 12.48 FT/S	620

613+42.29  
SEALED BY


DAVID PAST  
STATE ENGINEER  
STATE OF TENNESSEE

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION  
CULVERT  
CROSS-SECTIONS  
STA. 611+89.02  
STA. 613+42.29  
SCALE: 1"=20' VERT.

SHEET NO.	PROJECT NO.	YEAR	TYPE	DATE	SCALE
61	STP-6510	2012	R.O.W.	2017	1" = 20'
62	STP-6510	2012	CONST.	2017	1" = 20'
63	STP-6510	2012	CONST.	2017	1" = 20'
800	REV. 12-15-15, REVISED CULVERT CROSS SECTION AT STA. 57+59.57 MT., SHARON ROAD.				800
780					780
760					760
740	68+92.00 (CAVE SPRINGS RD. W.)				740
760					760
740					740
720					720
700	57+59.57 (MT. SHARON RD.)				700
740					740
720					720
700					700
680	51+01.64 (OLD U.S. 431 N)				680

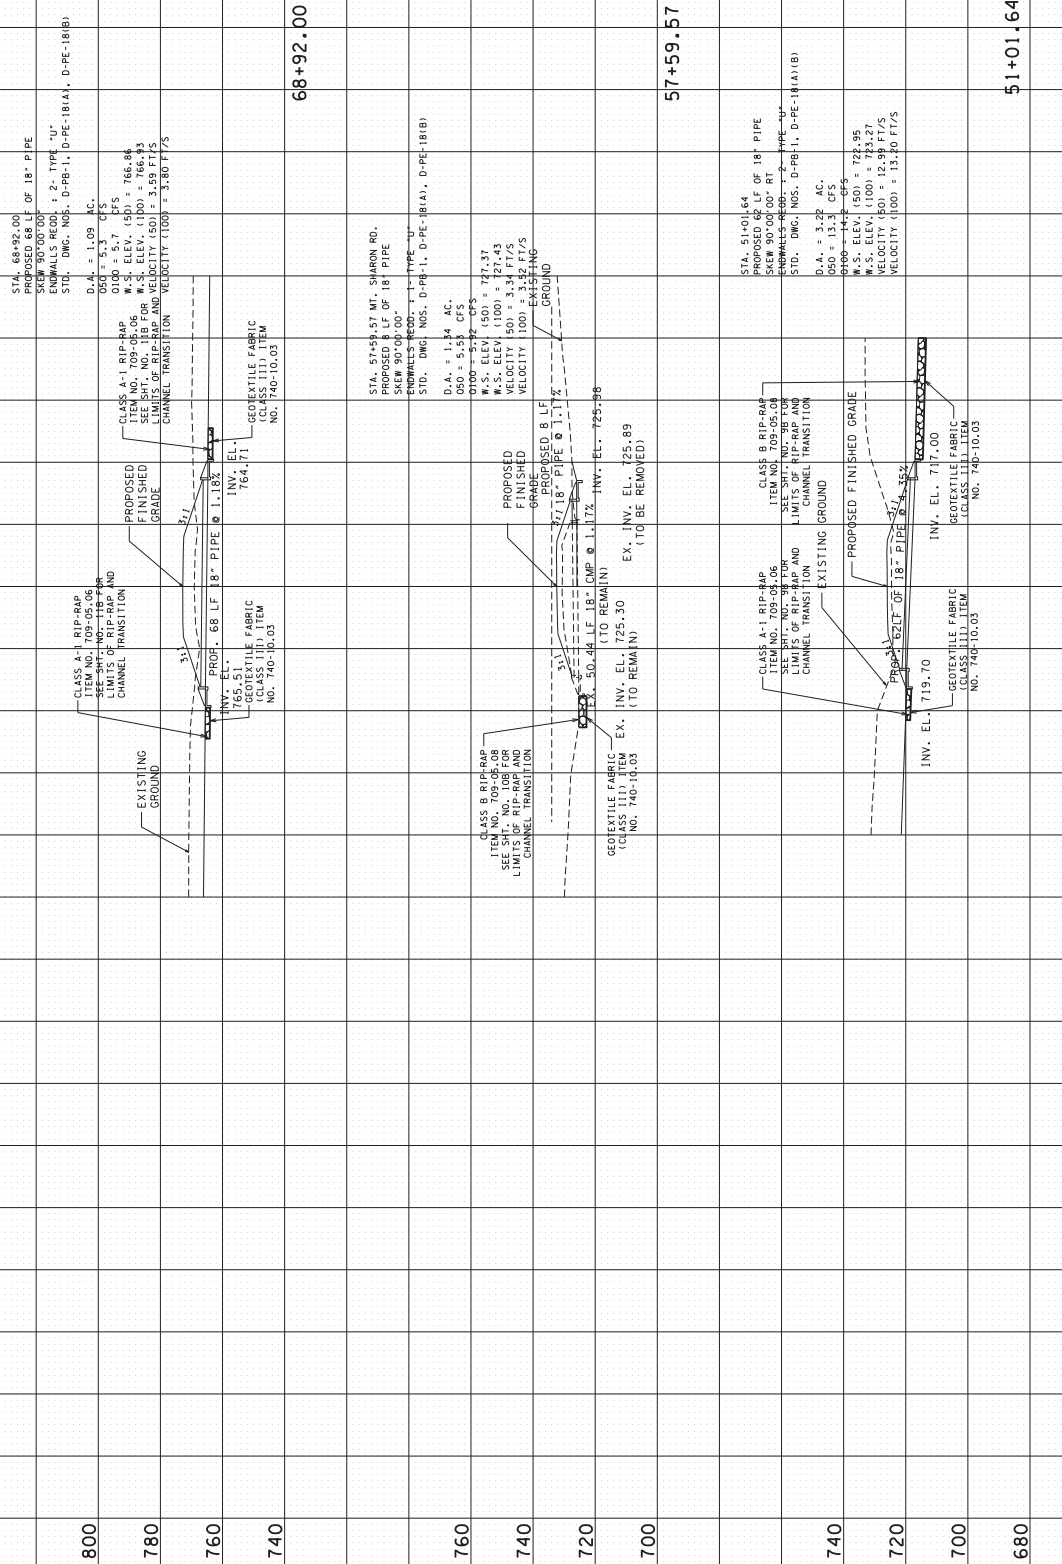

SHEET NO.	PROJECT NO.	YEAR	TYPE	ROW		TYPE	YEAR	PROJECT NO.	SHEET NO.
				2012	2017				
62	STP-6510							62	
64	STP-6510							64	
660								660	
640								640	
620								620	
600								600	
720								720	
700								700	
680								680	
660								660	
800								800	
780								780	
760								760	
740								740	

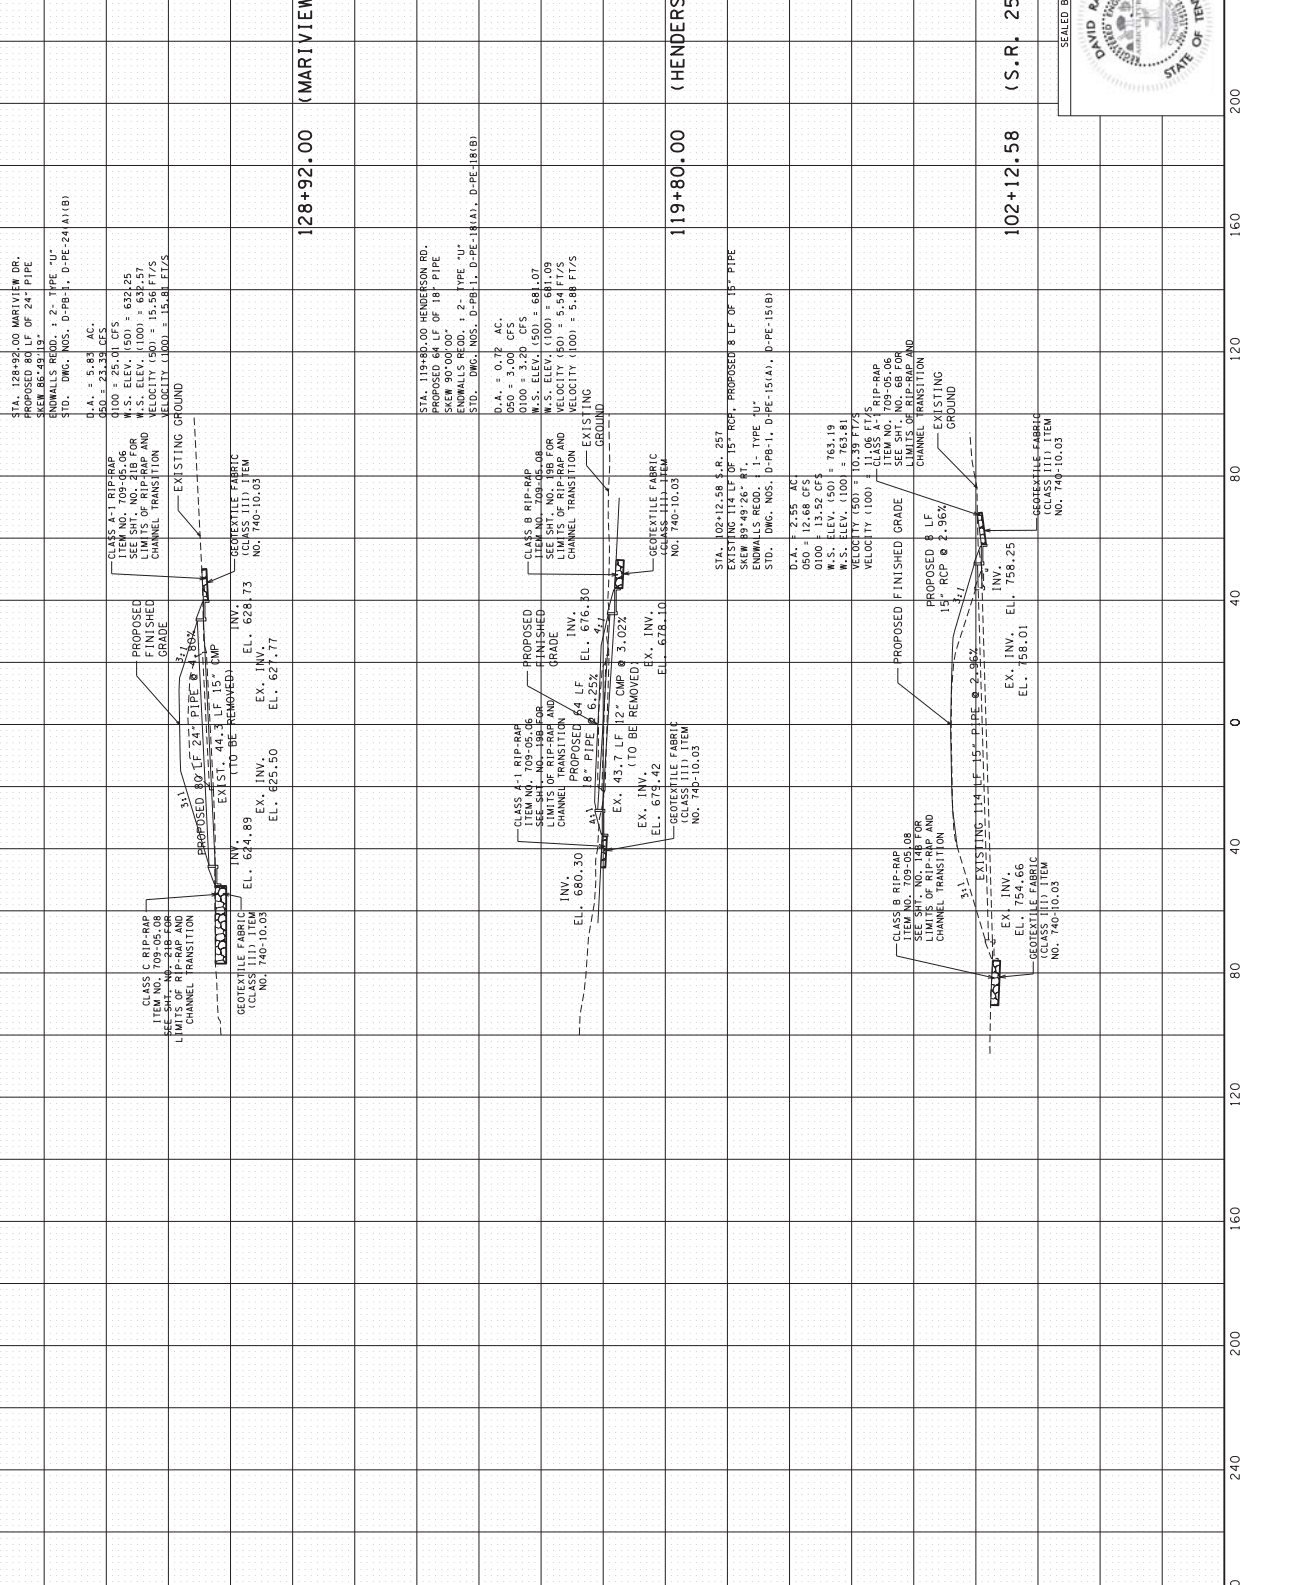

DAVID PAST  
 STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

CULVERT  
 CROSS-SECTIONS  
 STA. 439+56.56  
 STA. 449+66.24  
 SCALE: 1"=20' VERT.

280 240 200 160 120 80 40 0 40 80 120 160 200 240 280

## EPSC NOTES

- STREAMS, WETLANDS & BUFFER ZONES**
- ANY WORK WITHIN THE STREAM CHANNEL AREA (E.G. PIER FOOTING, RIP-RAP PLACEMENT, CULVERT/BRIDGE CONSTRUCTION, ETC.) SHALL BE SEPARATED FROM FLOWING WATER OR EXPECTED FLOW PATH AND PERFORMED DURING LOW FLOW CONDITIONS. ALL ITEMS USED WITHIN THE STREAM CHANNEL AREA FOR DIVERSION OF FLOW (OR EXPECTED FLOW), UNLESS SPECIFIED IN THE PLANS, SHALL NOT BE PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE COST OF OTHER ITEMS. THIS NOTE EXCLUDES ANY ITEMS SPECIFIED IN THE PLANS FOR THE TEMPORARY DIVERSION OF FLOW (E.G. ST-51) AND TEMPORARY DIVERSION CULVERTS (E.G. ST-32) FOR SINGLE BARREL CULVERT CONSTRUCTION.
  - ONCE WATER IS DIVERTED INTO A NEWLY CONSTRUCTED AND STABILIZED RELOCATED STREAM/CHANNEL, THE ECOLOGY SECTION SHALL BE NOTIFIED, THE STREAM NAME, STREAM NUMBER, AND DATE THE WATER WAS DIVERTED INTO THE NEWLY CONSTRUCTED STREAM / CHANNEL SHALL BE SUPPLIED WITH THE NOTIFICATION.

### UTILITY RELOCATION

- STORMWATER WHICH COLLECTS IN THE UTILITY TRENCH SHALL BE PUMPED INTO A DEWATERING STRUCTURE OR SEDIMENT FILTER BAG AND TREATED PRIOR TO DISCHARGE.
- SILT FENCE SHALL BE INSTALLED ON THE DOWNGRADIENT SIDE OF STOCKPILED SOIL. TRENCHING ACROSS WET WEATHER CONVEYANCES SHALL BE DONE DURING DRY CONDITIONS AND STABILIZED BY THE END OF THE WORK DAY.
- UTILITY CROSSINGS IN ENVIRONMENTAL FEATURES SHALL BE CONSTRUCTED IN ACCORDANCE WITH TDOT STANDARDS AND NO WORK SHALL BE CONDUCTED IN FLOWING WATERS. ENVIRONMENTAL PERMITS APPLY TO UTILITIES IN THIS PROJECT. THE STATE CONTRACTOR SHALL COMPLY WITH ALL REQUIREMENTS OF THE PERMITS.
- IT IS THE RESPONSIBILITY OF THE STATE UTILITY CONTRACTOR TO PROTECT EXPOSED EARTH FROM EROSION AND TO PROVIDE FOR CONTAINMENT OF SEDIMENT THAT MAY RESULT FROM THEIR WORK. PRIOR TO BEGINNING WORK, ADEQUATE MEASURES MUST BE IN PLACE TO TRAP ANY SEDIMENT THAT MAY TRAVEL OFFSITE IN THE EVENT OF RAIN. DURING THE PROGRESSION OF THEIR WORK, EXPOSED EARTH AREAS SHALL BE STABILIZED AS SOON AS POSSIBLE TO PREVENT EROSION. AT NO TIME SHALL EXPOSED EARTH RESULTING FROM THEIR OPERATIONS HAVE UNPROTECTED ACCESS TO FLOWING OFFSITE AND ENTERING WATERS OF THE STATE U.S.
- FOR THE INSTALLATION OF BURIED UTILITIES (PIPES AND CABLES), TRENCHES SHALL BE BACKFILLED DAILY AS CONSTRUCTION PROCEEDS. BACKFILLED TRENCHES SHALL BE SEEDED AND MULCHED OR SODDED DAILY IF POSSIBLE, BUT NO LATER THAN SEVEN DAYS AFTER BEING BACKFILLED. ANY TEMPORARY SPOILS OF EXCAVATED EARTH SHALL BE LOCATED WITHIN TDOT EPSC MEASURES OR RECEIVE SEPARATE EPSC MEASURES. IF TRENCHES ARE NOT BACKFILLED OVERNIGHT, THE STATE UTILITY CONTRACTOR SHALL MEASURE AND SHALL BE INSTALLED BY THE STATE UTILITY CONTRACTOR UNTIL SUCH TIME AS THE TRENCH IS BACKFILLED.
- IN REGARD TO EPSC, DEC REGULATIONS APPLY TO THE STATE UTILITY CONTRACTORS ON THIS PROJECT. THE STATE CONTRACTOR IS RESPONSIBLE FOR EPSC MEASURES RELATED TO UTILITY CONSTRUCTION INCLUDED IN THE STATE CONTRACT.
- TRENCHES FORMED FOR THE INSTALLATION OF BURIED UTILITIES MAY CAUSE STORMWATER RUNOFF TO CONCENTRATE AT THE TRENCH LINE. ADDITIONAL EPSC MEASURES MAY BE REQUIRED TO BE INSTALLED AS APPROVED BY THE TDOT PROJECT RESPONSIBLE PARTY.
- FOR THE INSTALLATION OF UNDERGROUND UTILITIES OUTSIDE OF THE TDOT RIGHT-OF-WAY, EPSC MEASURES SHALL BE INSTALLED PRIOR TO CLEARING, TRENCHING AND ASSOCIATED BLASTING IN THOSE AREAS NECESSARY TO PREVENT SEDIMENT FROM LEAVING THE CONSTRUCTION AREA. THESE EPSC MEASURES SHALL REMAIN UNTIL THE BACKFILLED TRENCH IS STABILIZED WITH FINAL VEGETATIVE COVER.
- THE UTILITY CONTRACTOR SHALL RESTORE ALL AFFECTED WET WEATHER CONVEYANCES TO PREVIOUS HYDRAULIC CONDITIONS AS APPROVED BY THE TDOT RESPONSIBLE PARTY.
- THE UTILITY CONTRACTOR WILL PROVIDE APPROPRIATE EPSC MEASURES TO REPLACE ON-SITE EPSC MEASURES REMOVED TO FACILITATE THE INSTALLATION OF UTILITIES. REPLACEMENT OF EPSC MEASURES WILL BE COORDINATED WITH THE TDOT RESPONSIBLE PARTY BEFORE COMMENCING WORK.

### TEMPORARY WETLAND IMPACT AREAS

- TOPSOIL IS TO BE REMOVED FROM ALL AREAS OF TEMPORARY WETLAND IMPACTS AND STOCKPILED PRIOR TO CONSTRUCTION.
- UPON COMPLETION OF CONSTRUCTION ACTIVITIES, TEMPORARY HAUL ROADS ARE TO BE REMOVED. EXCAVATED MATERIAL FROM THE HAUL ROADS IS TO BE DISPOSED OF AS DIRECTED BY THE ENGINEER.
- UPON COMPLETION OF CONSTRUCTION ACTIVITIES, ALL TEMPORARY WETLAND IMPACT AREAS ARE TO BE RESTORED TO PRE-CONSTRUCTION CONTOURS AND THE STOCKPILED WETLAND TOPSOIL SPREAD TO RESTORE THESE AREAS TO PRE-CONSTRUCTION ELEVATION.


### POLYACRYLAMIDE

- ENSURE POLYACRYLAMIDE (PAM) EMULSIONS AND POWDERS ARE OF THE ANIONIC TYPE AND MEET THE FOLLOWING REQUIREMENTS:
  - MEETS THE EPA AND FDA ACRYLAMIDE MONOMER LIMITS OF EQUAL TO OR GREATER THAN 0.005% ACRYLAMIDE MONOMER.
  - HAS A DENSITY OF 10% TO 55% BY WEIGHT AND A MOLECULAR WEIGHT OF 16 TO 24 MG/MOLE.
  - MIXTURE IS NON-COMBUSTIBLE.
  - CONTAINS ONLY MANUFACTURER'S RECOMMENDED ADDITIVES.
- PAM SHALL BE MIXED AND APPLIED IN ACCORDANCE WITH ALL OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA) MATERIAL SAFETY DATA SHEET REQUIREMENTS AND THE MANUFACTURER'S RECOMMENDATIONS FOR THE SPECIFIC SERIES CORRELATING TO ALL FEDERAL, STATE, AND LOCAL LAWS, RULES, AND REGULATIONS.
- ALL VENDORS AND SUPPLIERS OF PAM, PAM MIX, OR PAM BLENDS SHALL PRESENT OR SUPPLY A WRITTEN TOXICITY REPORT WHICH VERIFIES ACCEPTABLE TOXICITY PARAMETERS WHICH MEET OR EXCEED THE EPA REQUIREMENTS FOR THE STATE AND FEDERAL WATER QUALITY STANDARDS. WHILE EFFLUENT TESTING DOES NOT MEET THIS REQUIREMENT, THE CONTRACTOR SHALL OBTAIN AND PROVIDE TOXICITY TESTS TO THE STATE AND FEDERAL AGENCIES. TOXICITY TESTS HAVE BEEN REDUCED TO CHITOSAN AND PAM ARE NOT ALLOWED UNDER THIS SECTION DUE TO HIGH LEVELS OF TOXICITY TO AQUATIC ORGANISMS. PAM EMULSIONS SHALL NEVER BE APPLIED DIRECTLY TO STORMWATER RUNOFF OR RIPARIAN WATERS DUE TO SURFACTANT TOXICITY. THE CONTRACTOR MUST SEEK THE APPROVAL OF THE EPSC DESIGN ENGINEER AND TDOT IF CHITOSAN IS PROPOSED FOR USE ON THIS PROJECT.
- ALL VENDORS AND SUPPLIERS OF PAM, PAM MIX, OR PAM BLENDS SHALL SUPPLY WRITTEN SITE SPECIFIC TESTING RESULTS DEMONSTRATING A PERFORMANCE OF 95% OR GREATER REDUCTION OF NTU OR TSS FROM STORMWATER DISCHARGES.
- EMULSION BATCHES SHALL BE MIXED FOLLOWING RECOMMENDATIONS OF THE TESTING LABORATORY THAT DETERMINES THE PROPER PRODUCT FOR THE TARGET AREA. THE CONTRACTOR SHALL OBTAIN AND PROVIDE TOXICITY TESTS TO THE STATE AND FEDERAL AGENCIES. EMULSIONS SHALL NEVER BE APPLIED DIRECTLY TO STORMWATER RUNOFF OR RIPARIAN WATERS.
- PAM POWDER MAY BE APPLIED BY A HAND OR MECHANICAL SPREADER. MIXING PAM POWDER WITH DRY SILICA SAND WILL AID IN SPREADING.
- PREMIXING OF PAM POWDER INTO FERTILIZER, SEED, OR OTHER SOIL AMENDMENTS IS ALLOWED WHEN SPECIFIED IN THE DESIGN PLAN. APPLICATION METHOD SHALL ENSURE UNIFORM COVERAGE TO THE TARGET AREA.
- PAM LOSS OR BLOCS SHALL BE APPLIED FOLLOWING SITE TESTING RESULTS OF BLOCS PROPERLY APPLIED TO PREPARE AND MAINTAIN UNIFORM COVERAGE TO THE TARGET AREA. EMULSIONS SHALL NEVER EXCEED STATE AND FEDERAL WATER QUALITY REQUIREMENTS.

### ENVIRONMENTAL

- EXCEPT AS OTHERWISE SPECIFIED, THERE ARE NO KNOWN SPECIAL ENVIRONMENTAL FACTORS PRESENT ON THIS PROJECT THAT INDICATE A NEED FOR SEASONAL LIMITATIONS ON THE CLEARING, GRUBBING, EXCAVATION, GRADING, CUTTING OR FILLING OPERATIONS OR ON THE TOTAL AREA OF EXPOSED SOIL.

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-45(10)	63
CONST.	2017	STP-45(10)	65



STATE OF TENNESSEE  
DEPARTMENT OF  
TRANSPORTATION

EROSION  
PREVENTION &  
SEDIMENT CONTROL  
(EPSC) NOTES

(26) EMULSION BATCHES SHALL BE MIXED FOLLOWING RECOMMENDATIONS OF A TESTING LABORATORY THAT DETERMINES THE PROPER PRODUCT AND RATE TO MEET SITE REQUIREMENTS. APPLICATION METHOD SHALL ENSURE UNIFORM COVERAGE TO THE TARGET AREA. EMULSIONS SHALL NEVER BE APPLIED DIRECTLY TO STORMWATER RUNOFF OR RIPARIAN WATERS.

(27) PAM POWDER MAY BE APPLIED BY A HAND SPREADER OR A MECHANICAL SPREADER. MIXING PAM POWDER WITH DRY SILICA SAND WILL AID IN SPREADING.

(28) PREMIXING OF PAM POWDER INTO FERTILIZER, SEED, OR OTHER SOIL AMENDMENTS IS ALLOWED WHEN SPECIFIED IN THE DESIGN PLAN. APPLICATION METHOD SHALL ENSURE UNIFORM COVERAGE TO THE TARGET AREA.

(29) PAM LOGS OR BLOCKS SHALL BE APPLIED FOLLOWING SITE TESTING RESULTS TO ENSURE PROPER PLACEMENT AND PERFORMANCE AND SHALL MEET OR EXCEED STATE AND FEDERAL WATER QUALITY REQUIREMENTS.

#### TEMPORARY WETLAND IMPACT AREAS

(30) TOPSOIL IS TO BE REMOVED FROM ALL AREAS OF TEMPORARY WETLAND IMPACTS AND STOCKPILED PRIOR TO CONSTRUCTION.

(31) UPON COMPLETION OF CONSTRUCTION ACTIVITIES, TEMPORARY HAUL ROADS ARE TO BE REMOVED. EXCAVATED MATERIAL FROM THE HAUL ROADS IS TO BE DISPOSED OF AS DIRECTED BY THE ENGINEER.

(32) UPON COMPLETION OF CONSTRUCTION ACTIVITIES, ALL TEMPORARY WETLAND IMPACT AREAS ARE TO BE RESTORED TO PRE-CONSTRUCTION CONTOURS AND THE STOCKPILED WETLAND TOPSOIL SPREAD TO RESTORE THESE AREAS TO PRE-CONSTRUCTION ELEVATION.

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.M.	2012	STP-651.00	64
CONST.	2017	STP-651.00	66



SEALED BY

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

EROSION  
PREVENTION  
AND SEDIMENT  
CONTROL NOTES

TYPE	YEAR	PROJECT NO.	SHEET NO.
CONSTR.	2017	SIP-65H.01	67
R.O.M.	2012	SIP-65H.01	64A

**EROSION PREVENTION AND SEDIMENT CONTROL QUANTITIES**

ITEM NO.	DESCRIPTION	UNIT	QUANTITY
203-01	ROAD & DRAINAGE EXCAVATION (UNCLASSIFIED)	C.Y.	511541
209-02.05	12" TEMPORARY SLOPE DRAIN	L.F.	742
209-03.20	FILTER SOCK (8 INCH)	L.F.	4301
209-03.22	FILTER SOCK (18 INCH)	L.F.	910
209-05	SEDIMENT REMOVAL	C.Y.	8299
209-06.02	TEMPORARY SILT FENCE (WITH BACKING)	L.F.	3054
209-06.03	TEMPORARY SILT FENCE (WITHOUT BACKING)	L.F.	16624
209-06.04	TEMPORARY ENHANCED SILT FENCE	L.F.	515
209-08.04	ROCK CHECK DAM PER	EACH	627
209-08.08	ENHANCED ROCK CHECK DAM	EACH	169
209-09.01	SEDIMENT FILTER BAG (15' X 15')	EACH	5
209-10.20	TEMPORARY SEDIMENT TRAP	C.Y.	3164
209-40.42	CATCH BASIN FILTER ASSEMBLY (TYPE 2)	EACH	1
209-40.43	CATCH BASIN FILTER ASSEMBLY (TYPE 3)	EACH	21
209-45.01	TEMPORARY DIVERSION CHANNEL	L.F.	873
209-45.04	TEMPORARY IN STREAM DIVERSION	L.F.	156
303-10.01	MINERAL AGGREGATE (SIZE 57)	TON	108
621-03.06	42" TEMPORARY DRAINAGE PIPE	L.F.	135
621-03.07	48" TEMPORARY DRAINAGE PIPE	L.F.	104
707-08.11	HIGH-VISIBILITY CONSTRUCTION FENCE	L.F.	2904
709-05.06	MACHINED RIP-RAP (CLASS A-1)	TON	14304
740-10.03	GEOTEXILE (TYPE II) EROSION CONTROL	S.Y.	25949
740-11.02	TEMPORARY SEDIMENT TUBE 12IN	L.F.	2034
740-11.03	TEMPORARY SEDIMENT TUBE 18IN	L.F.	27850
740-11.05	TEMPORARY SEDIMENT TUBE 24IN	L.F.	2109
801-01.01	SEEDING (WITH MULCH)	UNITS	4378
801-01.07	TEMPORARY SEEDING (WITH MULCH)	UNITS	8756
801-02	SEEDING (WITHOUT MULCH)	UNITS	7
801-02.15	FERTILIZER	TONS	131
801-03	WATER (SEEDING & SODDING)	M.G.	1313
805-12.02	EROSION CONTROL BLANKET (TYPE II)	S.Y.	2227

**EPSC STAGE 1  
OUTFALL AREAS**

OUTFALL	AREA (AC.)	AVG SLOPE
1-1	1.7	18.7%
1-2	1.8	15.8%
1-3	4.0	4.5%
1-4	0.7	5.7%
1-5	1.5	11.7%
1-6	2.9	5.7%
1-7	0.6	14.8%
1-8	4.2	6.2%
1-9	0.5	2.3%
1-10	3.2	2.8%
1-11	0.9	7.0%
1-12	3.6	2.1%
1-13	1.3	3.0%
1-14	1.2	2.0%
1-15	2.6	0.8%

**EPSC STAGE 1  
OUTFALL AREAS**

OUTFALL	AREA (AC.)	AVG SLOPE
1-16	1.4	0.8%
1-17	1.4	1.5%
1-18	3.8	1.0%
1-19	1.0	1.5%
1-20	0.7	4.0%
1-21	3.2	3.8%
1-22	1.7	2.9%
1-23	1.6	3.3%
1-24	1.8	4.0%
1-25	7.9	3.9%
1-26	0.5	5.7%
1-27	7.5	4.9%
1-28	3.9	6.5%
1-29	3.6	5.0%

**EPSC STAGE 2  
OUTFALL AREAS**

OUTFALL	AREA (AC.)	AVG SLOPE
2-1	0.2	2.8%
2-2	0.4	22.3%
2-3	0.7	5.6%
2-4	2	15.0%
2-5	1.7	21.6%
2-6	1.9	27.9%
2-7	3.8	3.6%
2-8	1.4	7.1%
2-9	4.4	4.5%
2-10	4.7	5.4%
2-11	0.5	3.2%
2-12	3.2	2.5%
2-13	0.8	2.1%
2-14	5.4	2.0%
2-15	0.9	8.9%
2-16	3.3	2.7%
2-17	0.8	10.6%
2-18	1.3	7.0%
2-19	1.2	3.2%

**EPSC STAGE 2  
OUTFALL AREAS**

OUTFALL	AREA (AC.)	AVG SLOPE
2-20	0.3	6.0%
2-21	0.4	5.8%
2-22	2.6	1.6%
2-23	1.4	2.6%
2-24	1.4	3.7%
2-25	3.8	1.8%
2-26	1	3.6%
2-27	0.7	4.5%
2-28	0.4	2.3%
2-29	3.4	1.3%
2-30	3.2	3.5%
2-31	1.7	3.6%
2-32	1.6	4.3%
2-33	1.8	4.8%
2-34	7.9	4.2%
2-35	0.5	10.4%
2-36	7.5	4.7%
2-37	3.9	6.7%
2-38	39.2	3.7%

**EROSION PREVENTION AND SEDIMENT CONTROL LEGEND**

SYMBOL	ITEM	STD. DWG.
	HIGH VISIBILITY FENCE	S-F-1
	SEDIMENT FILTER BAG	EC-SIR-2
	SILT FENCE	EC-SIR-3B
	SILT FENCE WITH WIRE BACKING	EC-SIR-3C
	ENHANCED SILT FENCE	EC-SIR-3D
	ROCK CHECK DAM (V-DITCH)	EC-SIR-6
	ENHANCED ROCK CHECK DAM (V-DITCH)	EC-SIR-6A
	ENHANCED ROCK CHECK DAM (TRAPEZOIDAL DITCH)	EC-SIR-6A
	SEDIMENT TRAPPED CHECK DAM	EC-SIR-7
	SILT CHECK DAM	EC-SIR-8
	CULVERT PROTECTION (TYPE 1)	EC-SIR-11
	TEMPORARY CULVERT CROSSING (2'-42" - 1'-48")	EC-SIR-25
	TEMPORARY BERM	EC-SIR-27
	TEMPORARY SLOPE DRAIN	EC-SIR-27
	TEMPORARY DIVERSION CHANNEL (DESCRIBE SIZE AND TYPE OF LINING)	EC-SIR-31
	EROSION CONTROL BLANKET	EC-SIR-34
	SEDIMENT TUBE	EC-SIR-37
	CATCH BASIN FILTER ASSEMBLY (TYPE 2)	EC-SIR-42
	CATCH BASIN FILTER ASSEMBLY (TYPE 3)	EC-SIR-43

**EPSC STAGE 3  
OUTFALL AREAS**

OUTFALL	AREA (AC.)	AVG SLOPE
3-65	9.4	5.4%
3-66	4.4	8.9%
3-67	0.8	6.3%
3-68	0.5	7.5%
3-69	1.2	7.9%
3-70	49.4	6.2%

**EPSC STAGE 3  
OUTFALL AREAS**

OUTFALL	AREA (AC.)	AVG SLOPE
3-43	3.0	1.7%
3-44	1.5	0.7%
3-45	0.8	2.4%
3-46	2.9	1.6%
3-47	2.5	5.1%
3-48	0.9	2.8%
3-49	0.5	3.1%
3-50	2.6	2.1%
3-51	2.7	1.2%
3-52	3.6	6.2%
3-53	0.9	10.6%
3-54	0.9	3.9%
3-55	2.3	4.6%
3-56	0.9	0.7%
3-57	1.5	4.1%
3-58	2.0	2.3%
3-59	2.9	9.4%
3-60	0.8	4.5%
3-61	4.9	5.0%
3-62	0.3	5.5%
3-63	1.9	3.2%
3-64	1.8	2.4%

**EPSC STAGE 3  
OUTFALL AREAS**

OUTFALL	AREA (AC.)	AVG SLOPE
3-21	1.2	6.7%
3-22	2.0	3.0%
3-23	1.1	1.8%
3-24	5.4	4.7%
3-25	2.3	2.6%
3-26	0.6	18.9%
3-27	1.3	1.0%
3-28	0.6	1.5%
3-29	3.0	4.1%
3-30	0.7	5.4%
3-31	1.4	1.7%
3-32	3.6	3.2%
3-33	0.7	9.3%
3-34	4.7	8.1%
3-35	0.3	2.7%
3-36	0.4	2.4%
3-37	1.4	2.5%
3-38	1.0	5.9%
3-39	1.9	1.9%
3-40	1.1	7.6%
3-41	1.0	7.4%
3-42	1.5	0.8%

**EPSC STAGE 3  
OUTFALL AREAS**


OUTFALL	AREA (AC.)	AVG SLOPE
3-1	0.3	4.1%
3-2	0.6	3.5%
3-3	1.0	1.7%
3-4	1.9	1.9%
3-5	1.0	35.0%
3-6	1.5	4.3%
3-7	1.5	32.6%
3-8	2.4	13.7%
3-9	3.8	4.0%
3-10	0.2	9.3%
3-11	1.9	2.2%
3-12	2.8	4.5%
3-13	0.8	11.5%
3-14	7.9	3.7%
3-15	2.9	7.4%
3-16.1	6.8	6.2%
3-16.2	1.8	2.3%
3-16.3	1.2	6.7%
3-17	0.6	2.9%
3-18	1.3	4.7%
3-19	0.3	2.6%
3-20	1.8	3.7%



STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EROSION PREVENTION AND SEDIMENT CONTROL NOTES**

SHEET NO.	PROJECT NO.	YEAR	TYPE
65	STP-65(10)	2012	R.O.W.
66	STP-65(10)	2017	CONST.
68			

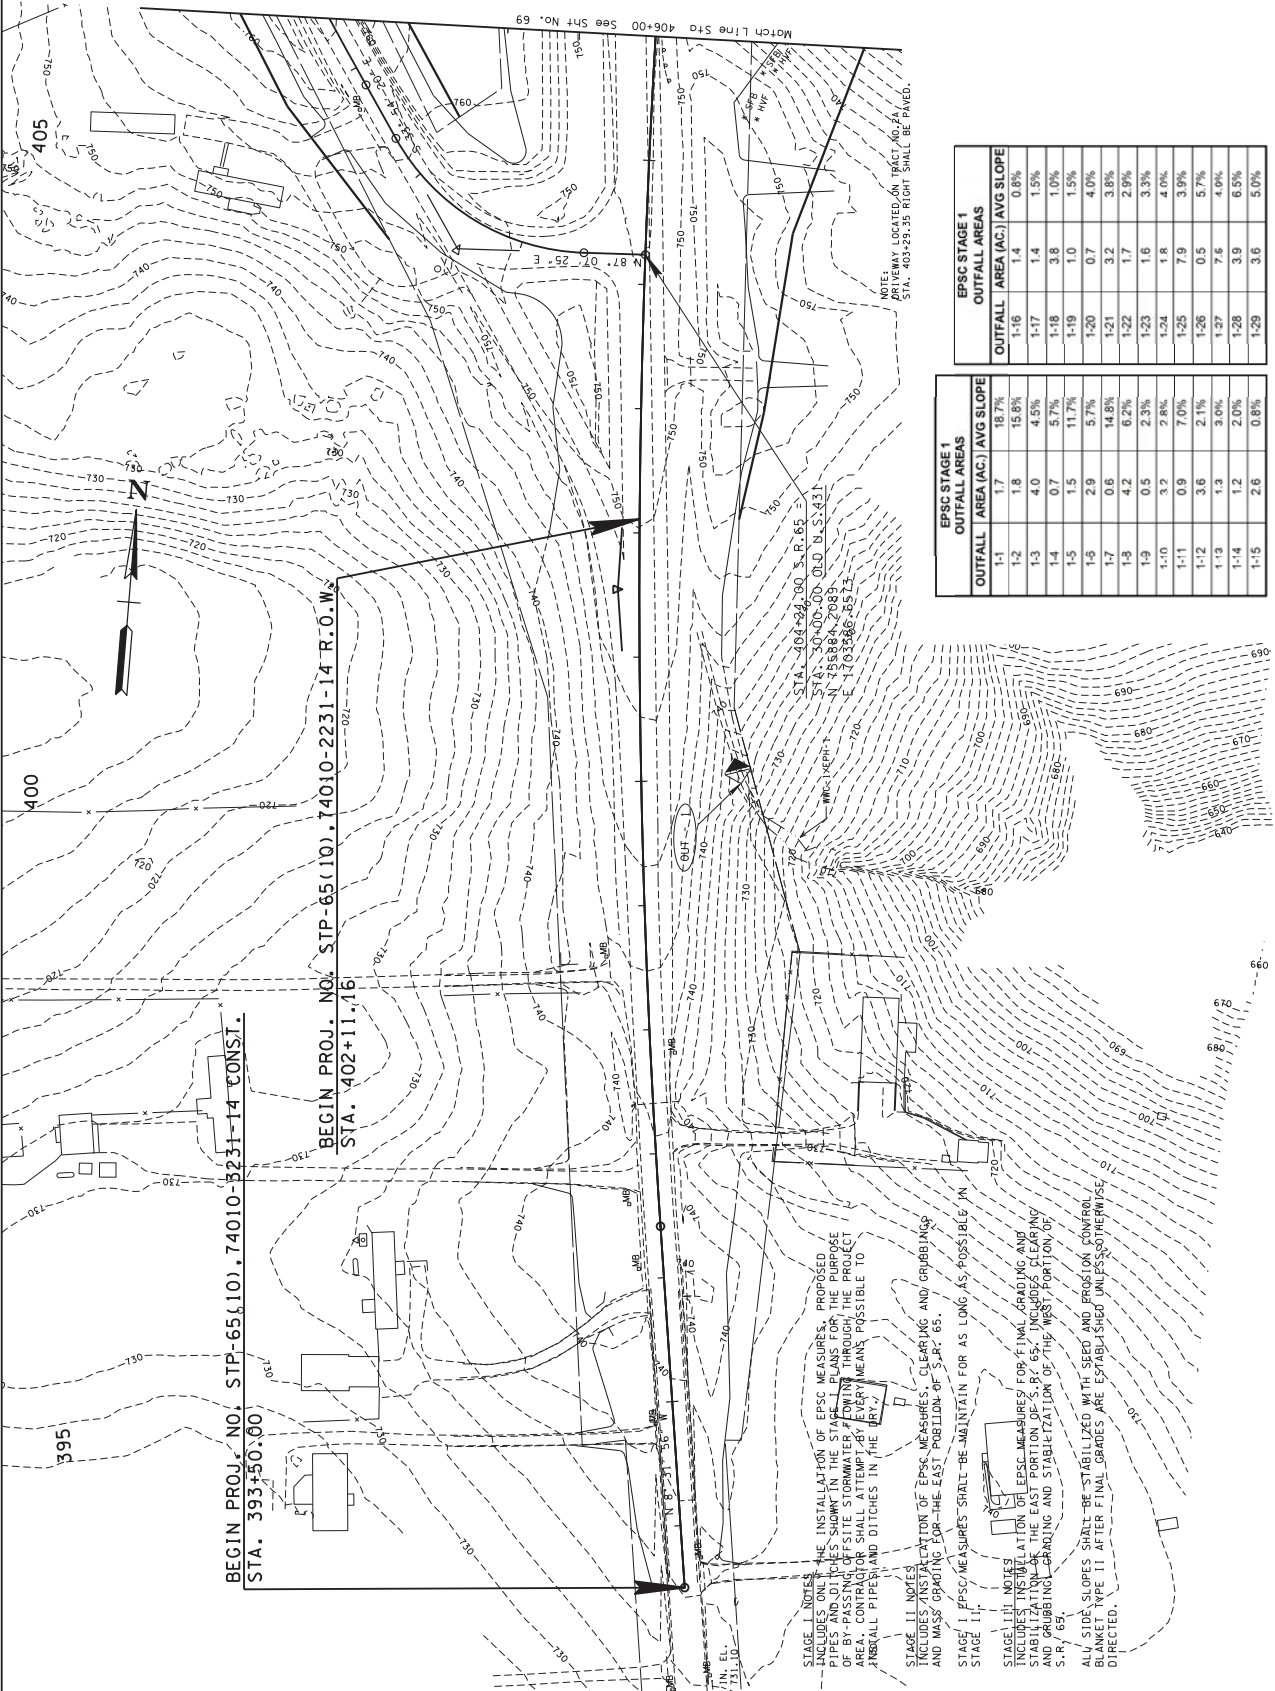

COORDINATES ARE UTM 83N UTM ZONE 18N. ALL ELEVATIONS ARE REFERENCED TO THE UGSD 1988. THE TOP ALL ELEVATIONS ARE REFERENCED TO THE UGSD 1988.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE I

REC. OF PROJ. TO STA. 406+00  
SCALE: 1" = 50'

EPSC STAGE I OUTFALL AREAS		
OUTFALL	AREA (AC.)	AVG SLOPE
1-1	1.7	18.7%
1-2	1.8	15.8%
1-3	4.0	4.5%
1-4	0.7	5.7%
1-5	1.5	11.7%
1-6	2.9	5.7%
1-7	0.6	14.8%
1-8	4.2	6.2%
1-9	0.5	2.3%
1-10	3.2	2.8%
1-11	0.9	7.0%
1-12	3.6	2.1%
1-13	1.3	3.0%
1-14	1.2	2.0%
1-15	2.6	0.8%

EPSC STAGE I OUTFALL AREAS		
OUTFALL	AREA (AC.)	AVG SLOPE
1-16	1.4	0.8%
1-17	1.4	1.5%
1-18	3.8	1.0%
1-19	1.0	1.5%
1-20	0.7	4.0%
1-21	3.2	3.8%
1-22	1.7	2.9%
1-23	1.6	3.3%
1-24	1.8	4.0%
1-25	7.9	3.9%
1-26	0.5	5.7%
1-27	7.6	4.0%
1-28	3.9	6.5%
1-29	3.6	5.0%

STAGE I NOTES  
INCLUDES THE INSTALLATION OF EPSC MEASURES, PROPOSED PIPES AND DITCHES SHOWN IN THE STAGE I PLAN FOR THE PURPOSE OF STABILIZATION OF THE EAST PORTION OF S.R. 65. THIS PROJECT AREA CONTROL SHALL BE MAINTAINED BY THE CONTRACTOR. ALL EXISTING PIPES AND DITCHES IN THE AREA SHALL BE MAINTAINED.

STAGE II NOTES  
INCLUDES THE INSTALLATION OF EPSC MEASURES, CLEARING AND GRUBBING AND MASS GRADING FOR THE EAST PORTION OF S.R. 65.

STAGE I EPSC MEASURES SHALL BE MAINTAINED FOR AS LONG AS POSSIBLE IN STAGE II.

STAGE II NOTES  
INCLUDES THE INSTALLATION OF EPSC MEASURES FOR FINAL GRADING AND STABILIZATION OF THE EAST PORTION OF S.R. 65. INCLUDES CLEARING AND GRUBBING AND STABILIZATION OF THE WEST PORTION OF S.R. 65.


ALL SLOPE SLOPES SHALL BE STABILIZED WITH SEED AND PROTECTIVE COVER OR BLANKET TYPE II AFTER FINAL GRADING ARE ESTABLISHED UNLESS OTHERWISE DIRECTED.

NOTE: ANY LOCATED IN PROJECT AREA SHALL BE PAVED.

STA. 402+24.00 S. R. 65  
STA. 30+00.00 OLD N.S. 421  
N 133884.2885  
E 1103386.3512



TYPE	YEAR	PROJECT NO.	SHEET NO.
CONST.	2017	STP-65101	66
		STP-65101	69

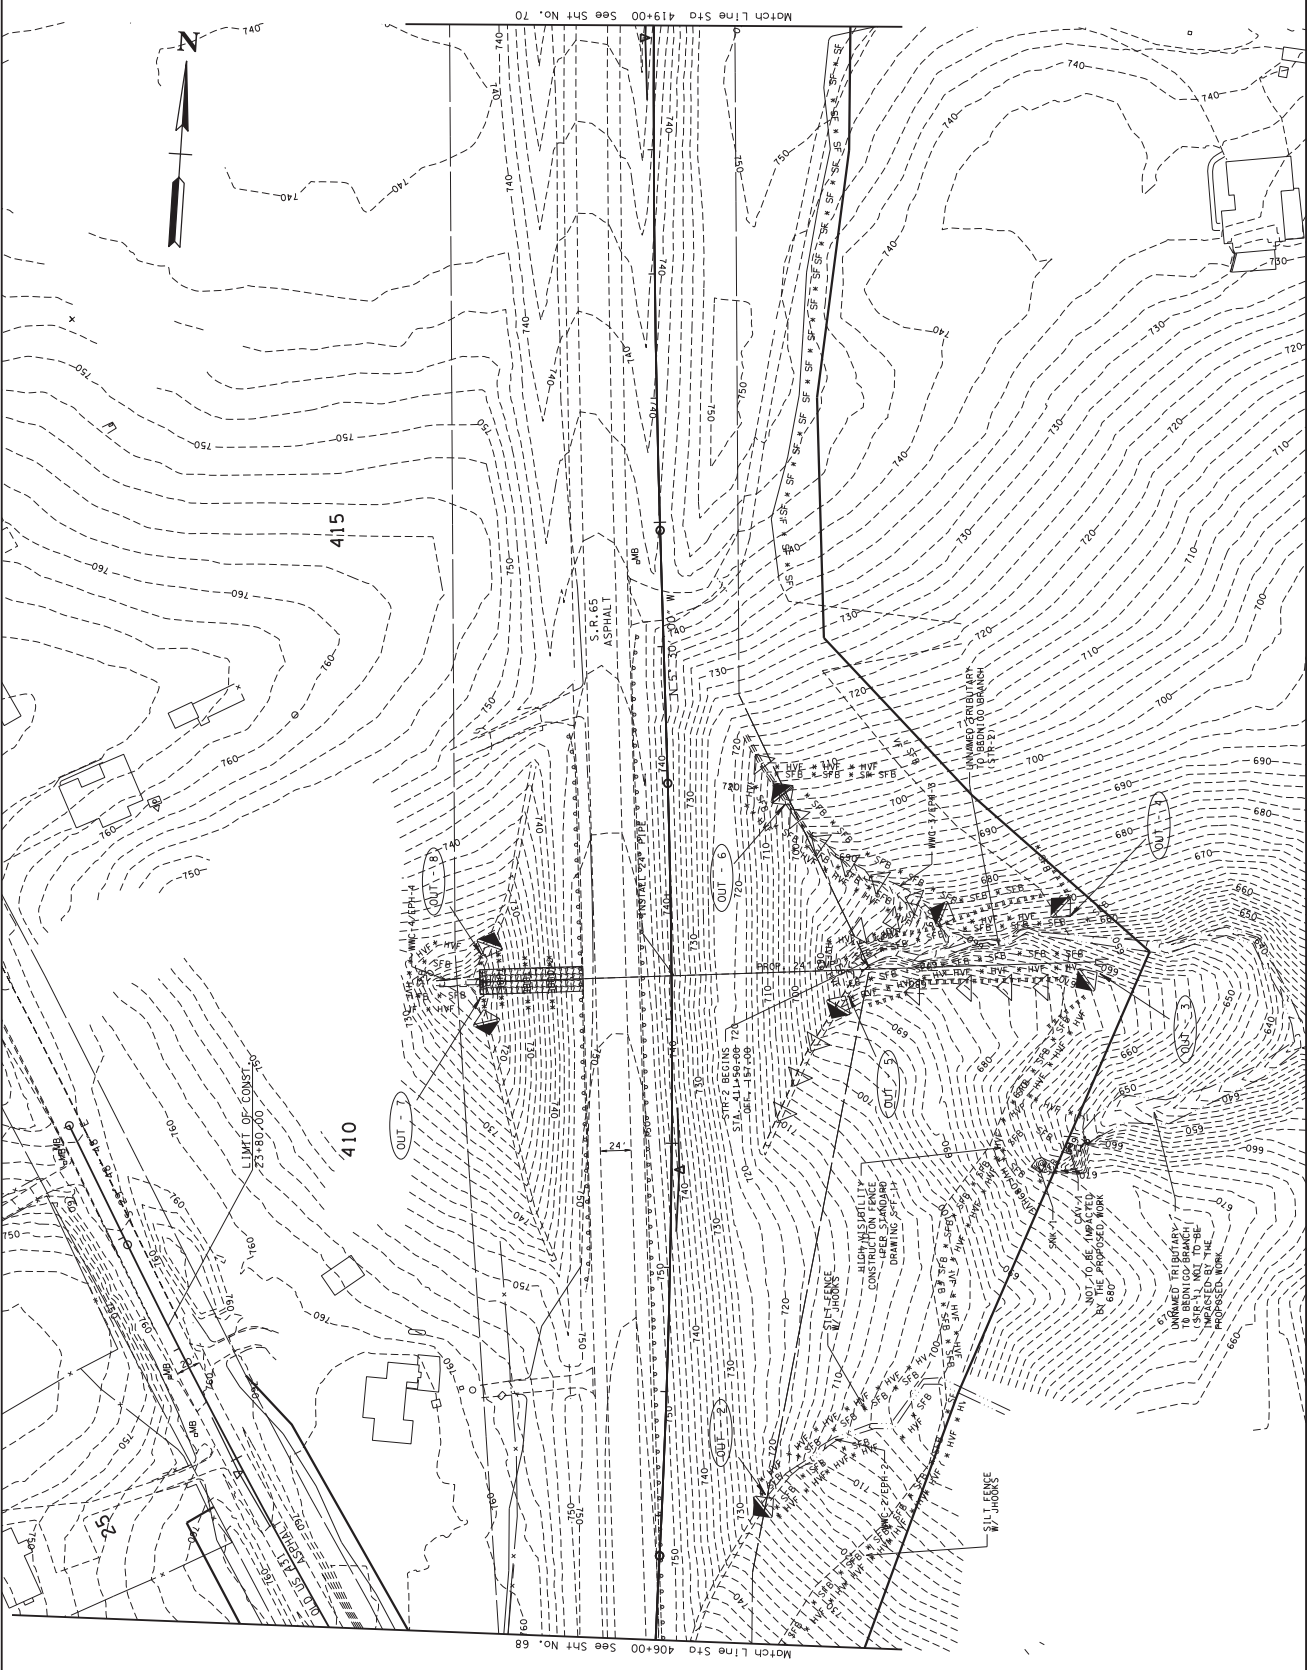

COORDINATES ARE UTM 83 UZS82. FACTOR OF 1000000 AND TIED TO THE TBM. ALL ELEVATIONS ARE REFERENCED TO THE 1985 BENCHMARK.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE I**

STA. 406+00 TO STA. 419+00  
SCALE: 1" = 50'

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65101	67
CONST.	2017	STP-65101	70




COORDINATES ARE UTM 84N 18S, FACTOR OF 1000000 AND TIED TO THE TBM. ALL ELEVATIONS ARE REFERENCED TO THE MVD 1986.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE I**

STA. 419+00 TO STA. 432+00  
SCALE: 1" = 50'

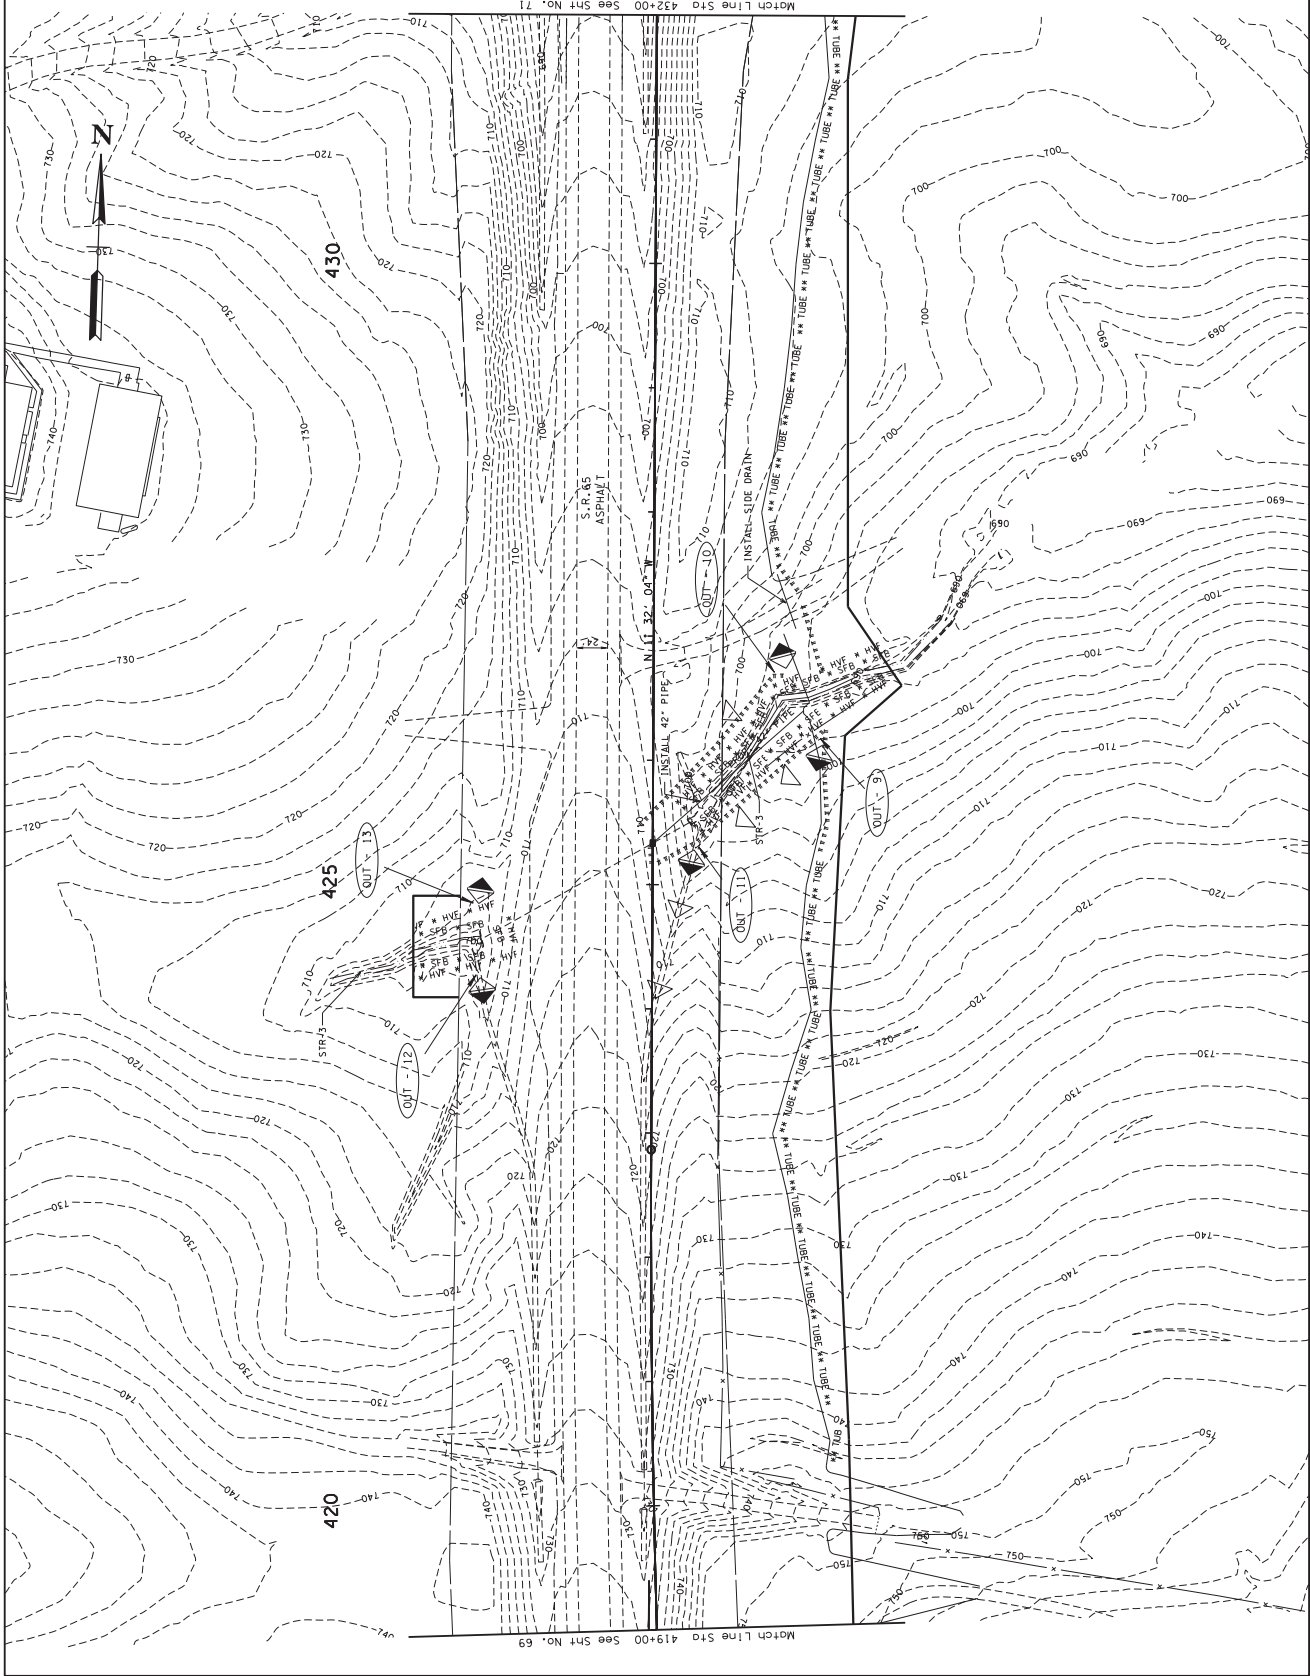

SHEET NO.	PROJECT NO.	YEAR	TYPE
68	STP-65101	2012	R.O.W.
71	STP-65101	2017	CONST.




COORDINATES ARE UTM 83N/98E. FACTOR OF 1000000 AND TIED TO THE TOPN. ALL ELEVATIONS ARE REFERENCED TO THE 1985 BENCHMARK.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION



**EPSC PLAN  
STAGE I**

STA. 432+00 TO STA. 445+00  
SCALE: 1" = 50'

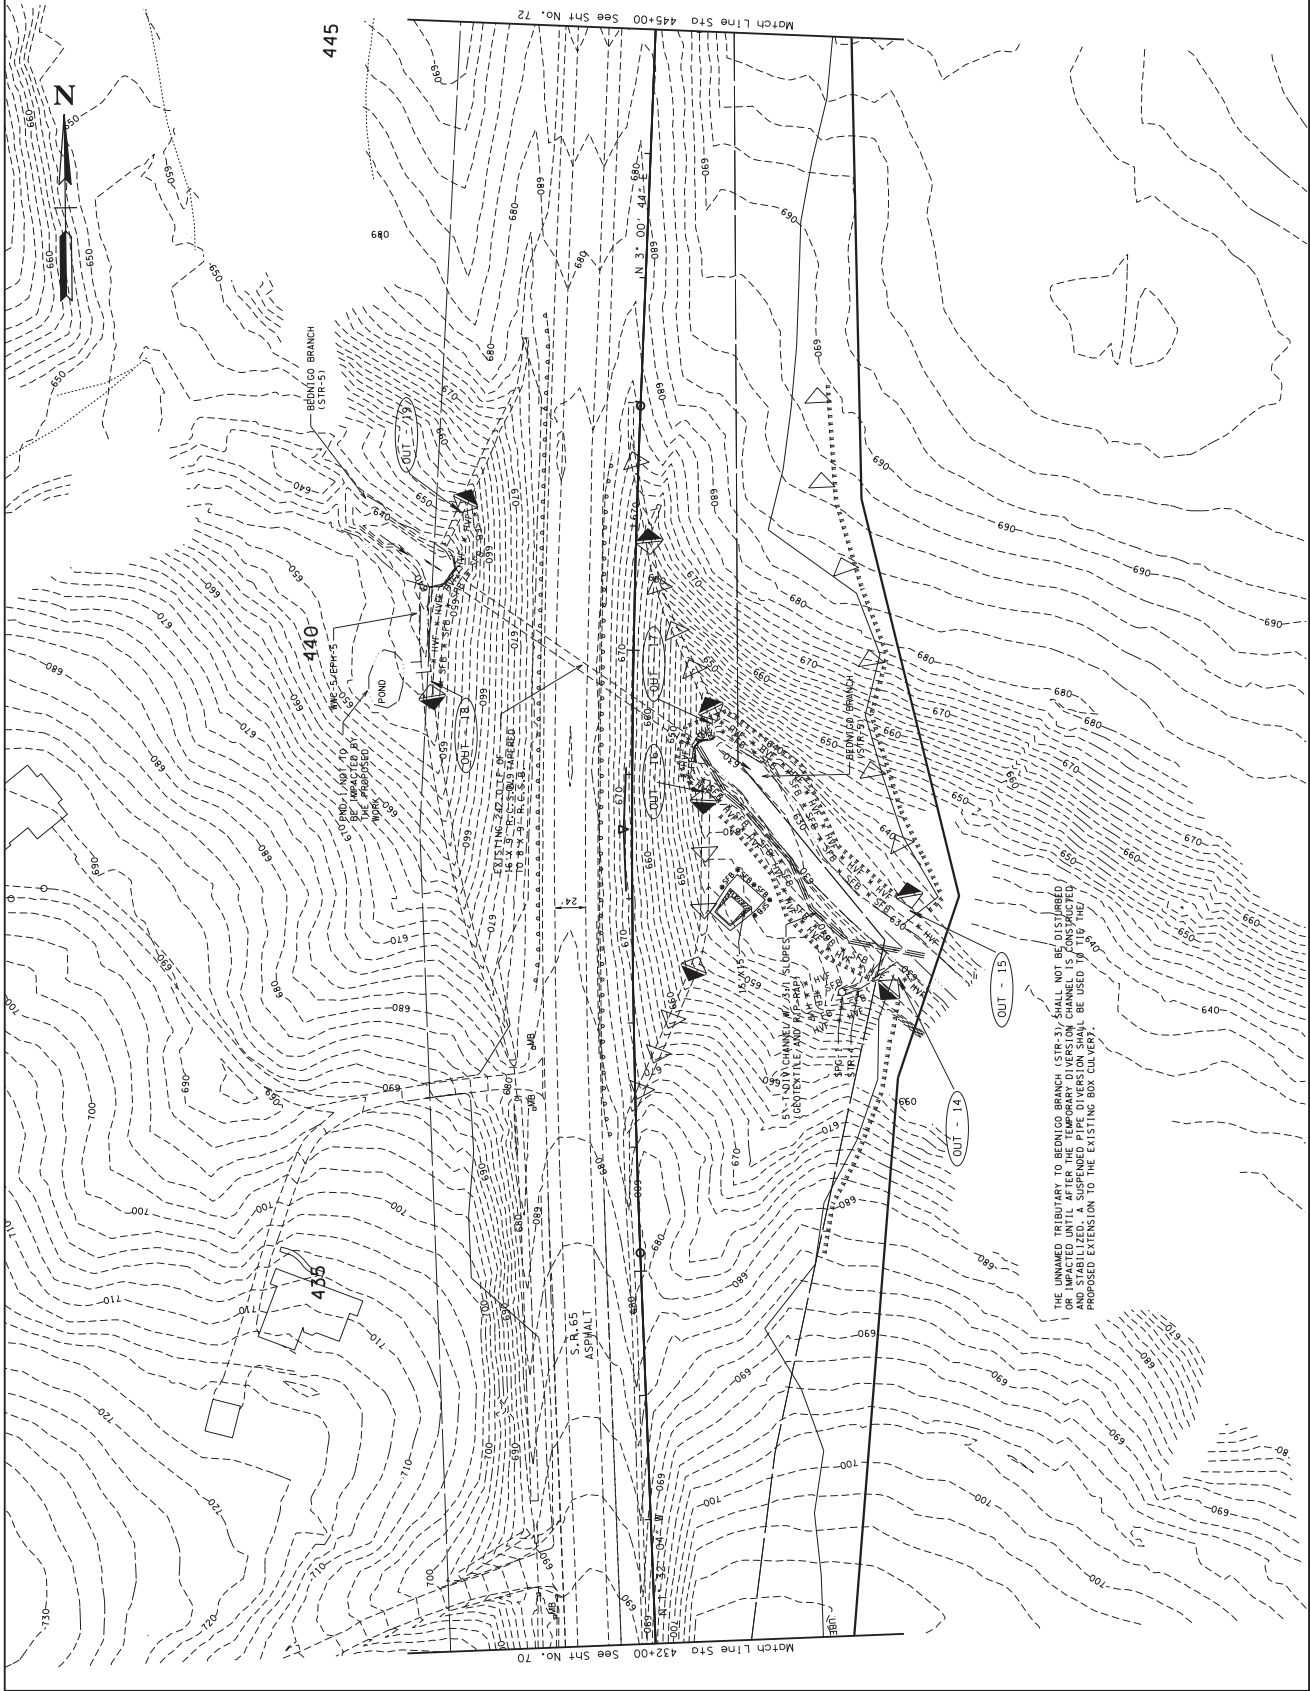

THE UNPAVED TRIBUTARY TO BENICO BRANCH (STEP 3) SHALL NOT BE DISTURBED OR IMPACTED UNTIL AFTER THE TEMPORARY DIVERSION CHANNEL IS CONSTRUCTED AND STABILIZED. A SUSPENDED PIPE DIVERSION CHANNEL SHALL BE USED TO TIE THE PROPOSED EXTENSION TO THE EXISTING BOX CULVERT.

SHEET NO.	PROJECT NO.	YEAR	TYPE
69	STP-65101	2012	R.O.W.
72	STP-65101	2017	CONST.

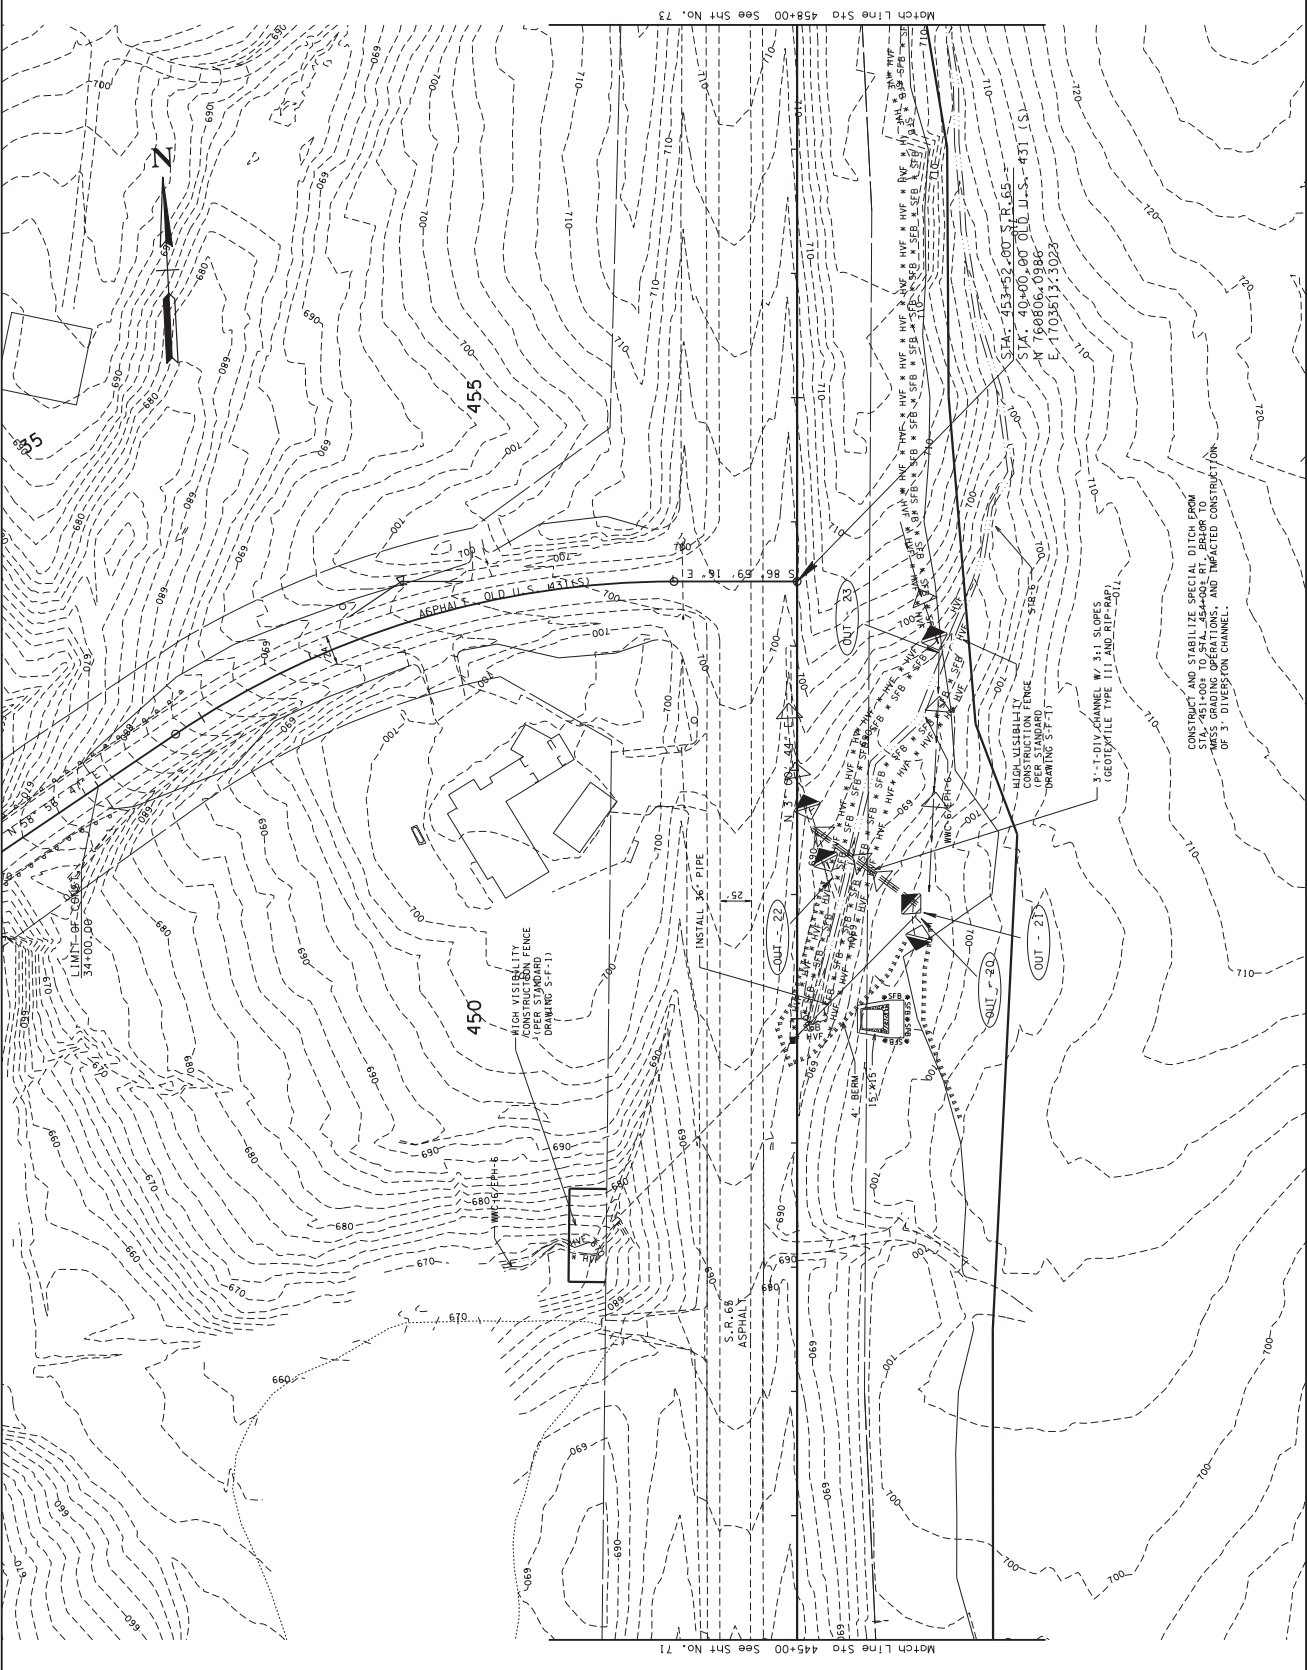

COORDINATES ARE UTM 84Q UTM ZONE 18Q. ALL ELEVATIONS ARE REFERENCED TO THE NAD 83 DATUM.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE I

STA. 445+00 TO STA. 458+00  
SCALE: 1" = 50'

SHEET NO.	PROJECT NO.	YEAR	TYPE
70	STP-65H101	2012	R.O.W.
73	STP-65H101	2017	CONST.




COORDINATES ARE UTM 84U 85N. FACTOR OF 1.000000 AND TIED TO THE TBM. ALL ELEVATIONS ARE REFERENCED TO THE NAVD 83EB.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE I**

STA. 458+00 TO STA. 471+00  
SCALE: 1" = 50'

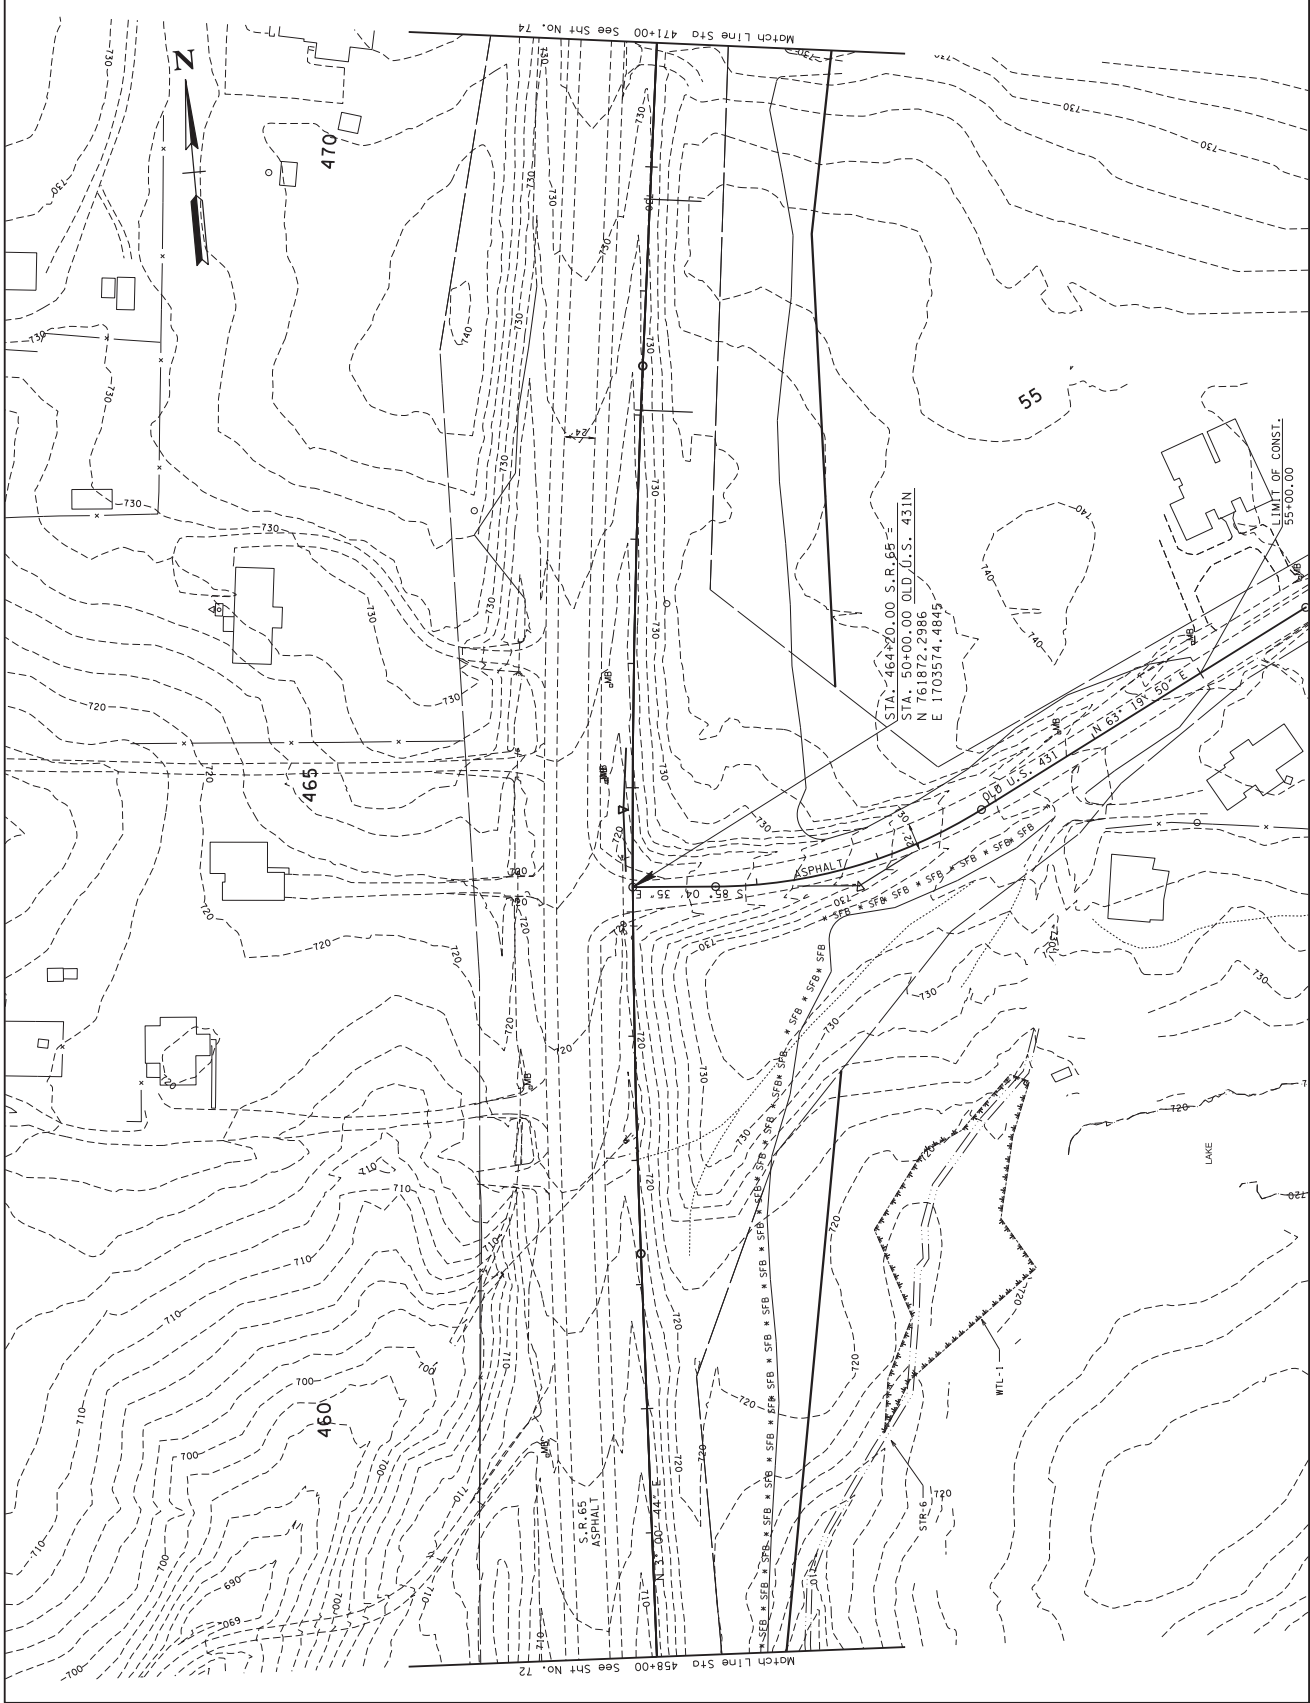


SHEET NO.	PROJECT NO.
71	STP-65101
74	STP-65101

REV. 12-15-13: REVISED THE LIMIT OF CONSTRUCTION ON MT. SHARON ROAD.



COORDINATES ARE UTM 84 UZ58. ALL DISTANCES AND STATIONING ARE IN METERS AND TIED TO THE TBM. ALL ELEVATIONS ARE REFERENCED TO THE UTM 8458.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION  
**EPSC PLAN**  
**STAGE I**  
STA. 471+00 TO STA. 484+00  
SCALE: 1" = 50'

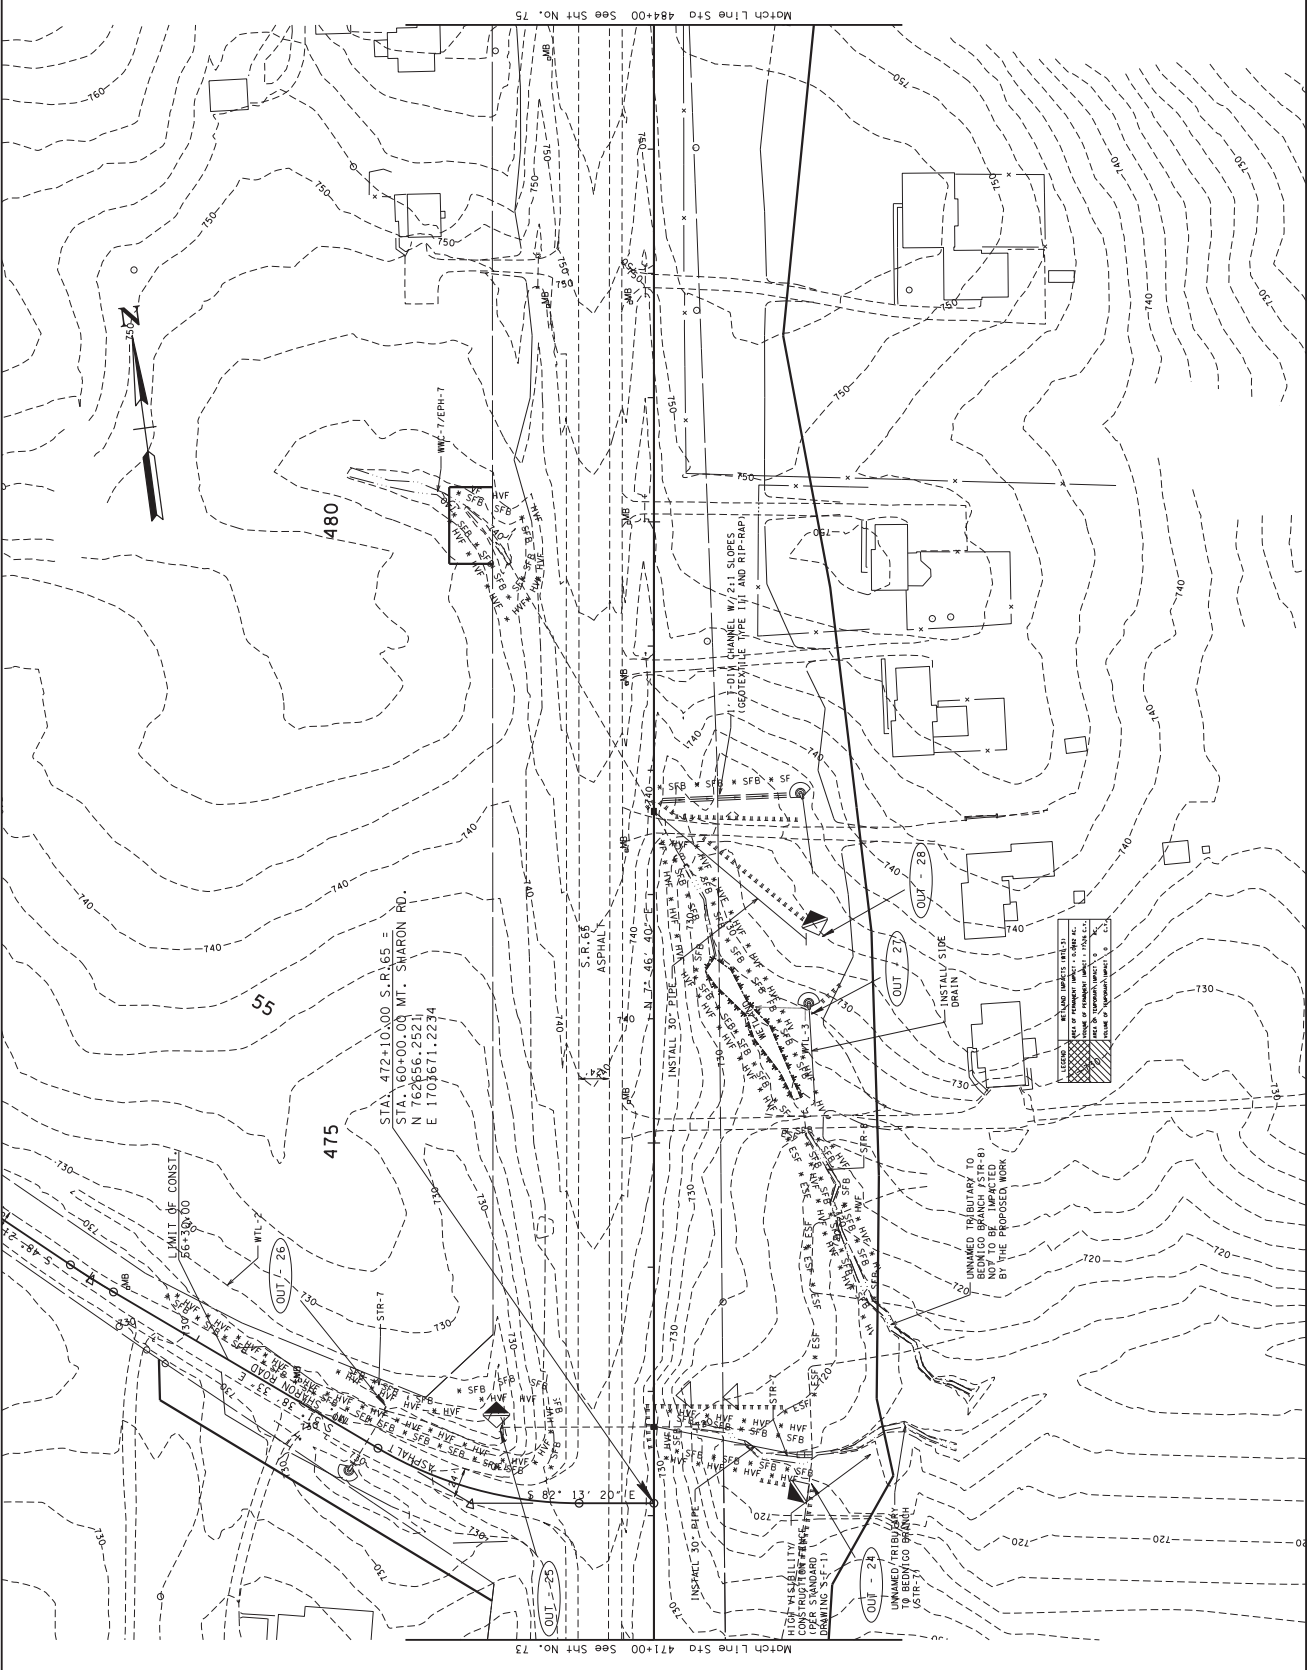

SHEET NO.	PROJECT NO.	YEAR	TYPE
72	STP-65101	2012	R.O.W.
75	STP-65101	2017	CONST.




COORDINATES ARE UTM 84N98E. ANGLE MEASUREMENTS ARE IN DEGREES. FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE NAVD 1988.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE I

STA. 484+00 TO STA. 497+00  
SCALE: 1" = 50'

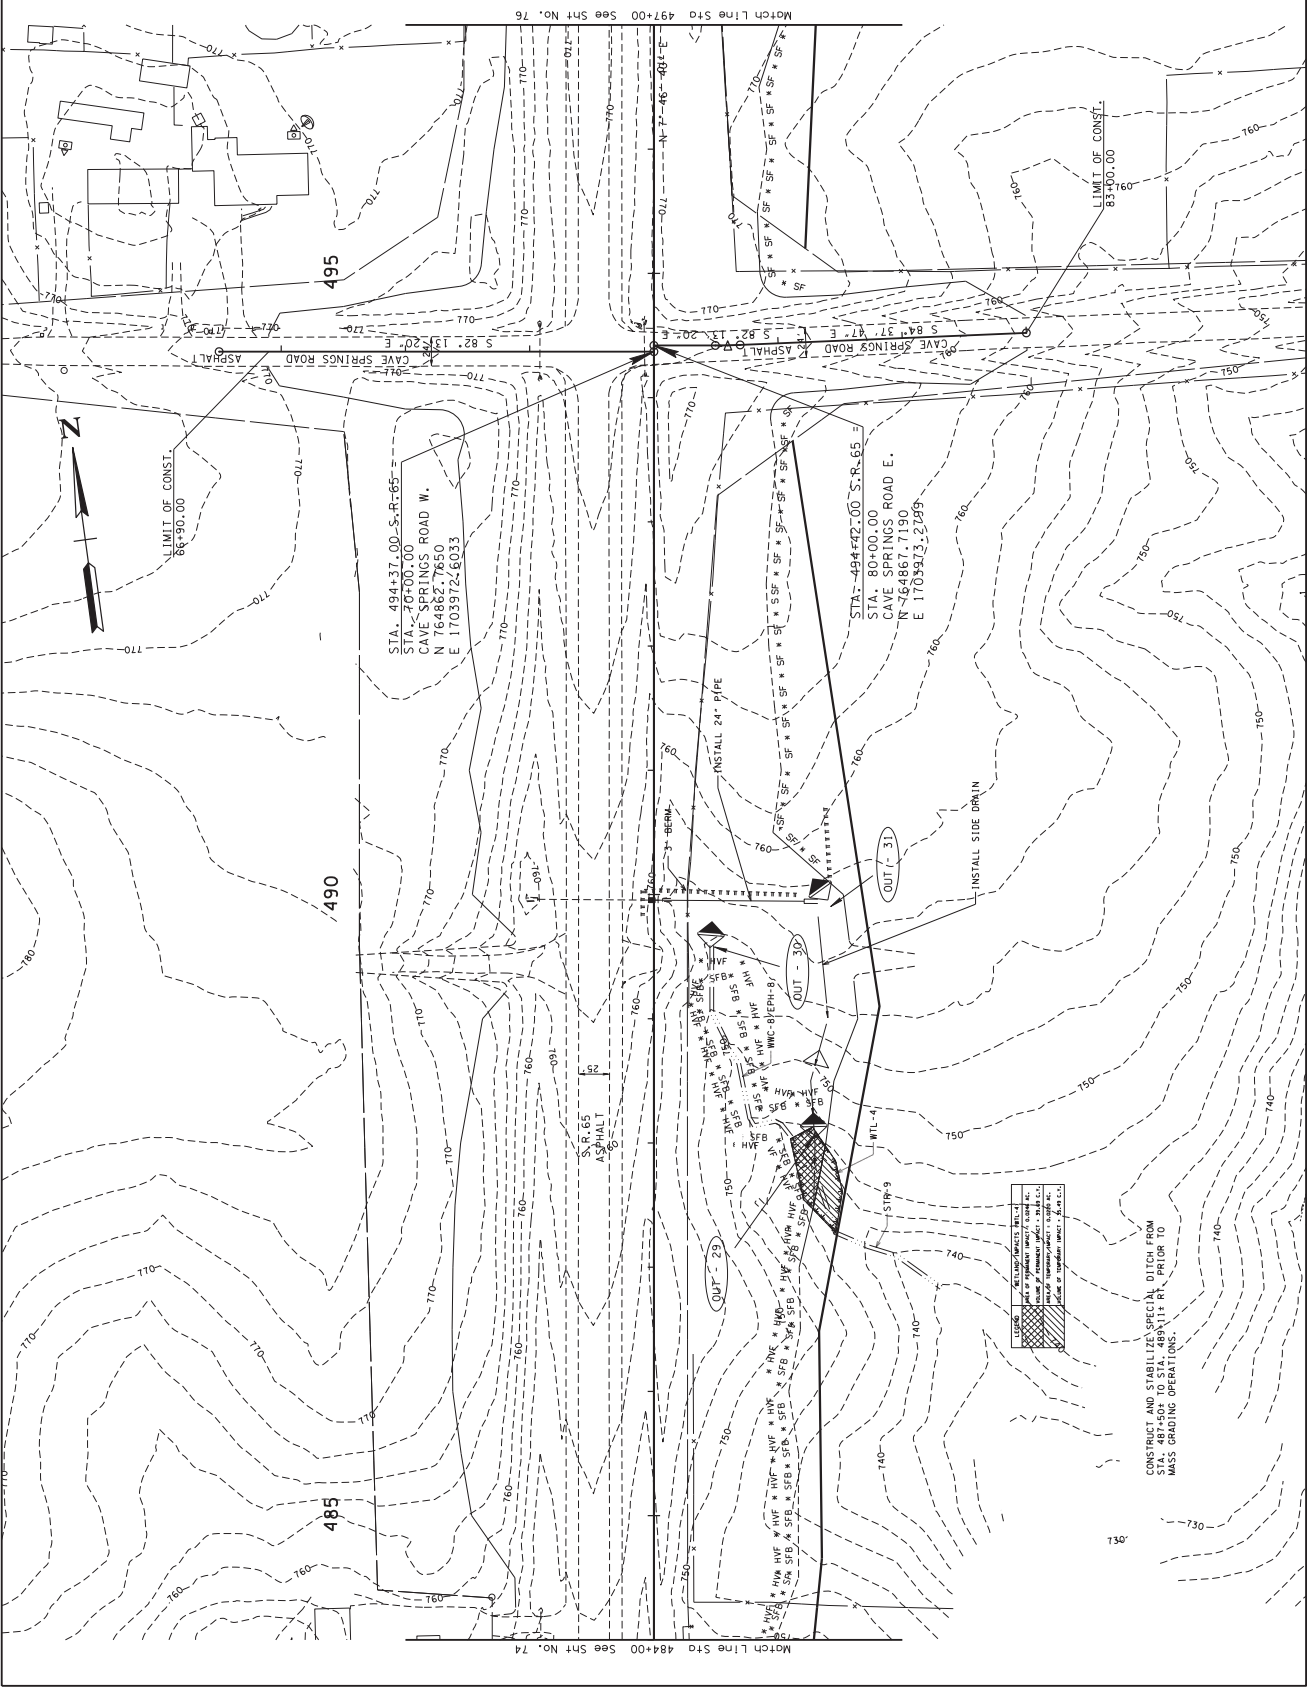


SYMBOL	DESCRIPTION
[Hatched Area]	CONSTRUCT AND STABILIZE SPEC. DITCH FROM STA. 487+50 TO STA. 489+11 RT. PRIOR TO MASS GRADING OPERATIONS.
[Dashed Line]	EXIST. ASPHALT
[Solid Line]	PROPOSED ASPHALT
[Dotted Line]	PROPOSED SIDEWALK
[Circle with Arrow]	INSTALL SIDE DRAIN
[Circle with 'X']	INSTALL 24\"/>

CONSTRUCT AND STABILIZE SPEC. DITCH FROM STA. 487+50 TO STA. 489+11 RT. PRIOR TO MASS GRADING OPERATIONS.

SHEET NO.	PROJECT NO.
73	STP-65101
76	STP-65101

TYPE	YEAR
R.O.W.	2012
CONST.	2017

YEAR	DESCRIPTION
2012	STP-65101
2017	STP-65101

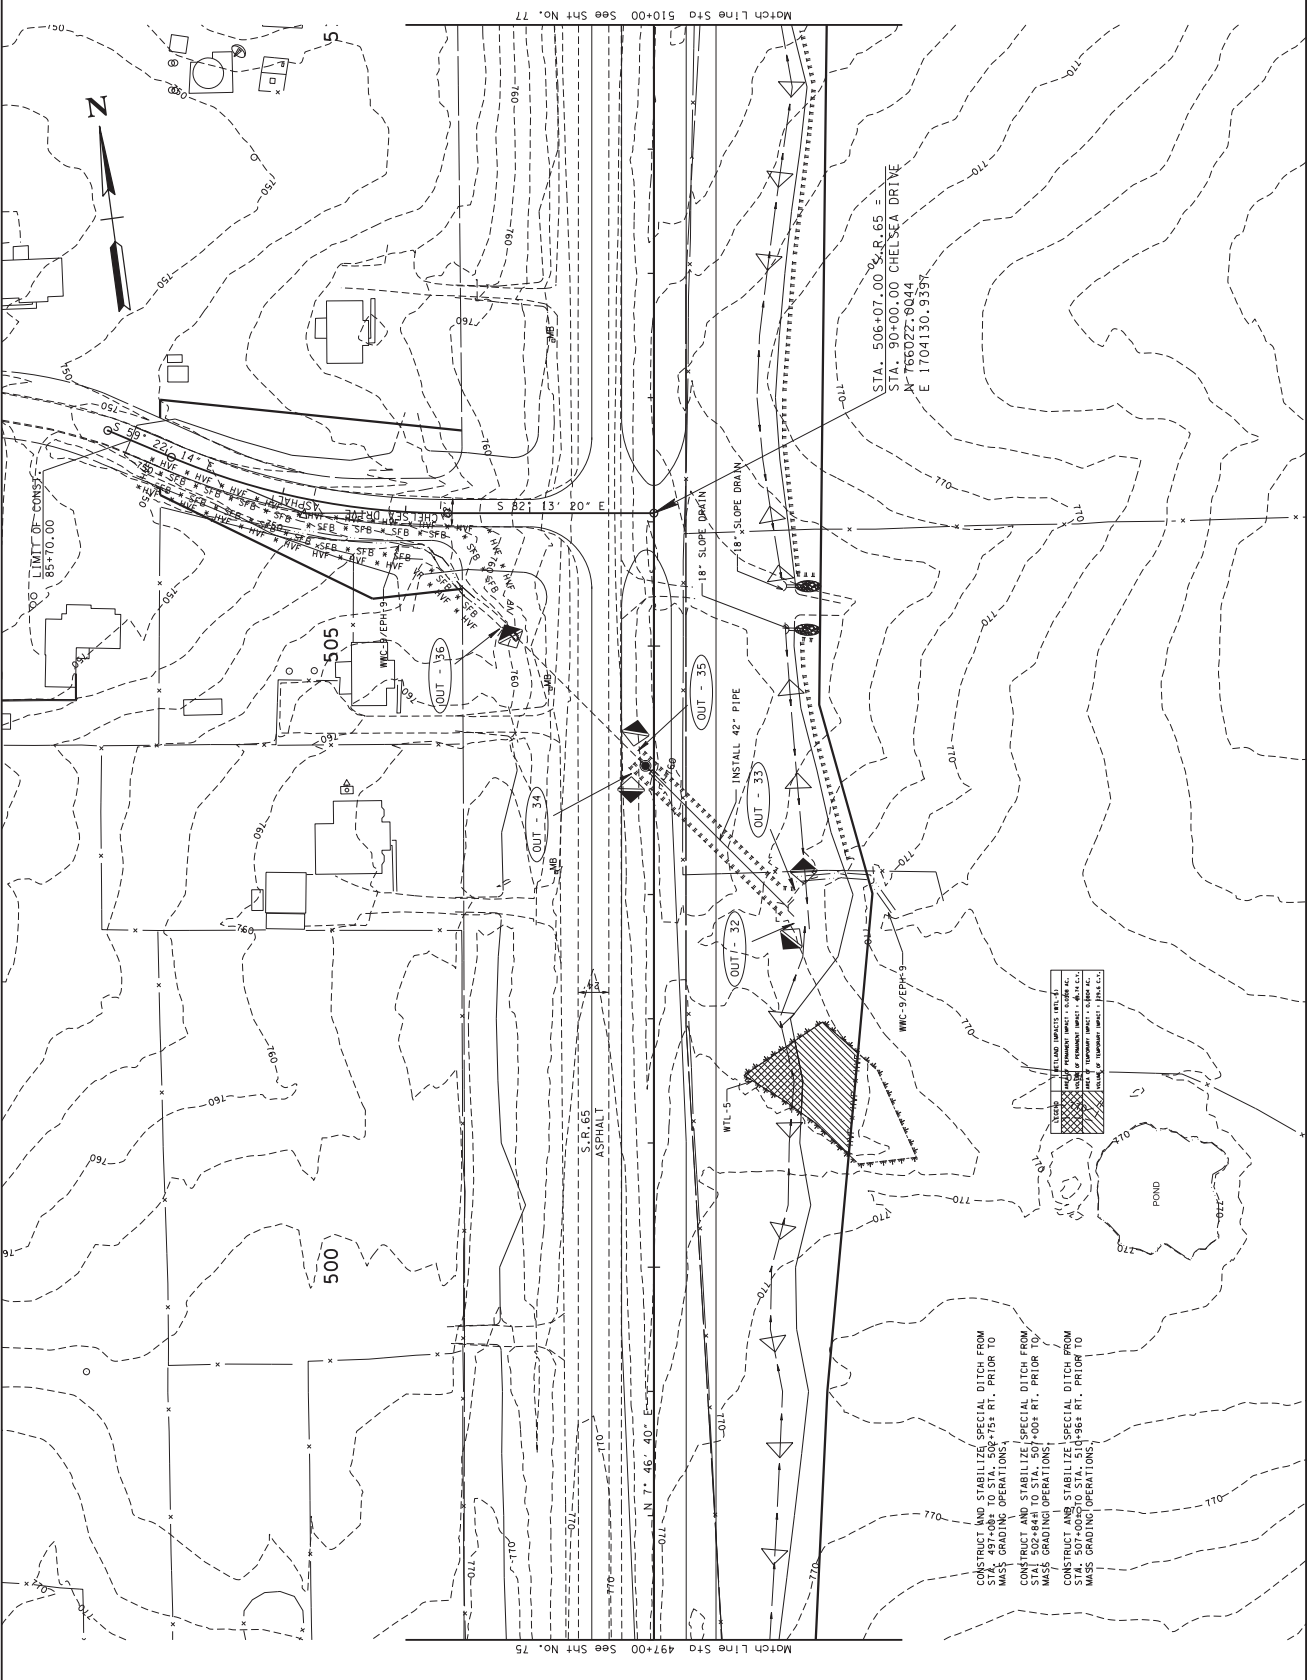

COORDINATES ARE UTM 83N UTM ZONE 18N. ALL ELEVATIONS ARE REFERENCED TO THE UTM 83N DATUM. THE UTM 83N DATUM IS TIED TO THE UTM 83N DATUM. THE UTM 83N DATUM IS TIED TO THE UTM 83N DATUM.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE I**

STA. 497+00 TO STA. 510+00  
SCALE: 1" = 50'

CONSTRUCT AND STABILIZE SPECIAL DITCH FROM STA. 497+00 TO STA. 510+00. PRIOR TO MASS GRADING OPERATIONS.


CONSTRUCT AND STABILIZE SPECIAL DITCH FROM STA. 502+44 TO STA. 504+00. PRIOR TO MASS GRADING OPERATIONS.

CONSTRUCT AND STABILIZE SPECIAL DITCH FROM STA. 507+00 TO STA. 510+96. RT. PRIOR TO MASS GRADING OPERATIONS.





TYPE	YEAR	PROJECT NO.	SHEET NO.
CONST.	2017	STP-65H101	77
CONST.	2017	STP-65H101	74

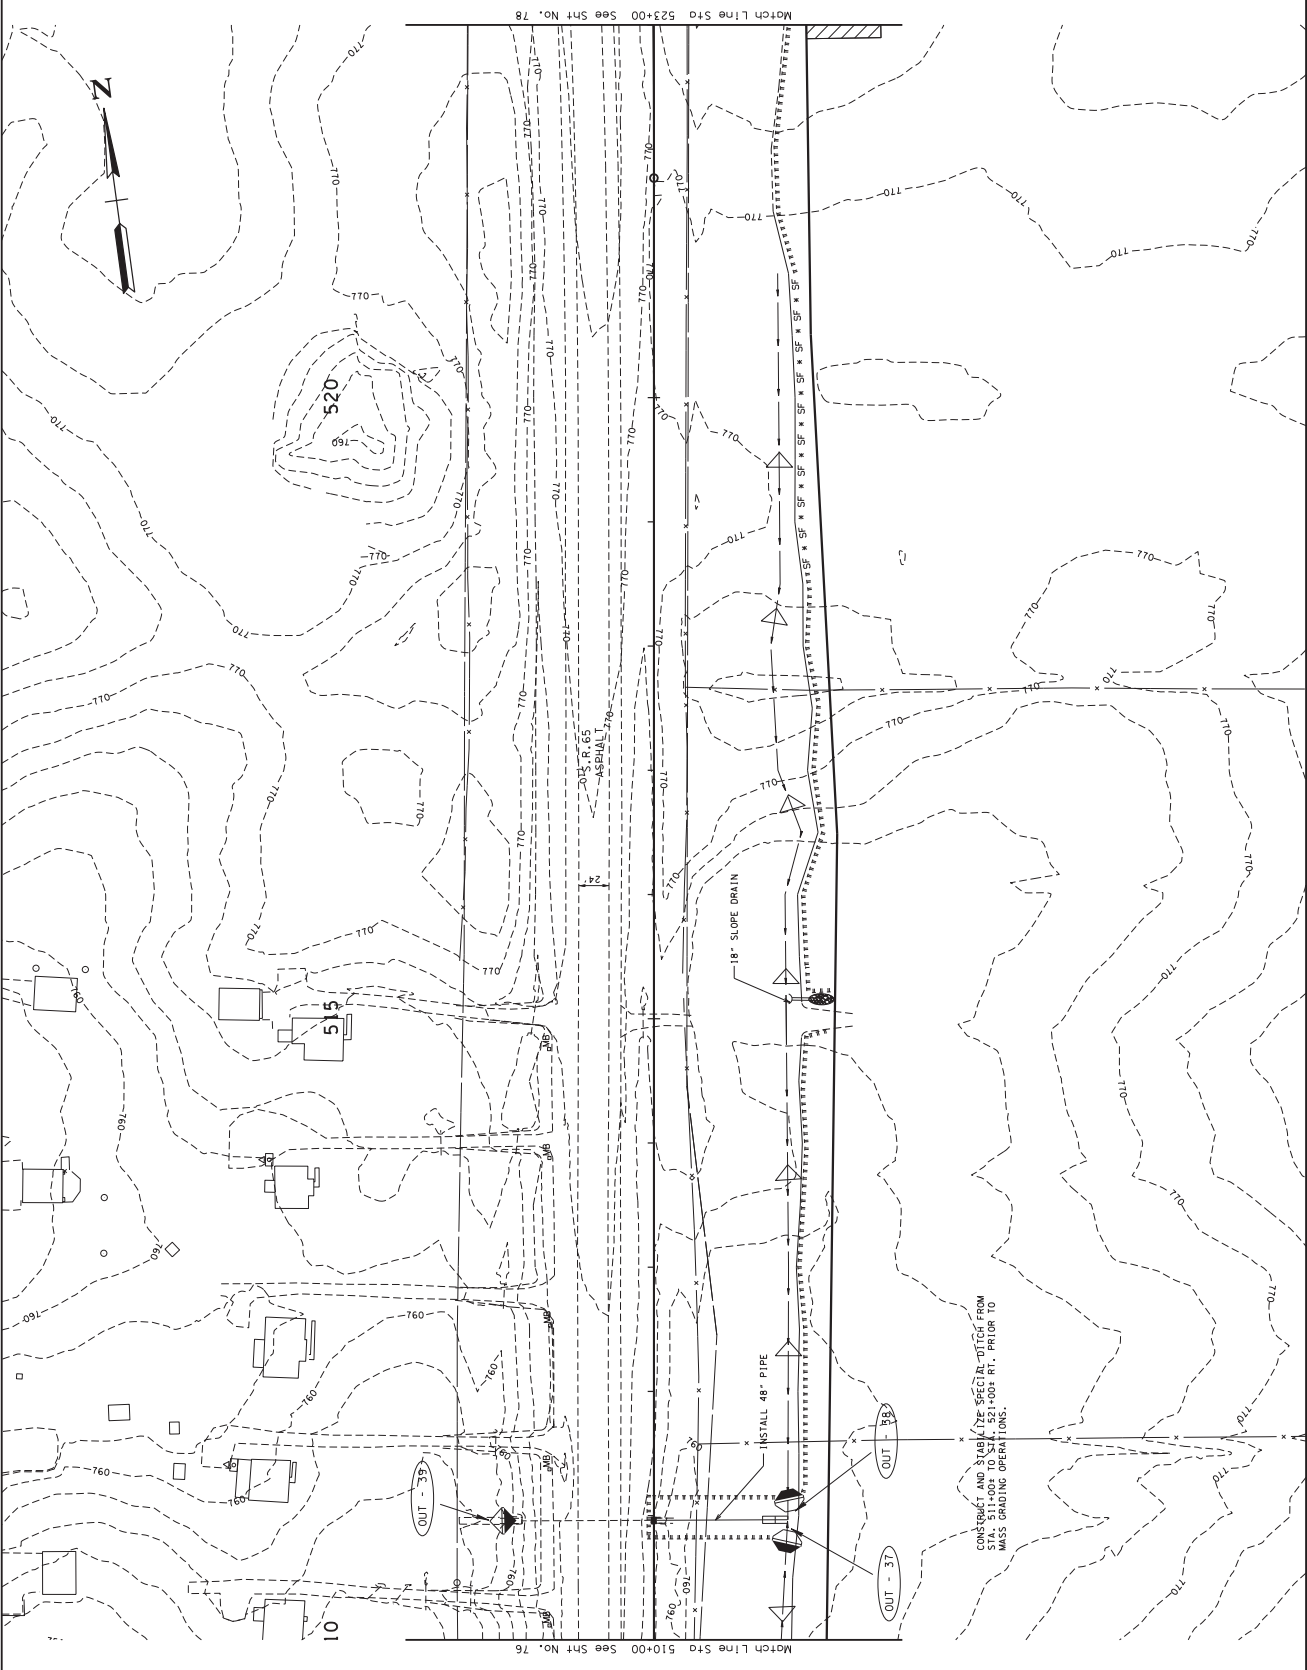

SEAL BY  
 DAVID EAST  
 LICENSE NO. 000000  
 STATE OF TENNESSEE


COORDINATES ARE UTM 84N UZS.  
 DATUM IS NAD 83.  
 FACTOR OF 1.000000 AND TIED TO  
 THE TORN. ALL ELEVATIONS ARE  
 REFERENCED TO THE UTM 84N UZS.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE I

STA. 510+00 TO STA. 523+00  
 SCALE: 1" = 50'

TYPE	YEAR	PROJECT NO.	SHEET NO.
CONST.	2017	STP-65101	78
		STP-65101	75

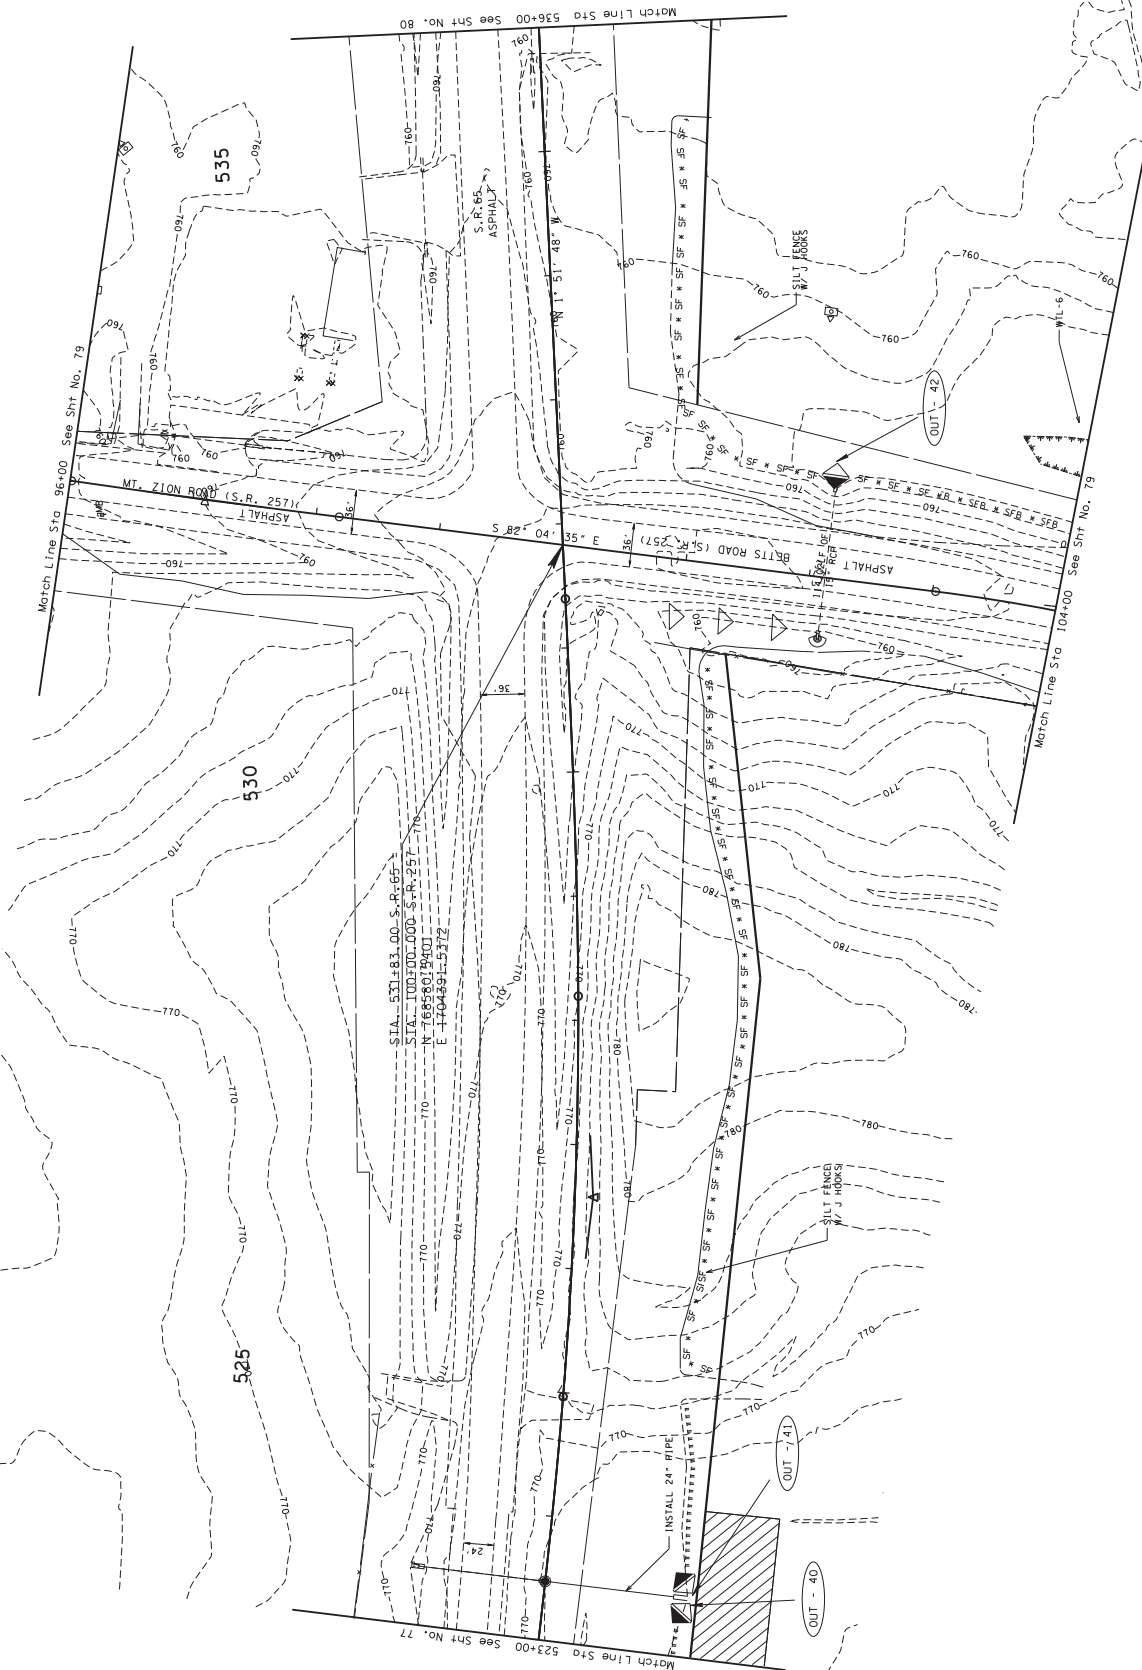




COORDINATES ARE UTM 84N UTM ZONE 18N. ALL ELEVATIONS ARE REFERENCED TO THE 1985 DATUM. A FACTOR OF 1.000000 AND TIED TO THE TBM. ALL ELEVATIONS ARE REFERENCED TO THE 1985 DATUM.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE I**

STA. 523+00 TO STA. 536+00  
SCALE: 1" = 50'

SHEET NO.	PROJECT NO.	YEAR	TYPE
75A	STP-65101	2012	R.O.M.
79	STP-65101	2017	CONST.

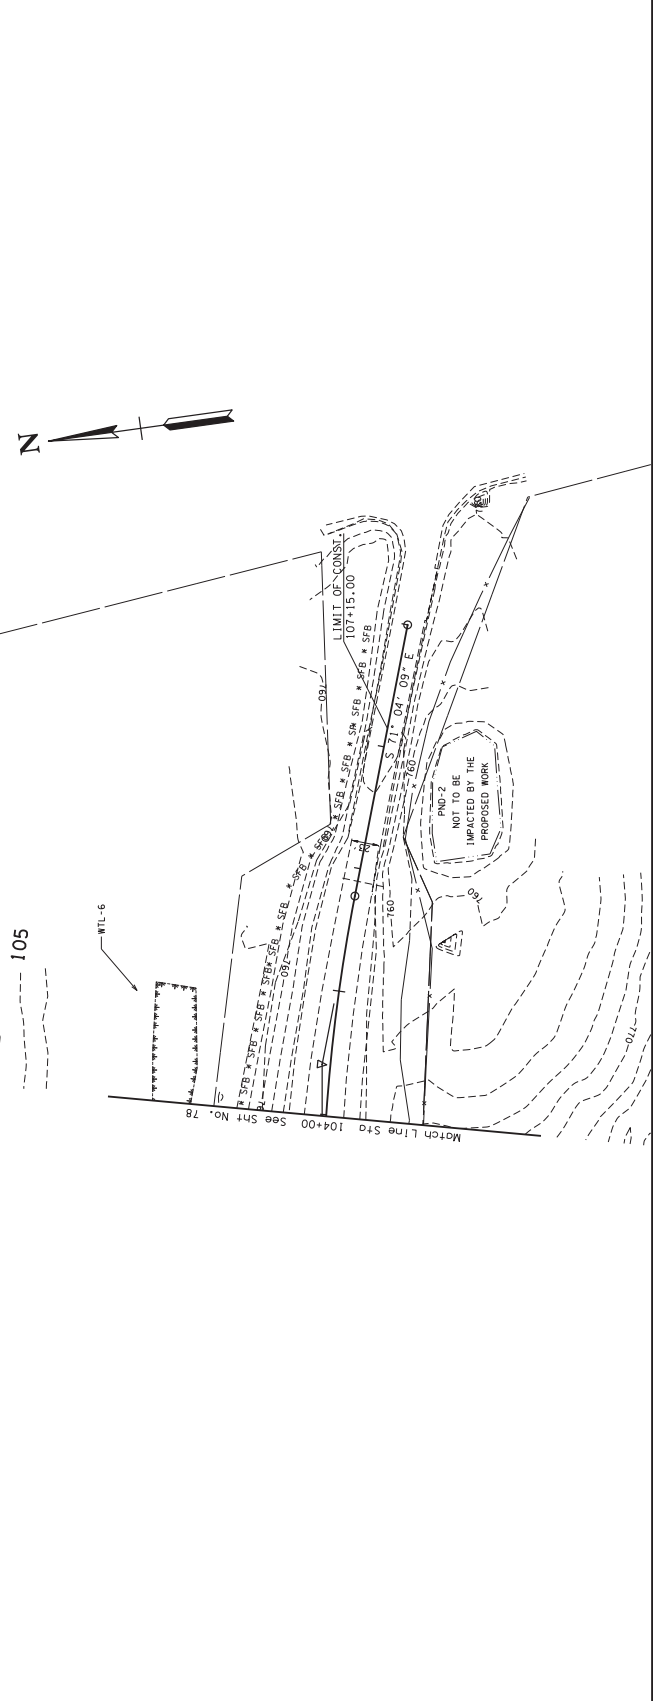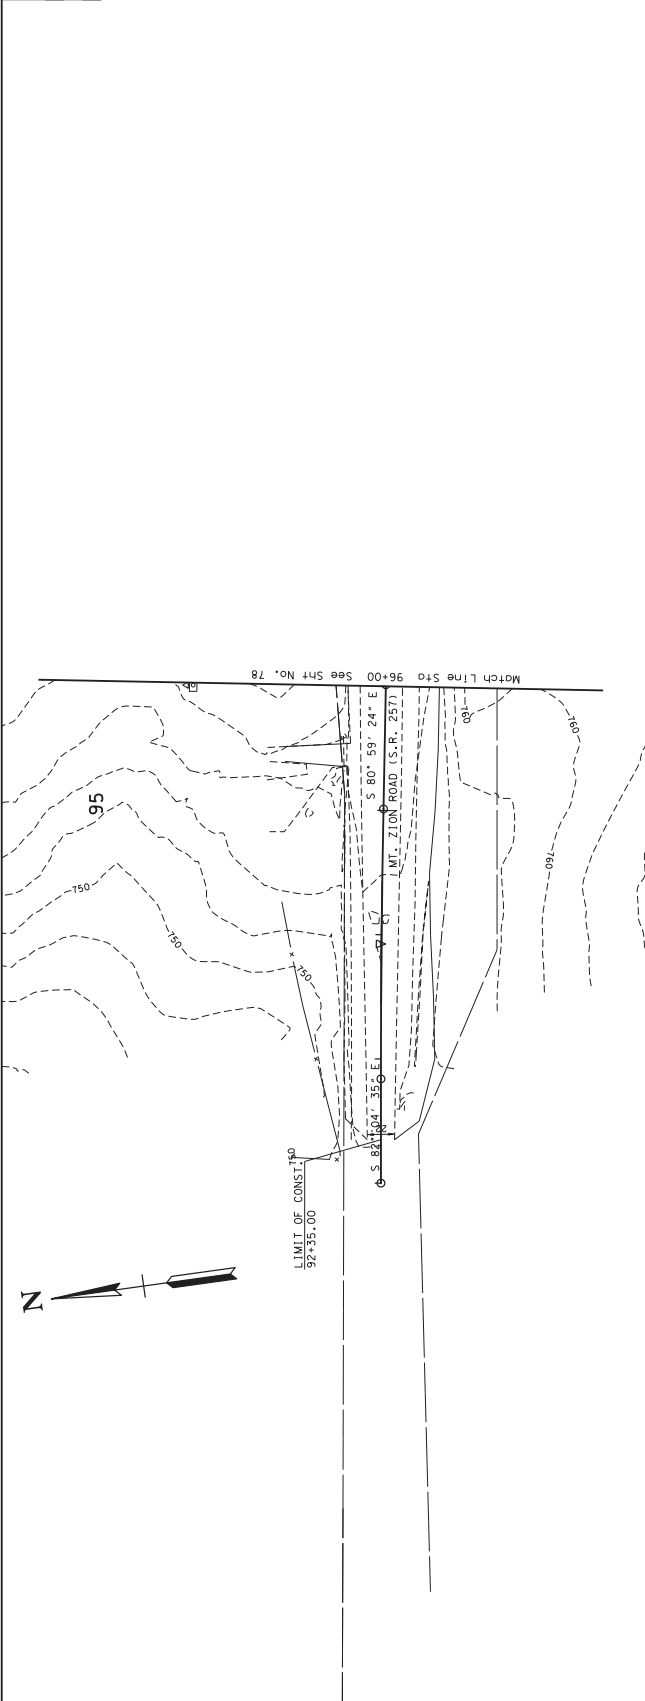


COORDINATES ARE UTM 84N UTM ZONE 18Q. ALL ELEVATIONS ARE REFERENCED TO THE MVD 1986. THE TOPN ALL ELEVATIONS ARE REFERENCED TO THE MVD 1986.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

EPSC PLAN  
STAGE I  
S.R. 257  
SCALE: 1" = 50'

SHEET NO.	PROJECT NO.
76	STP-65101
80	STP-65101

YEAR	TYPE
2012	R.O.W.
2017	CONST.



Match Line Sta 536+00 See Sht No. 78

Match Line Sta 549+00 See Sht No. 81

CONSTRUCT AND STABILIZE SPECIAL DITCH FROM STA. 542+00 TO STA. 544+29.19 RT. PRIOR TO MASS GRADING OPERATIONS.

CONSTRUCT AND STABILIZE SPECIAL DITCH FROM STA. 548+51.1 TO STA. 549+00 RT. PRIOR TO MASS GRADING OPERATIONS.

INSTALL 42" PIPE

OUT - 548

OUT - 549

MHC-10/EPH-10

MHC-10/EPH-10

MHC-10/EPH-10

S.R. 65 ASPHALT

6/2/2017 10:46:37 PM \\BOS159V\ngs\proj\cts\transportation\0503\transportation\B065\_080\_EC04.sht

SEAL BY

DAVID EAST

STATE OF TENNESSEE

COORDINATES ARE UTM 83N UTM ZONE 18Q. FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE NAD 83 EB.

STATE OF TENNESSEE

DEPARTMENT OF TRANSPORTATION

EPSC PLAN

STAGE I

STA. 536+00 TO STA. 549+00

SCALE: 1" = 50'

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65101	77
CONST.	2017	STP-65101	81




COORDINATES ARE UTM 83 UZS92.  
 ALL DISTANCES AND ANGLES  
 FACTOR OF 1.000000 AND TIED TO  
 THE TBM. ALL ELEVATIONS ARE  
 REFERENCED TO THE 1985 B.S.M.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION


# EPSC PLAN STAGE I

STA. 549+00 TO STA. 562+00  
 SCALE: 1" = 50'

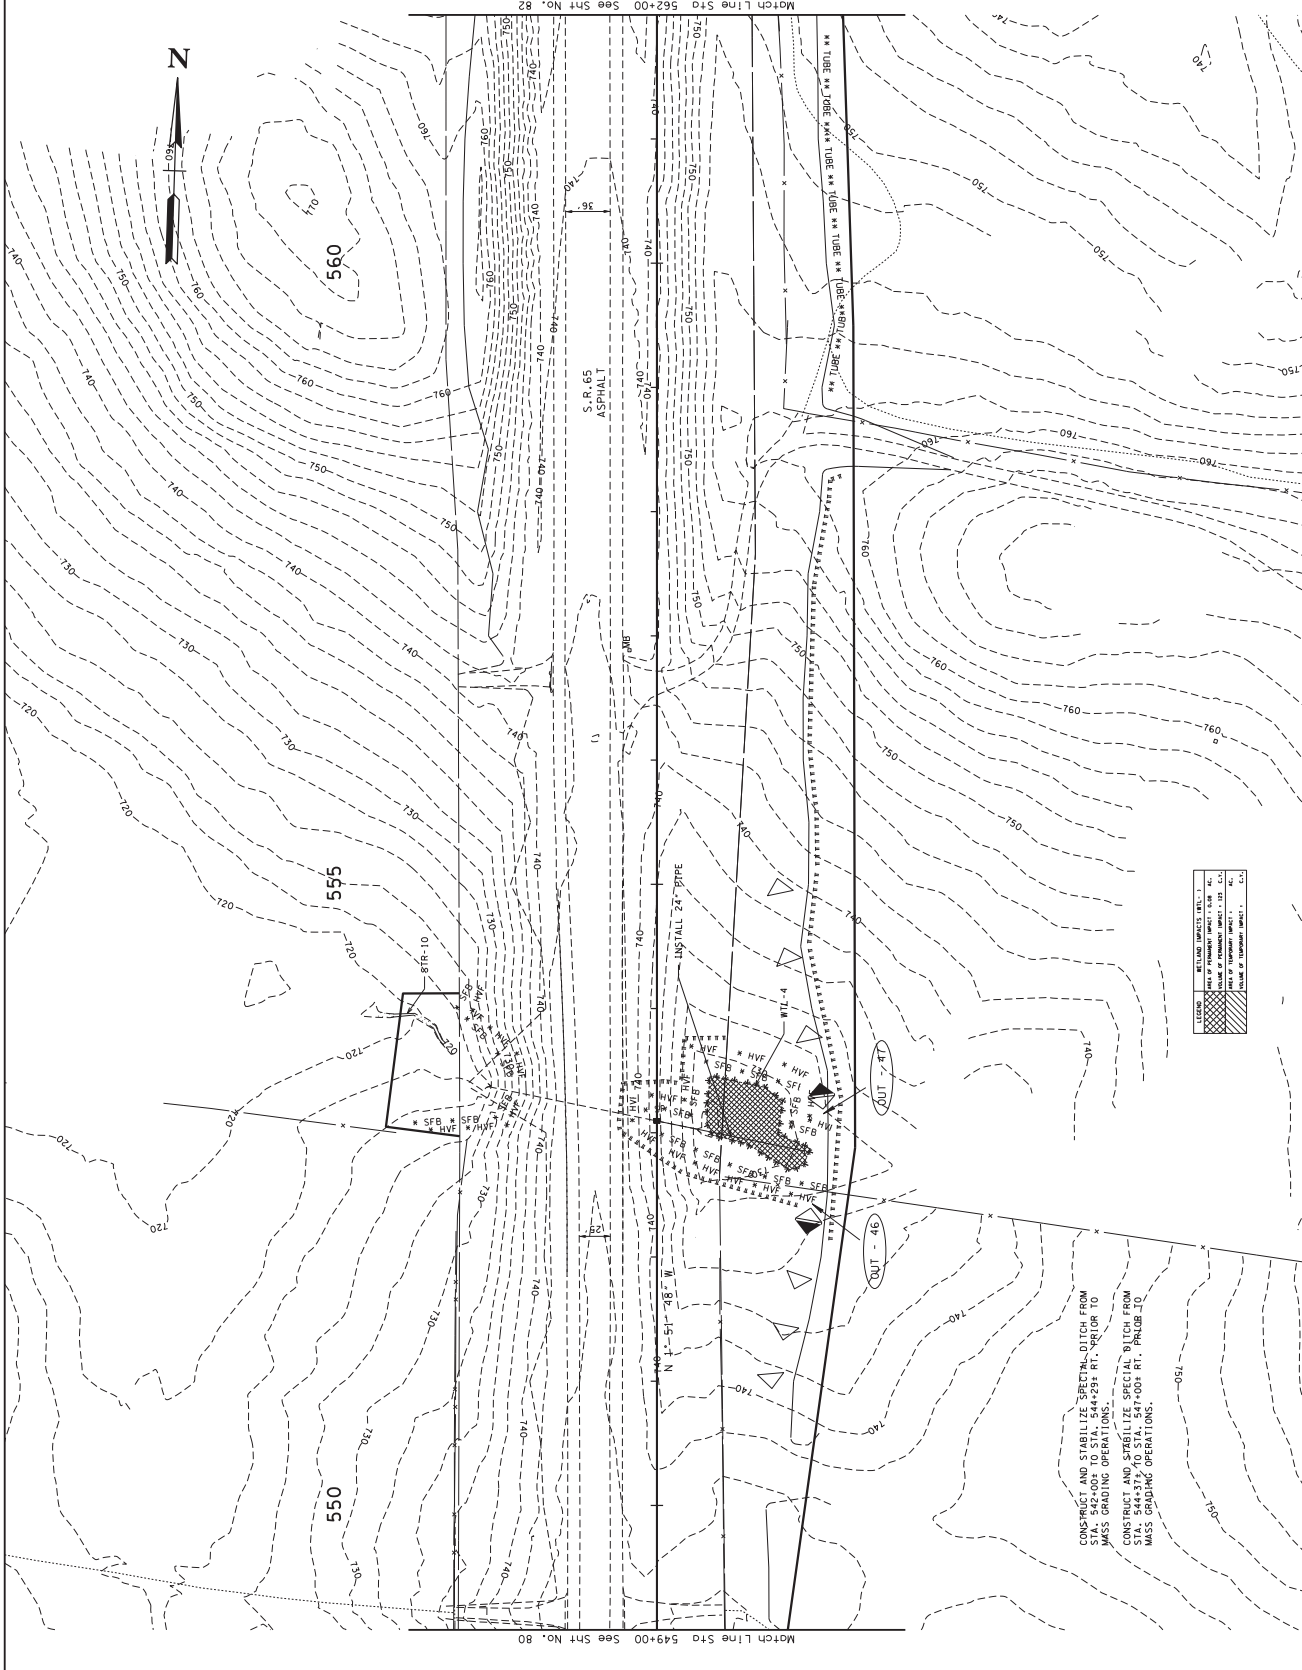


SHEET NO.	PROJECT NO.
78	STP-65101
B2	STP-65101

TYPE	YEAR
R.O.W.	2012
CONST.	2017




COORDINATES ARE UTM 834998. ANS PROJECTIONS AND FACTOR OF 1000000 AND TIED TO THE TNM. ALL ELEVATIONS ARE REFERENCED TO THE MGD DSB.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION  
**EPSC PLAN  
STAGE I**  
STA. 562+00 TO STA. 575+00  
SCALE: 1" = 50'

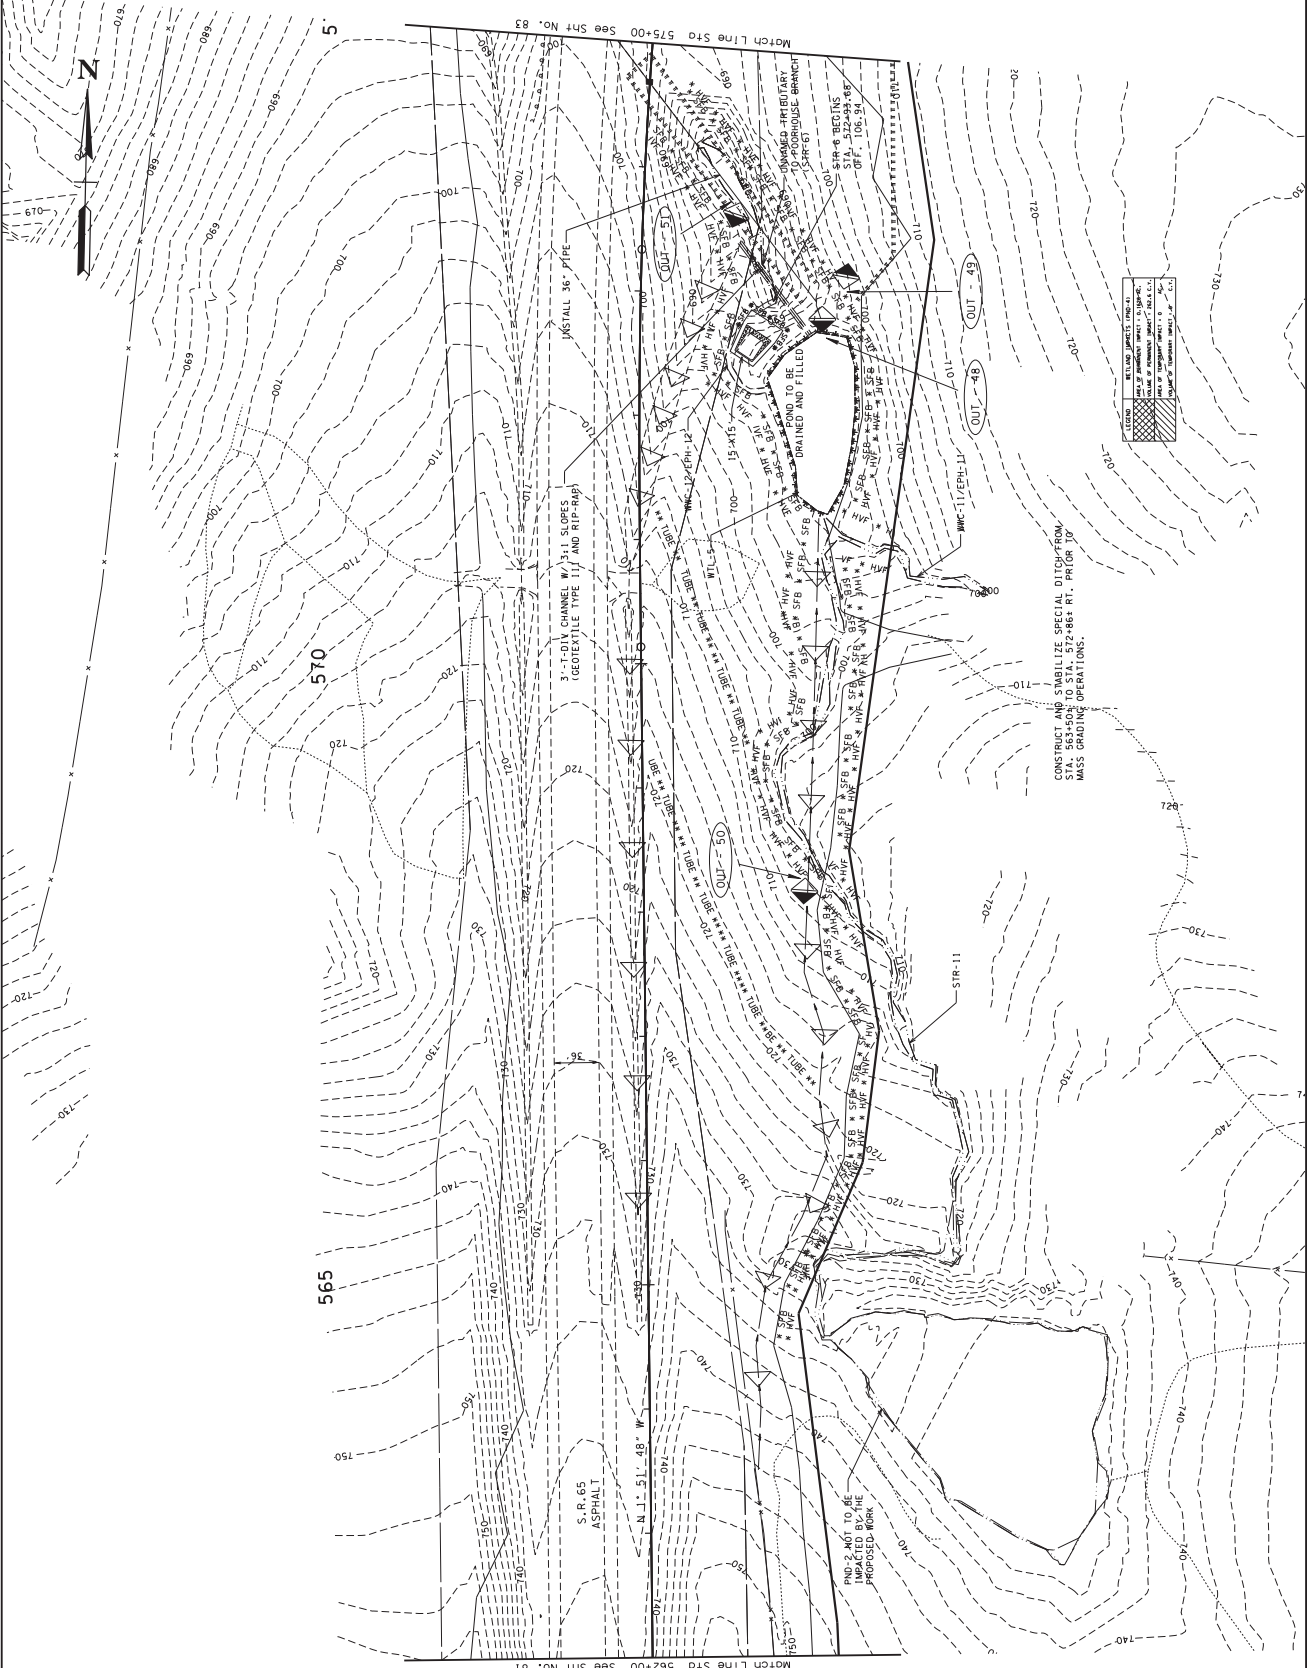

SHEET NO.	79
PROJECT NO.	STP-65101
YEAR	2012
R.O.W.	2012
CONST.	2017
	83



COORDINATES ARE UTM 84U 18S, ANSISTD 83, FACTOR OF 1.000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE 1985 BENCHMARK.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE I

STA. 575+00 TO STA. 588+00  
SCALE: 1" = 50'

YEAR	PROJECT NO.	SHEET NO.
2012	STP-65101	80
2017	STP-65101	84




COORDINATES ARE UTM 83Q UTM 18S, FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE 1988 BSL.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

EPSC PLAN  
STAGE I

STA. 588+00 TO STA. 601+00  
SCALE: 1" = 50'

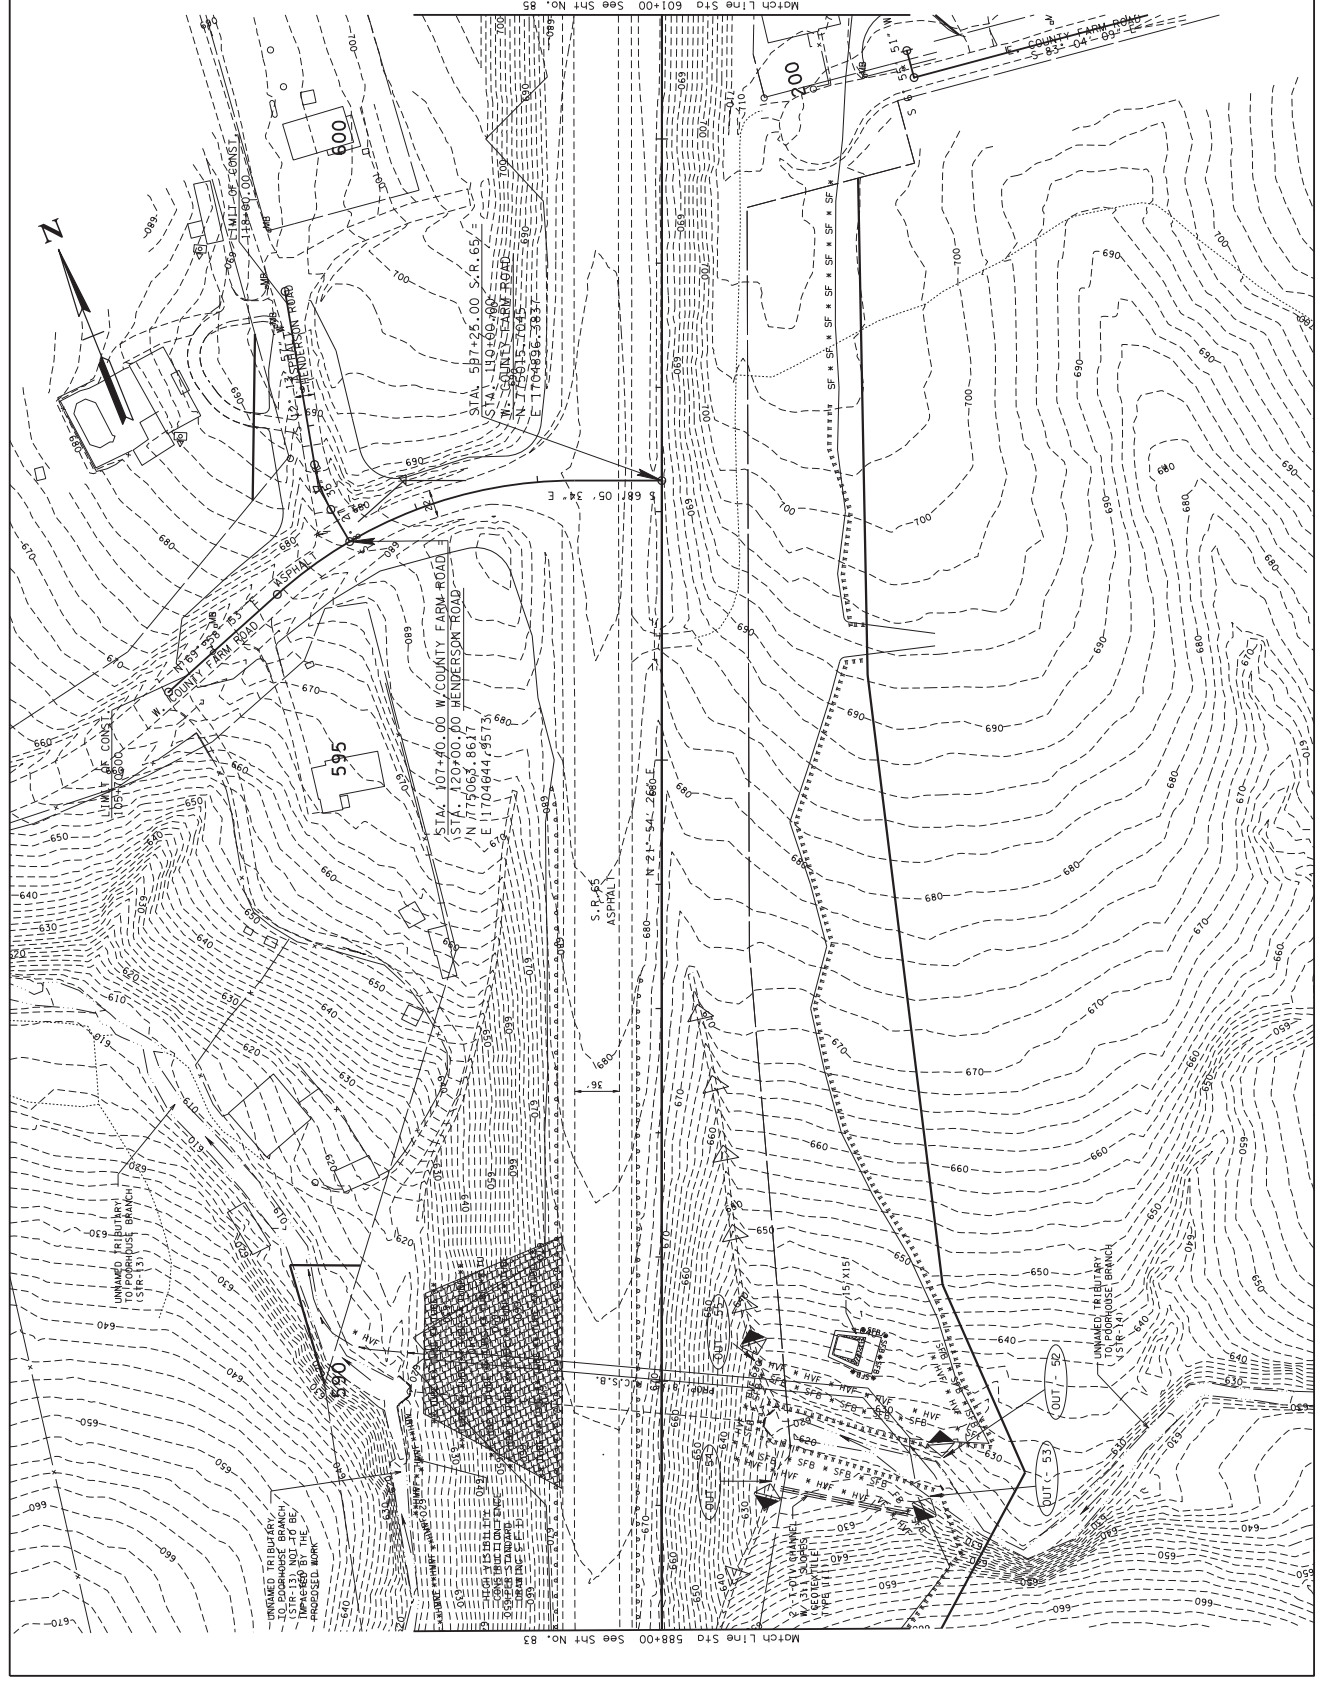



SHEET NO.	PROJECT NO.
NO.	STP-65101
81	STP-65101
85	

YEAR	TYPE
2012	R.O.W.
2017	CONST.


SEAL BY  
DAVID EAST

**STATE OF TENNESSEE**  
**DEPARTMENT OF TRANSPORTATION**

**EPSC PLAN**  
**STAGE I**



STA. 601+00 TO STA. 614+00  
SCALE: 1" = 50'

COORDINATES ARE UTM 84U 9952,  
NAD 83. DISTANCE FROM THE  
FACTOR OF 1000000 AND TIED TO  
THE TOPN. ALL ELEVATIONS ARE  
REFERRED TO THE MVD 958L.

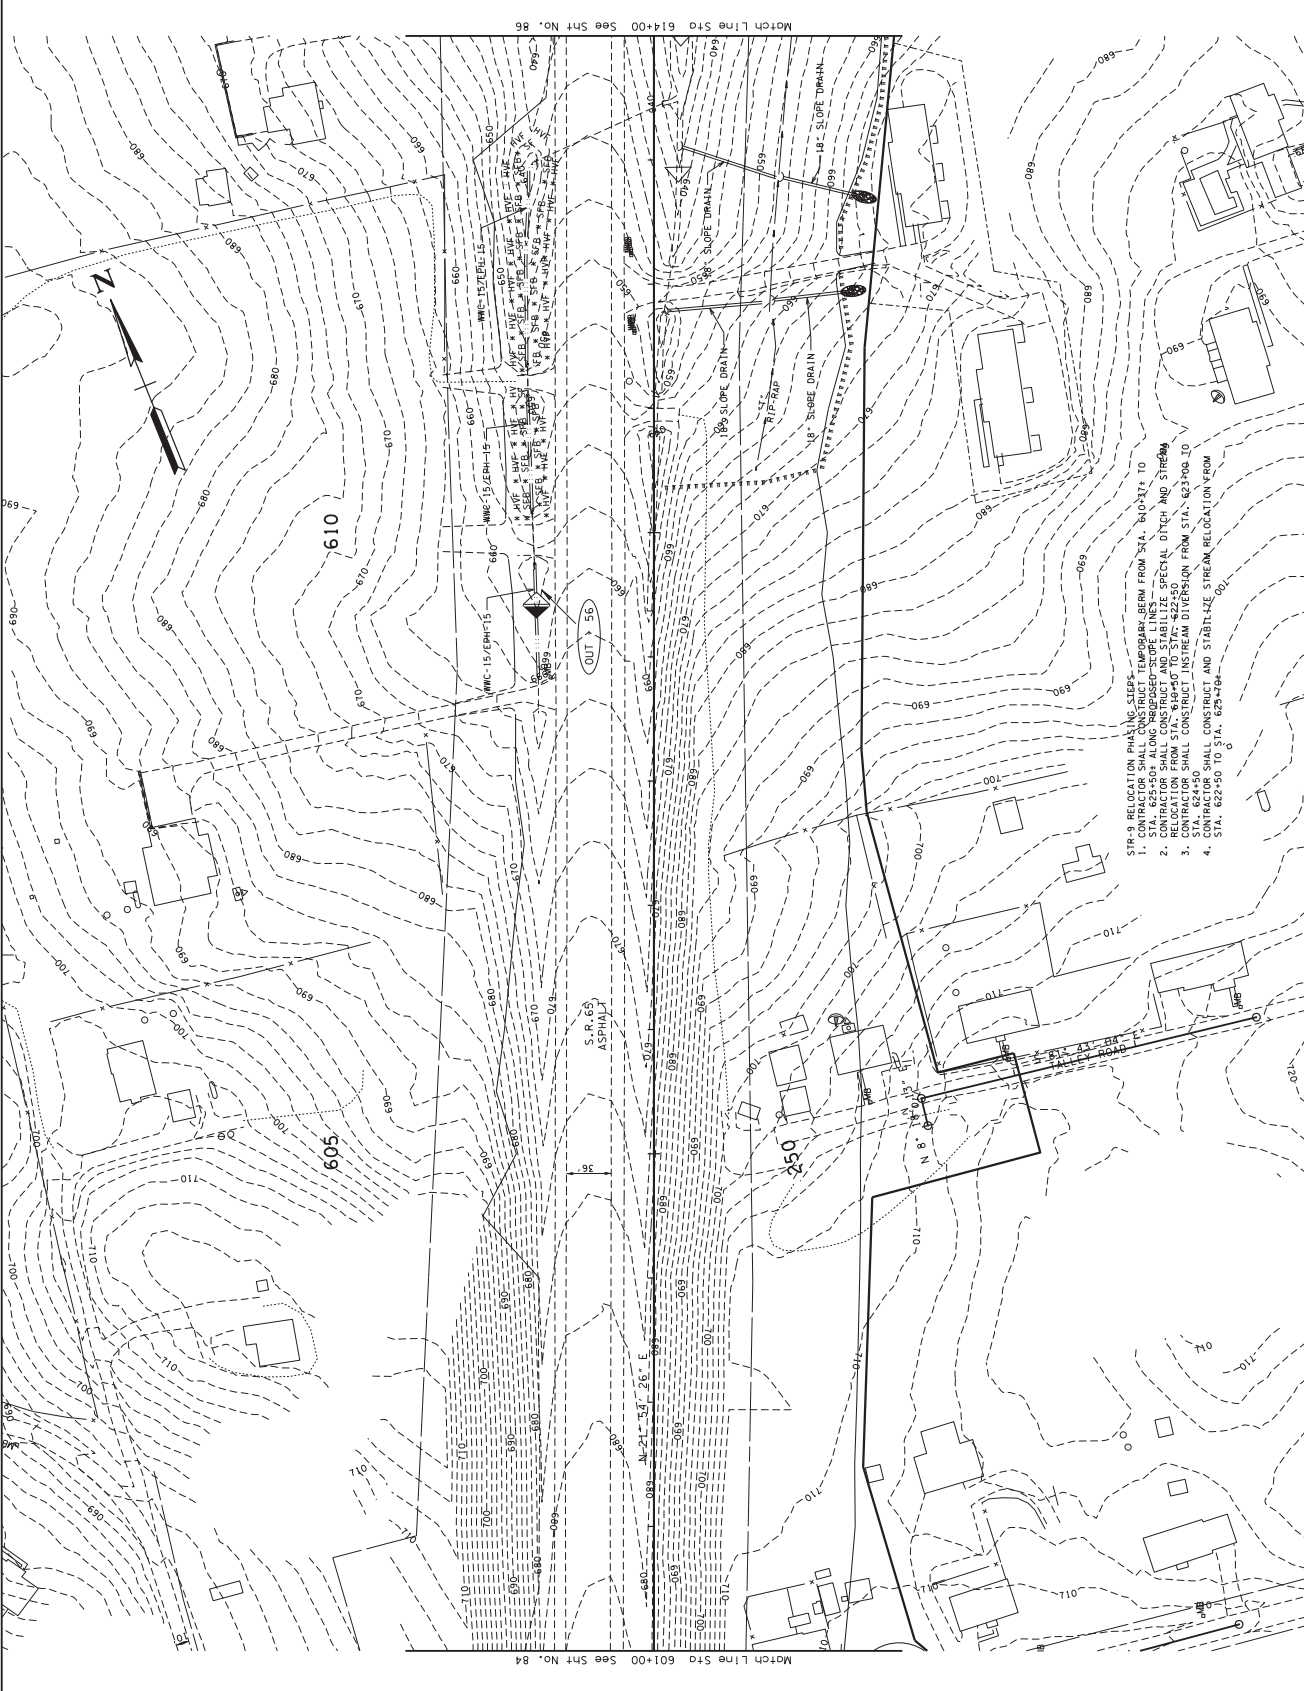

- STR-9 RELOCATION PHASING STEPS
1. CONTRACTOR SHALL CONSTRUCT TEMPORARY BERM FROM STA. 601+10 TO STA. 601+50 TO PROTECT EXISTING CHANNEL FROM CONSTRUCTION AND STABILIZE SPECIAL DITCH AND STREAM.
  2. CONTRACTOR SHALL CONSTRUCT AND STABILIZE SPECIAL DITCH AND STREAM RELOCATION FROM STA. 601+50 TO STA. 622+50.
  3. CONTRACTOR SHALL CONSTRUCT INSTREAM DIVERSION FROM STA. 622+00 TO STA. 622+50.
  4. CONTRACTOR SHALL CONSTRUCT AND STABILIZE STREAM RELOCATION FROM STA. 622+50 TO STA. 625+00.

SHEET NO.	PROJECT NO.
NO.	
82	STP-65101
86	STP-65101
	CONST. 2017

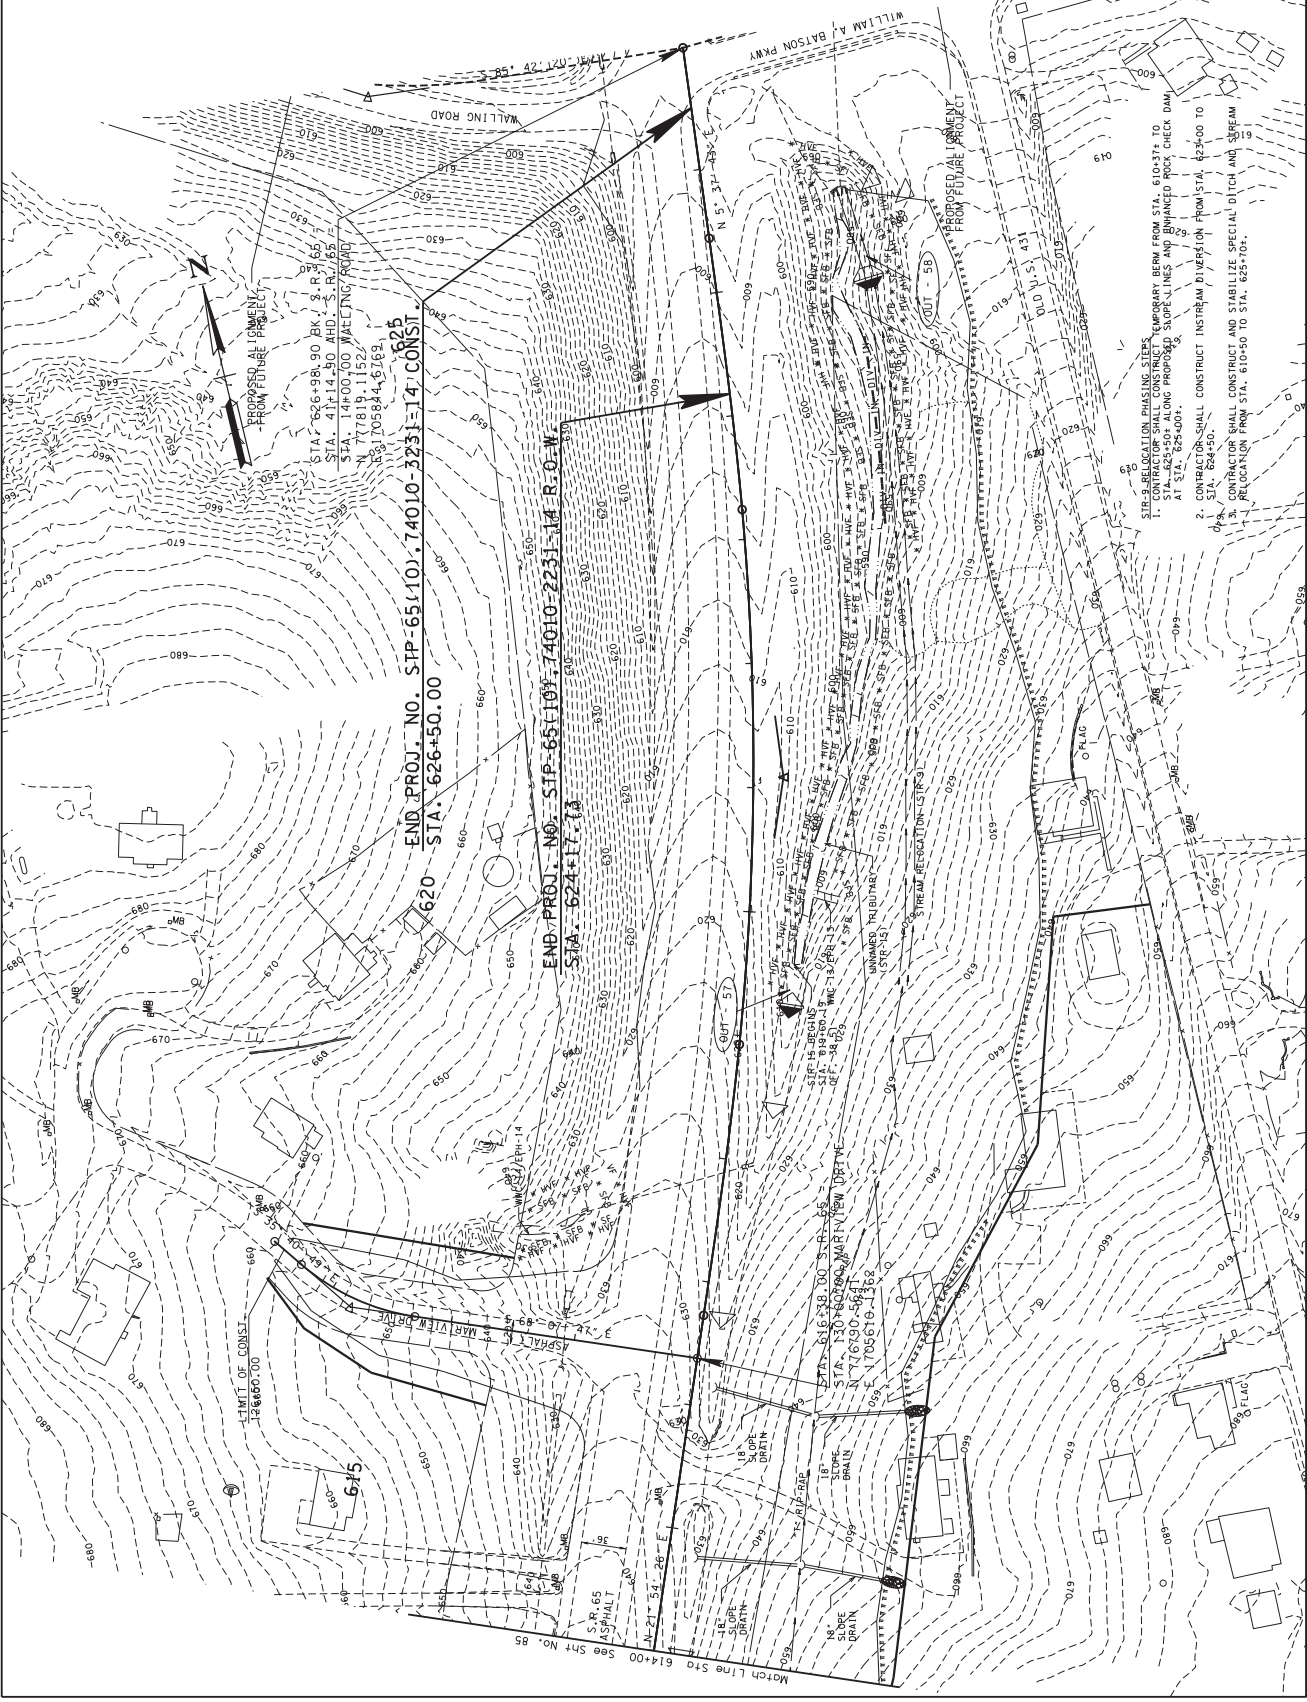


COORDINATES ARE UTM 84N98E. FACTOR OF 0.000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERRED TO THE NAVD 83EB.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE I

STA. 614+00 TO END OF PROJ.  
SCALE: 1" = 50'

SHEET NO.	PROJECT NO.	YEAR	TYPE
83	STP-65101	2012	R.O.W.
BT	STP-65101	2017	CONST.




COORDINATES ARE UTM 83N UTM ZONE 18Q. ALL ELEVATIONS ARE REFERENCED TO THE MVD 1988.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE II

BEG. OF PROJ. TO STA. 406+00  
SCALE: 1" = 50'

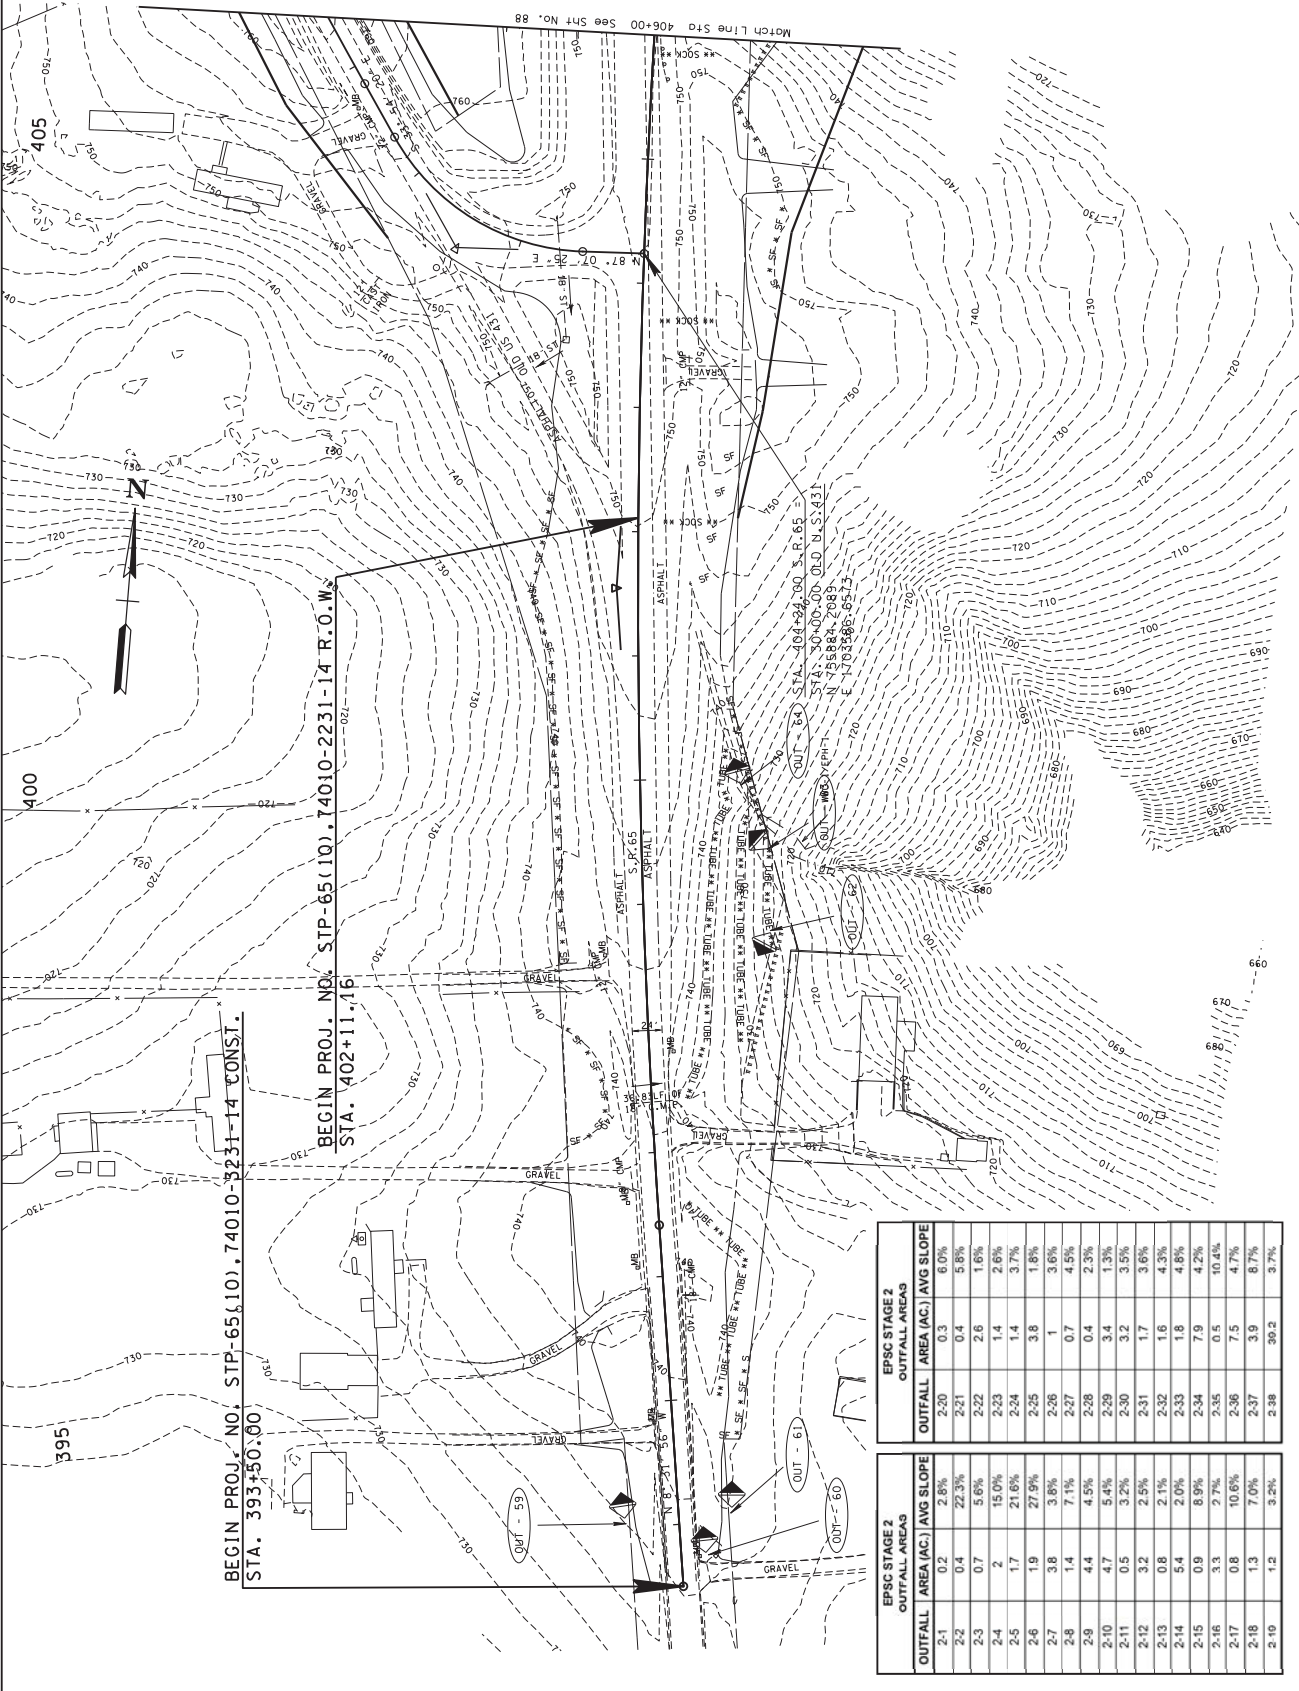

BEGIN PROJ. NO. STP-65(10).74010-3231-14 CONST.  
STA. 393+50.00

BEGIN PROJ. NO. STP-65(10).74010-2231-14 R.O.W.  
STA. 402+11.16

EPSC STAGE 2  
OUTFALL AREAS


OUTFALL	AREA (AC.)	AVG SLOPE
2-20	0.3	6.0%
2-21	0.4	5.8%
2-22	2.6	1.6%
2-23	1.4	2.6%
2-24	1.4	3.7%
2-25	3.8	1.8%
2-26	1	3.6%
2-27	0.7	4.5%
2-28	0.4	2.3%
2-29	3.4	1.3%
2-30	3.2	3.5%
2-31	1.7	3.6%
2-32	1.6	4.3%
2-33	1.8	4.8%
2-34	7.9	4.2%
2-35	0.5	10.4%
2-36	7.5	4.7%
2-37	3.9	6.7%
2-38	30.2	3.7%

EPSC STAGE 2  
OUTFALL AREAS

OUTFALL	AREA (AC.)	AVG SLOPE
2-1	0.2	2.8%
2-2	0.4	22.3%
2-3	0.7	5.6%
2-4	2	15.0%
2-5	1.7	21.6%
2-6	1.9	27.9%
2-7	3.8	3.9%
2-8	1.4	7.1%
2-9	4.4	4.5%
2-10	4.7	5.4%
2-11	0.5	3.2%
2-12	3.2	2.5%
2-13	0.8	2.1%
2-14	5.4	2.0%
2-15	0.9	8.9%
2-16	3.3	2.7%
2-17	0.8	10.6%
2-18	1.3	7.0%
2-19	1.2	3.2%



SHEET NO.	PROJECT NO.
NO.	
85	2012
B9	2017

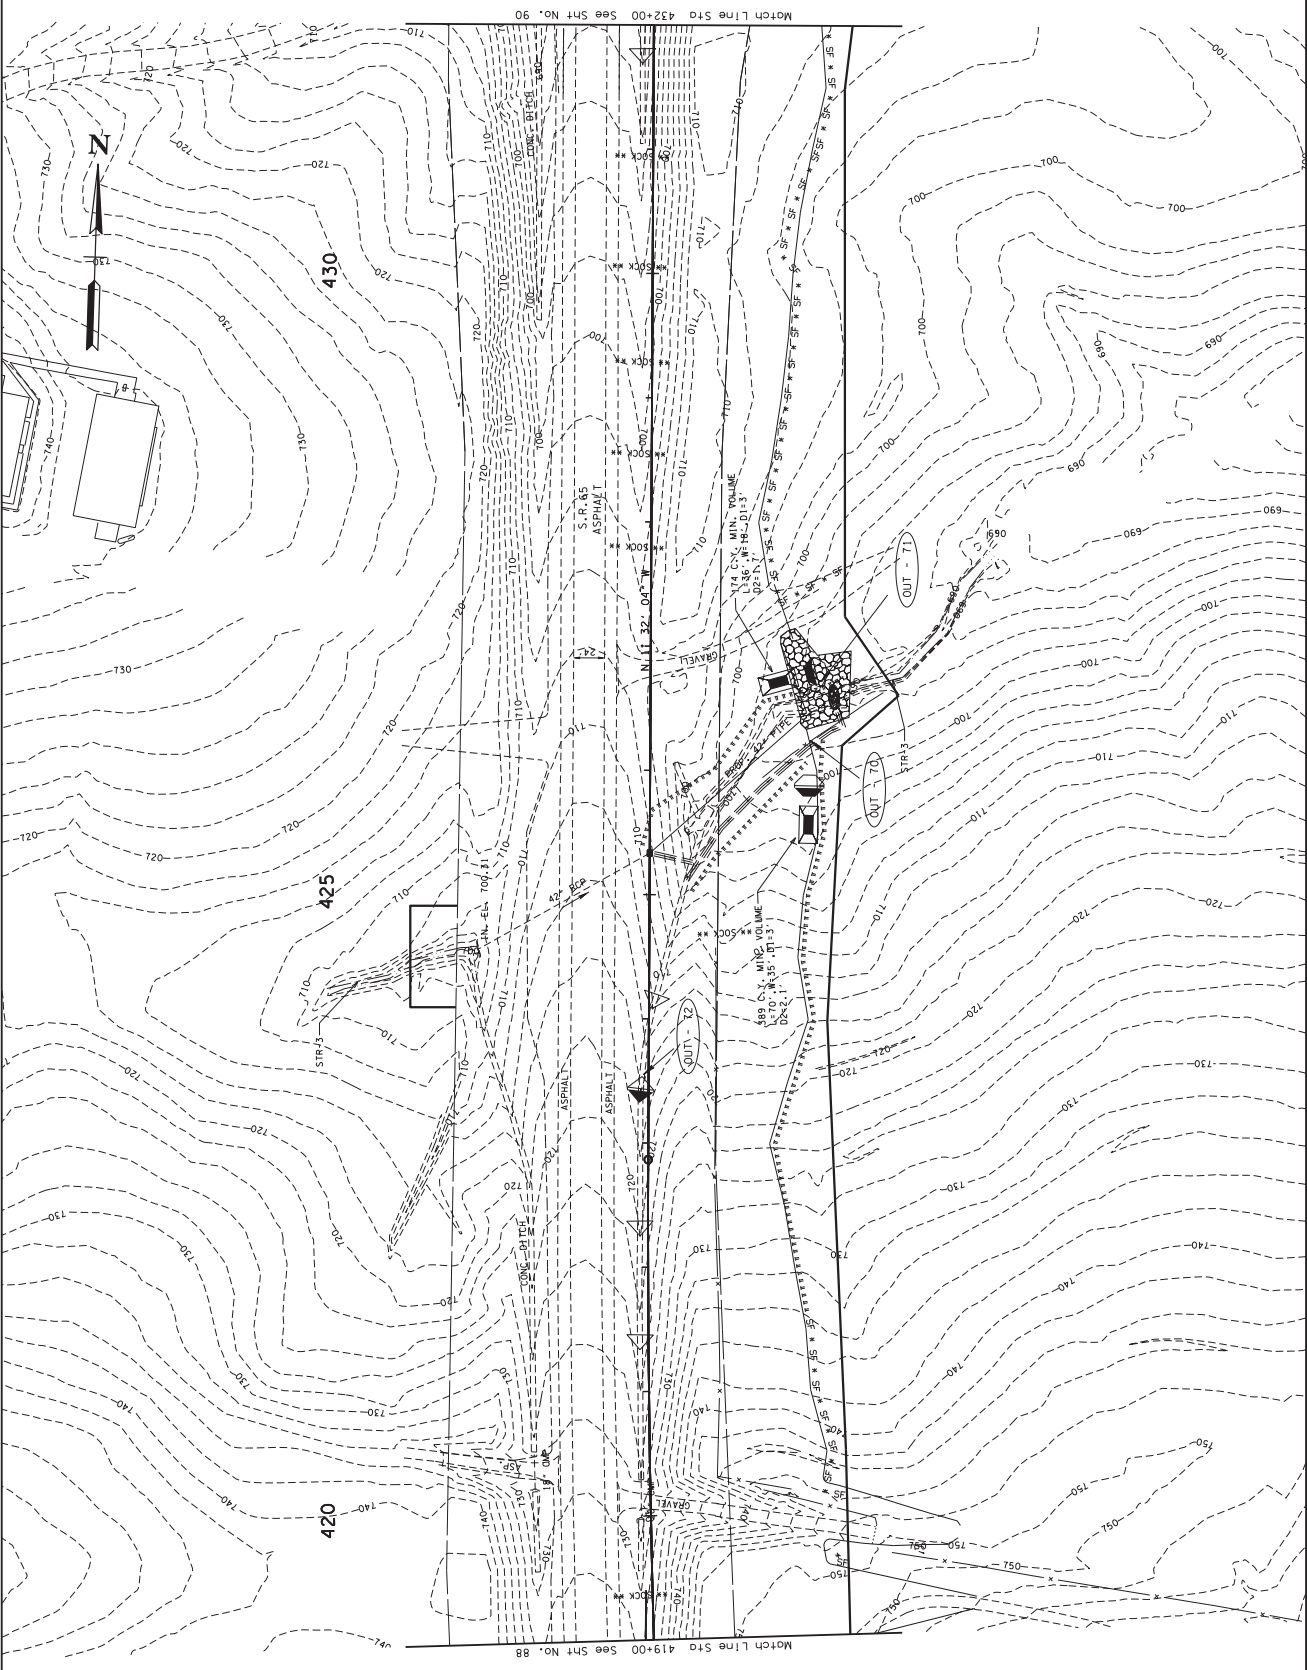

COORDINATES ARE UTM 84N UTM 18S. FACTOR OF 1000000 AND TIED TO THE TOWN. ALL ELEVATIONS ARE REFERENCED TO THE NAVD 83.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

EPSC PLAN  
STAGE II

STA. 419+00 TO STA. 432+00  
SCALE: 1" = 50'

PROJECT NO.	STP-65101
YEAR	2012
R.O.W.	2012
CONST.	2017
SHEET NO.	86
	90



COORDINATES USED BY THESE  
 ANNOTATIONS ARE UNADJUSTED.  
 FACTOR OF 1000000 AND TIED TO  
 THE TBM. ALL ELEVATIONS ARE  
 REFERENCED TO THE NAVD 83.


STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE II

STA. 432+00 TO STA. 445+00  
 SCALE: 1" = 50'



TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65101	B7
CONST.	2017	STP-65101	B1




COORDINATES ARE UTM 84N95E, FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE MVD 1986.


STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE II**

STA. 445+00 TO STA. 458+00  
SCALE: 1" = 50'

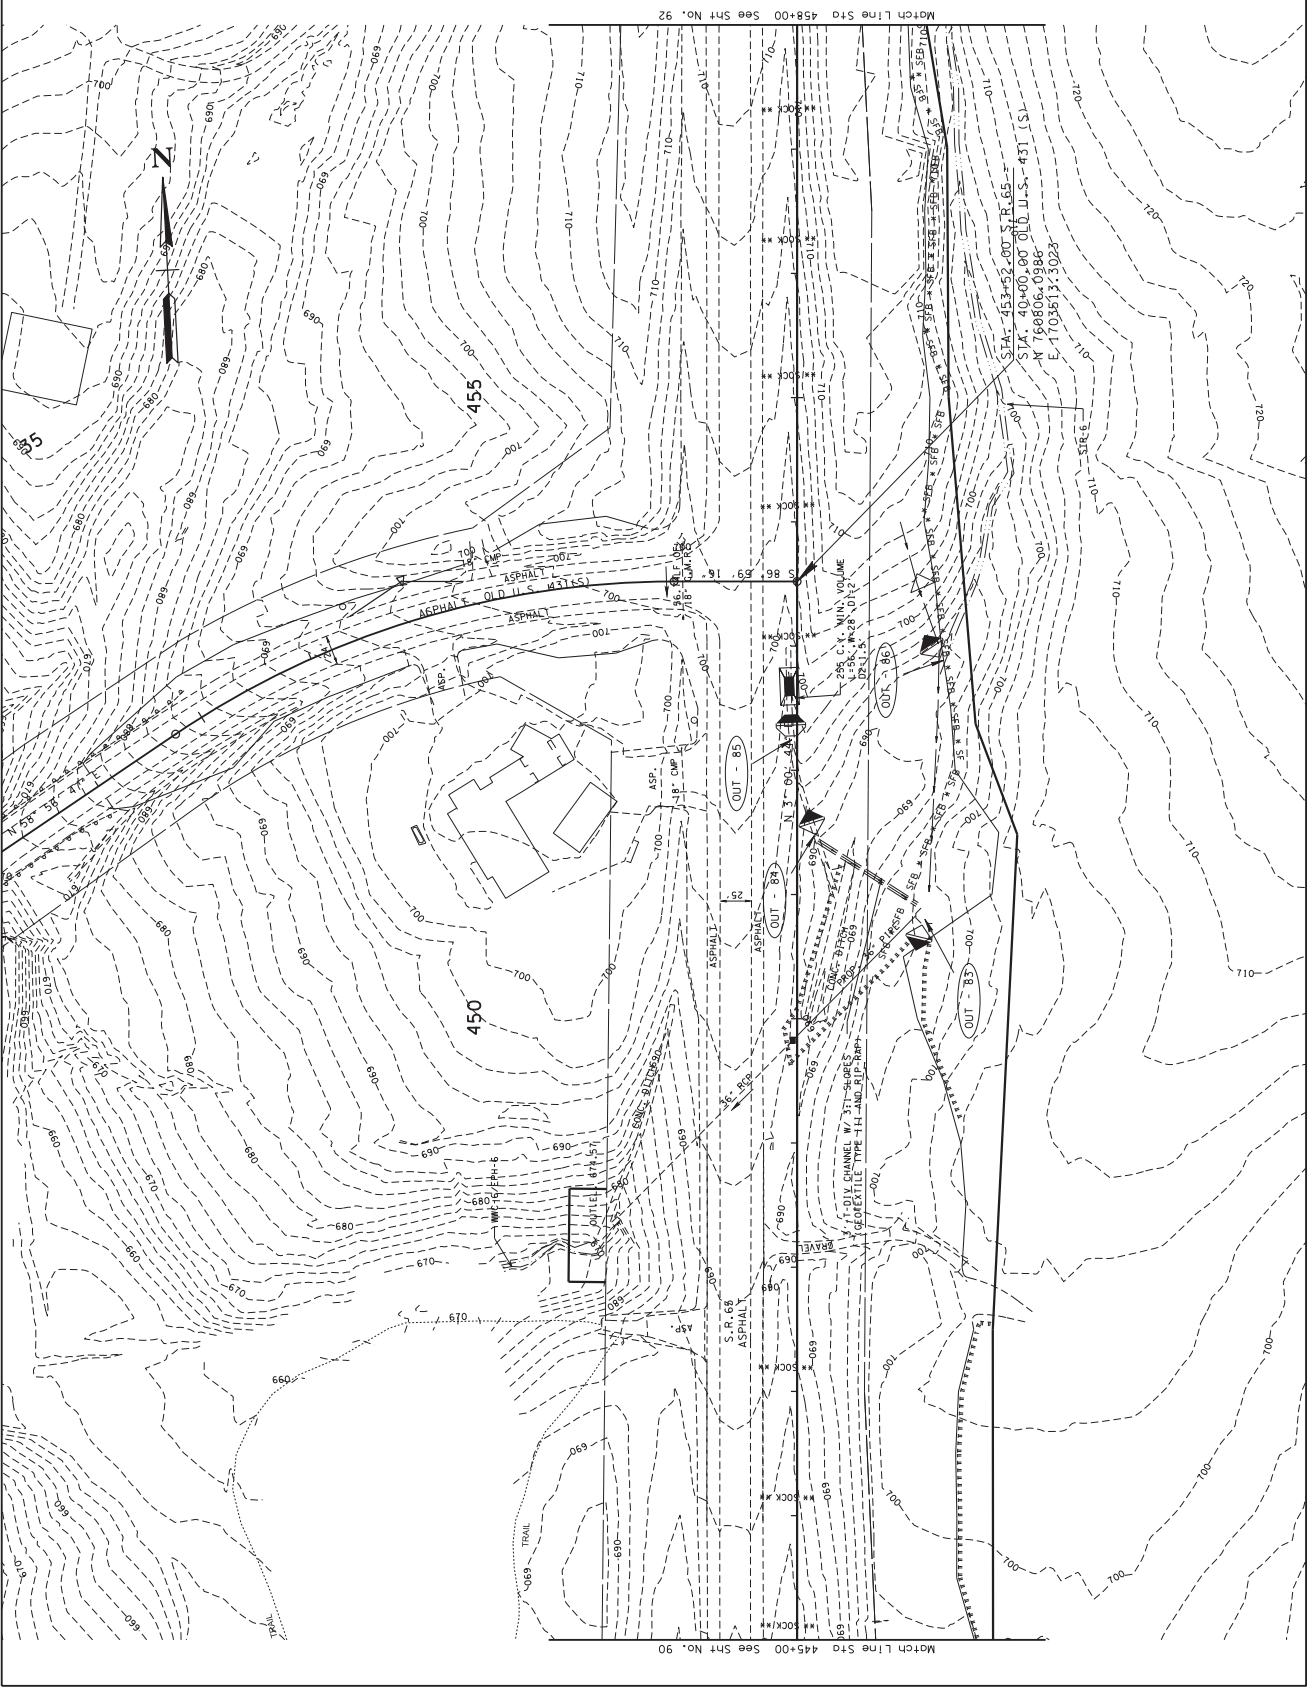

SHEET NO.	PROJECT NO.	YEAR	TYPE
88	STP-65H101	2012	R.O.W.
92	STP-65H101	2017	CONST.




COORDINATES ARE UTM 84Q UTM ZONE. FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE NAD 83 B.S.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE II**

STA. 458+00 TO STA. 471+00  
SCALE: 1" = 50'

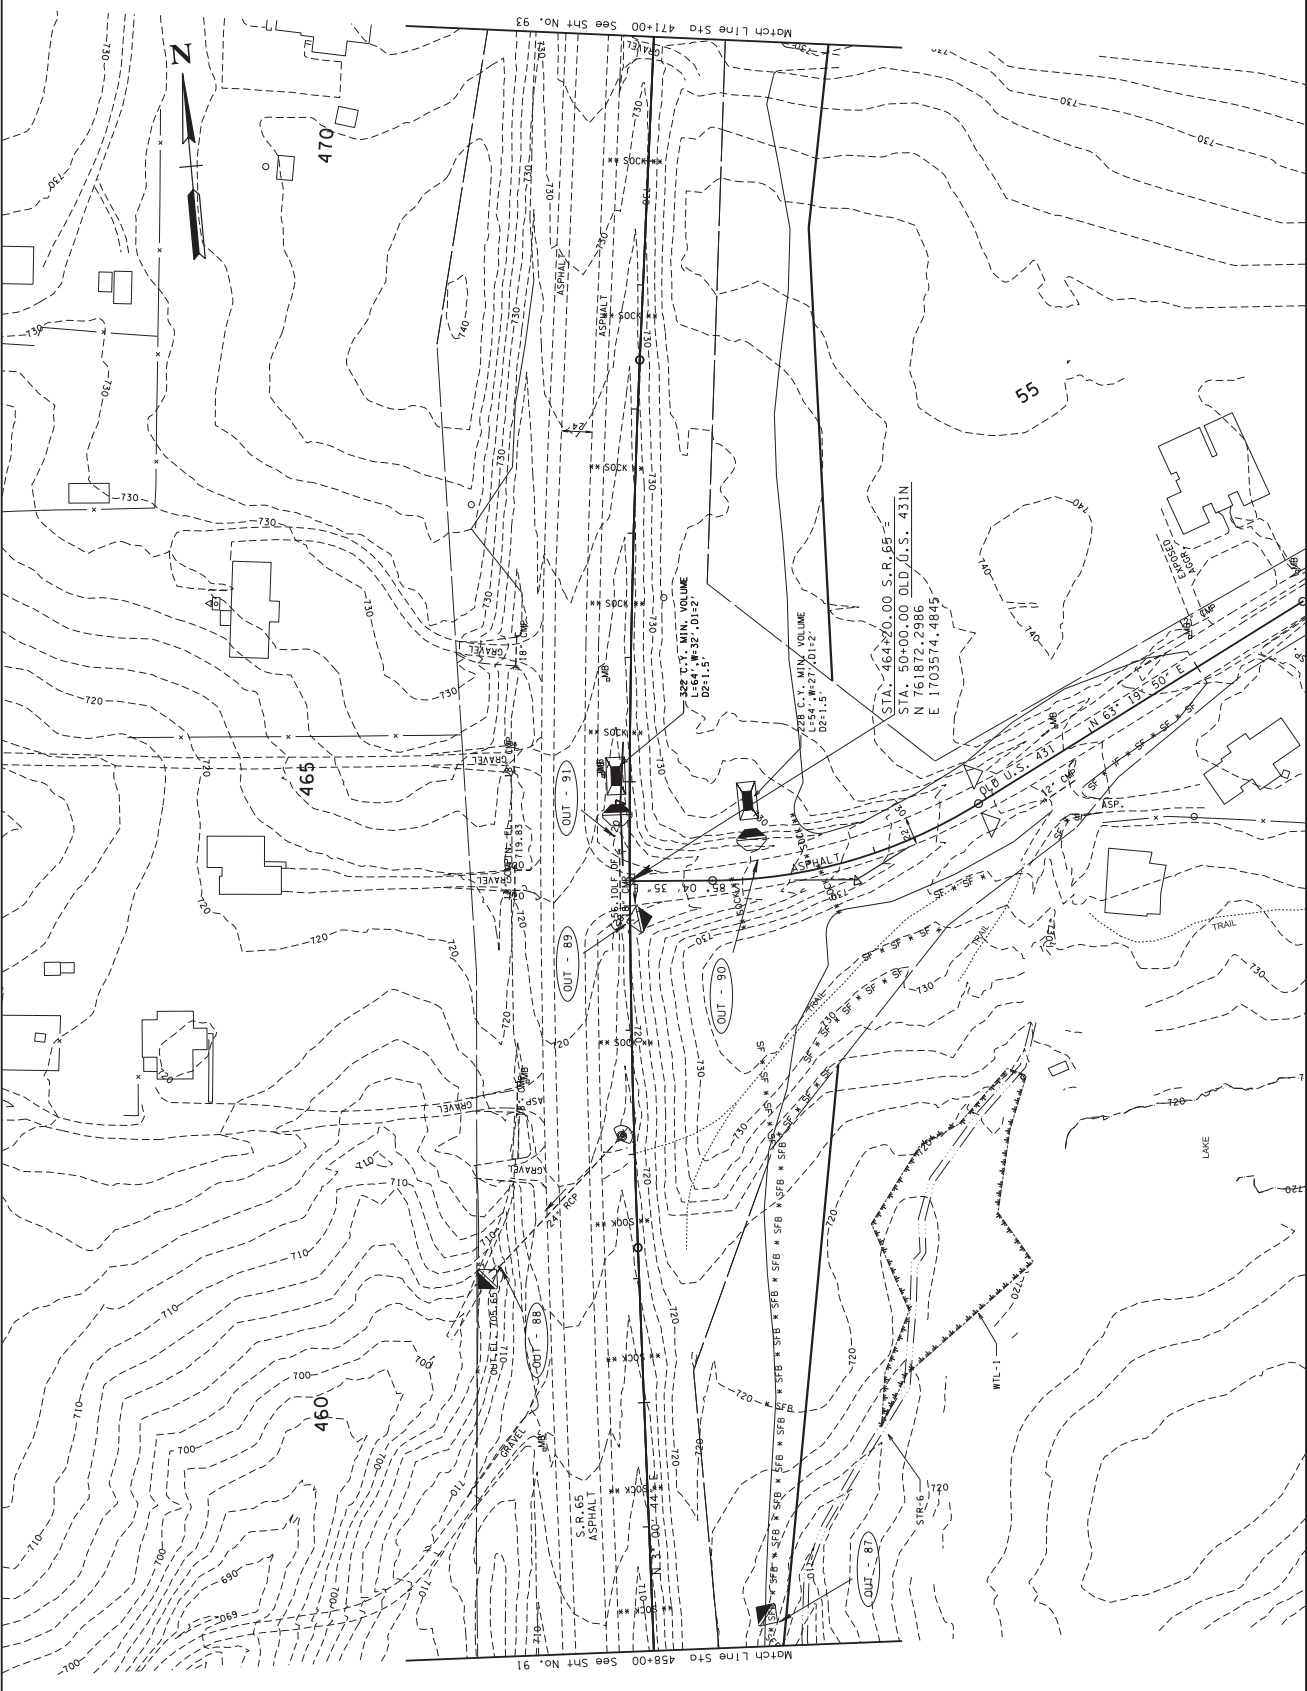

STA. 464+20.00 S.R. 65 =  
STA. 50+00.00 OLD U.S. 43 IN  
N 761872.2986  
E 1703574.4845

322' L.C. MIN. VOLUME  
L=64' R=32' D1=12'  
D2=1.5'

1554' L.C. MIN. VOLUME  
L=54' R=27' D1=12'  
D2=1.5'



SHEET NO.	PROJECT NO.	YEAR	TYPE
89	STP-65101	2012	R.O.W.
93	STP-65101	2017	CONST.

REV. 12-15-13: REVISED THE LIMIT OF CONSTRUCTION ON MT. SHARON ROAD.




COORDINATES ARE UTM 84N UTM ZONE 18N. ALL DISTANCES AND SLOPES ARE IN METERS AND TIED TO FACTOR OF 1000000 AND TIED TO THE TBM. ALL ELEVATIONS ARE REFERENCED TO THE 1985 BENCHMARK.


STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE II**

STA. 471+00 TO STA. 484+00  
SCALE: 1" = 50'

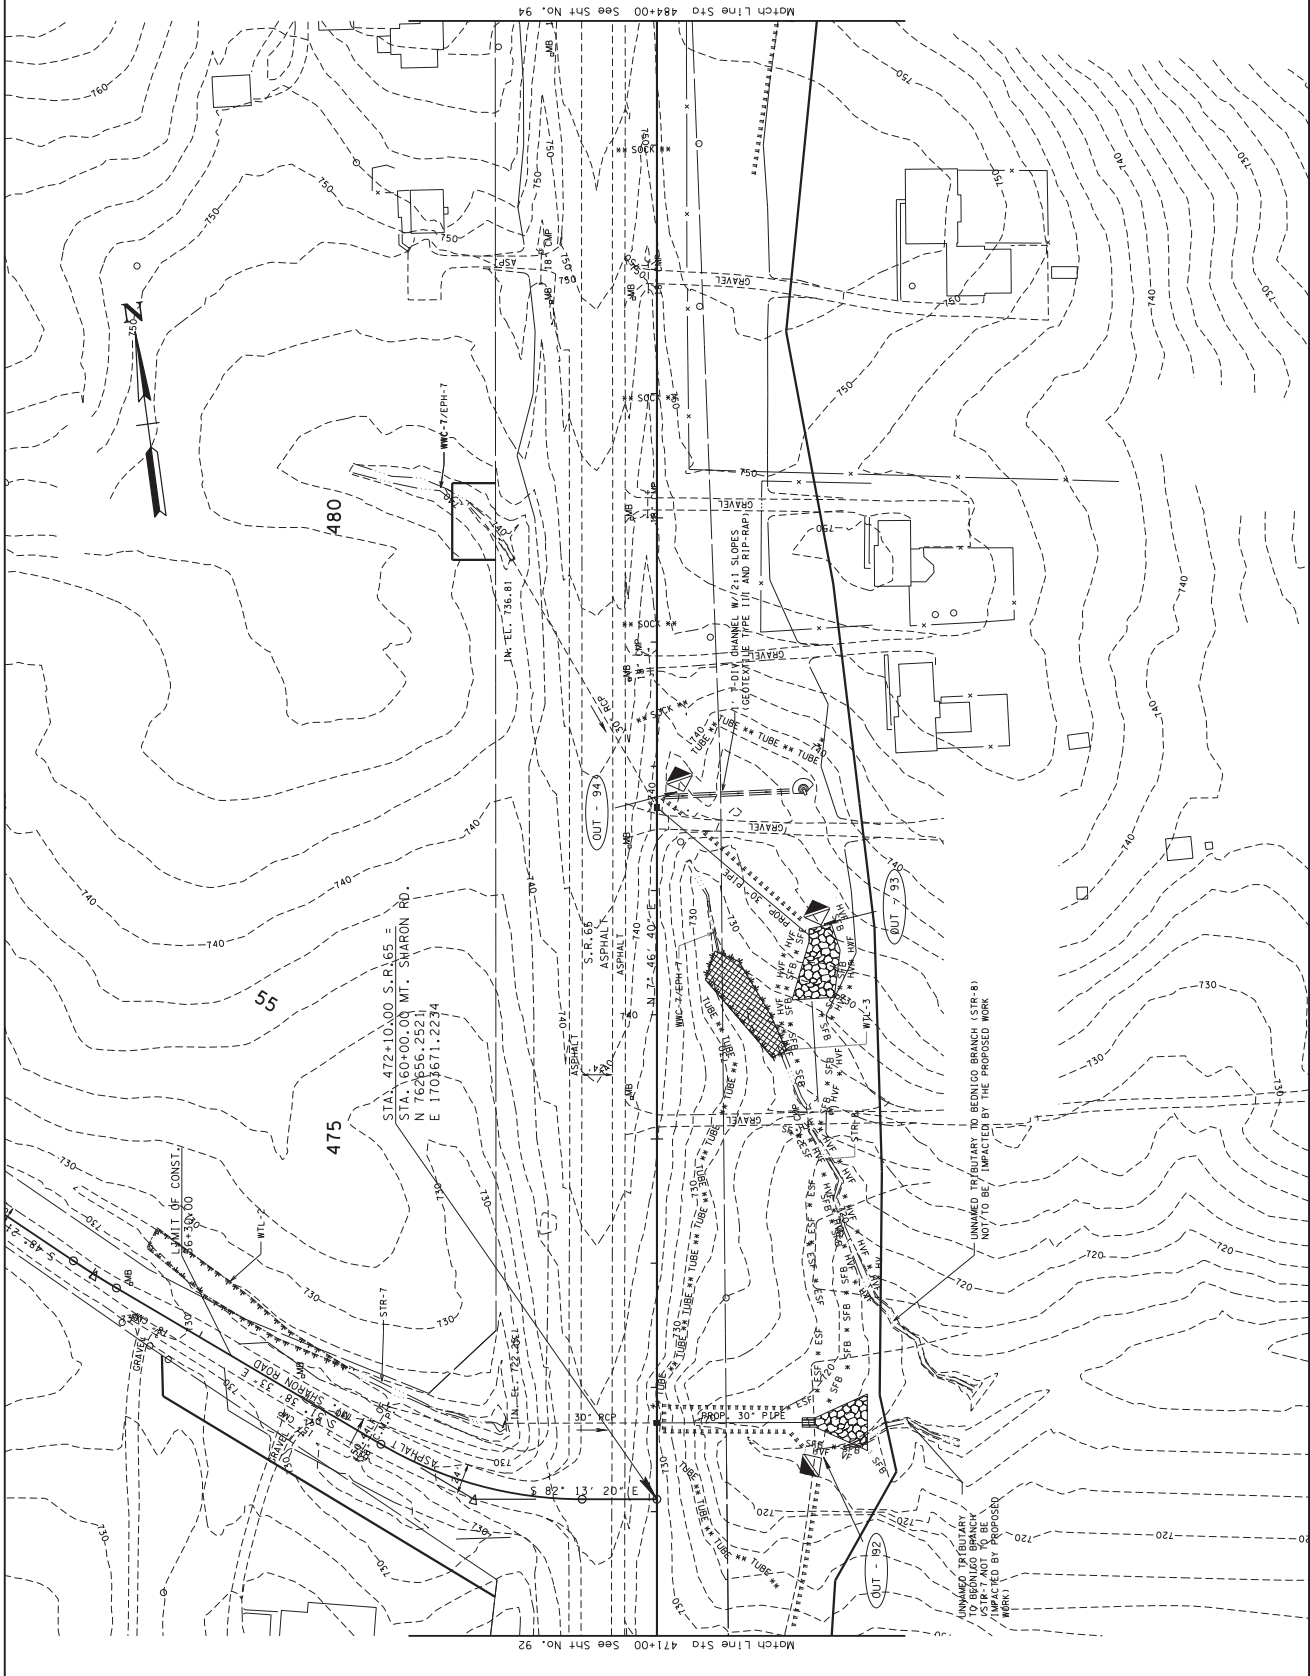

SHEET NO.	PROJECT NO.	YEAR	TYPE
90	STP-65101	2012	R.O.W.
94	STP-65101	2017	CONST.

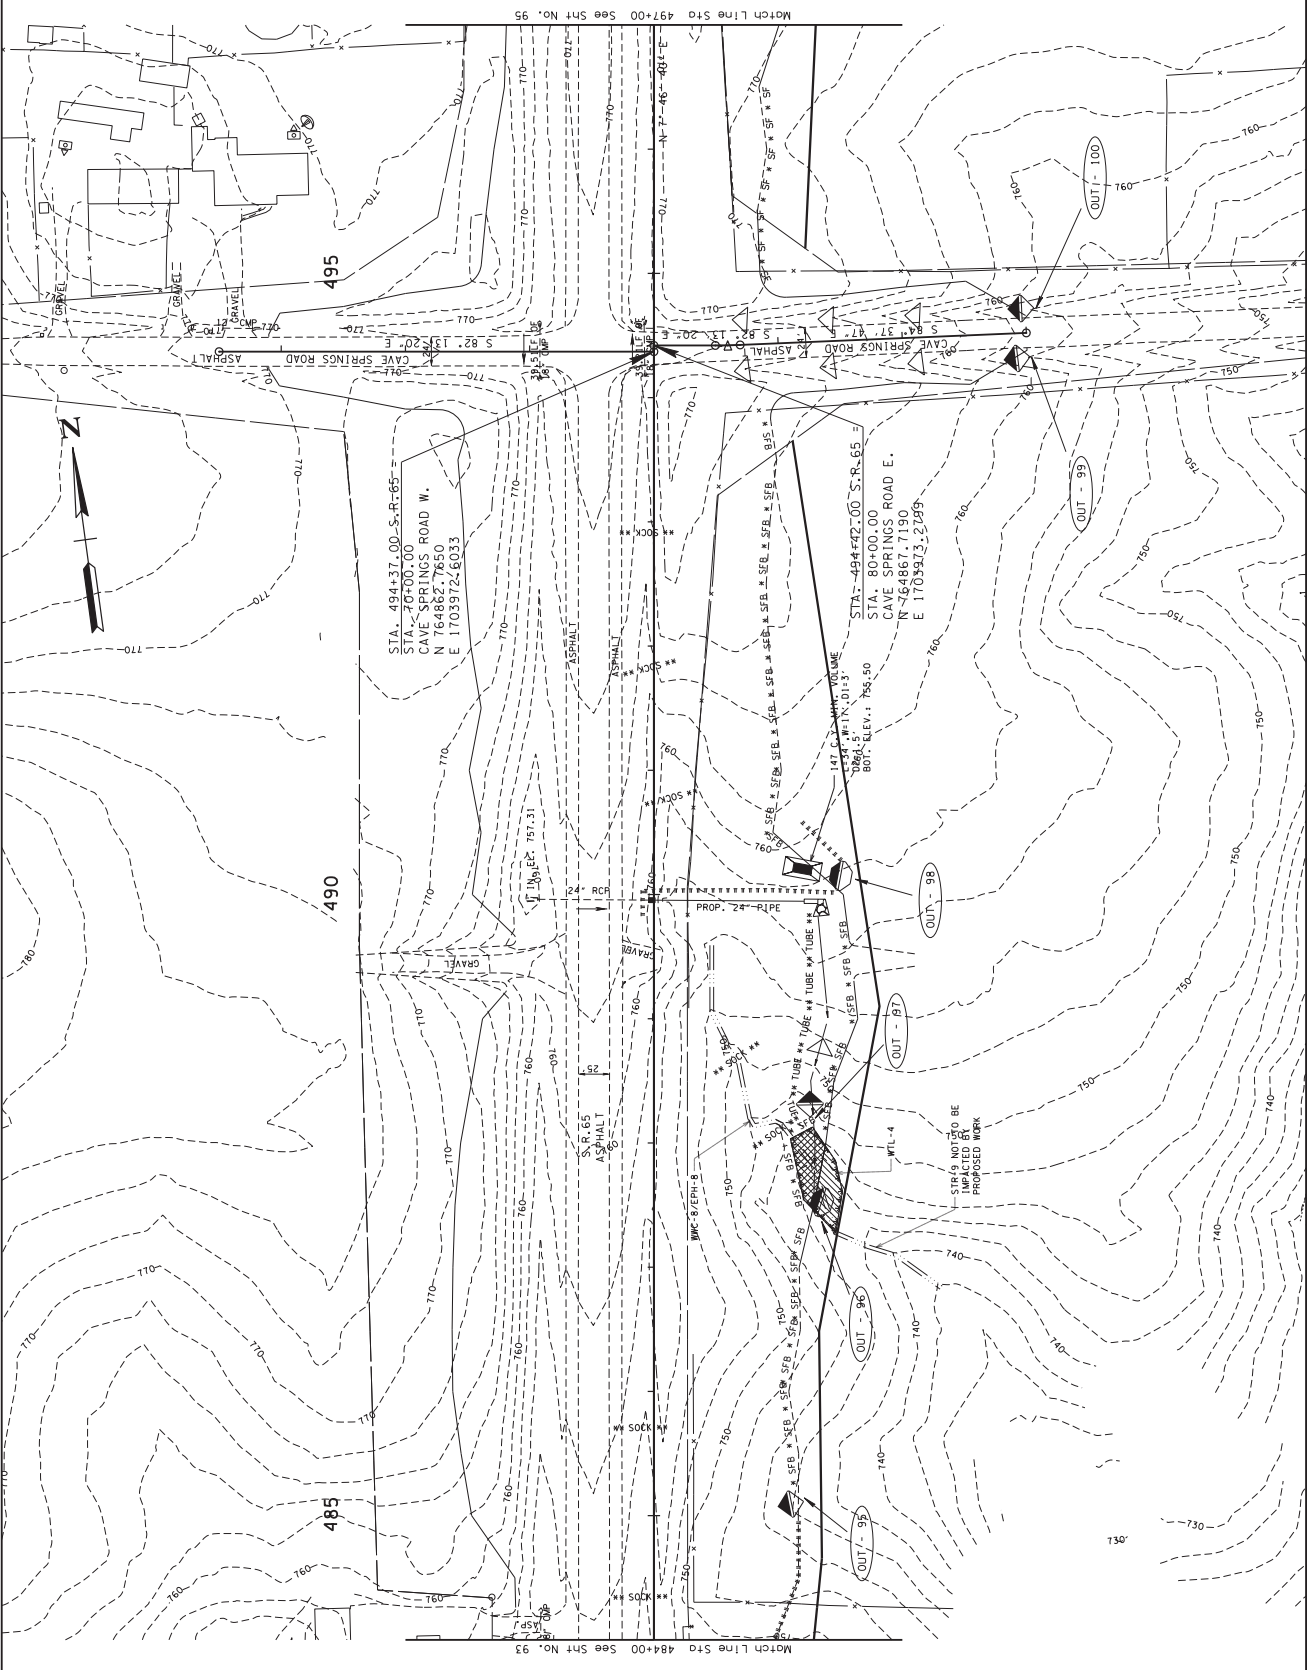

COORDINATES ARE UTM 83Q UTM ZONE 18N. ALL DISTANCES AND STATIONING ARE IN METERS. A SCALE FACTOR OF 0.000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE NAVD 1988.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE II

STA. 484+00 TO STA. 497+00  
SCALE: 1" = 50'

TYPE	YEAR	PROJECT NO.	SHEET NO.
	2012	STP-65H101	91
CONST.	2017	STP-65H101	95




COORDINATES ARE UTM 84N UTM ZONE 18T. FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE NGVD 1988.



STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

EPSC PLAN  
STAGE II

STA. 497+00 TO STA. 510+00  
SCALE: 1" = 50'

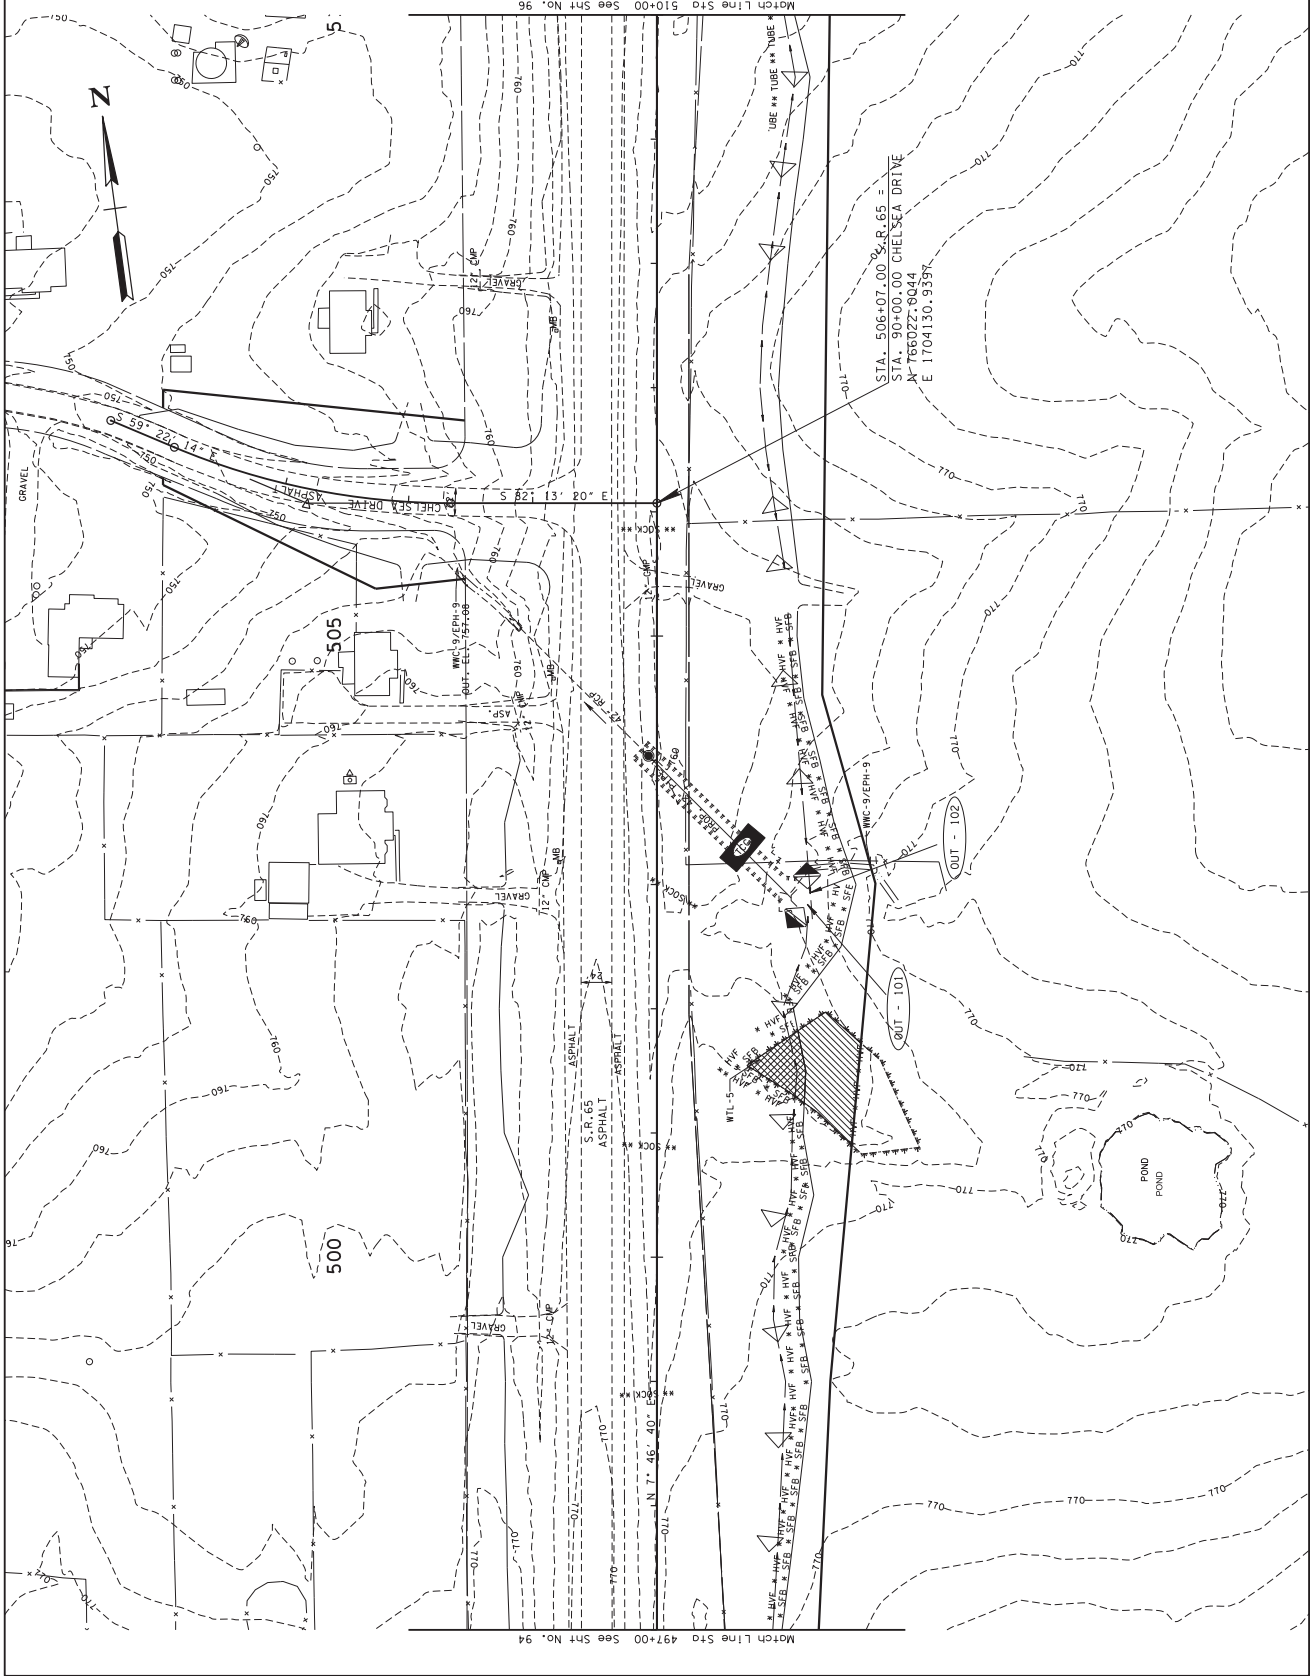

SHEET NO.	PROJECT NO.	YEAR	TYPE
92	STP-65101	2012	R.O.W.
96	STP-65101	2017	CONST.

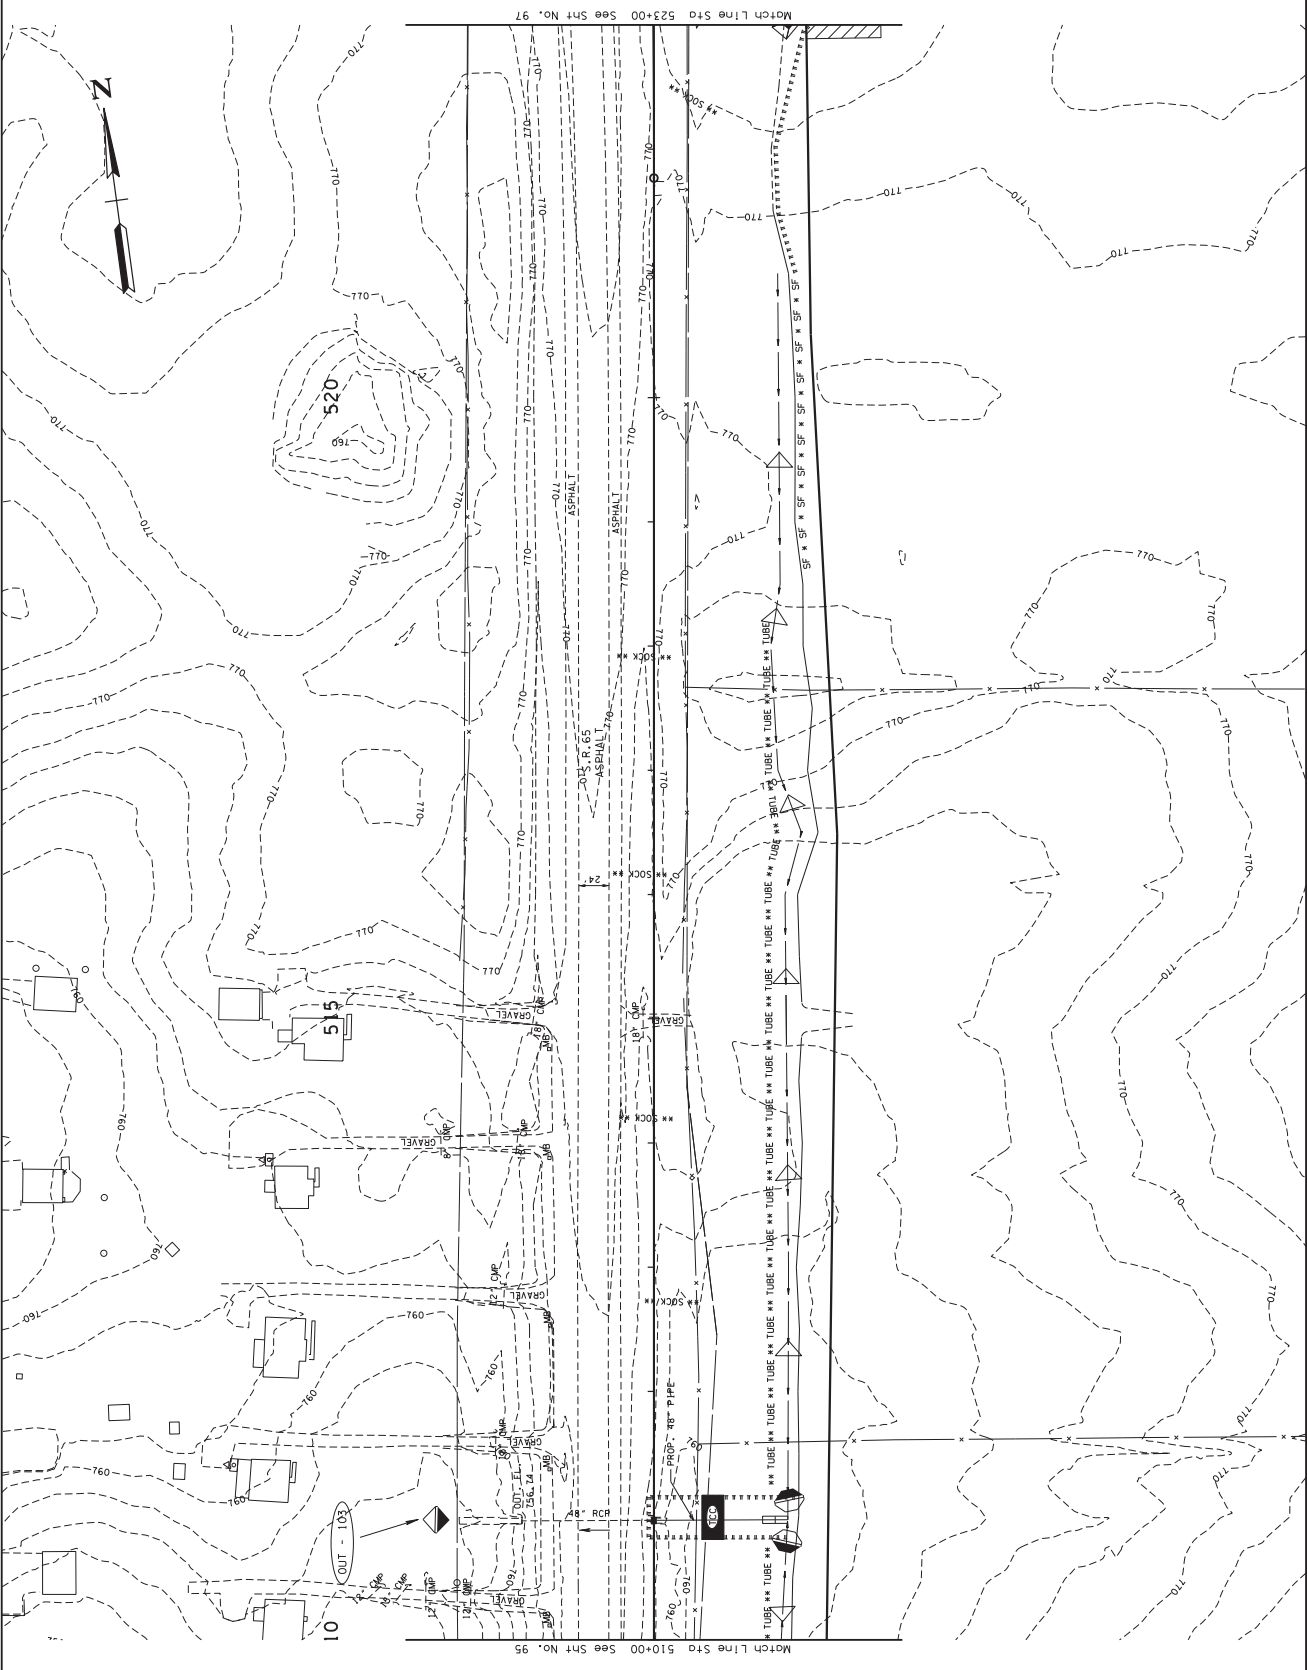

SEAL BY  
**DAVID EAST**  
 ENGINEER  
 STATE OF TENNESSEE  
 LICENSE NO. 1000000

COORDINATES ARE UTM 84N UZS.  
 DATUM IS NAD 83.  
 FACTOR OF 1.000000 AND TIED TO  
 THE TBM. ALL ELEVATIONS ARE  
 REFERENCED TO THE UTM 84N UZS.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION  
**EPSC PLAN**  
**STAGE II**  
 STA. 510+00 TO STA. 523+00  
 SCALE: 1" = 50'

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65101	93
CONST.	2017	STP-65101	97




COORDINATES ARE UTM 84N UTM ZONE 18Q. FACTOR OF 1000000 AND TIED TO THE TBM. ALL ELEVATIONS ARE REFERENCED TO THE 1985 BENCHMARK.



STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE II

STA. 523+00 TO STA. 536+00  
SCALE: 1" = 50'

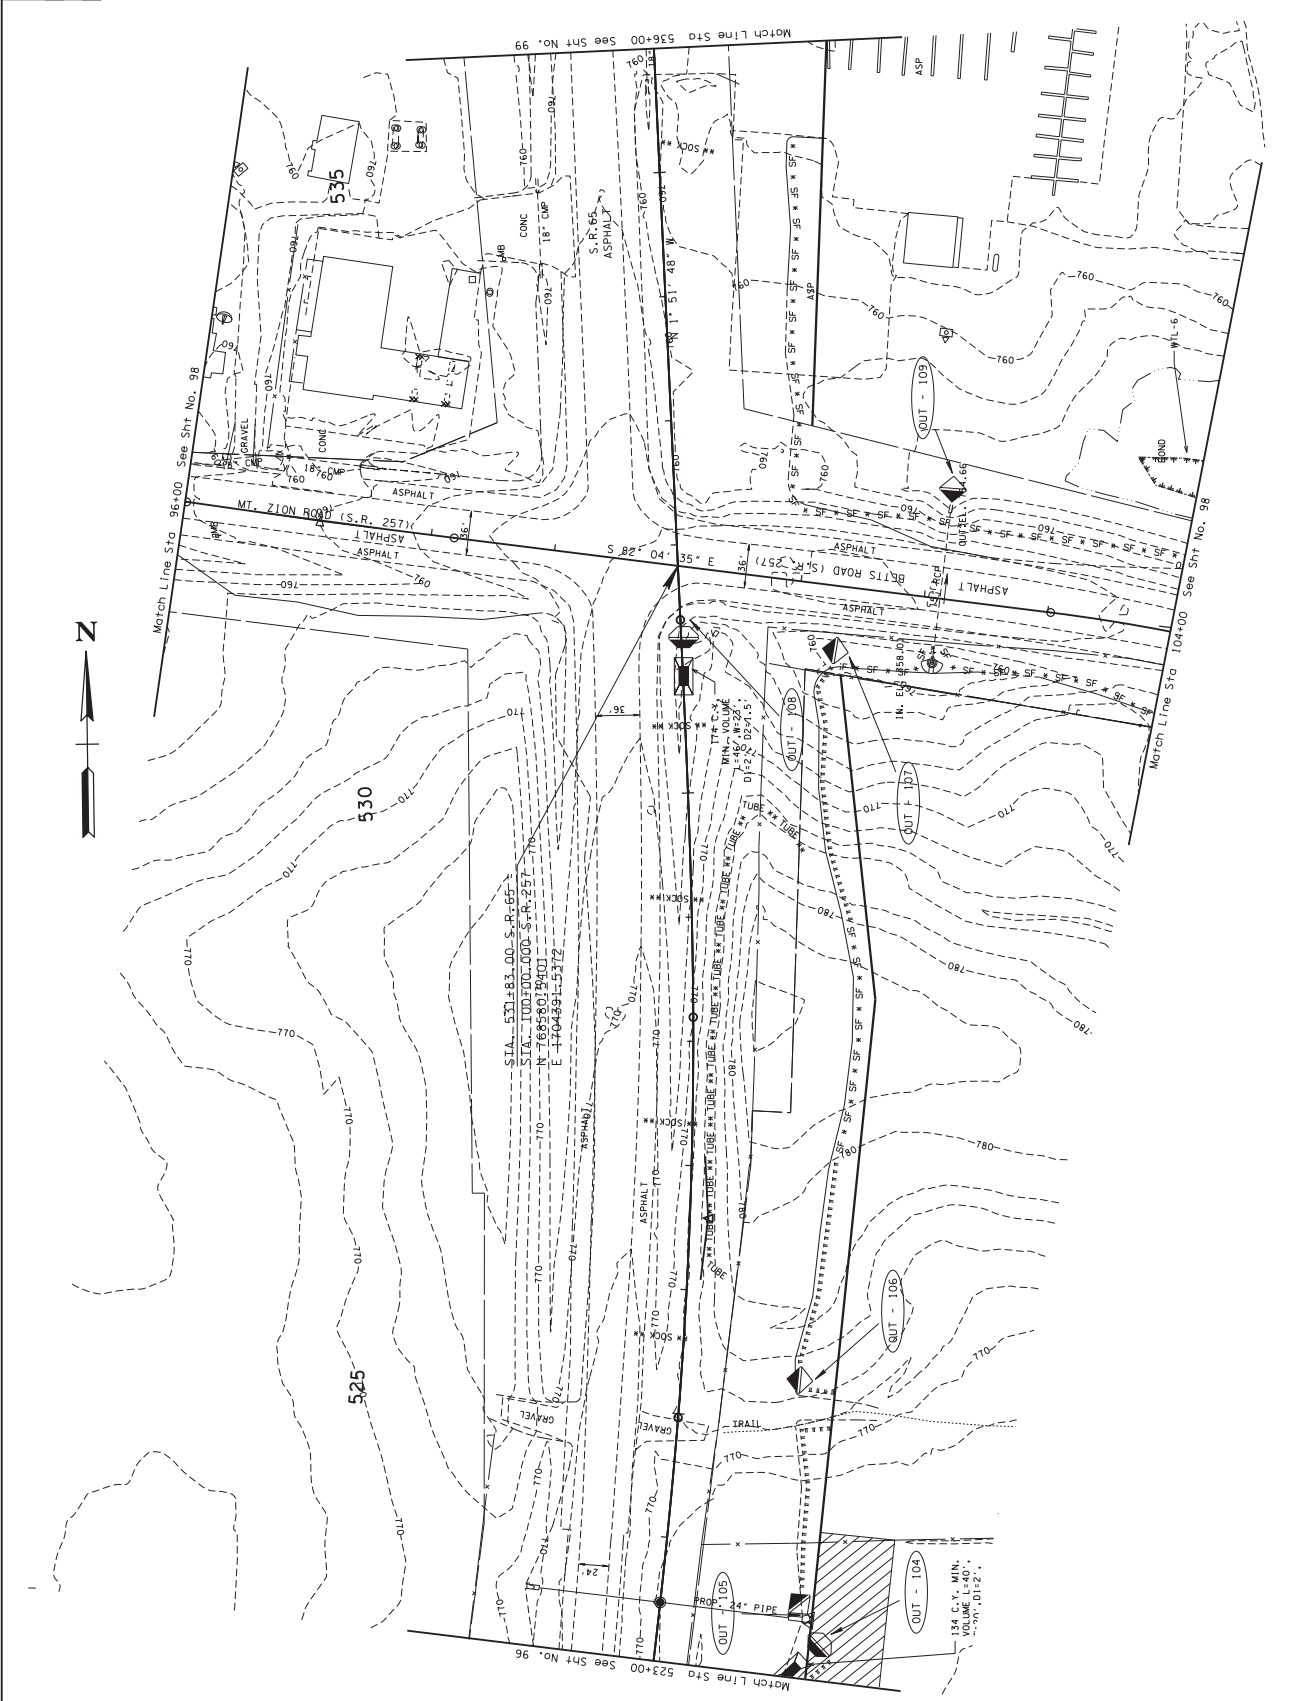

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65H101	93A
CONST.	2017	STP-65H101	98

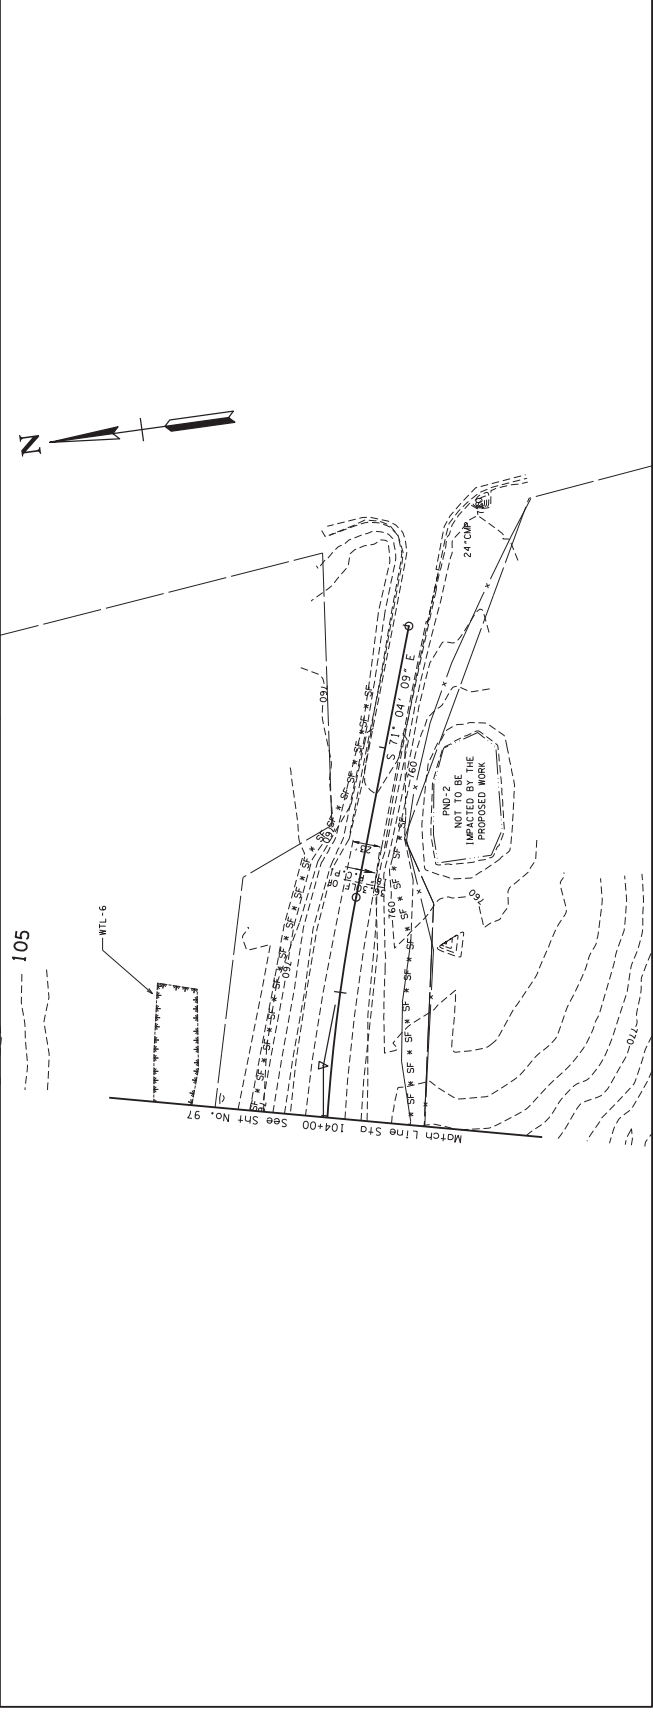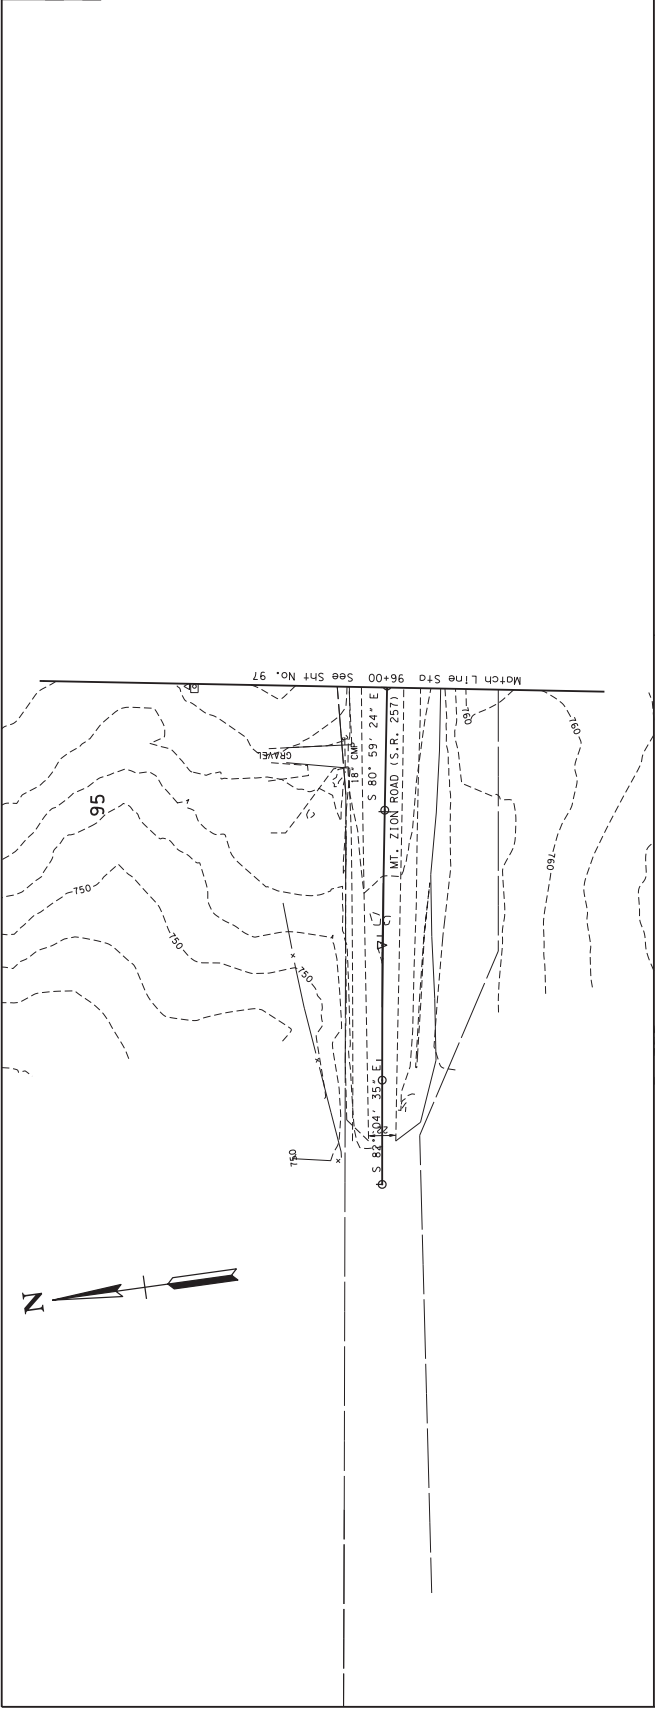

COORDINATES ARE UTM 84N UTM 18S. ANGLE SYSTEM IS SINE. FACTOR OF 1.000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE 1988.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE II**  
S.R. 257  
SCALE: 1" = 50'

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65101	94
CONST.	2017	STP-65101	99




COORDINATES ARE UTM 84N UZS82.  
FACTORS OF 1000000 AND TIED TO  
THE TORN. ALL ELEVATIONS ARE  
REFERRED TO THE 1988 DSB.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

EPSC PLAN  
STAGE II

STA. 536+00 TO STA. 549+00  
SCALE: 1" = 50'

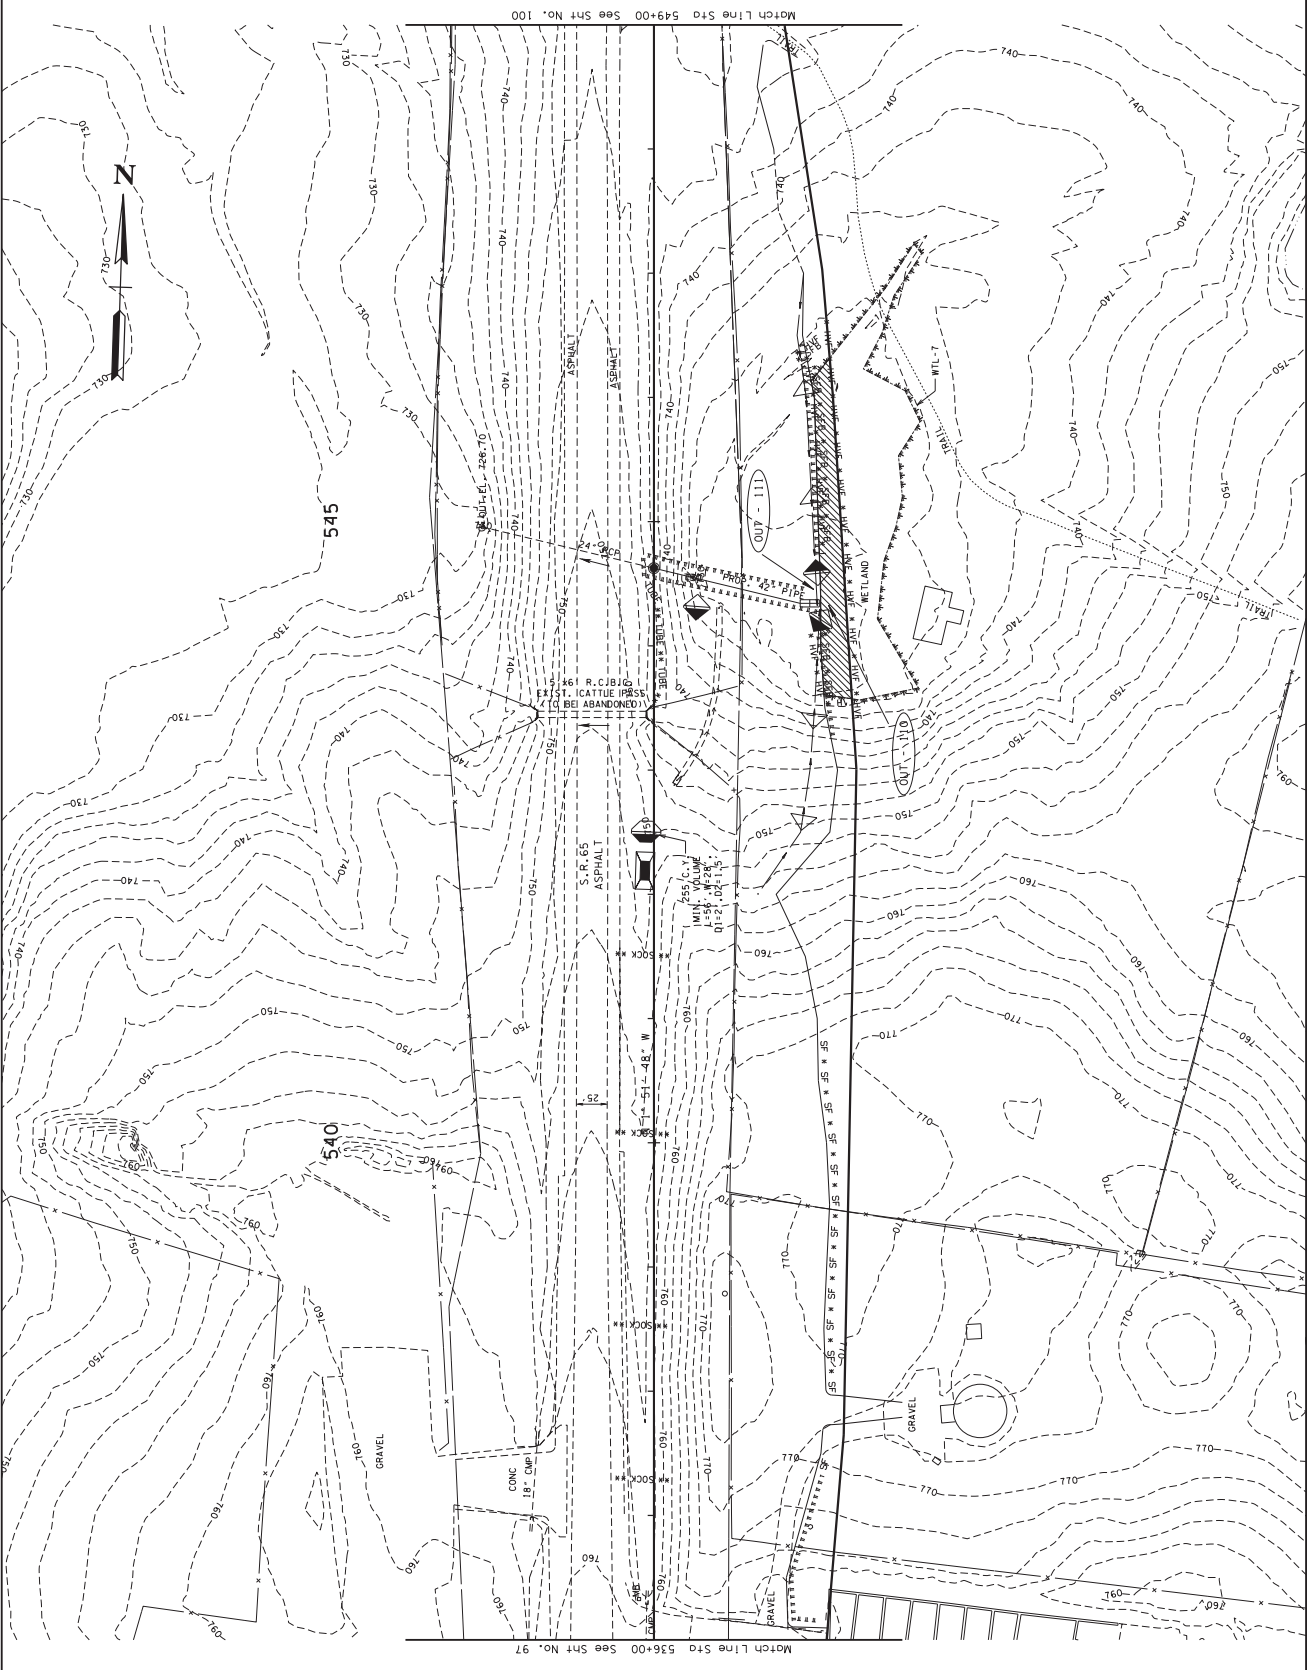

SHEET NO.	PROJECT NO.
95	STP-65101
100	STP-65101
	CONST. 2017




COORDINATES ARE UTM 83N 95E,  
 DATUM: NAD 83, SCALE: 1:50,000,  
 FACTOR OF 1.000000 AND TIED TO  
 THE TOPN. ALL ELEVATIONS ARE  
 REFERENCED TO THE 1988 BSEL.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
 STAGE II**

STA. 549+00 TO STA. 562+00  
 SCALE: 1"= 50'

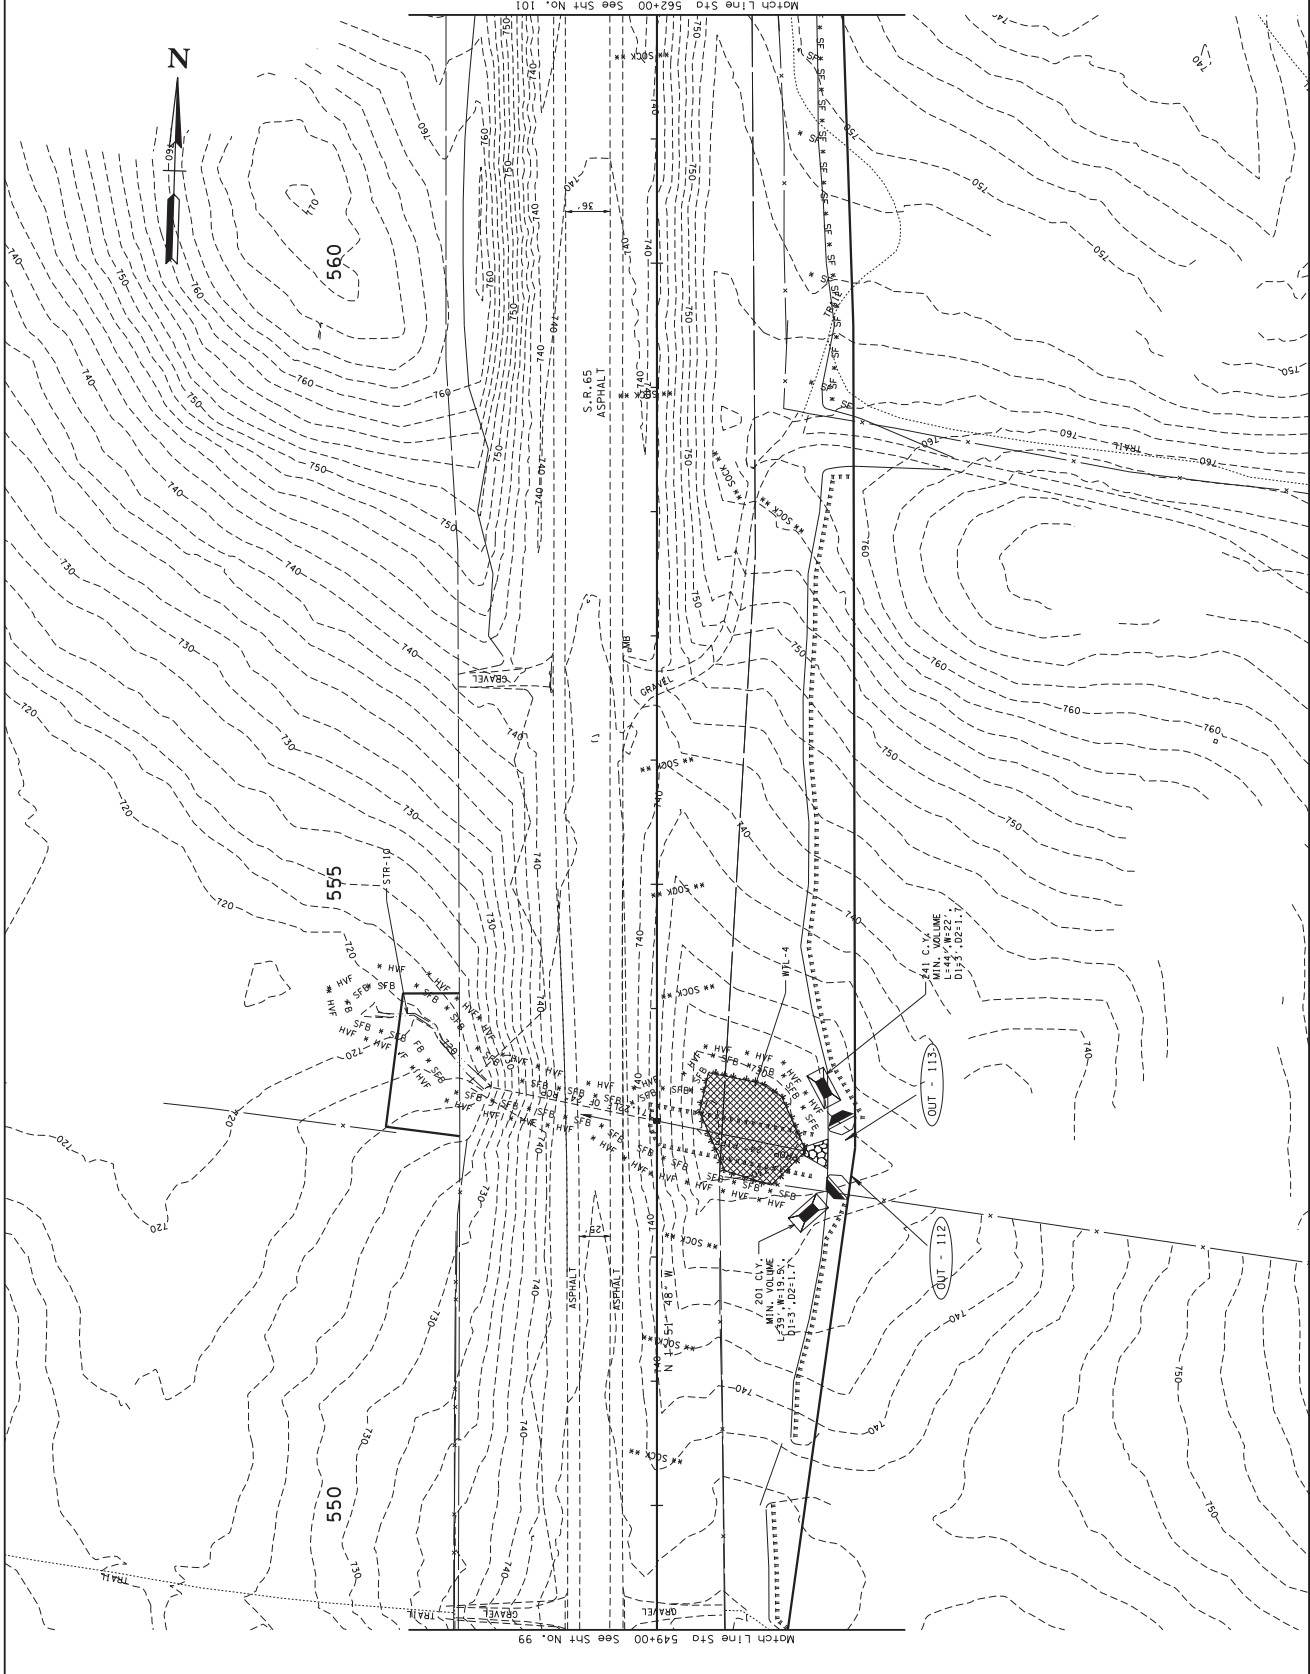



SHEET NO.	PROJECT NO.	YEAR	TYPE
101	STP-65H101	2017	CONST.
96	STP-65H101	2012	R.O.W.




COORDINATES ARE UTM 84N 98E, ANS 2011 DATUM. SCALE FACTOR OF 1.000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE 1985 B.S.M.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION


**EPSC PLAN  
STAGE II**

STA. 562+00 TO STA. 575+00  
SCALE: 1" = 50'

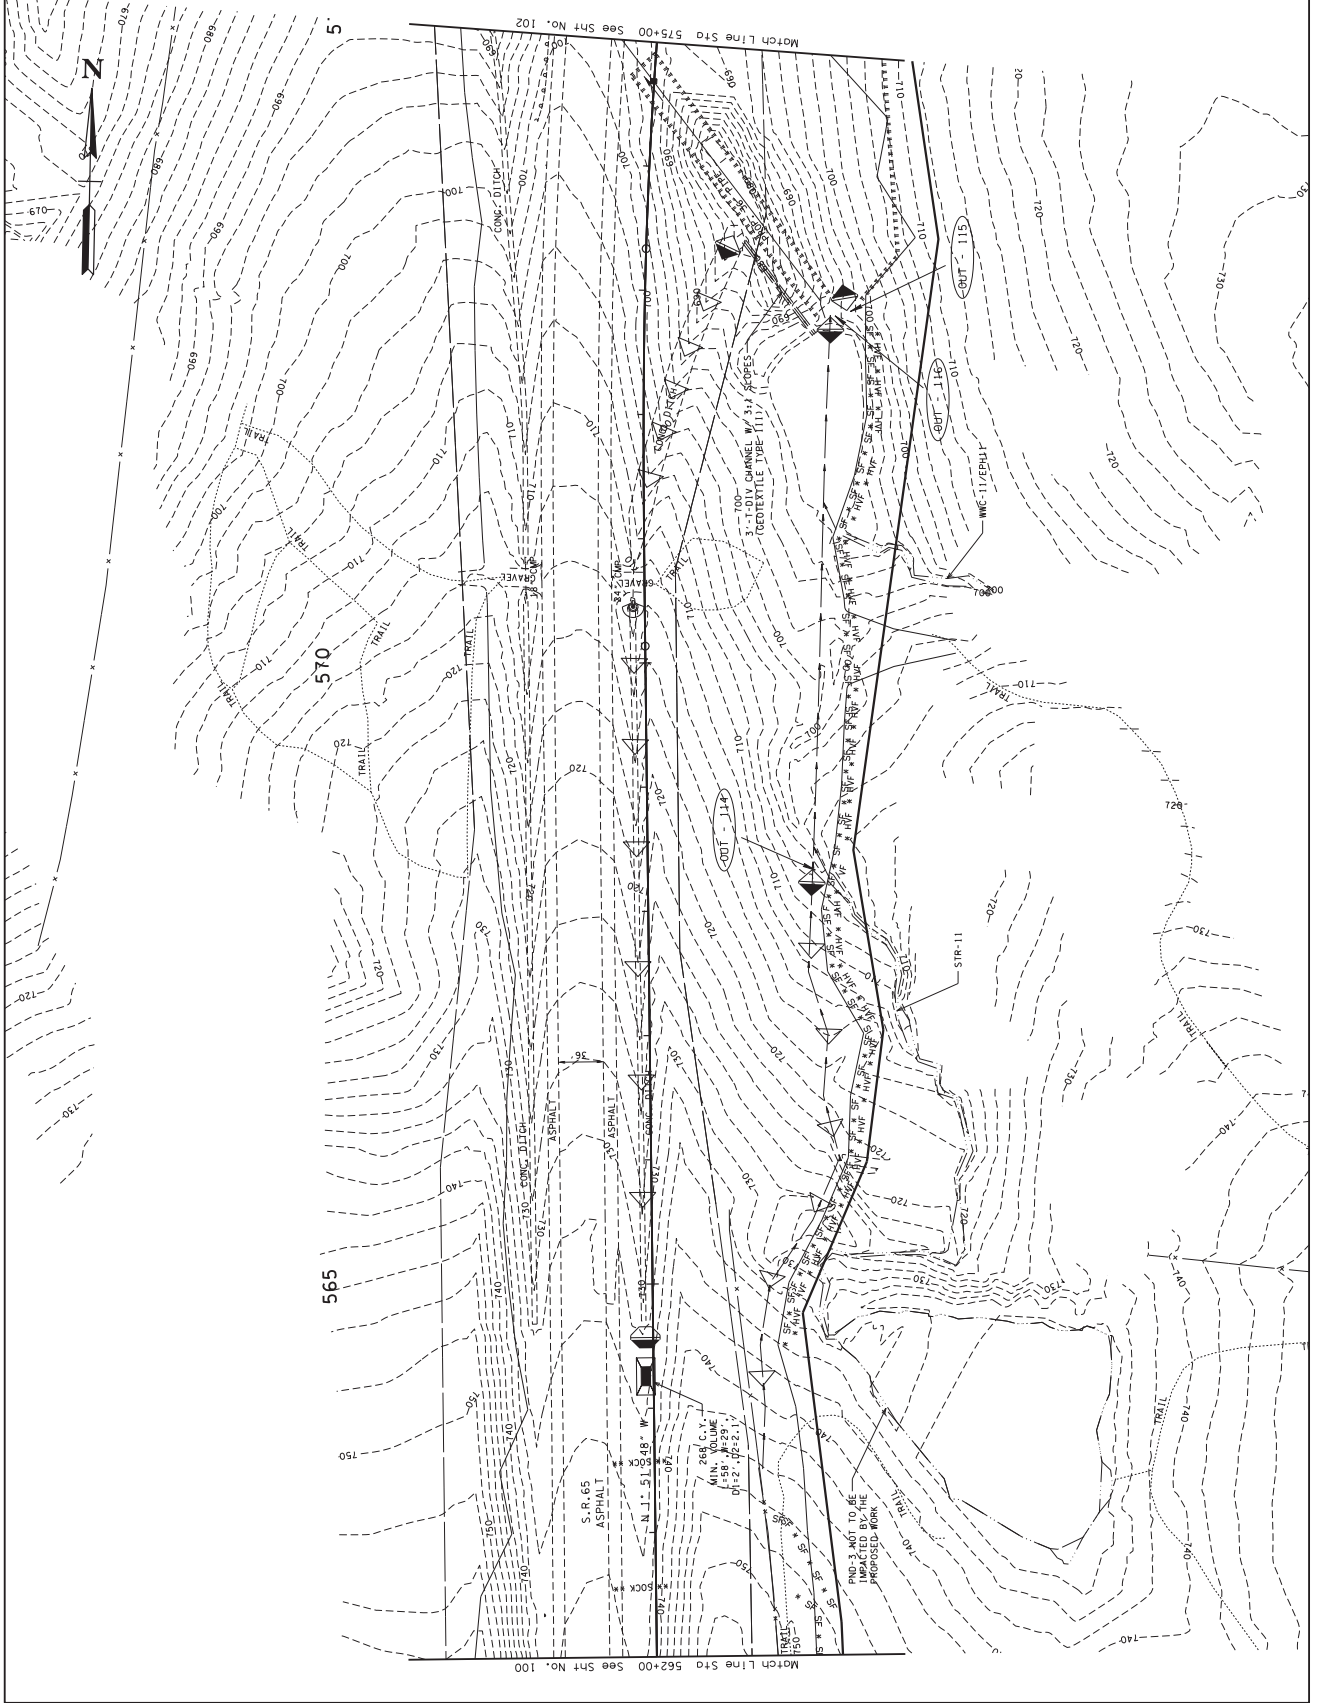

SHEET NO.	PROJECT NO.
97	STP-65101
102	STP-65101

TYPE	YEAR
R.O.W.	2012
CONST.	2017

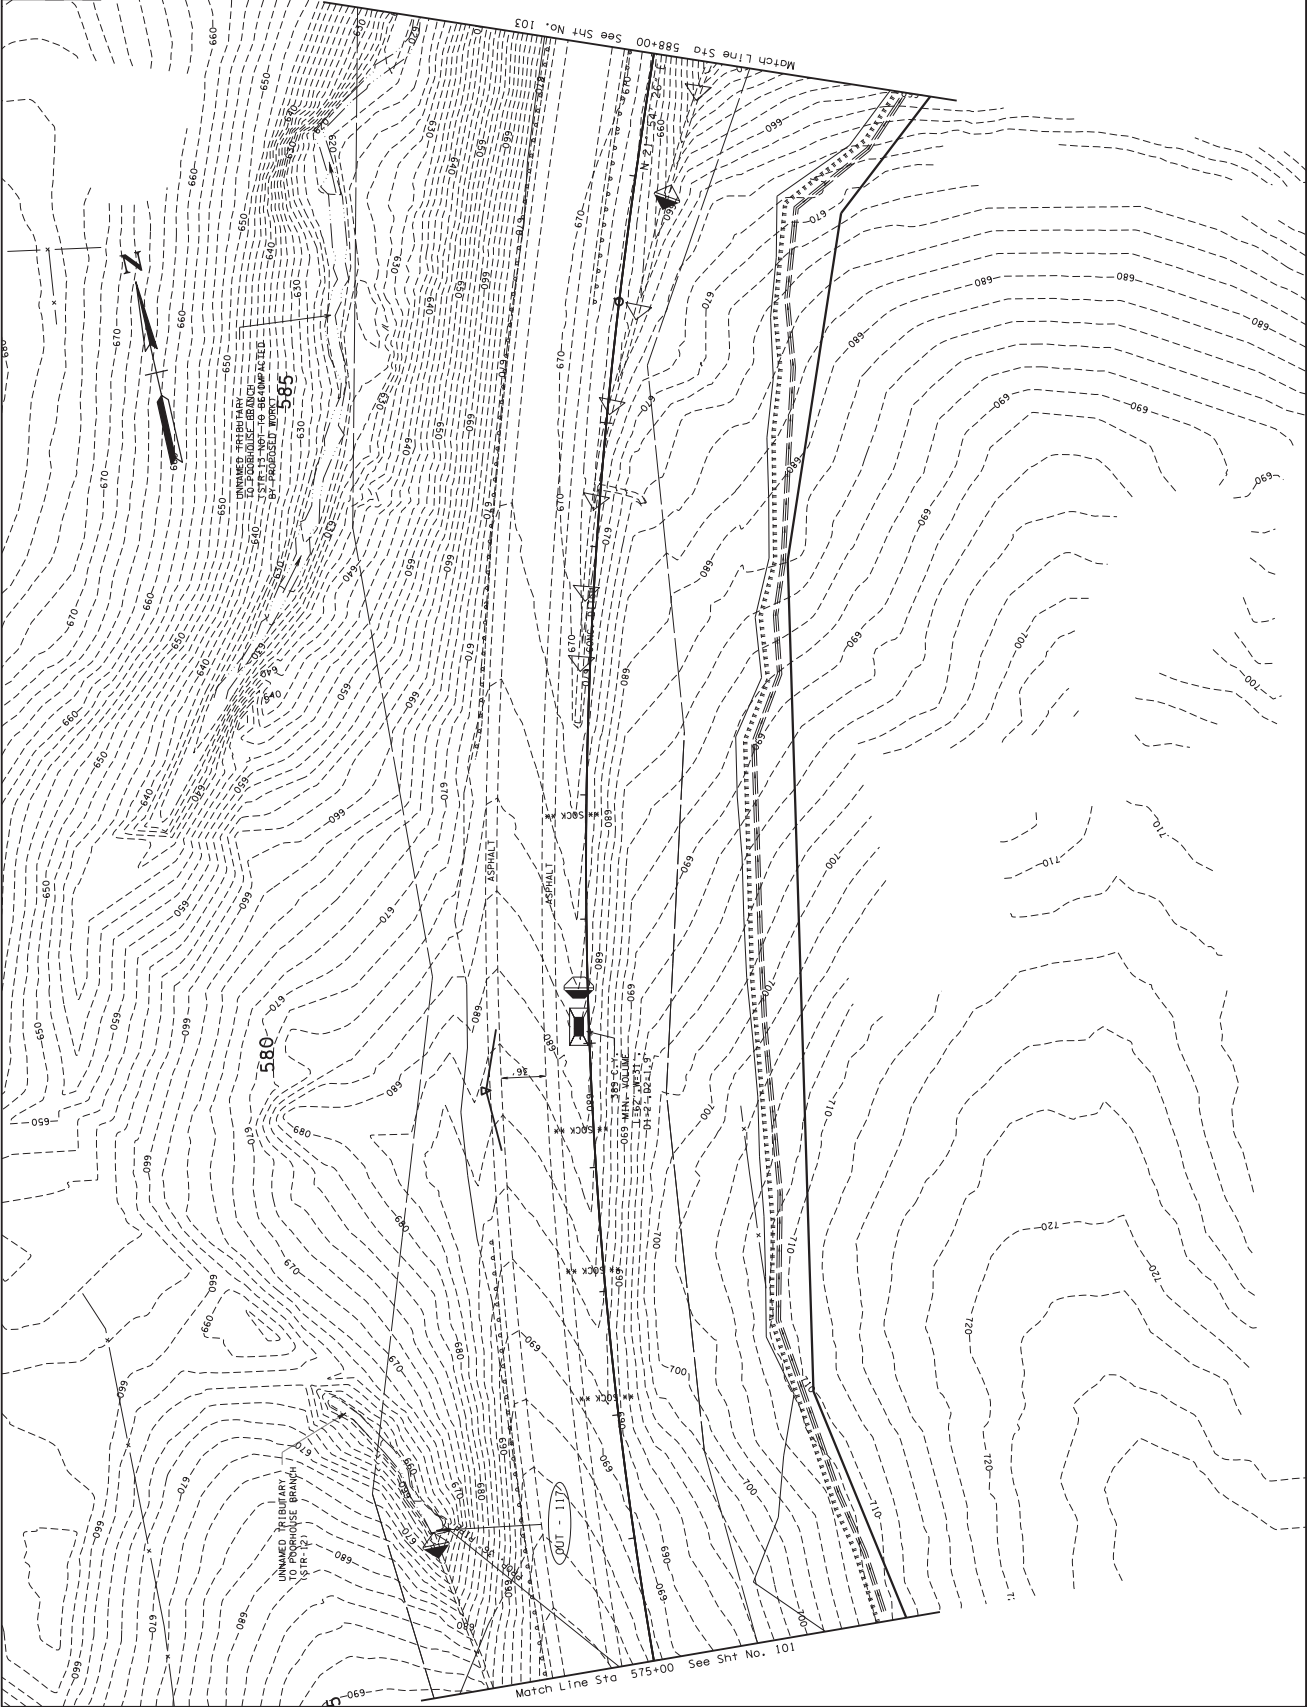

COORDINATES ARE UTM 84N UTM 18S. ANSISTD 83. ANSISTD 83. FACTOR OF 1.000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE ANSD 1988.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE II


STA. 575+00 TO STA. 588+00  
SCALE: 1" = 50'

PROJECT NO. STP-65101  
 YEAR 2012  
 R.O.W. STP-65101  
 CONST. STP-65101  
 SHEET NO. 98  
 103



COORDINATES ARE UTM 83W 98E.  
 FACTOR OF 1400000 AND TIED TO  
 THE TORN. ALL ELEVATIONS ARE  
 REFERRED TO THE 1985 B.S.


STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION  
**EPSC PLAN  
 STAGE II**  
 STA. 588+00 TO STA. 601+00  
 SCALE: 1" = 50'

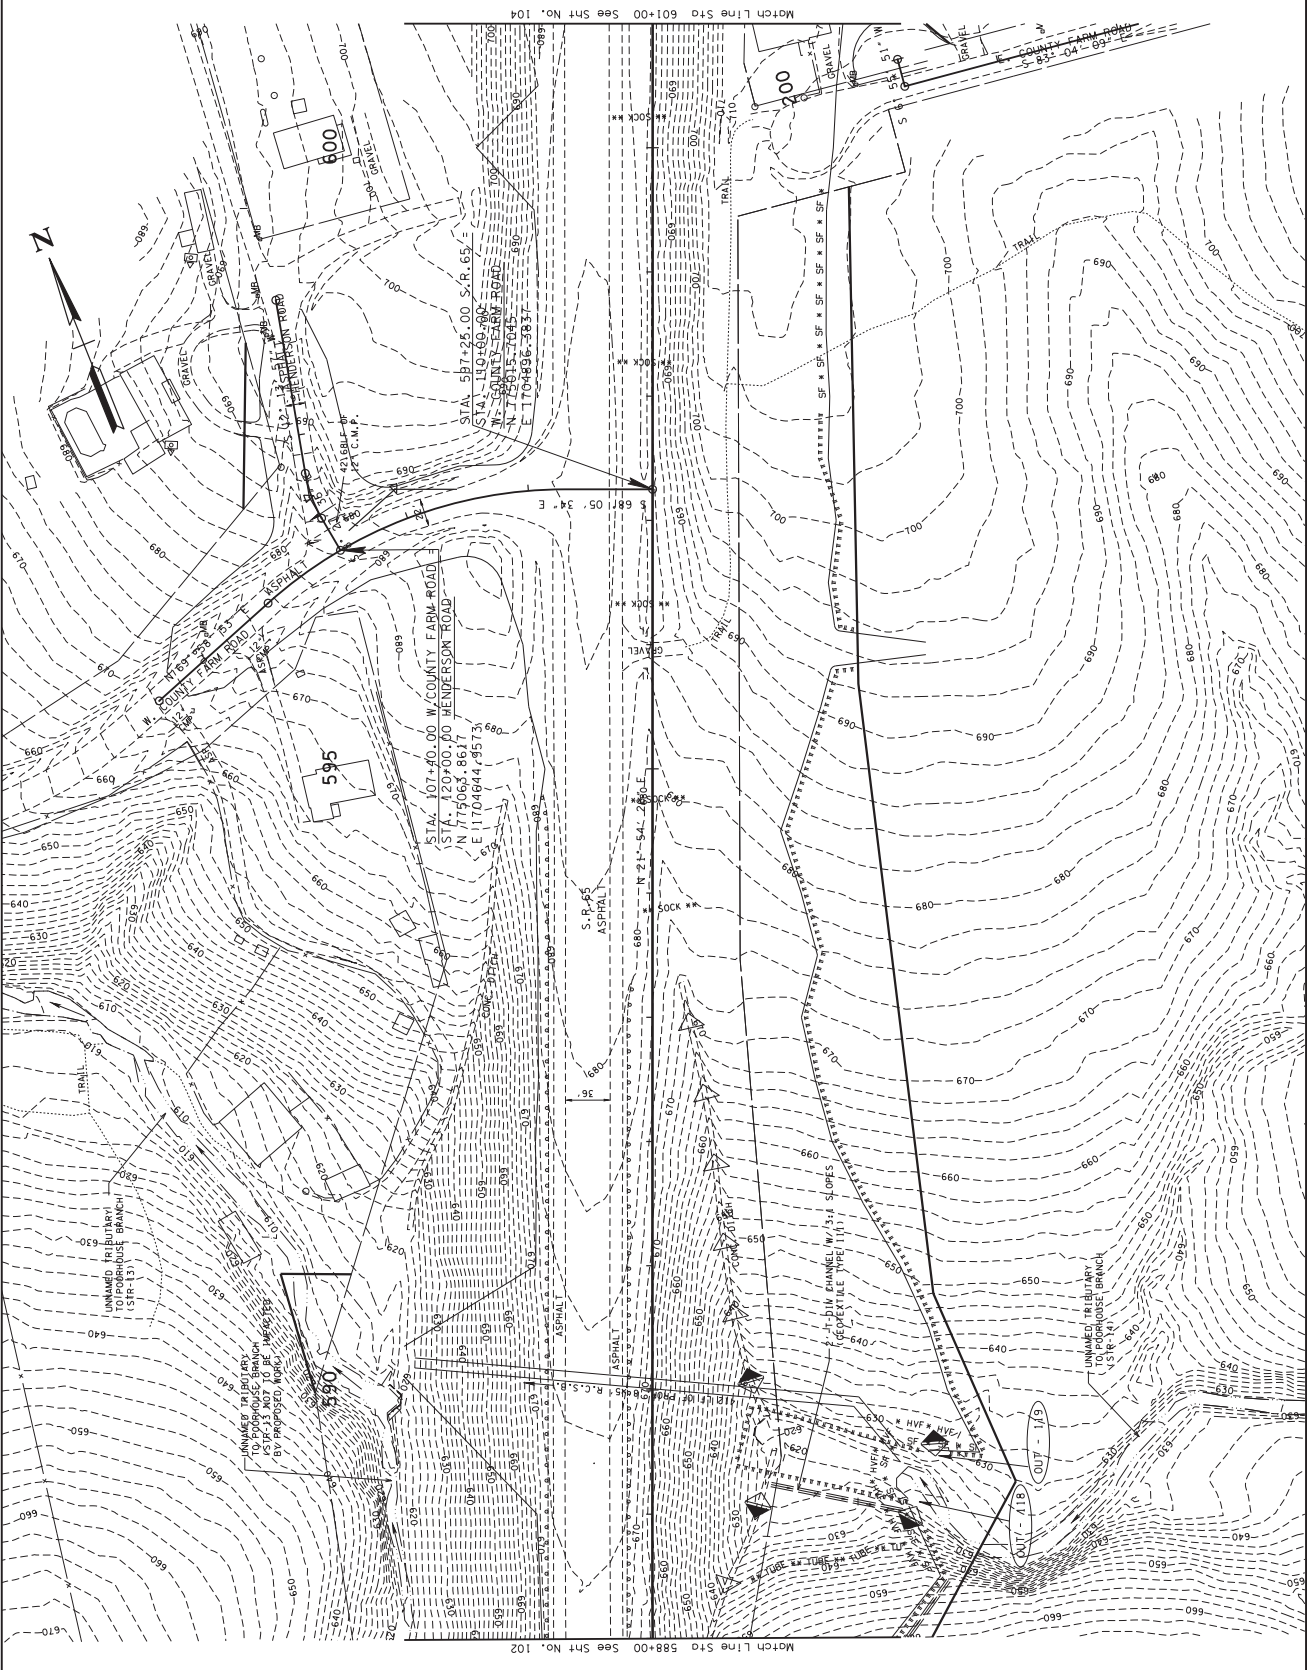

Match Line Sta 588+00 See Sht No. 102  
 Match Line Sta 601+00 See Sht No. 104

\\B051015\N49\F\proj\03\217\transportation\03\tech\road\plan\B065\_103\_EC036.rvt  
 5/23/2017 10:46 PM

TYPE	YEAR	PROJECT NO.	SHEET NO.
CONSTR.	2017	STP-65101	99
		STP-65101	104




COORDINATES ARE UTM 84Q UTM 95E. FACTOR OF 1000000 AND TIED TO THE TBM. ALL ELEVATIONS ARE REFERENCED TO THE 1985 B.S.M.



STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE II

STA. 601+00 TO STA. 614+00  
SCALE: 1" = 50'

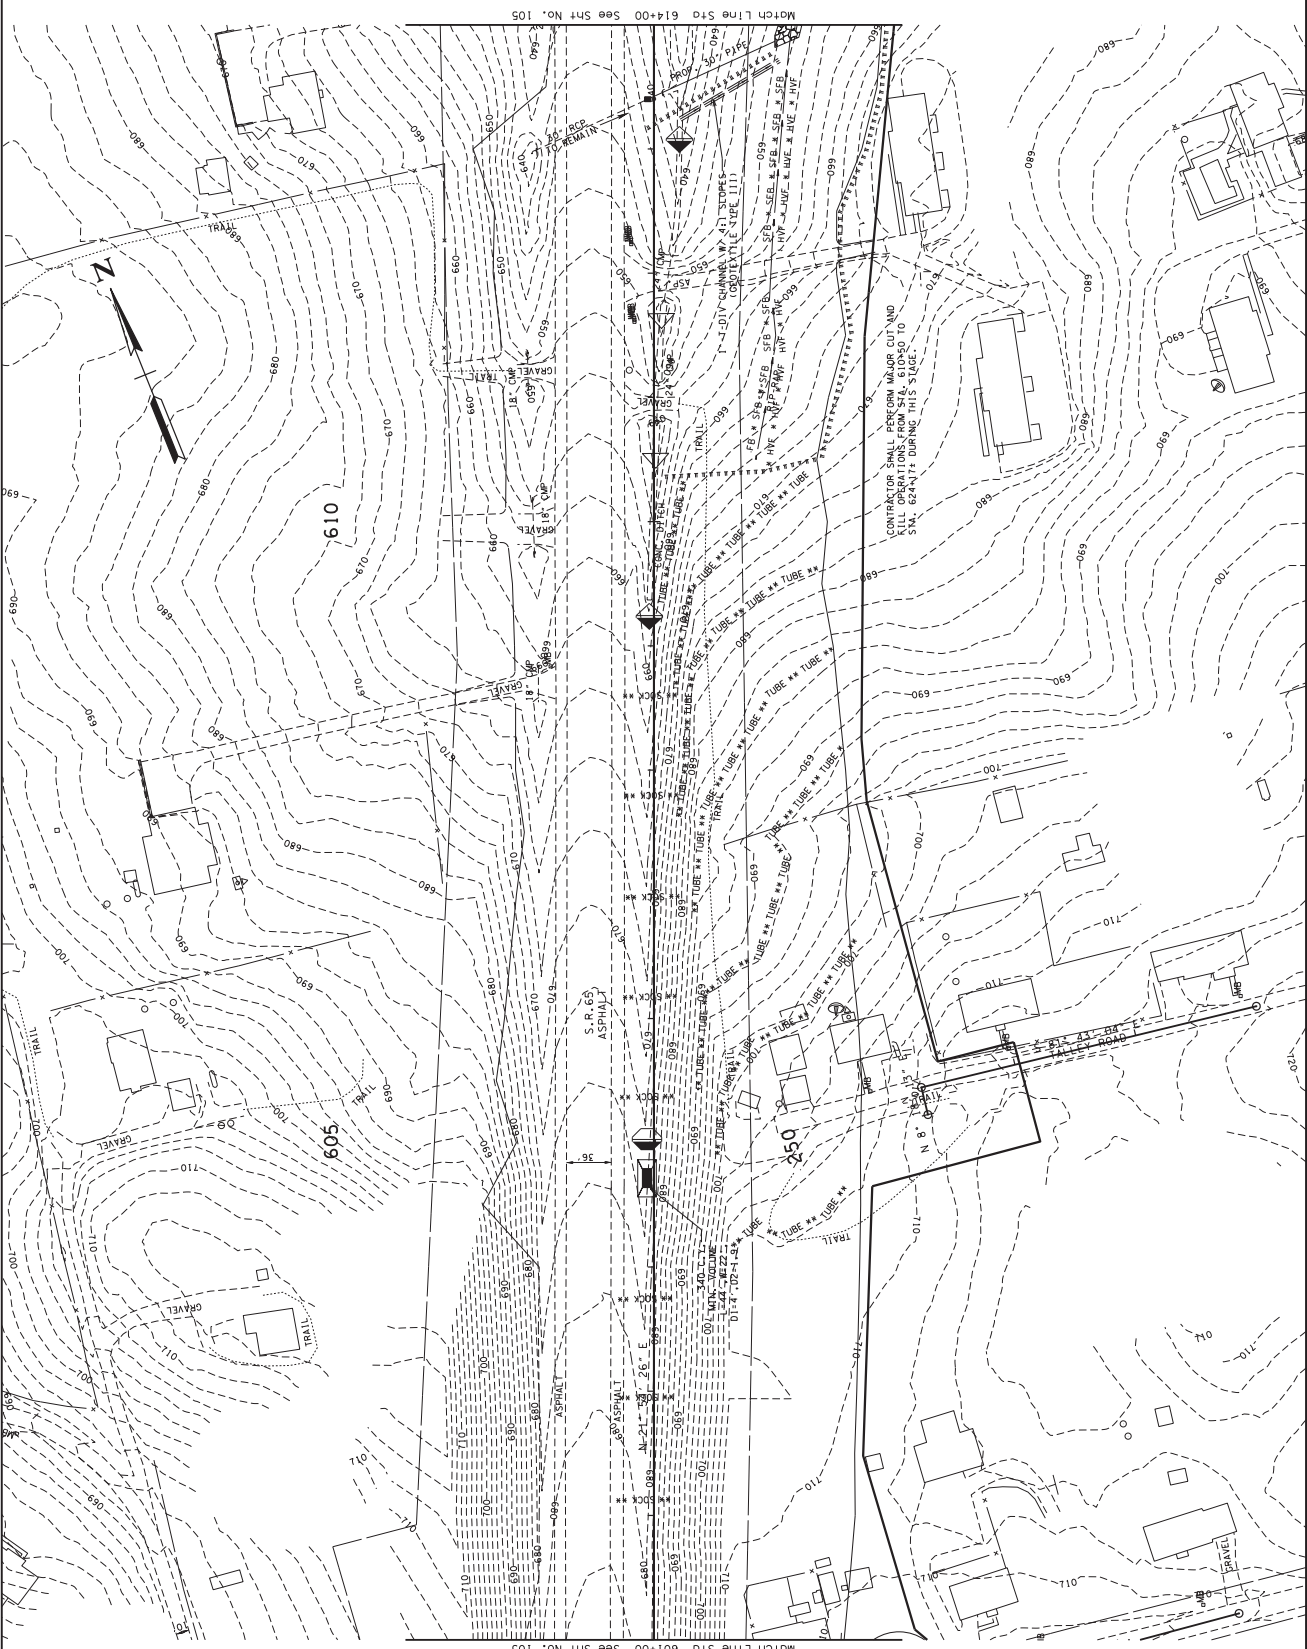

SHEET NO.	PROJECT NO.	YEAR	TYPE
100	STP-65101	2012	R.O.W.
101	STP-65101	2017	CONST.
106	STP-65101		

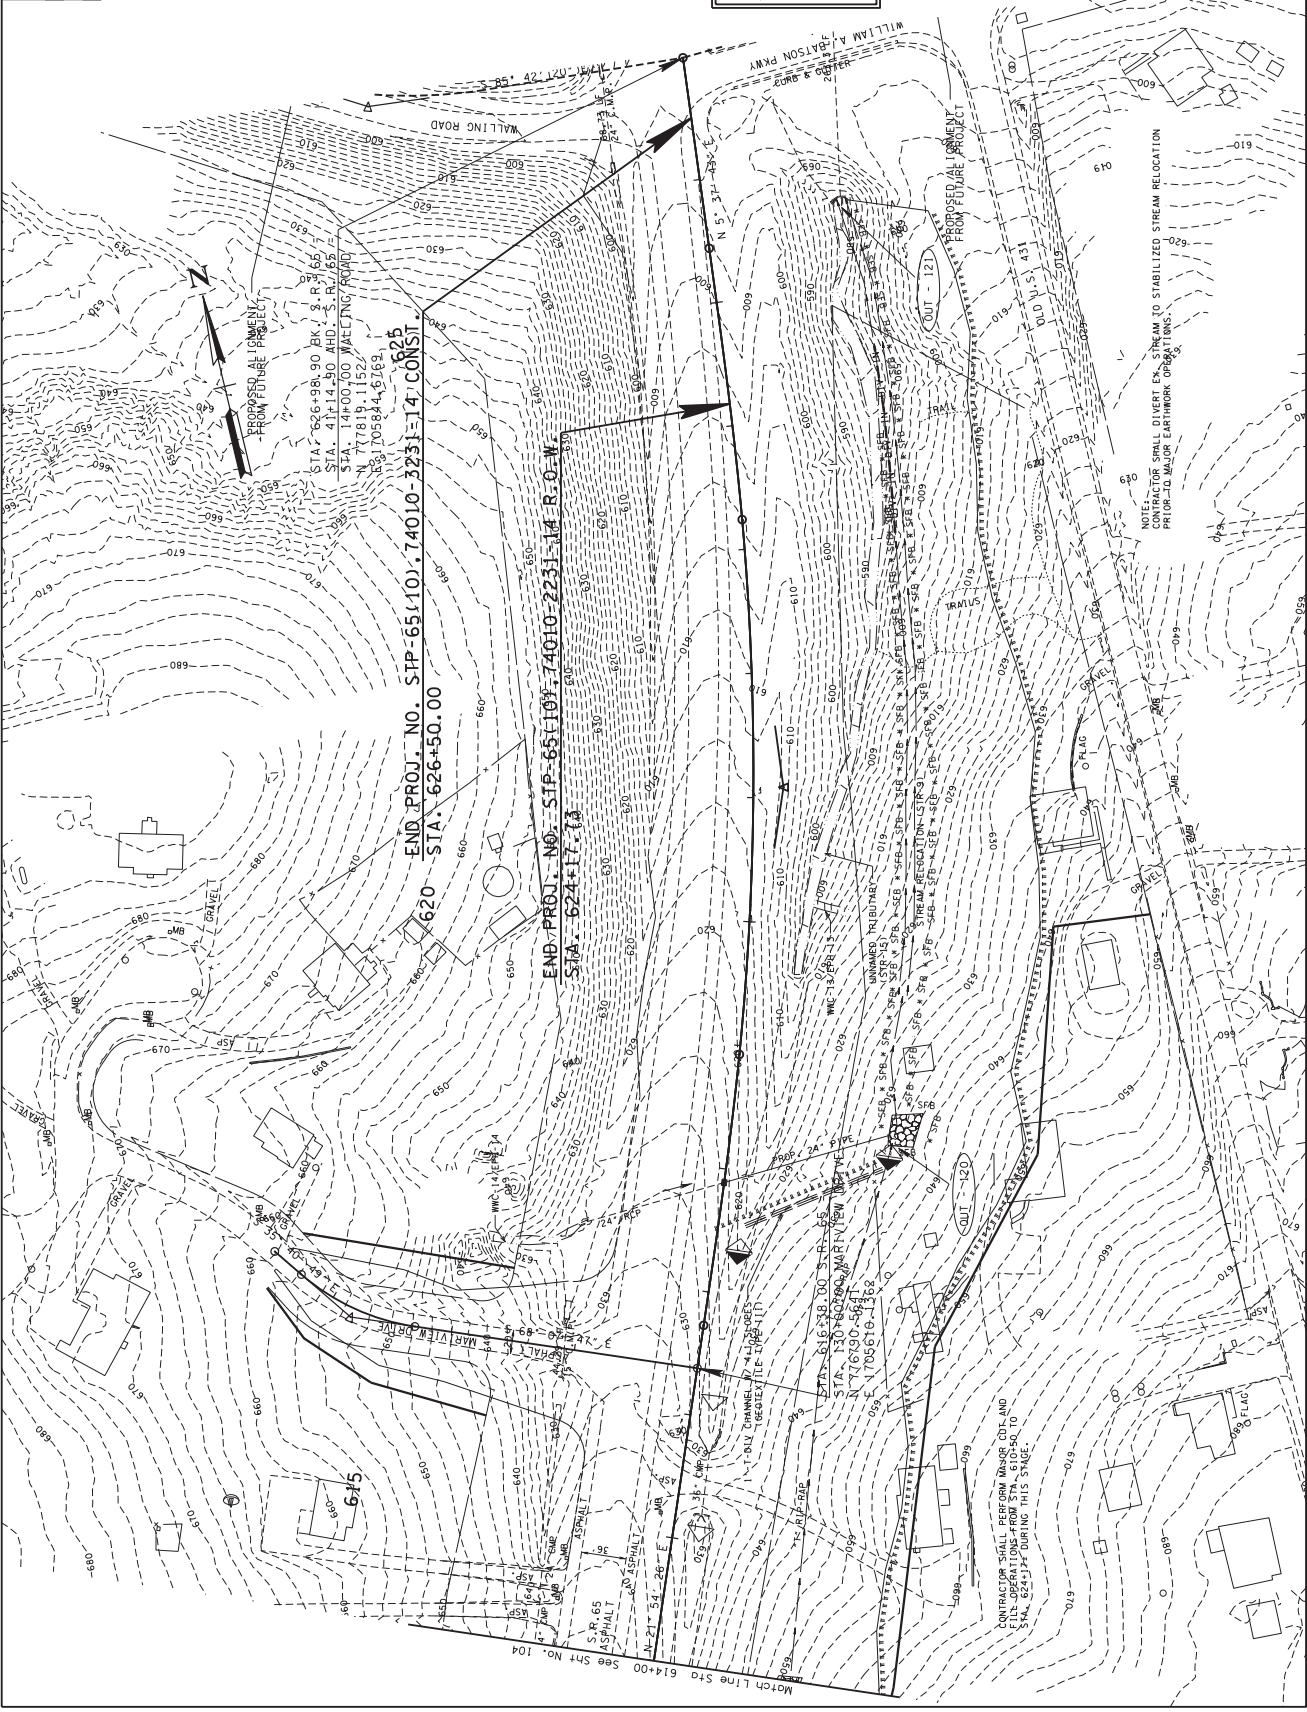

SEAL BY  
 DAVID EAST  
 10/29/17  
 STATE OF TENNESSEE

COORDINATES ARE UTM 84N UTM ZONE 18Q UTM DATUM NAD 83  
 FACTOR OF 0.000000 AND TIED TO THE TOP. ALL ELEVATIONS ARE REFERENCED TO THE NAVD 83.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

EPSC PLAN  
 STAGE II

STA. 614+00 TO END OF PROJ.  
 SCALE: 1" = 50'

SHEET NO.	PROJECT NO.	YEAR	TYPE
101	STP-65(10)	2012	R.O.W.
106	STP-65(10)	2017	CONST.




COORDINATES ARE UTM 85N UTM ZONE 18S. ALL STATION ELEVATIONS ARE REFERENCED TO THE 1985 DATUM. THE TOP OF ALL ELEVATIONS ARE REFERENCED TO THE 1985 DATUM.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE III

REC. OF PROJ. TO STA. 406+00  
SCALE: 1" = 50'

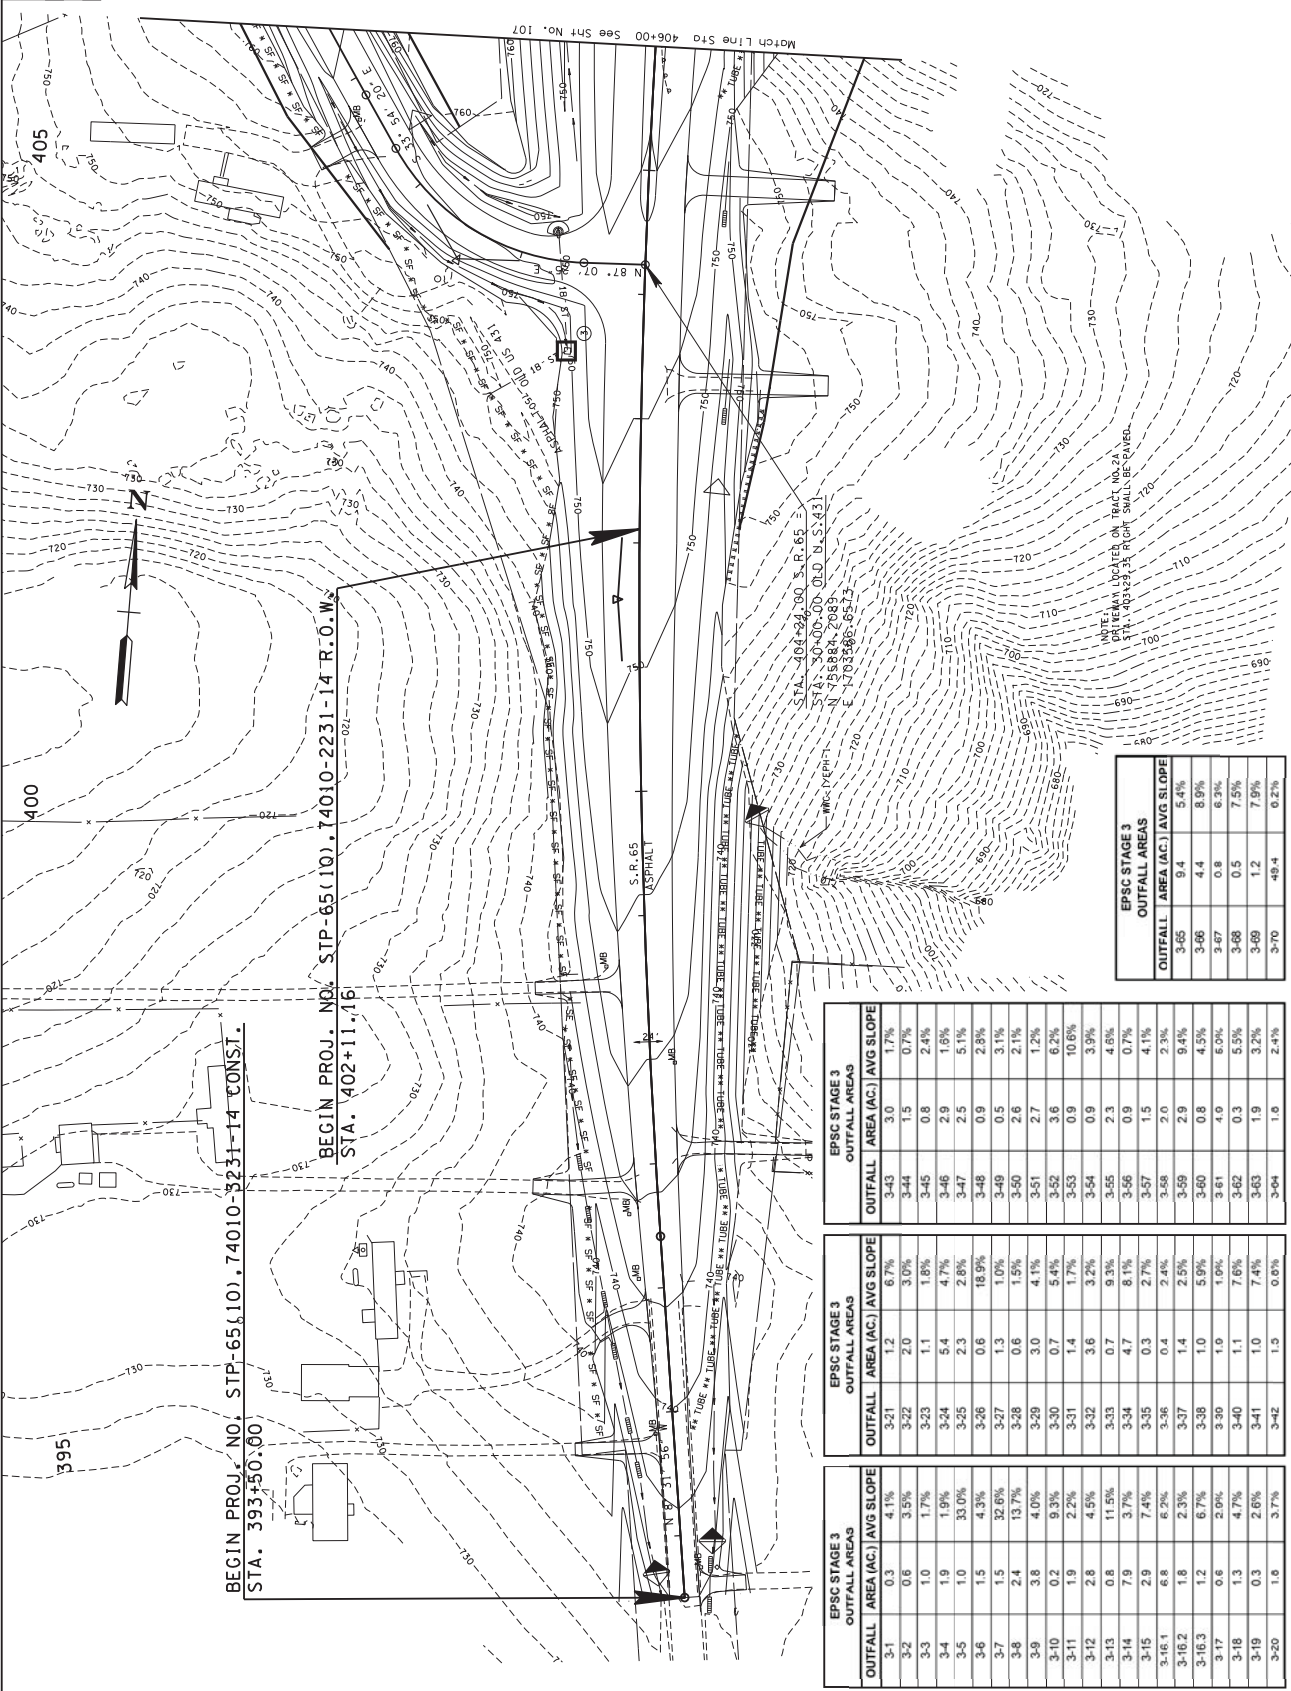

EPSC STAGE 3 OUTFALL AREAS		
OUTFALL	AREA (AC.)	AVG SLOPE
3-65	9.4	5.4%
3-66	4.4	8.6%
3-67	0.8	6.3%
3-68	0.5	7.5%
3-69	1.2	7.9%
3-70	49.4	0.2%

EPSC STAGE 3 OUTFALL AREAS		
OUTFALL	AREA (AC.)	AVG SLOPE
3-43	3.0	1.7%
3-44	1.5	0.7%
3-45	0.8	2.4%
3-46	2.9	1.6%
3-47	2.5	5.1%
3-48	0.9	2.8%
3-49	0.5	3.1%
3-50	2.6	2.1%
3-51	2.7	1.2%
3-52	3.6	6.2%
3-53	0.9	10.6%
3-54	0.9	3.9%
3-55	2.3	4.8%
3-56	0.9	0.7%
3-57	1.5	4.1%
3-58	2.0	2.3%
3-59	2.9	9.4%
3-60	0.8	4.5%
3-61	4.0	6.0%
3-62	0.3	5.5%
3-63	1.9	3.2%
3-64	1.0	2.4%

EPSC STAGE 3 OUTFALL AREAS		
OUTFALL	AREA (AC.)	AVG SLOPE
3-21	1.2	6.7%
3-22	2.0	3.0%
3-23	1.1	1.8%
3-24	5.4	4.7%
3-25	2.3	2.8%
3-26	0.6	18.9%
3-27	1.3	1.0%
3-28	0.6	1.5%
3-29	3.0	4.1%
3-30	0.7	5.4%
3-31	1.4	1.7%
3-32	3.6	3.2%
3-33	0.7	9.3%
3-34	4.7	8.1%
3-35	0.3	2.7%
3-36	0.4	2.4%
3-37	1.4	2.5%
3-38	1.0	5.9%
3-39	1.9	1.9%
3-40	1.1	7.6%
3-41	1.0	7.4%
3-42	1.3	0.0%

EPSC STAGE 3 OUTFALL AREAS		
OUTFALL	AREA (AC.)	AVG SLOPE
3-1	0.3	4.1%
3-2	0.6	3.5%
3-3	1.0	1.7%
3-4	1.9	1.9%
3-5	1.0	33.0%
3-6	1.5	4.3%
3-7	1.5	32.6%
3-8	2.4	13.7%
3-9	3.8	4.0%
3-10	0.2	9.3%
3-11	1.9	2.2%
3-12	2.8	4.5%
3-13	0.8	11.5%
3-14	7.9	3.7%
3-15	2.9	7.4%
3-16.1	6.8	6.2%
3-16.2	1.8	2.3%
3-16.3	1.2	6.7%
3-17	0.6	5.0%
3-18	1.3	4.7%
3-19	0.3	2.6%
3-20	1.6	3.7%

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65101	102
CONST.	2017	STP-65101	107




COORDINATES ARE UTM 83N 95E.  
 FACTOR OF ACCURACY IS 1:50000 AND TIED TO  
 THE TBM. ALL ELEVATIONS ARE  
 REFERENCED TO THE NAVD 83.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
 STAGE III**

STA. 406+00 TO STA. 419+00  
 SCALE: 1" = 50'

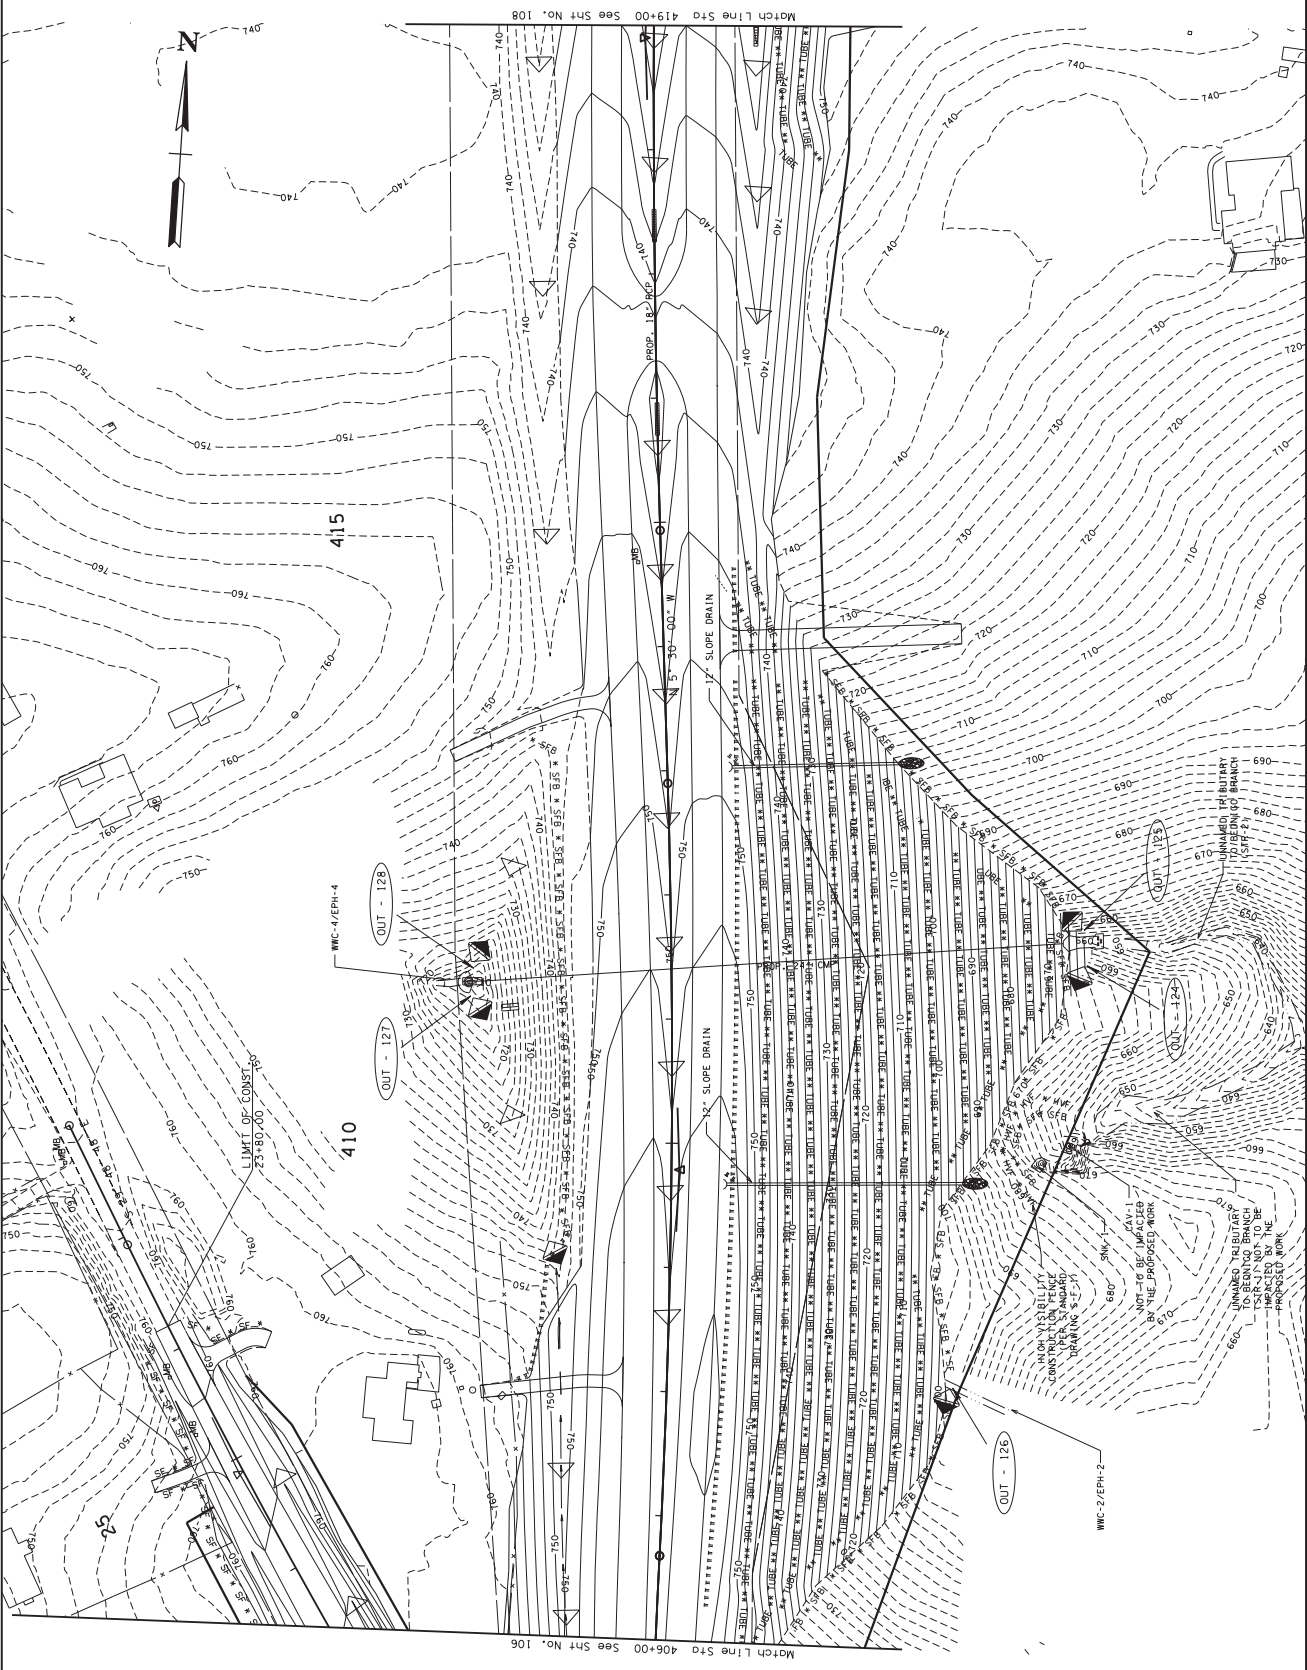

SHEET NO.	PROJECT NO.	YEAR	TYPE
103	STP-65101	2012	R.O.W.
108	STP-65101	2017	CONST.




COORDINATES ARE UTM 84N 98E.  
 FACTOR OF 1.000000 AND TIED TO  
 THE TBM. ALL ELEVATIONS ARE  
 REFERENCED TO THE NAVD 1988.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION


**EPSC PLAN  
 STAGE III**

STA. 419+00 TO STA. 432+00  
 SCALE: 1" = 50'

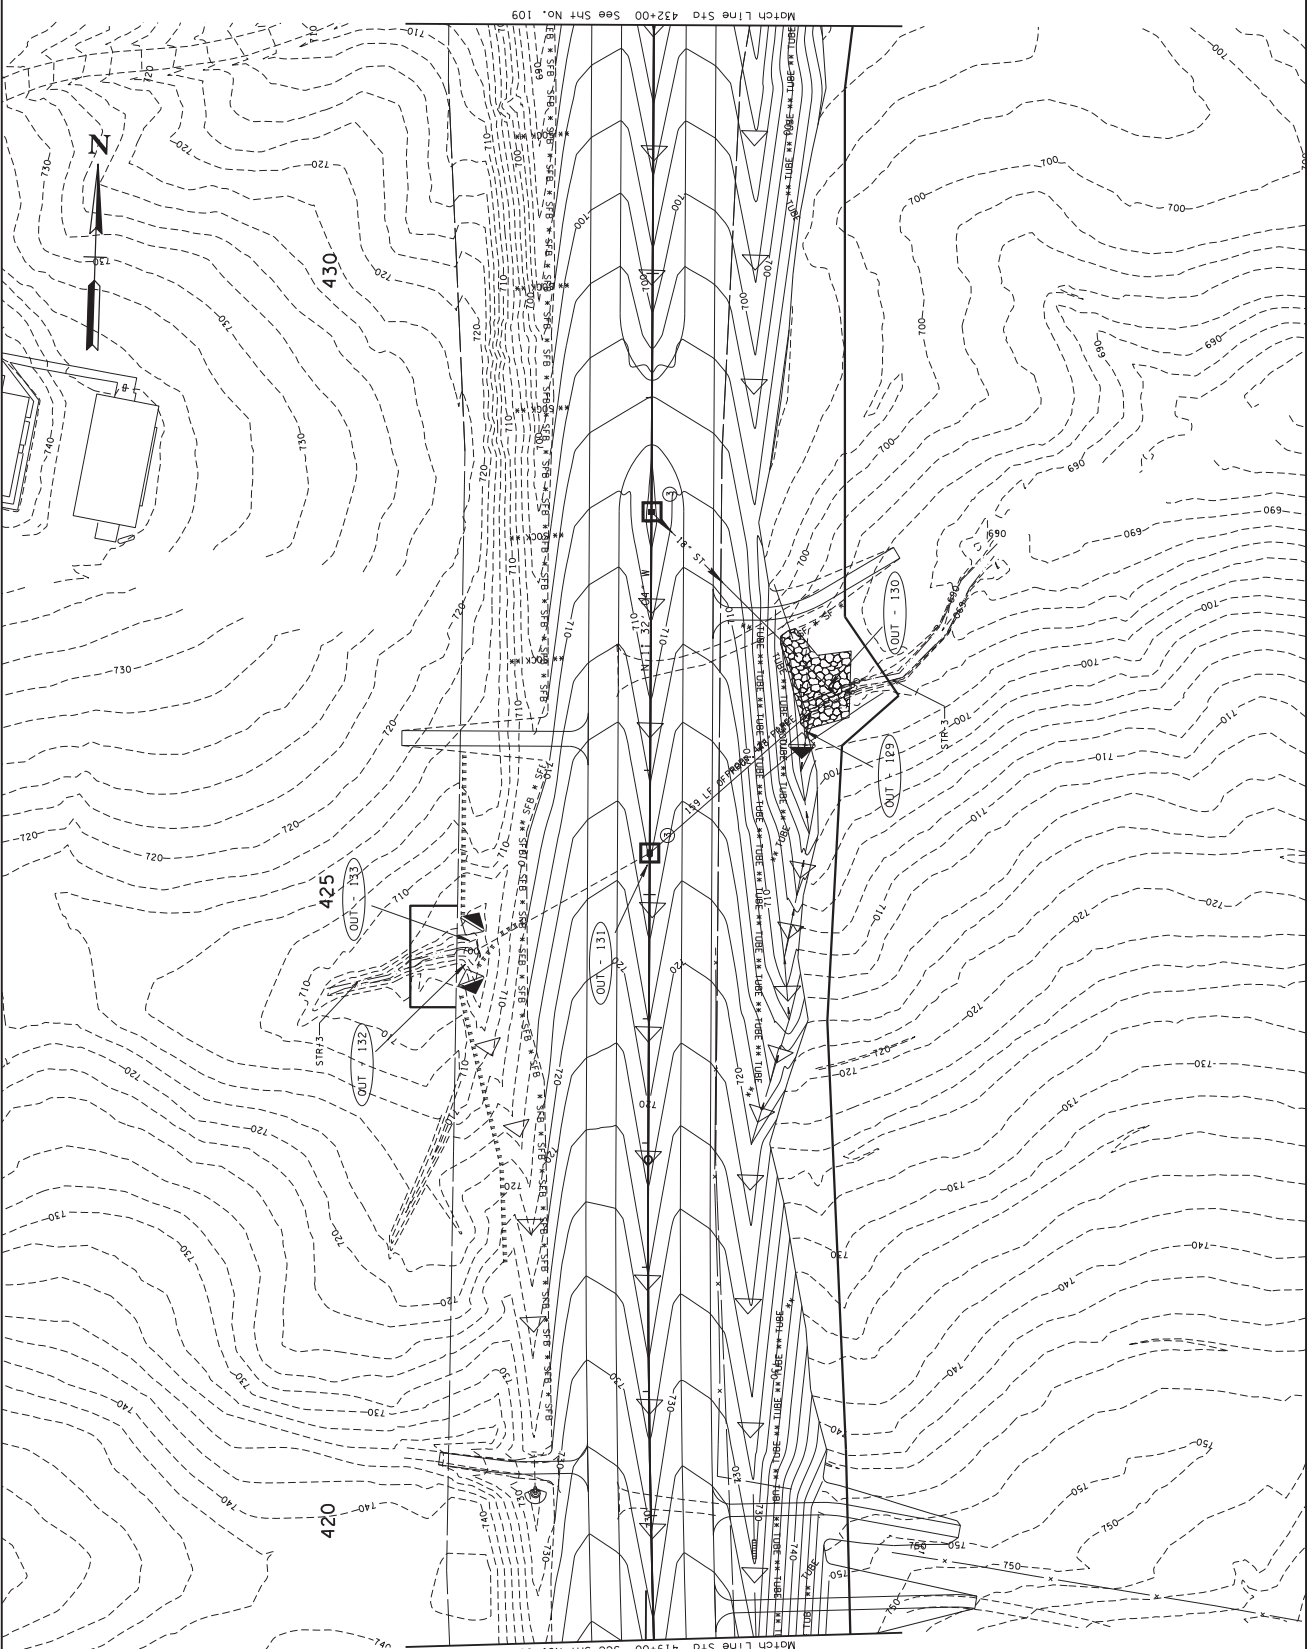



SHEET NO.	PROJECT NO.
104	STP-65101
109	STP-65101
	CONST. 2017

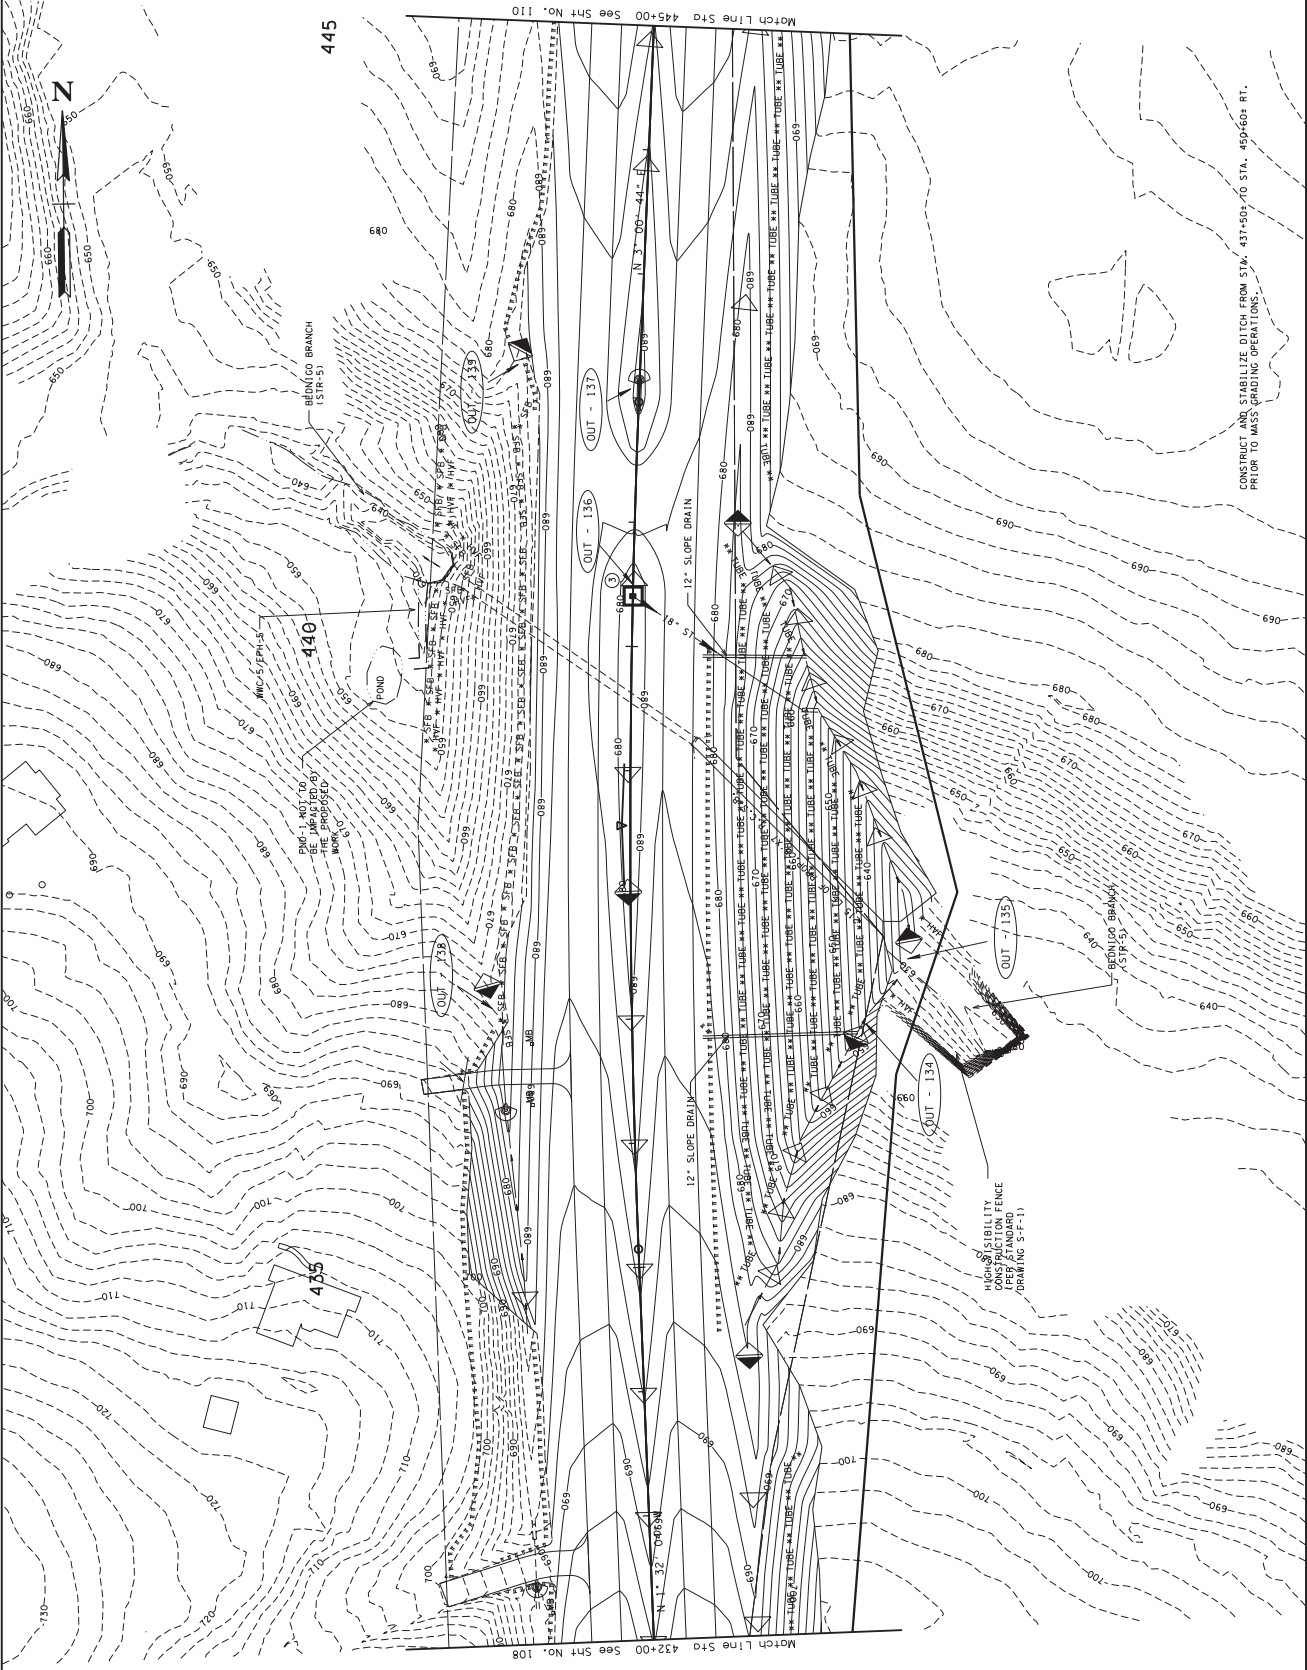

COORDINATES ARE UTM 84N UTM ZONE 18Q UTM DATUM NAD 83. ALL ELEVATIONS ARE REFERENCED TO THE UTM DATUM.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
 STAGE III**


STA. 432+00 TO STA. 445+00  
 SCALE: 1" = 50'



SHEET NO.	PROJECT NO.
NO.	STP-65101
106	STP-65101
111	

YEAR	TYPE
2012	CONST.
2017	

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
EPSC PLAN
STAGE III
STA. 458+00 TO STA. 471+00
SCALE: 1" = 50'

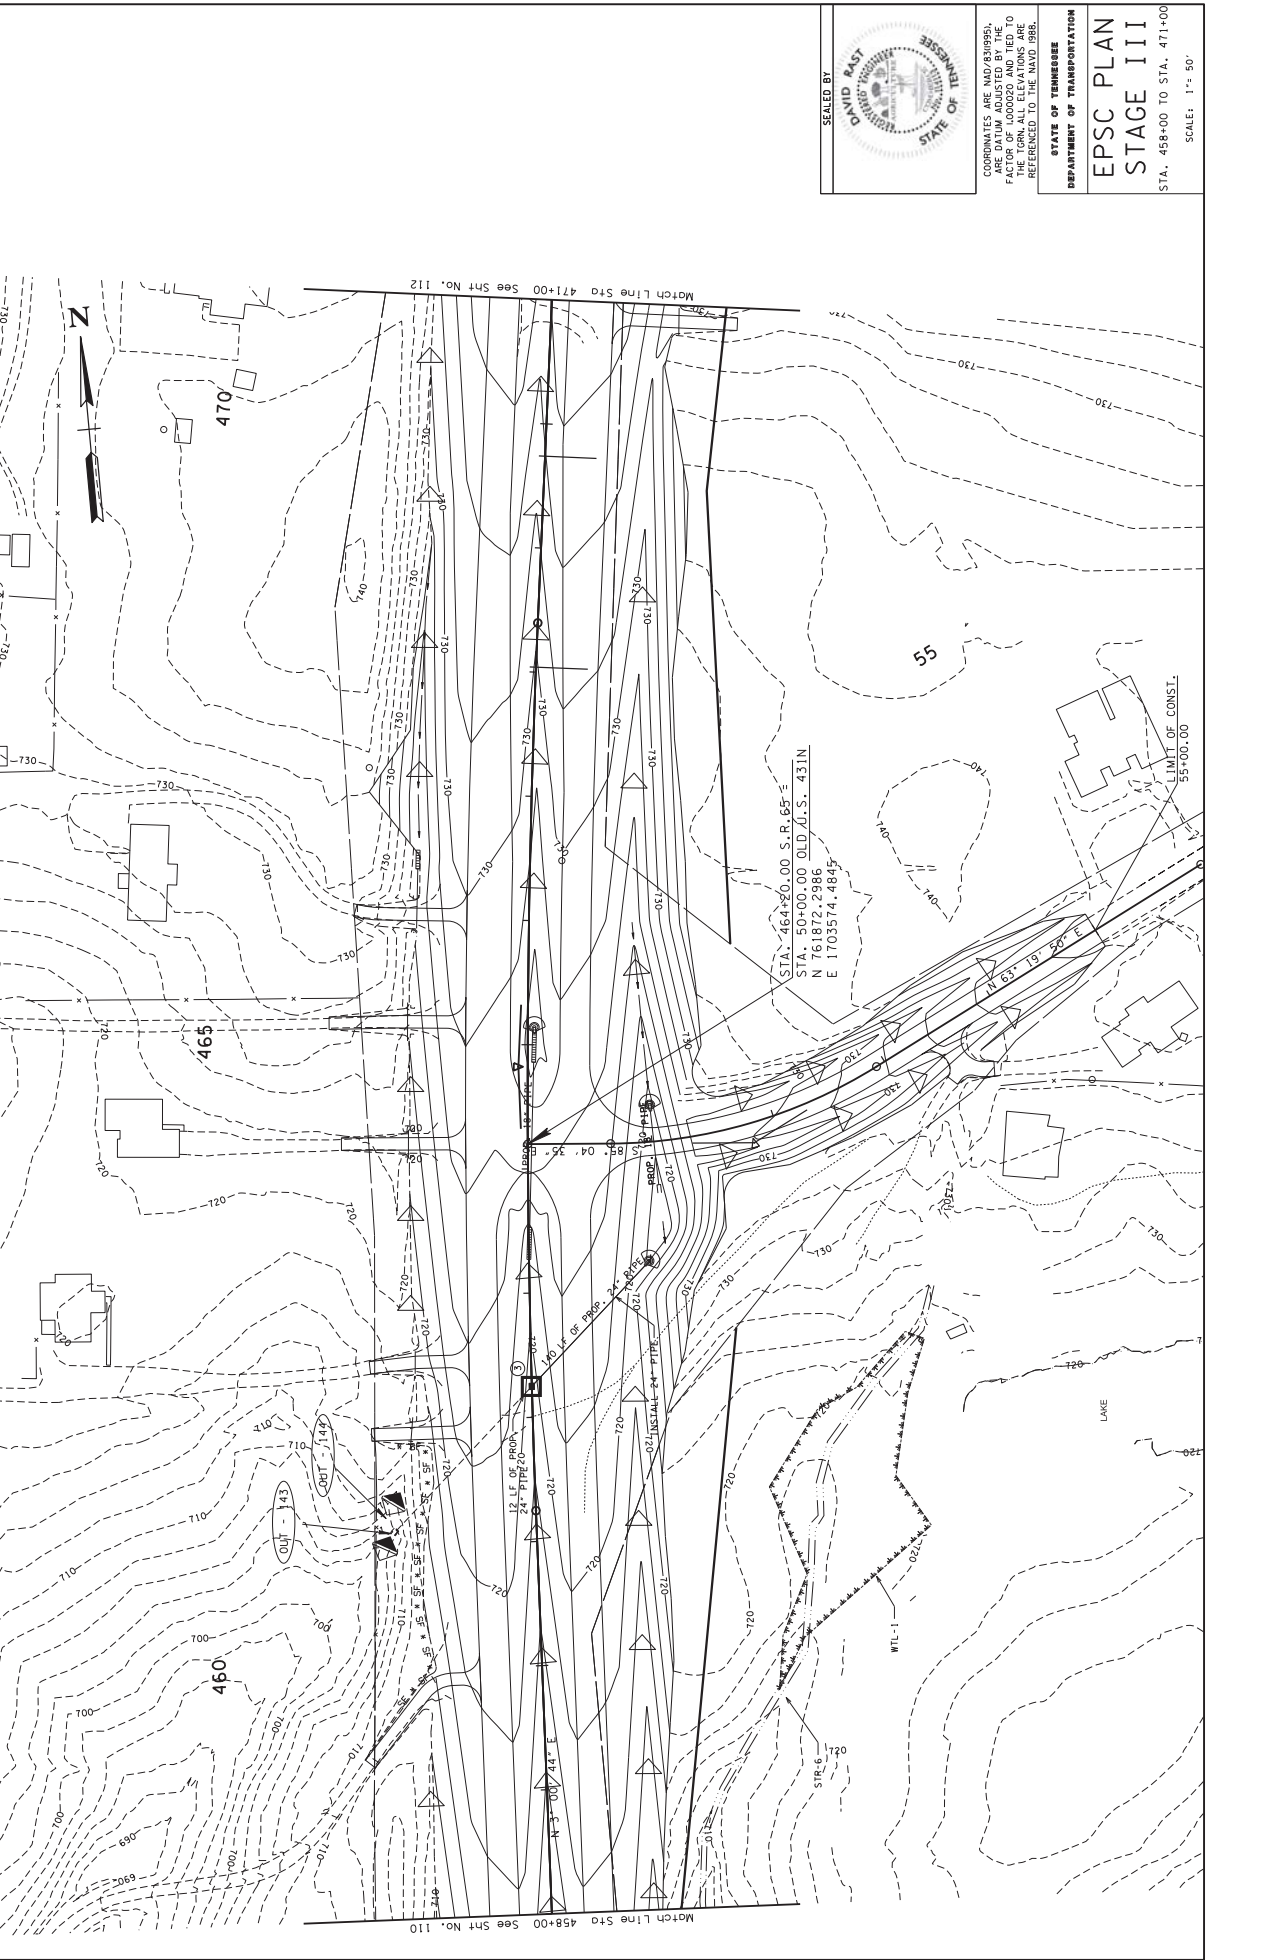

COORDINATES ARE UTM 83U 98S.  
 FACTOR OF 1.000000 AND TIED TO  
 THE TORN. ALL ELEVATIONS ARE  
 REFERENCED TO THE NAD 83EB.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION  
**EPSC PLAN**  
**STAGE III**  
 STA. 458+00 TO STA. 471+00  
 SCALE: 1" = 50'

SHEET NO.	PROJECT NO.	YEAR	TYPE
107	STP-65101	2012	R.O.W.
112	STP-65101	2017	CONST.

REV. 12-15-13, REVISED THE  
LIMIT OF CONSTRUCTION ON MT.  
SHARON ROAD.




COORDINATES ARE UTM 83N UTM  
METERS. THE STATE PLANNING  
FACTOR OF 1.000000 AND TIED TO  
THE TOP. ALL ELEVATIONS ARE  
REFERRED TO THE MVD 8586.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION


**EPSC PLAN  
STAGE III**

STA. 471+00 TO STA. 484+00  
SCALE: 1" = 50'

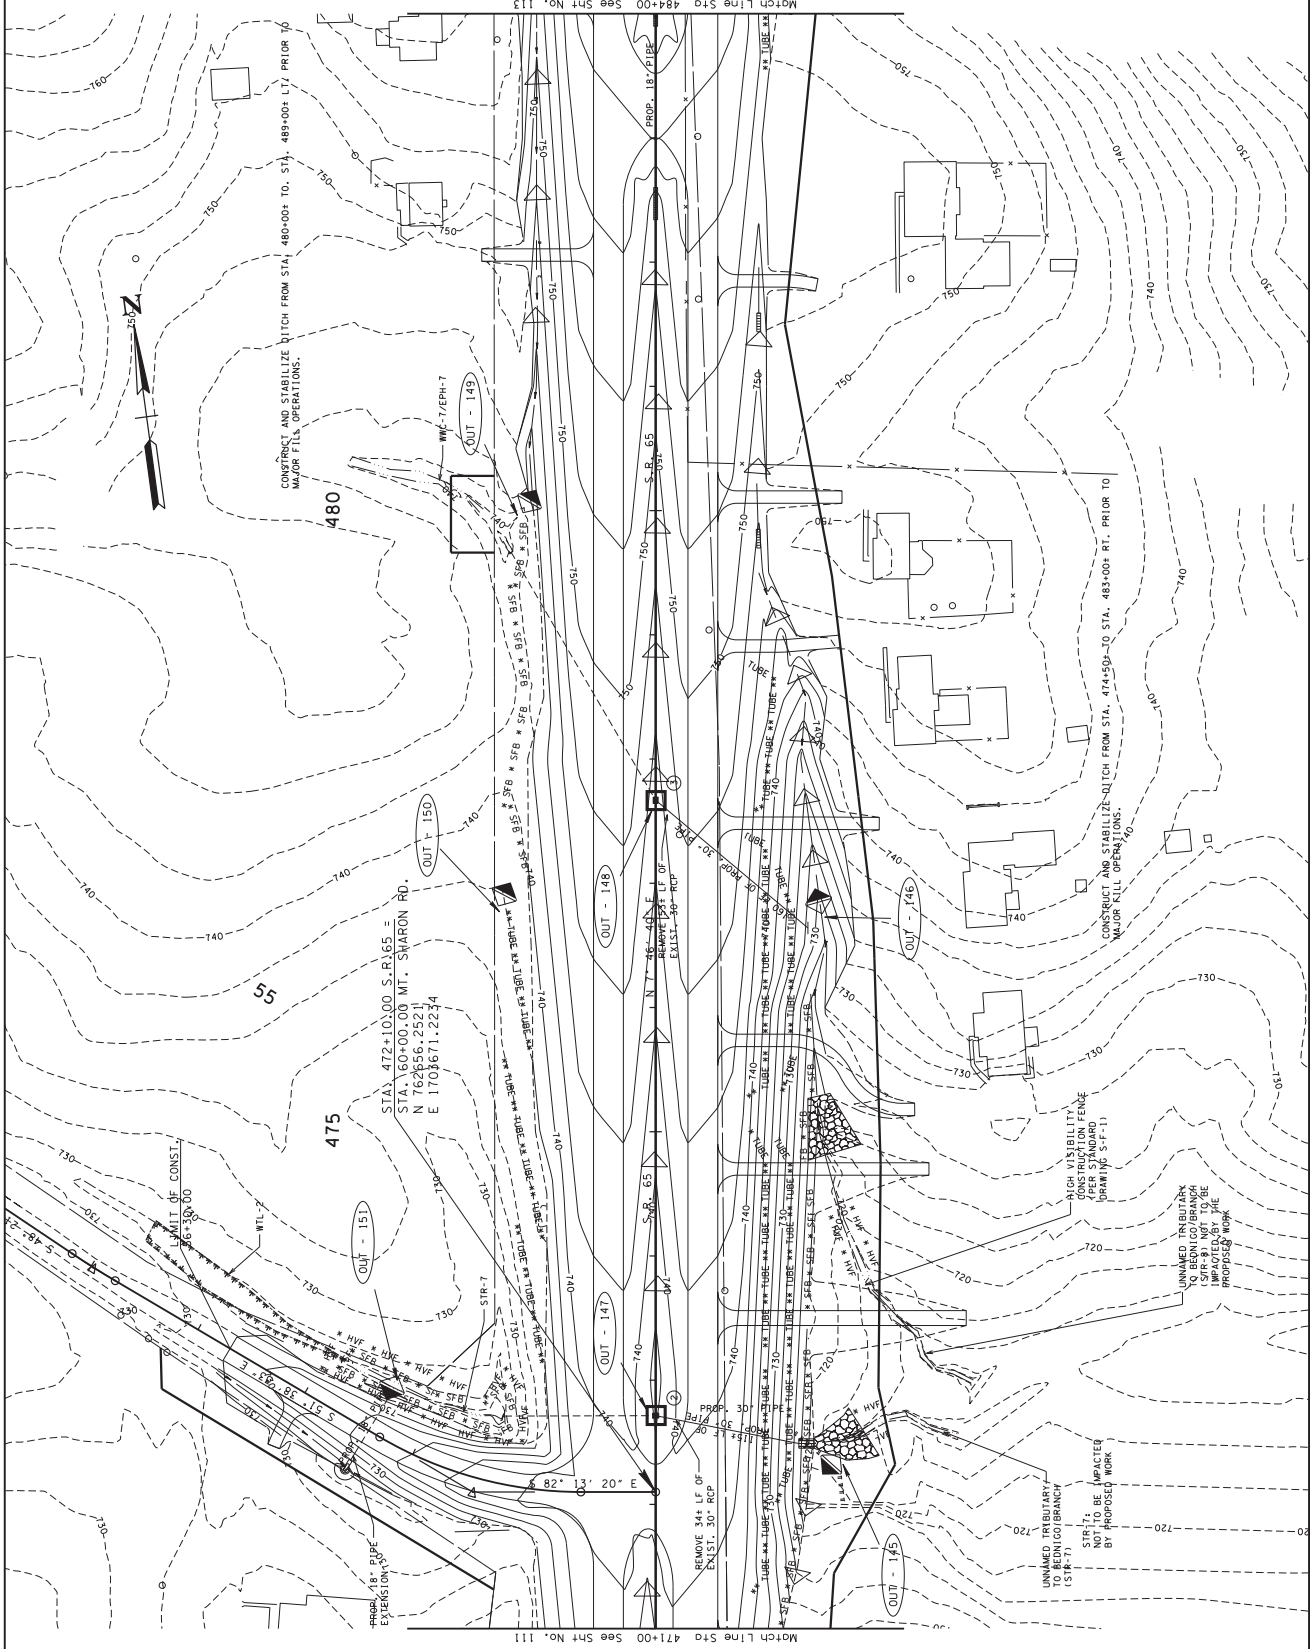

\\B05105V\Nashproj\proj\transportation\053\Techprod\Plan\B065 12.EC045.sht  
5/2/2017 10:28 PM

SHEET NO.	PROJECT NO.
108	STP-65101
113	STP-65101
	CONST. 2017

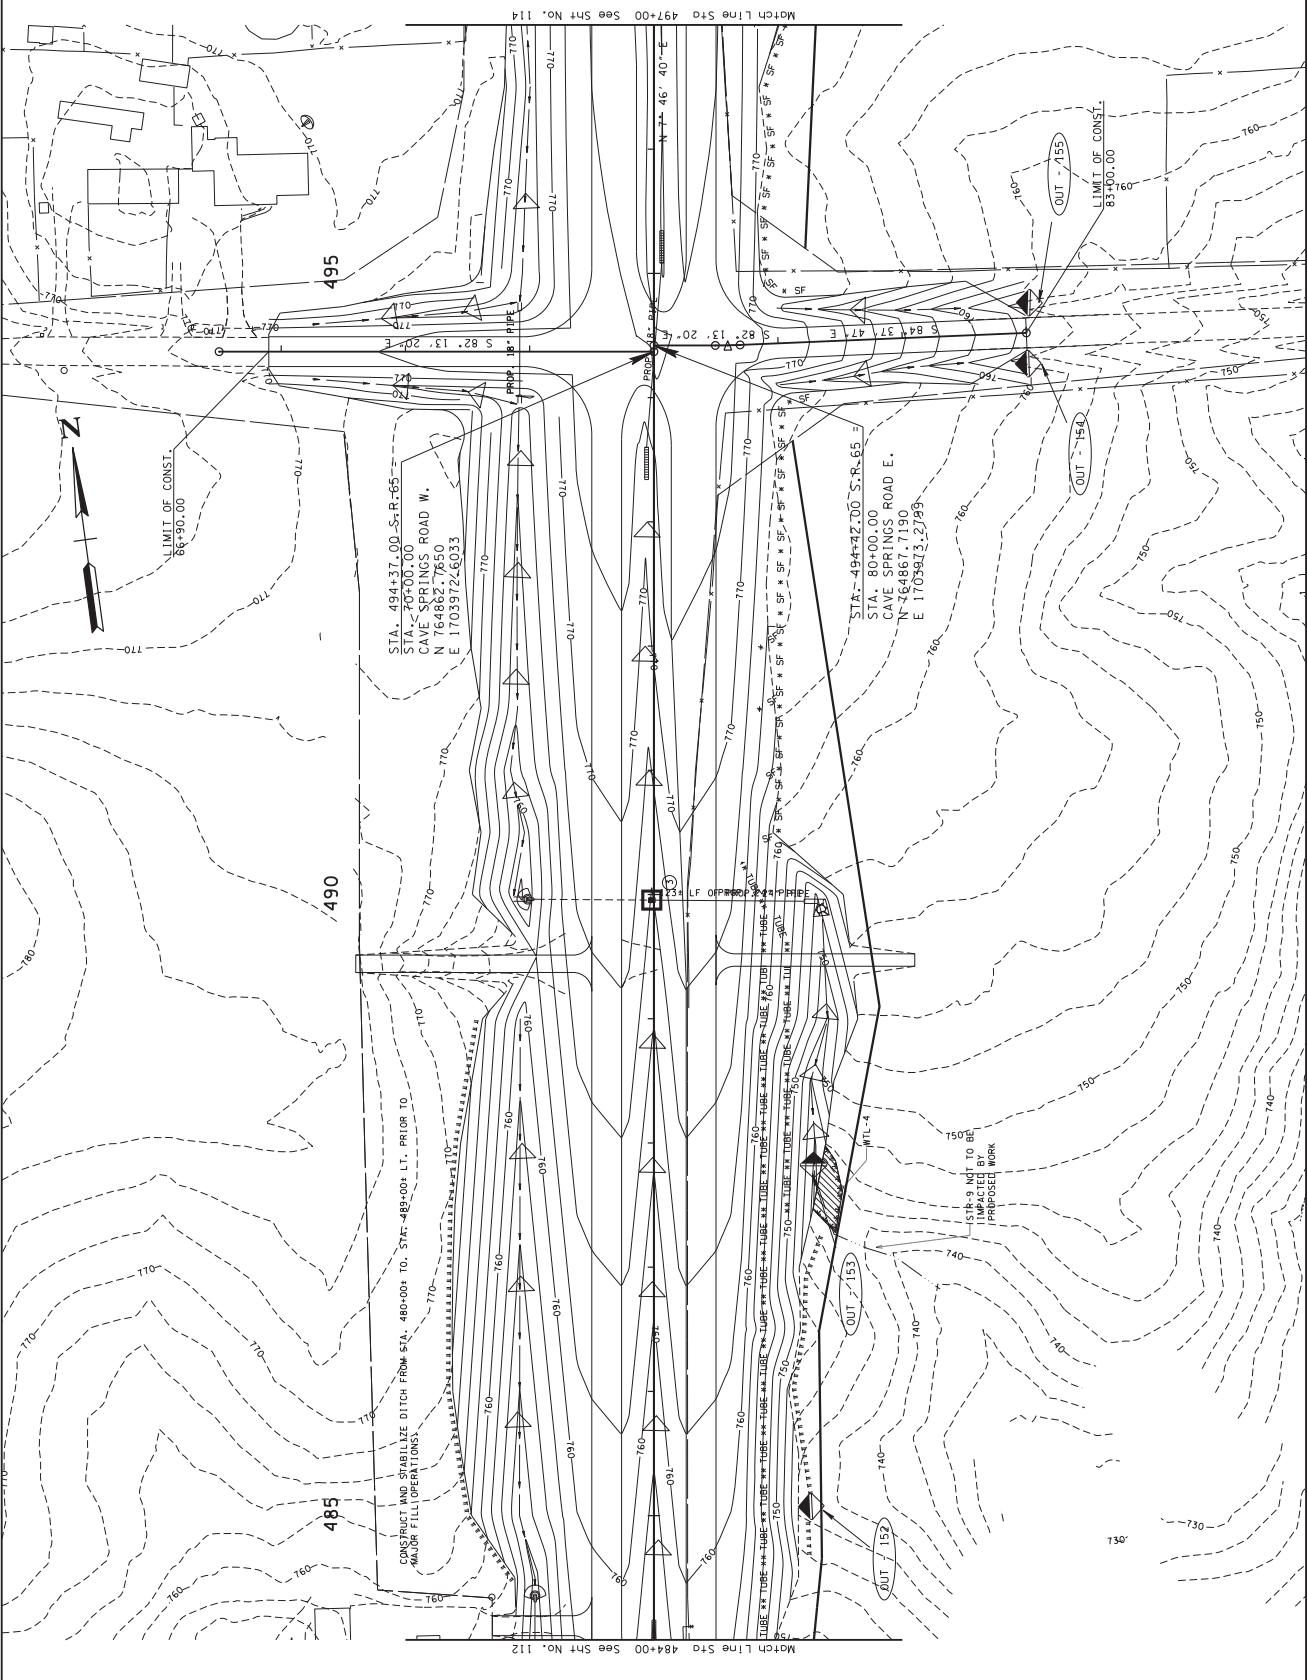

COORDINATES ARE UTM 84N98E, FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE NAD 83EB.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE III**

STA. 484+00 TO STA. 497+00  
SCALE: 1" = 50'

TYPE	YEAR	PROJECT NO.	SHEET NO.
CONST.	2017	STP-65101	114
CONST.	2012	STP-65101	109




COORDINATES ARE UTM 84N95E, ARE NOT TO BE USED AS A FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE NAVD 83EB.


STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

EPSC PLAN  
STAGE III

STA. 497+00 TO STA. 510+00  
SCALE: 1" = 50'

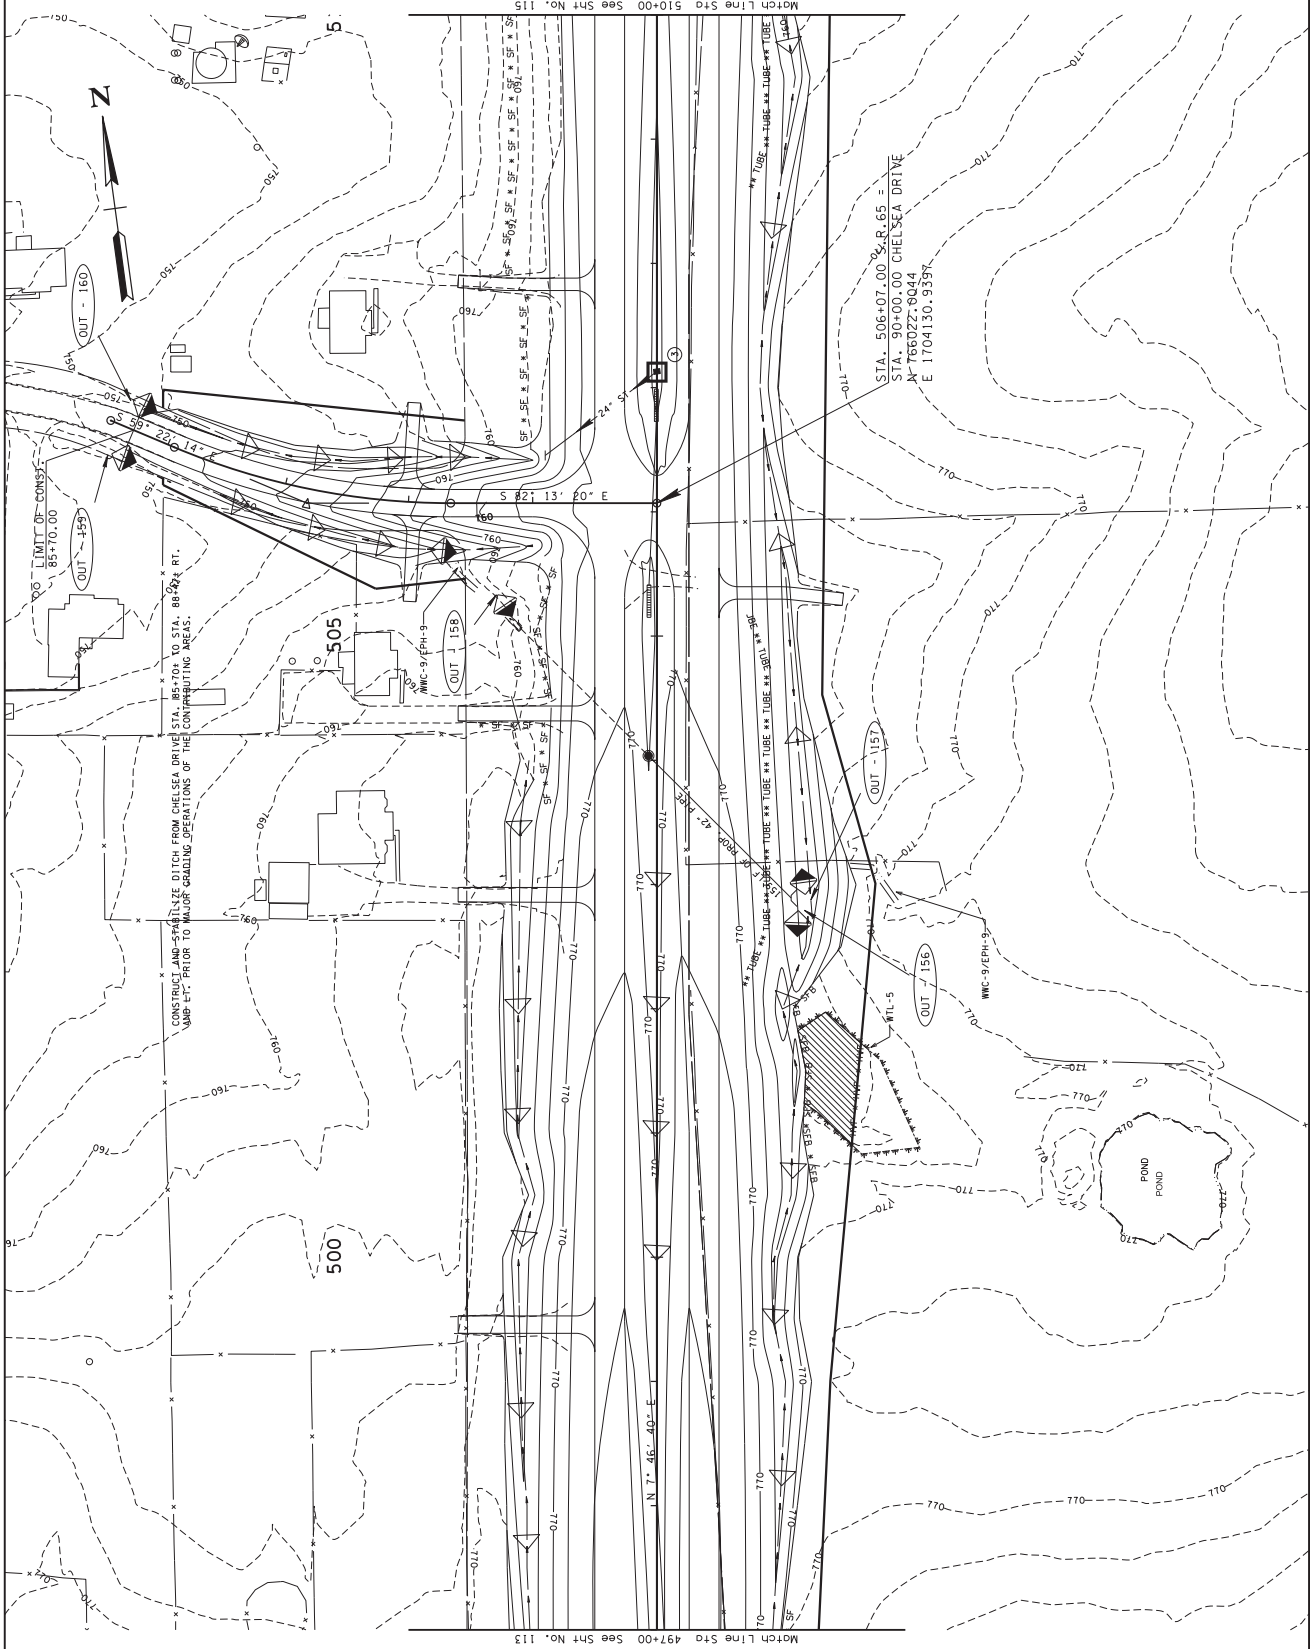

SHEET NO.	PROJECT NO.	YEAR	TYPE
110	STP-65101	2012	R.O.W.
111	STP-65101	2017	CONST.
115	STP-65101		

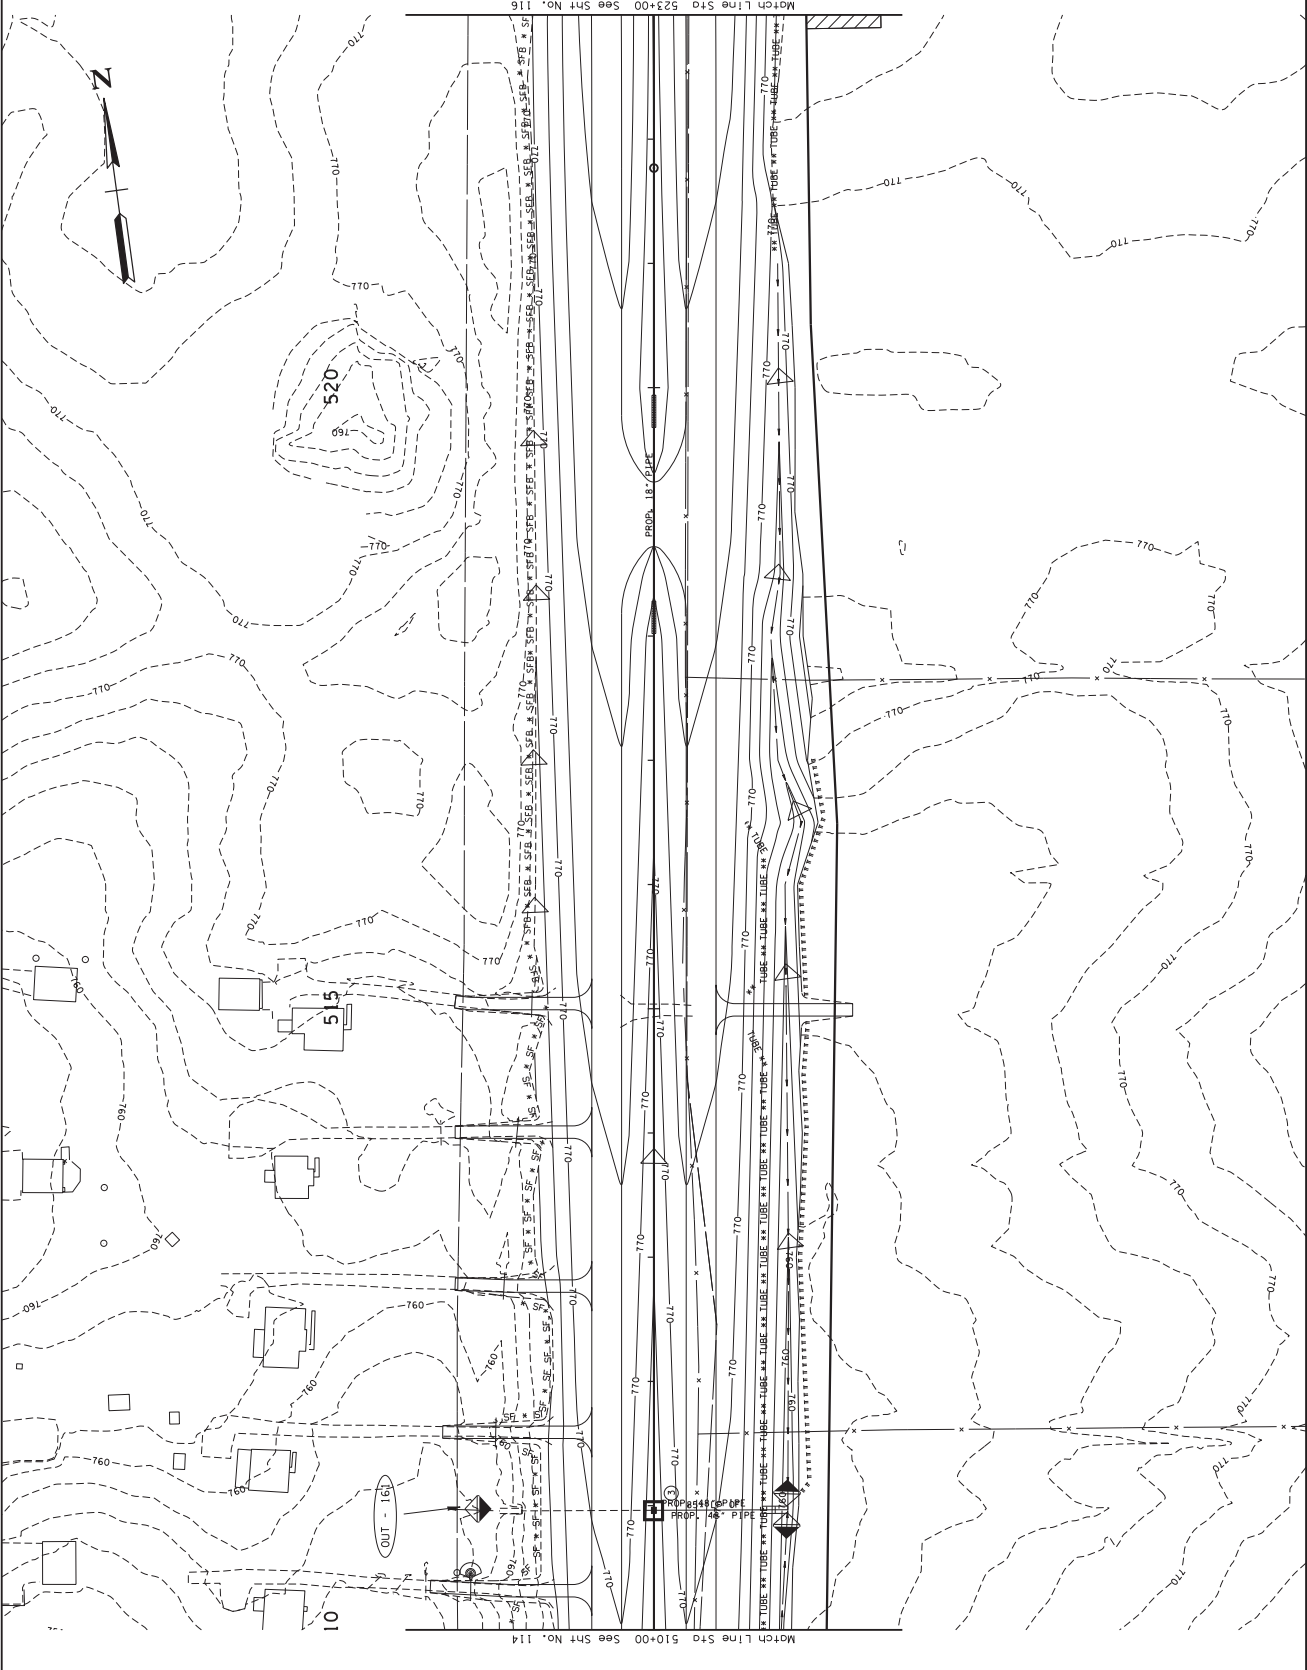

SEAL BY  
DAVID EAST  
10000  
TENN. REG. P.E.  
STATE OF TENNESSEE


COORDINATES ARE UTM 84N UZ58E. ANSISTE. FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE MVD 1988.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

EPSC PLAN  
STAGE III

STA. 510+00 TO STA. 523+00  
SCALE: 1" = 50'

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65101	111
CONST.	2017	STP-65101	116

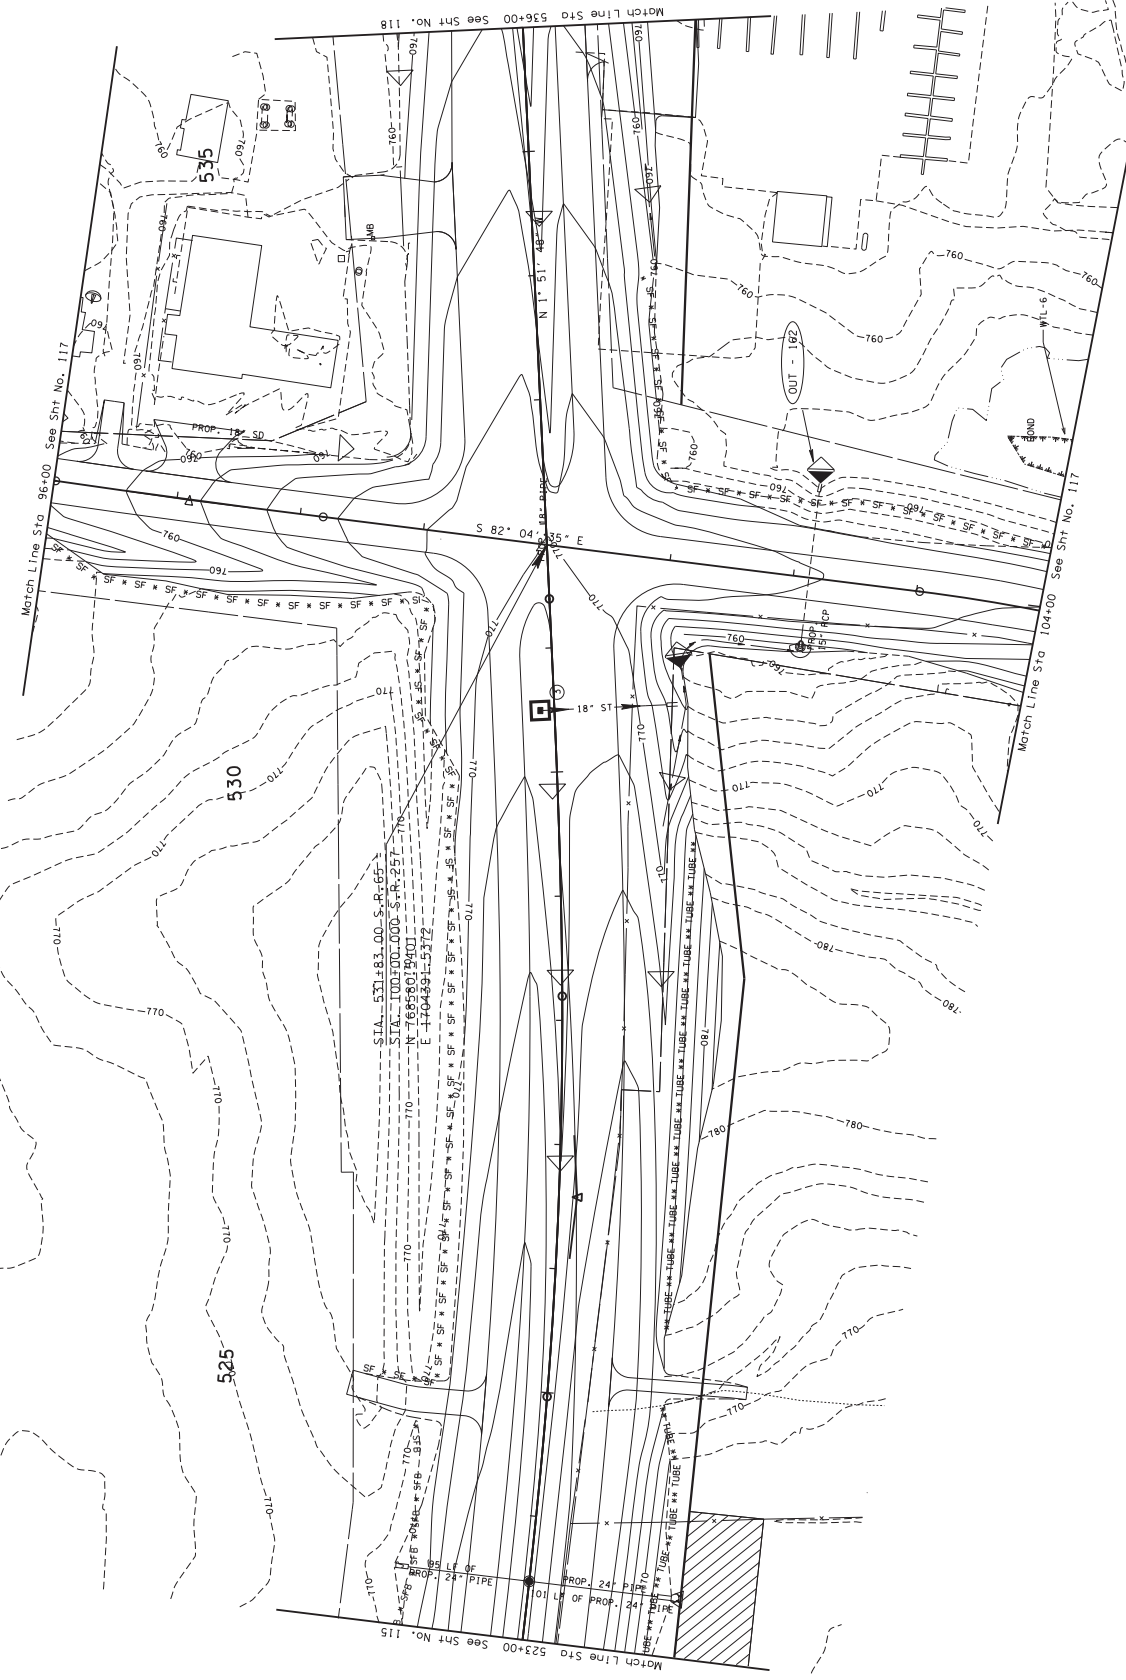

COORDINATES ARE UTM 83N 18S. FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE NAVD 1988.



STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE III**

STA. 523+00 TO STA. 536+00  
SCALE: 1" = 50'



TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65H101	111A
CONST.	2017	STP-65H101	117

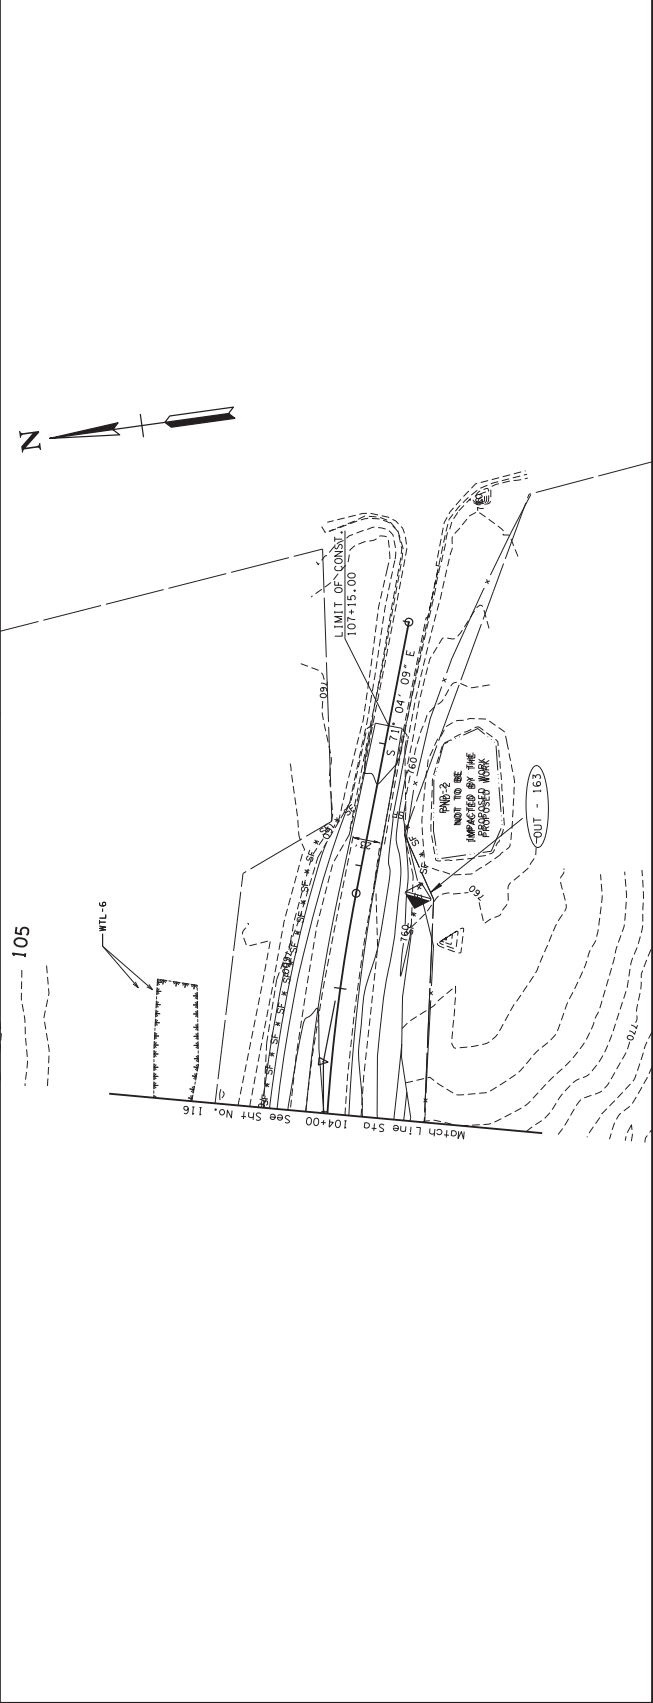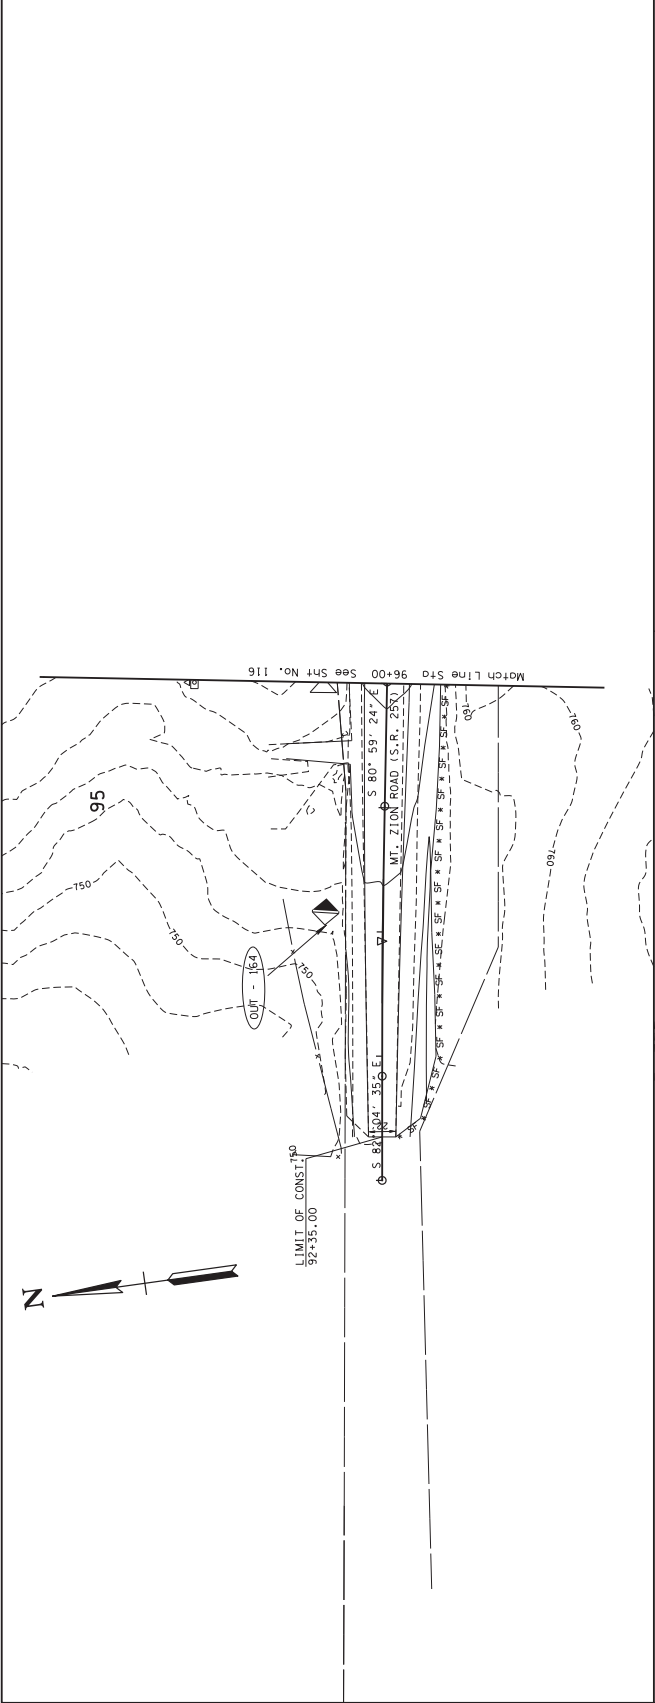


COORDINATES ARE UTM 84N UTM ZONE 18Q. ALL ELEVATIONS ARE REFERENCED TO THE UTM DATUM. THE HORIZONTAL SCALE IS 1"=50'. THE VERTICAL SCALE IS 1"=10'. THE TOPN ALL ELEVATIONS ARE REFERENCED TO THE UTM DATUM.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

EPSC PLAN  
STAGE III  
S.R. 257  
SCALE: 1"= 50'

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65101	112
CONST.	2017	STP-65101	118

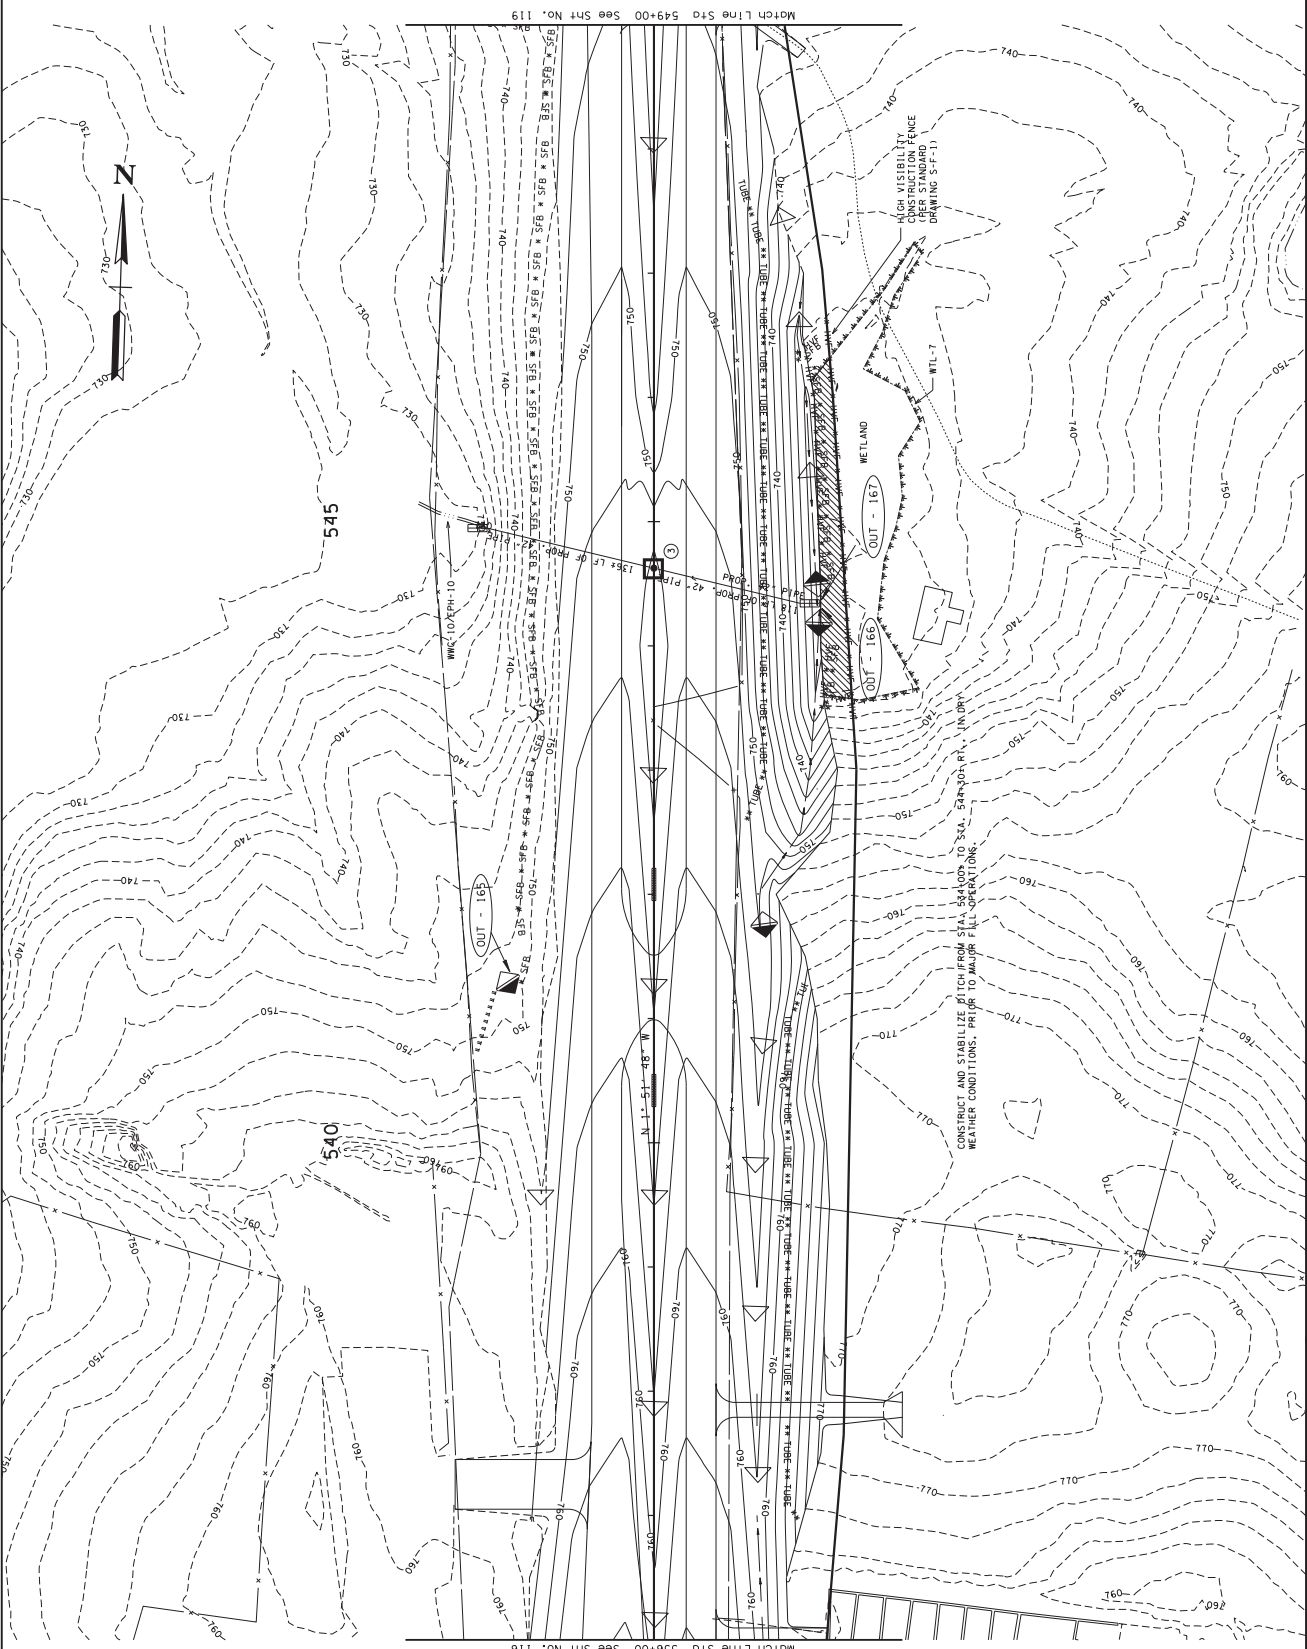

SEAL BY  
DAVID EAST  
STATE OF TENNESSEE  
LICENSE NO. 10000


COORDINATES ARE UTM 83N UTM ZONE 18Q. FACTOR OF 0.000000 AND TIED TO THE TBM. ALL ELEVATIONS ARE REFERENCED TO THE UTM 83N.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE III**

STA. 536+00 TO STA. 549+00  
SCALE: 1" = 50'

TYPE	YEAR	PROJECT NO.	SHEET NO.
R.O.W.	2012	STP-65101	113
CONST.	2017	STP-65101	119

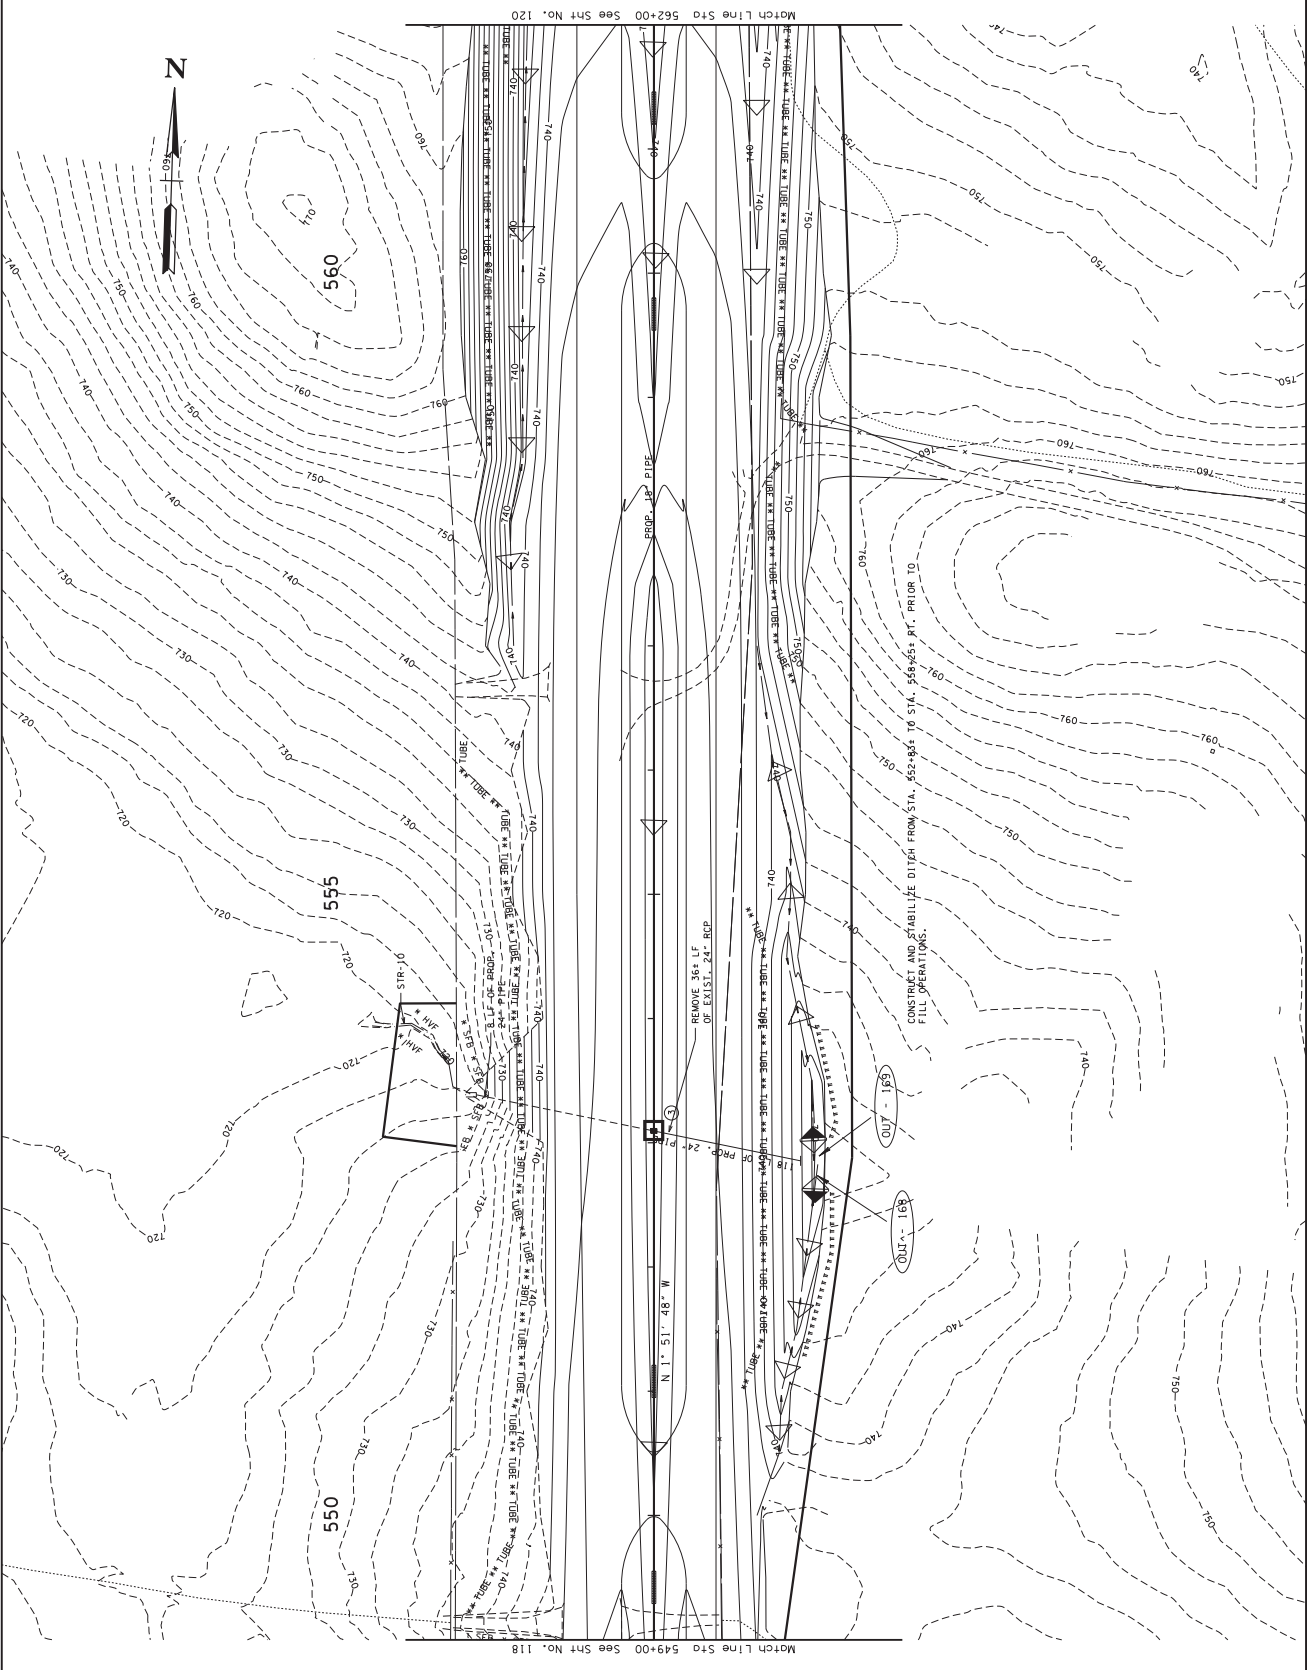



COORDINATES ARE UTM 84N UTM ZONE 18Q. FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE NAVD 1988.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE III**

STA. 549+00 TO STA. 562+00  
SCALE: 1" = 50'

SHEET NO.	PROJECT NO.	YEAR	TYPE
11-4	STP-65101	2012	R.O.W.
120	STP-65101	2017	CONST.

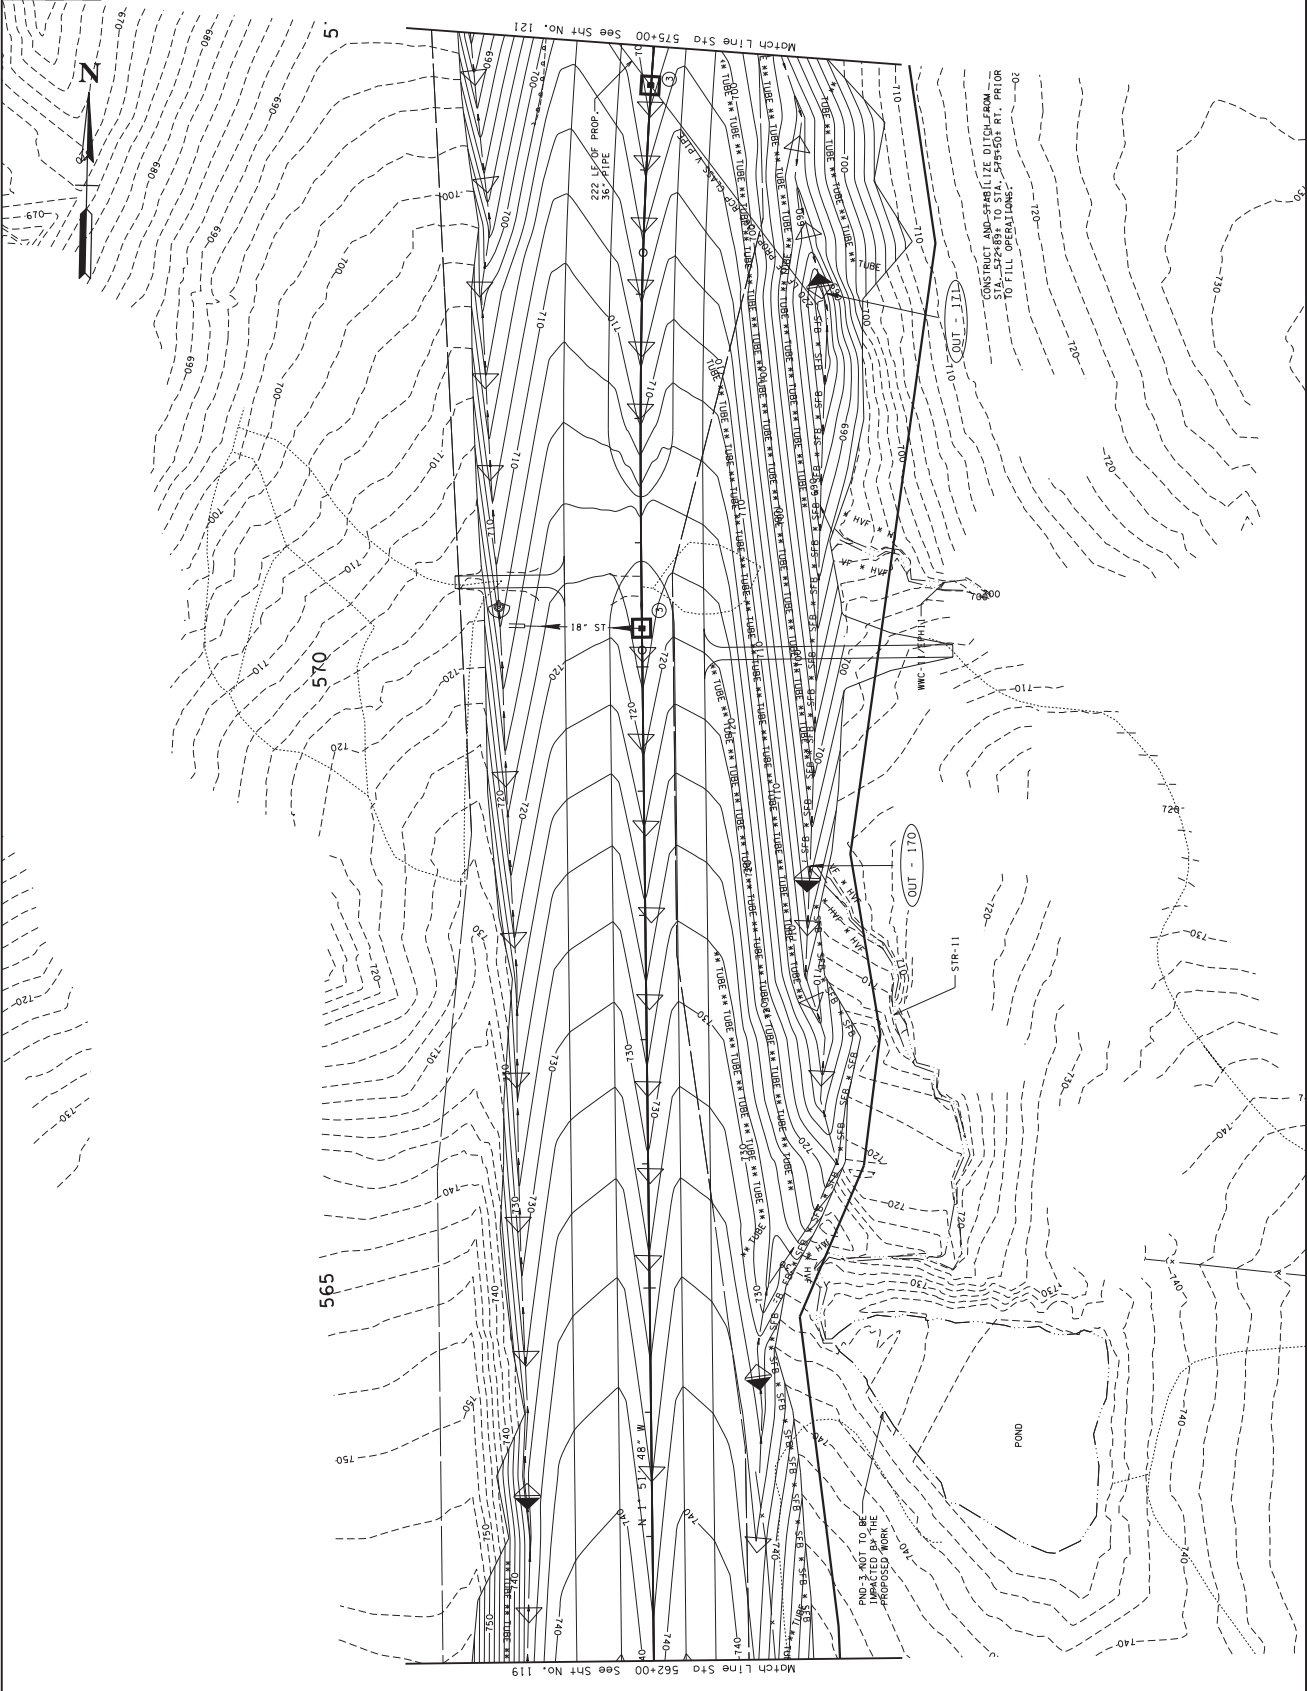

SEAL BY  
**DAVID EAST**  
 LICENSE NO. 12053  
 STATE OF TENNESSEE

COORDINATES ARE UTM 84N UTM ZONE 18S. ALL STATIONING IS IN STATIONING SYSTEM 18S. ALL ELEVATIONS ARE REFERENCED TO THE NGVD 1988.

STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

# EPSC PLAN STAGE III

STA. 562+00 TO STA. 575+00  
 SCALE: 1" = 50'

SHEET NO.	115
PROJECT NO.	STP-65101
YEAR	2012
R.O.W.	2017
TYPE	CONST.
	121




COORDINATES ARE UTM 84N95E, ANSISTE AND TIED TO FACTOR OF 1000000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE 1985 B.S.M.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION


**EPSC PLAN  
STAGE III**

STA. 575+00 TO STA. 588+00  
SCALE: 1" = 50'

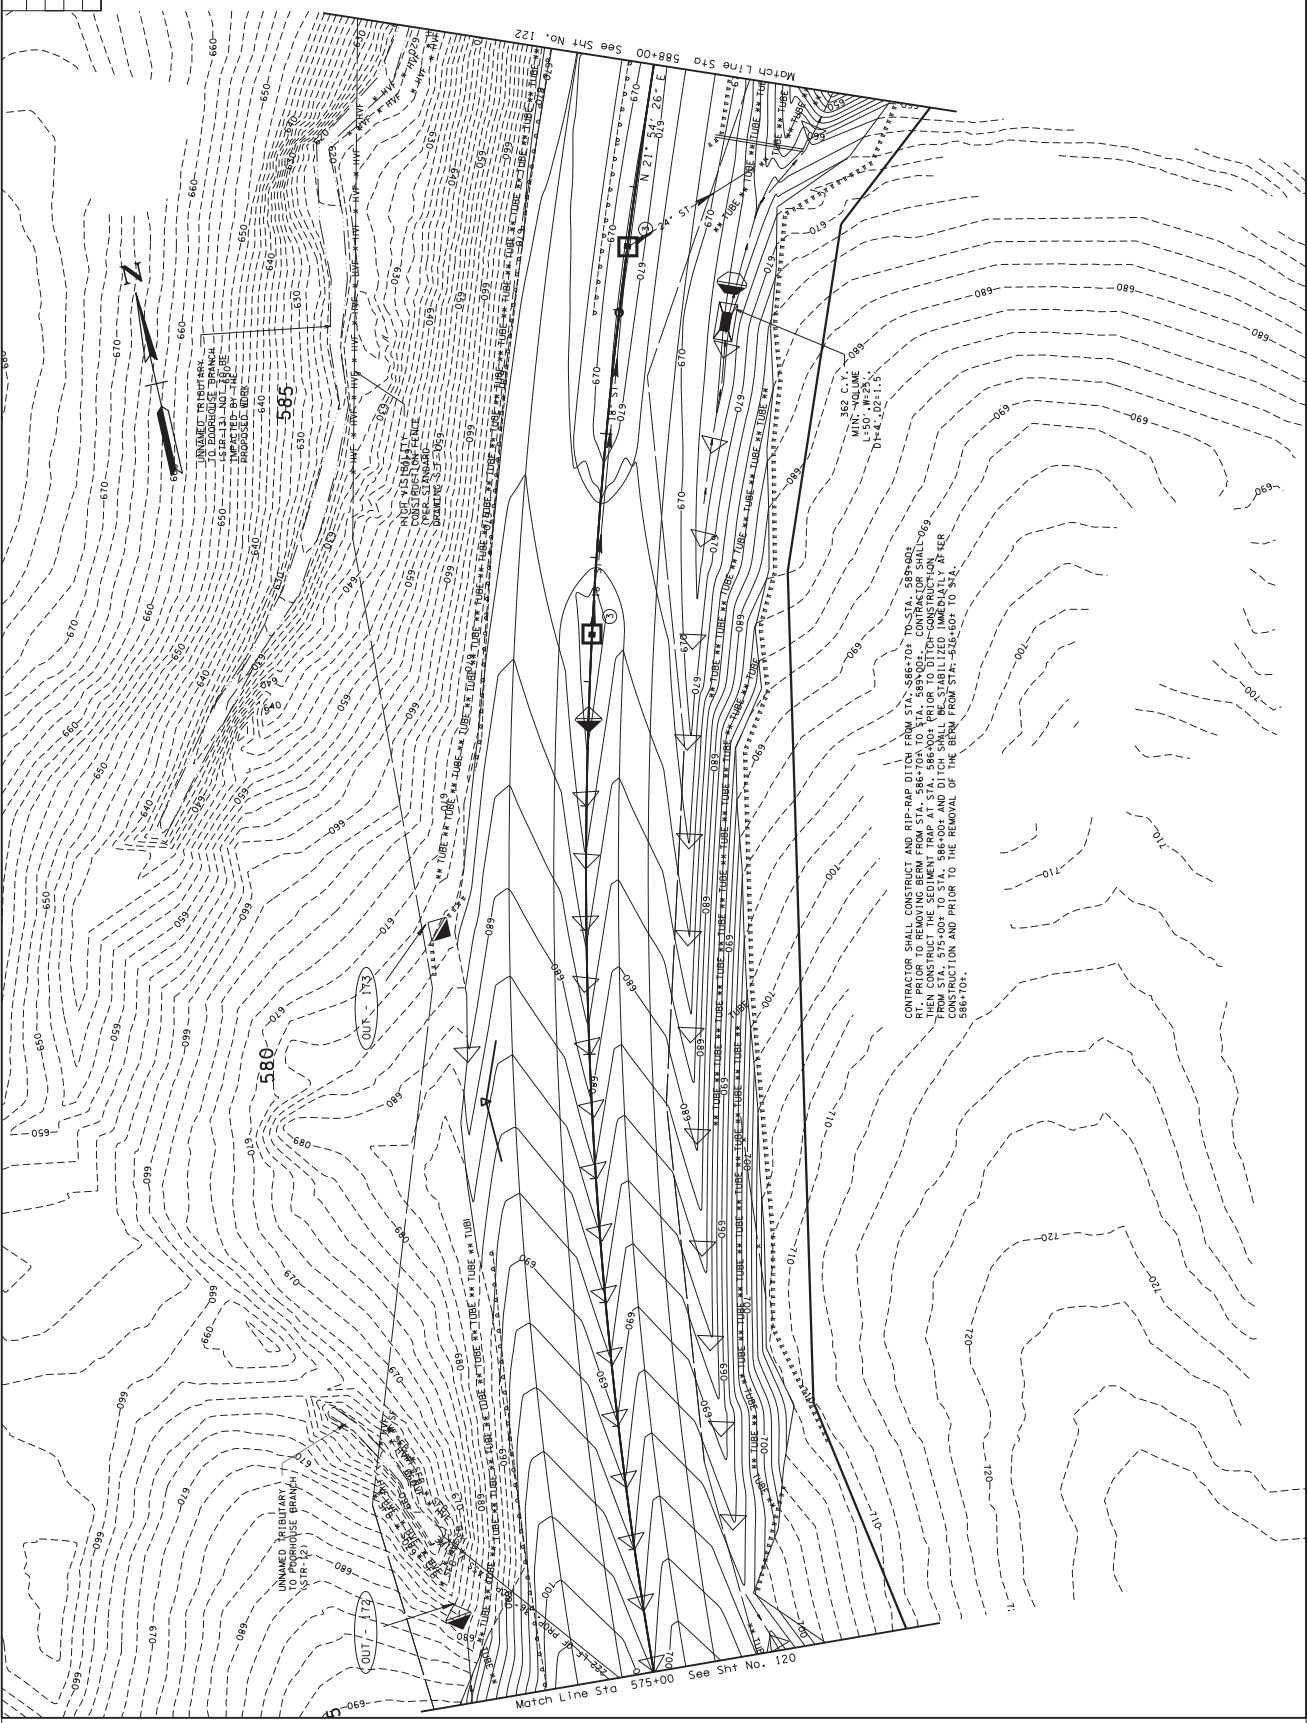



SHEET NO.	PROJECT NO.
117	STP-65101
123	STP-65101

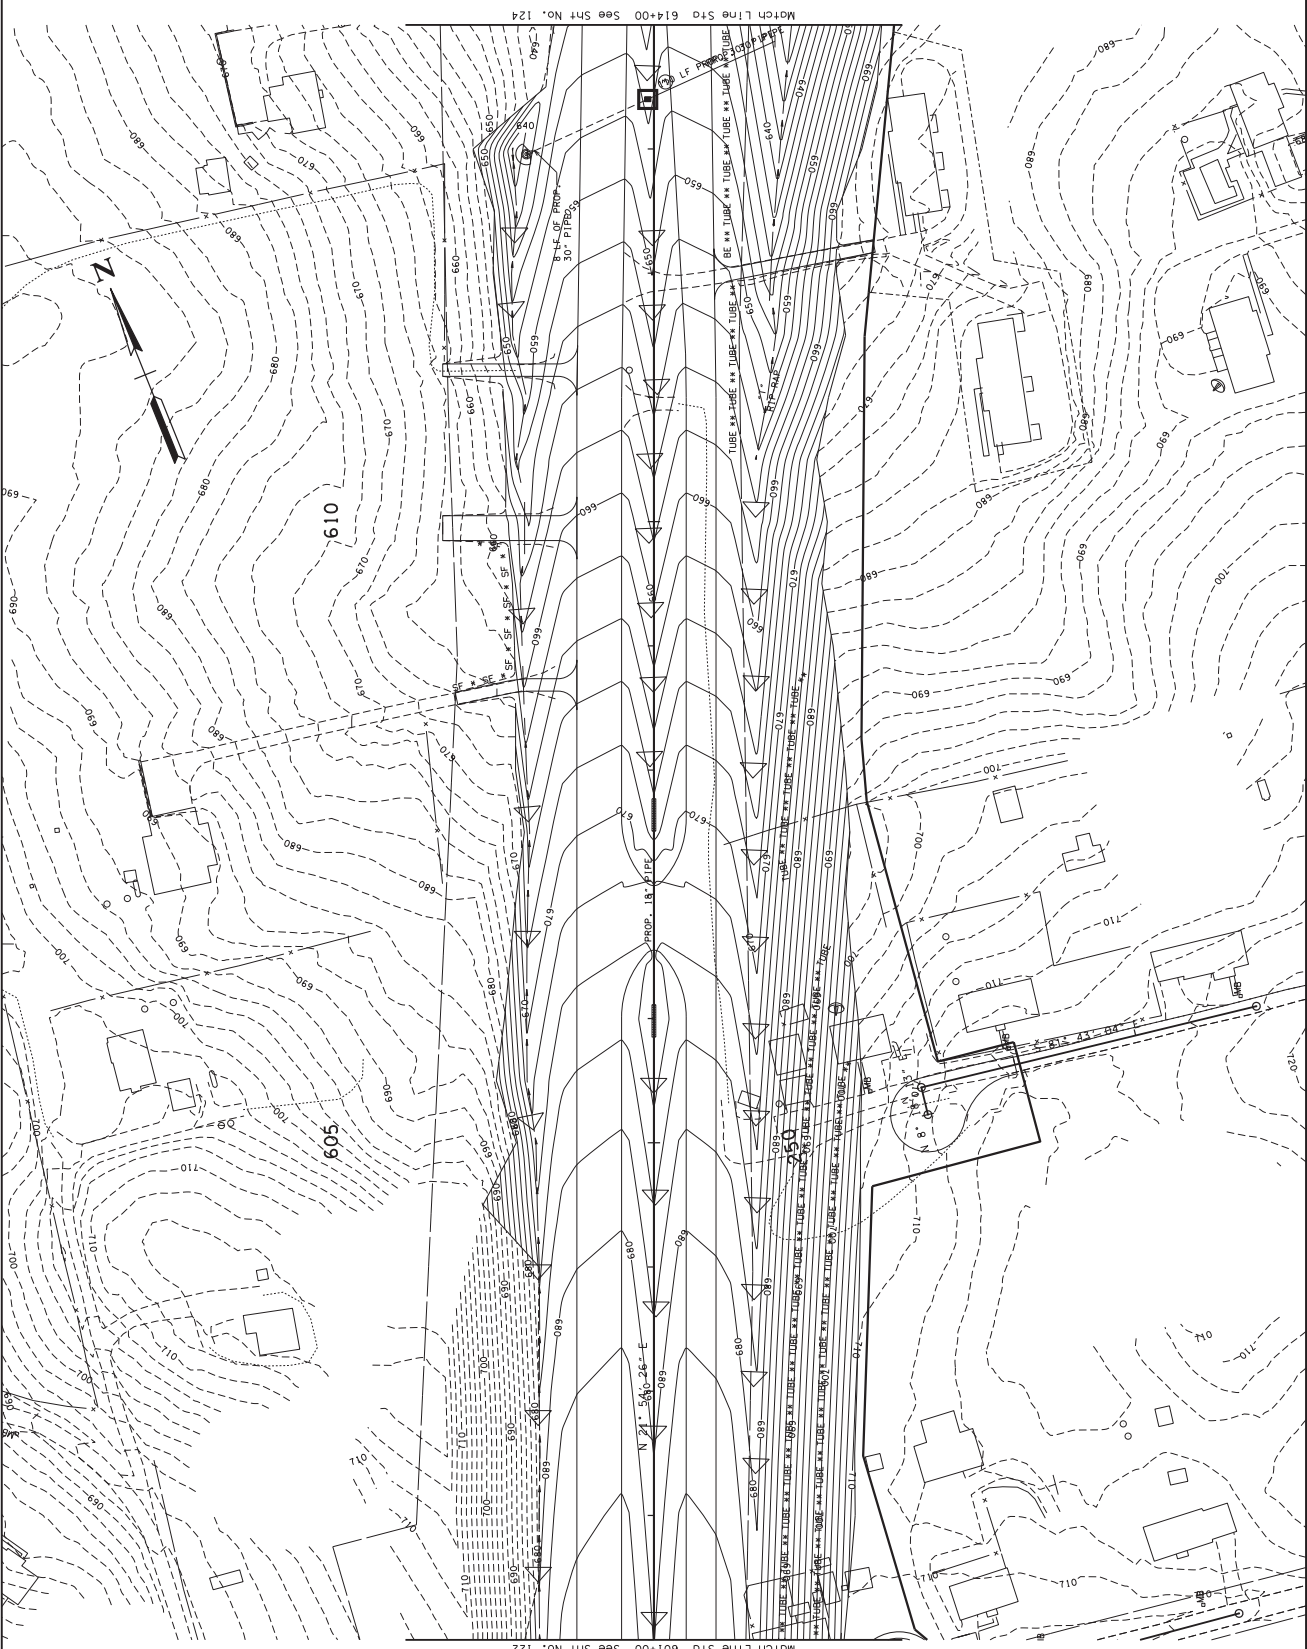

COORDINATES ARE UTM 83N 95E.  
 FACTOR OF 1000000 AND TIED TO  
 THE TBM. ALL ELEVATIONS ARE  
 REFERENCED TO THE 1985 B.S.M.


STATE OF TENNESSEE  
 DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
 STAGE III**

STA. 601+00 TO STA. 614+00  
 SCALE: 1" = 50'

SHEET NO.	PROJECT NO.	YEAR	TYPE
118	STP-65101	2012	R.O.W.
124	STP-65101	2017	CONST.

NOTE 1: DURING A HEAVY STORM EVENT, THE CONTRACTOR SHALL PUMP POUNDED WATER TO PREVENT OVERTOPPING THE ENHANCEMENT.



COORDINATES ARE UTM 834952. FACTOR OF 100000 AND TIED TO THE TORN. ALL ELEVATIONS ARE REFERENCED TO THE 1985 B.S.M.

STATE OF TENNESSEE  
DEPARTMENT OF TRANSPORTATION

**EPSC PLAN  
STAGE III**

STA. 614+00 TO END OF PROJ.  
SCALE: 1" = 50'

