INDEX

DESCRIPTION	SHT.
TITLE SHEET	1
ESTIMATED QUANTITIES, TYPICAL SECTIONS & DETAILS	2 -4
UTILITY OWNERS	5
GENERAL NOTES	6
SPECIAL NOTES	7

STANDARD ROADWAY DRAWINGS

DWG. NO.	REV.	DESCRIPTION
ROADWAY DESIGN STANDARDS		
RD-A-1	12-18-99	STANDARD ABBREVIATIONS
RD-L-1	10-26-94	STANDARD LEGEND
RD-L-2	09-05-01	STANDARD LEGEND FOR UTILITY INSTALLATIONS
SAFETY APPURTENANCES AND FENCE		
S-CZ-1		CLEAR ZONE CRITERIA
S-PL-1		SAFETY PLAN AT ROADSIDE HAZARDS
S-PL 2		SAFETY PLAN AT SIDE ROADS OR PRIVATE DRIVES
S-PL-6		SAFETY PLAN: SAFETY HARDWARE PLACEMENT
S-GR31-1		W-BEAM GUARDRAIL
S-GRT-2		TYPE 38 GUARDRAIL TERMINAL
S-GRT-2R		EARTH PAD FOR TYPE 38 TERMINAL (RETROFIT)
S-GRA-3		GUARDRAIL ANCHOR FOR TYPE 21, 13 AND IN-LINE TERMINALS
TRAFFIC CONTROL APPURTENANCES		
T-M-1	11-01-11	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS AND MARKING ABBREVIATIONS
T-M-2	01-15-13	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS
T-M-4	11-01-11	STANDARD INTERSECTION PAVEMENT MARKINGS
T-WZ-10	04-02-12	ADVANCE ROAD WORK SIGNING ON HIGHWAYS AND FREEWAYS

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
BUREAU OF ENGINEERING

CLAY COUNTY
STATE ROUTE 292
FROM SR-53 (LM 0.00)
TO OVERTON COUNTY LINE (LM 6.48)

OVERTON COUNTY
STATE ROUTE 292
FROM CLAY COUNTY LINE (LM 0.00)
TO SR-136 (LM 3.40)

STATE ROUTE 293
FROM SR-136 (LM 0.00)
TO SR-111 (LM SR-111 (LM 4.64)

MICRO-SURFACE OR ULTRA THIN LIFT CS, GUARDRAIL & PAVEMENT MARKINGS

STATE HIGHWAY NO. 292 & 293 F.A.H.S. NO. XX

TENN.	YEAR	SHEET NO.
	2015	1
FED. AID PROJ. NO.	HSIP-292(10)	
STATE PROJ. NO.	14011-3204-94, 14011-4204-04 67010-3204-94, 67010-4204-04	
FED. AID PROJ. NO.	HSIP-293(12)	
STATE PROJ. NO.	67065-3202-94, 67065-4202-04	

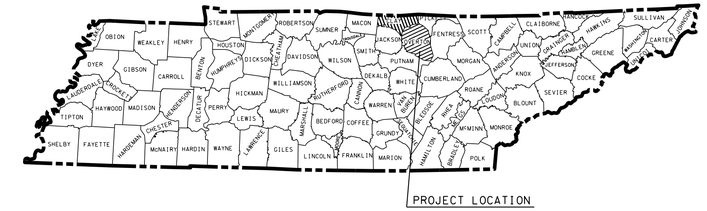

N

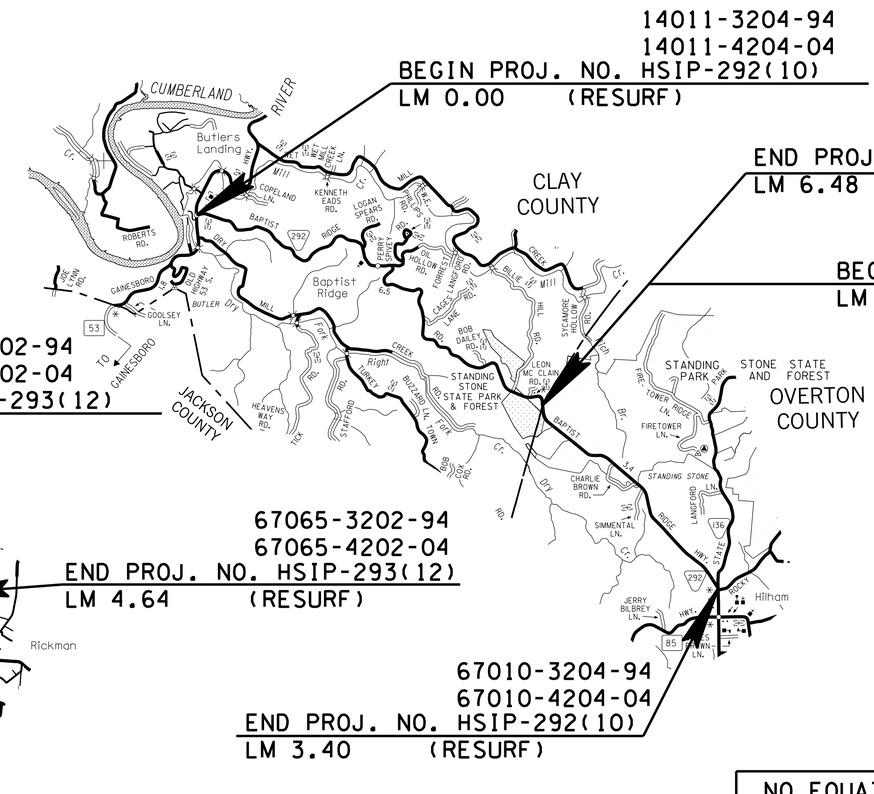

SCALE
0 1 2 3 MILES

SEALED BY
ROBERT W. RODGERS
REGISTERED ENGINEER
AGRICULTURE
12/01/2014
COMMERCE
NO. 00022259
STATE OF TENNESSEE

APPROVED: Paul D. Degges
PAUL D. DEGGES, CHIEF ENGINEER

DATE:

APPROVED:
JOHN SCHROER, COMMISSIONER

NO EQUATIONS

SPECIAL NOTES

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED MARCH 1, 2006 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT ROAD SP. SV. 2 ROBERT RODGERS PE

DESIGNER DIANE EVITT CHECKED BY GORDON MASENGALE

P.E. NO. 98023-4217-04

PIN NO. 082826.03, 084111.01

SR-293 EXCLUSIONS	
LM TO LM	LENGTH (MILE)
1.21 - 1.25	0.04
3.67 - 3.68	0.01
T O T A L =	0.05

	CLAY SR-292	OVERTON SR-292	OVERTON SR-293	TOTAL	
PROJECT LENGTH	6.48	3.40	4.59	14.47	MILES
TOTAL LANE MILES RESURFACED	12.96	6.80	9.18	28.94	MILES

CLAY SR-292 TRAFFIC DATA	
AADT (2014)	400

OVERTON SR-292 TRAFFIC DATA	
AADT (2014)	450

OVERTON SR-293 TRAFFIC DATA	
AADT (2014)	1,300

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED:

DIVISION ADMINISTRATOR DATE

\\JJ02WF01.tdot.state.tn.us\02Shared\Design County Folders\Design Resurfacing Folders\Resurf 2015\2015 State Routes\SF3 Clay-Overton-292_Overton-293\001_Clay-292-Ove-292-293_Title.dgn 24-NOV-2014 08:16