STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
BUREAU OF ENGINEERING

TENN.	YEAR	SHEET NO.
	2015	1
FED. AID PROJ. NO.	NH/HSIP-55(23)	
STATE PROJ. NO.	64005-8223-14	
STATE PROJ. NO.	64005-3223-94	

Index Of Sheets
Resurfacing

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	ESTIMATED ROADWAY QUANTITIES
2A	TYPICAL SECTIONS AND PAVING SCHEDULE
2B	GENERAL NOTES
2C	SPECIAL NOTES

"NO PROJECT COMMITMENT SHEET INCLUDED IN THIS SET OF PLANS."
"NO UTILITY SHEETS"

MOORE COUNTY

STATE ROUTE NO. 55

FROM STATE ROUTE 50 (L.M. 0.00)
TO COFFEE COUNTY LINE (L.M. 11.16)

RESURFACING

PROJECT LOCATION

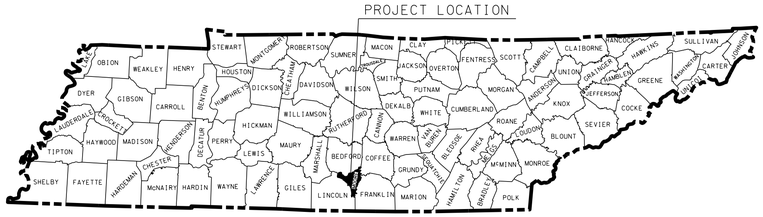

STANDARD ROADWAY DRAWINGS

DWG. NO.	REV.	DESCRIPTION
ROADWAY DESIGN STANDARDS		
RD-A-1	12-18-99	STANDARD ABBREVIATIONS
RD-L-1	10-26-94	STANDARD LEGEND
SAFETY APPURTENANCES AND FENCE		
S-GR31-1	12-01-14	W-BEAM GUARDRAIL
S-GRT-2	11-03-14	TYPE 38 GUARDRAIL TERMINAL
S-GRT-2R		EARTH PAD FOR TYPE 38 (RETROFIT)
S-GRA-3		GUARDRAIL ANCHOR FOR TYPE 21, 13, AND IN-LINE TERMINALS
TRAFFIC CONTROL APPURTENANCES		
T-FAB-1	05-27-97	FLASHING YELLOW ARROW BOARD
T-M-1	07-24-14	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS AND MARKING ABBREVIATIONS
T-M-2	07-24-14	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS
T-M-3	07-24-14	MARKING STANDARDS FOR TRAFFIC ISLANDS, MEDIANS & PAVED SHOULDERS ON CONVENTIONAL ROADS
T-M-4	07-24-14	STANDARD INTERSECTION PAVEMENT MARKINGS
T-M-15A	01-30-15	ASPHALT SHOULDER RUMBLE STRIP INSTALLATION DETAILS FOR NON-ACCESS CONTROLLED ROUTES
T-M-16	12-01-14	ASPHALT SHOULDER RUMBLE STRIPE INSTALLATION DETAILS FOR NON-ACCESS CONTROLLED ROUTES
T-WZ-10	04-02-12	ADVANCE ROAD WORK SIGNING ON HIGHWAYS AND FREEWAYS

STATE HIGHWAY NO. 55 F.A.H.S. NO.

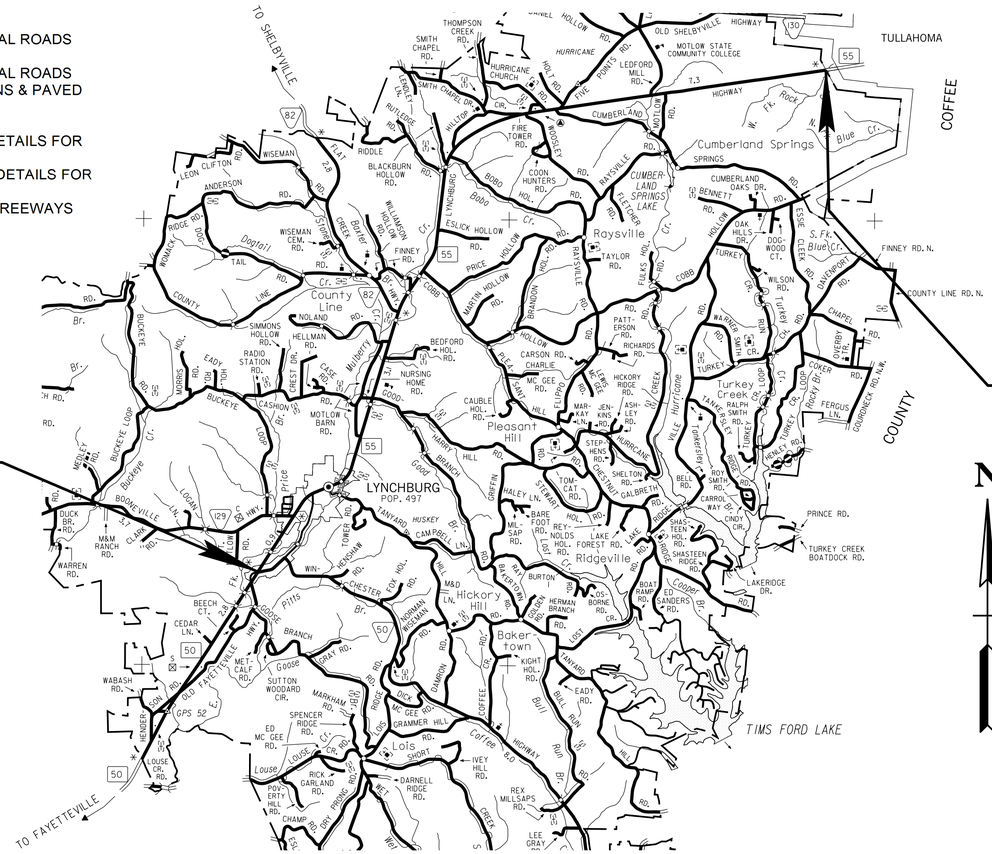

SCALE: 1" = 1 MILE

64005-8223-14
64005-3223-94
BEGIN PROJ. NO. NH/HSIP-55(23)

L.M. 0.00

64005-8223-14
64005-3223-94
END PROJ. NO. NH/HSIP-55(23)

L.M. 11.16

EXCLUSIONS	
LOCATION	LENGTH (FT.)
E. FORK MULBERRY CR. BRIDGE (LM 0.31)	142.5'
L.M. 1.11 TO L.M. 1.86	3,960'
E. FORK MULBERRY CR. BRIDGE (LM 3.88)	185'
L.M. 4.16 TO L.M. 4.34	950'
L.M. 4.46 TO L.M. 4.53	370'
T O T A L =	5,480'

● INCLUDES MULBERRY CR. BRIDGE (LM 4.25).

SEALED BY
DUANE M. HESTER
AGRICULTURE
COMMERCE
NO. 110014
STATE OF TENNESSEE
03/03/2015

APPROVED: Paul D. Degges
PAUL D. DEGGES, CHIEF ENGINEER

DATE:

APPROVED:
JOHN SCHROER, COMMISSIONER

SPECIAL NOTES

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED JANUARY 1, 2015 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT TRANS. PROJ. SP. SV. 2 BILLY BINION

DESIGNER JACOB BROOKS CHECKED BY ALVIN A. WHITE

P.E. NO. 98034-4299-04 (DESIGN)

PIN NO. 120938.00

TRAFFIC DATA	
ADT (2015)	7330
V	45 MPH

PROJECT LENGTH 10.08 MILES
TOTAL LANE MILES RESURFACED 20.5 MILES

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED:

DIVISION ADMINISTRATOR DATE

\\JU03WF01.tdot.state.tn.us\03Shared\SURVEY\DESIGN\Resurfacing Plans\2015\05-May Letting\MooreSR55 JB\00L_TitleSheet.dgn 03-MAR-2015 16:17