


300 mm DIAGONAL TRANSVERSE CHANNELIZATION MARKINGS TO BE PAID FOR UNDER ITEM NO. 716M02.04, PLASTIC PAVEMENT MARKING (CHANNELIZATION STRIPING) PER SQUARE METER.

100 mm DOUBLE SOLID YELLOW LINE TO BE PAID FOR UNDER THE APPROPRIATE PAVEMENT MARKING (LINE) PAY ITEM USED ON THE PROJECT.

FOR MEDIAN WIDTH LESS THAN 1.8 m NO MARKING WILL BE REQUIRED (MEASURED OUTSIDE OF BOUNDARY LINES).


MARKED MEDIAN ISLAND AND OBSTRUCTION APPROACH

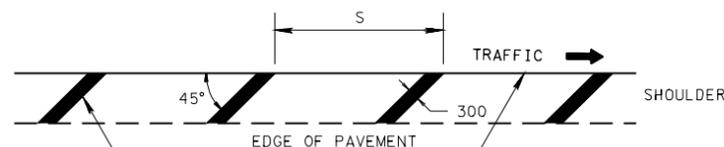

300 mm DIAGONAL TRANSVERSE CHANNELIZATION MARKINGS TO BE PAID FOR UNDER ITEM NO. 716M04.04, PLASTIC PAVEMENT MARKING (TRANSVERSE SHOULDER) PER METER.

100 mm SINGLE SOLID WHITE LINE TO BE PAID FOR UNDER THE APPROPRIATE PAVEMENT MARKING (LINE) PAY ITEM USED ON THE PROJECT.

TRANSVERSE SHOULDER MARKING

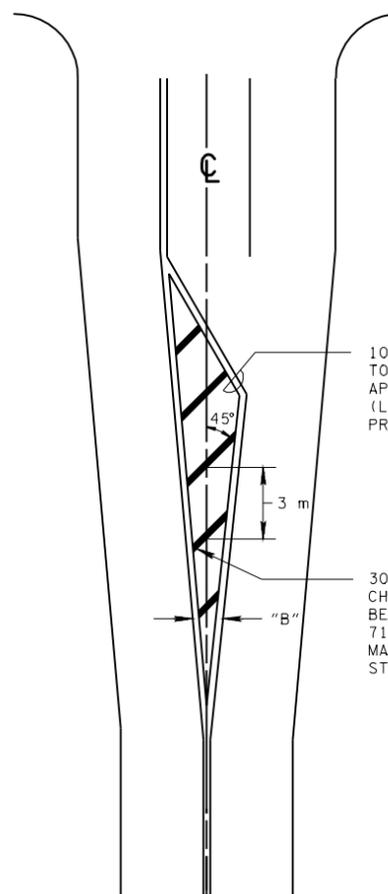


100 mm DOUBLE SOLID YELLOW LINE TO BE PAID FOR UNDER THE APPROPRIATE PAVEMENT MARKING (LINE) PAY ITEM USED ON THE PROJECT.

300 mm DIAGONAL TRANSVERSE CHANNELIZATION MARKINGS TO BE PAID FOR UNDER ITEM NO. 716M02.04, PLASTIC PAVEMENT MARKING (CHANNELIZATION STRIPING) PER SQUARE METER.

LEFT TURN CHANNELIZATION ISLAND

WHEN WIDTH "B" IS LESS THAN 1.8 m (MEASURED PERPENDICULAR TO THE C) -NO DIAGONAL MARKING WILL BE REQUIRED.

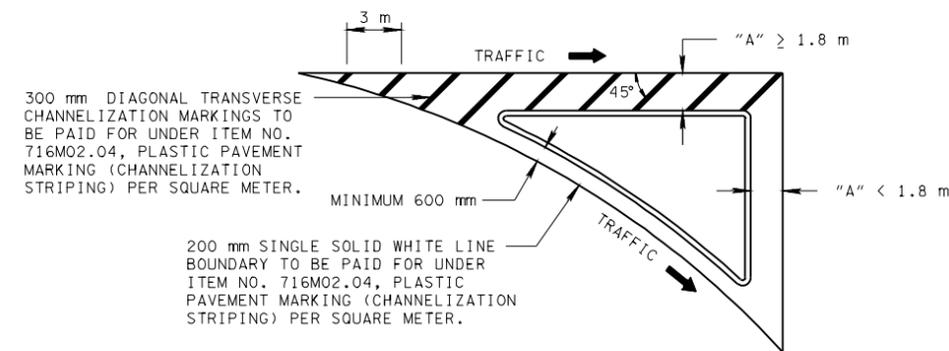


300 mm DIAGONAL TRANSVERSE CHANNELIZATION MARKINGS TO BE PAID FOR UNDER ITEM NO. 716M02.04, PLASTIC PAVEMENT MARKING (CHANNELIZATION STRIPING) PER SQUARE METER.

200 mm SINGLE SOLID WHITE LINE BOUNDARY TO BE PAID FOR UNDER ITEM NO. 716M02.04, PLASTIC PAVEMENT MARKING (CHANNELIZATION STRIPING) PER SQUARE METER.

WHEN DISTANCE "A" IS LESS THAN 1.8 m, NO DIAGONAL MARKING WILL BE REQUIRED (MEASURED FACE OF CURB TO OUTSIDE OF BOUNDARY LINE)


RAISED ISLAND (SAME FOR DEPRESSED ISLAND)

200 mm SINGLE SOLID WHITE LINE BOUNDARY TO BE PAID FOR UNDER NO. 716M02.04, PLASTIC PAVEMENT MARKING (CHANNELIZATION STRIPING) PER SQUARE METER.

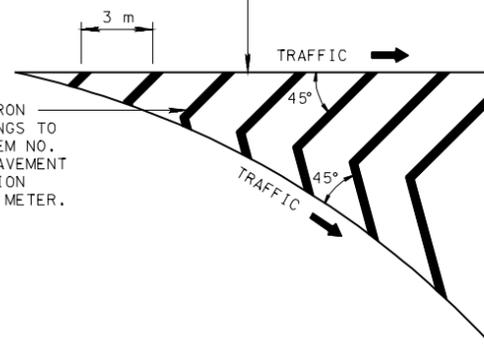

300 mm DIAGONAL CHEVRON CHANNELIZATION MARKINGS TO BE PAID FOR UNDER ITEM NO. 716M02.04, PLASTIC PAVEMENT MARKING (CHANNELIZATION STRIPING) PER SQUARE METER.

MARKED ISLAND AREA GREATER THAN 37 m²

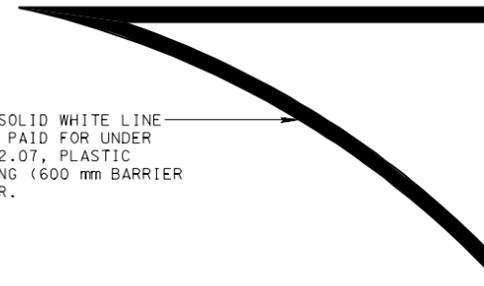

600 mm SINGLE SOLID WHITE LINE BOUNDARY TO BE PAID FOR UNDER ITEM NO. 716M02.07, PLASTIC PAVEMENT MARKING (600 mm BARRIER LINE) PER METER.

MARKED ISLAND AREA EQUAL TO OR LESS THAN 37 m² (SEE NOTE E)

TRAFFIC ISLANDS

POSTED SPEED	SHOULDERS AND MARKED MEDIANS	OBSTRUCTION APPROACH
65 km/h OR LESS	15 m	3 m
70 km/h OR GREATER	30 m	6 m

(D) SPACING IN TABLE SHOWN AS "S" IN DETAILS ON THIS SHEET.

GENERAL NOTES

- (A) TO SEPARATE TRAFFIC MOVEMENT IN THE SAME DIRECTION, DIAGONAL MARKING SHALL BE WHITE (HWL) WITH AN 200 mm SSWL BOUNDARY.
- (B) TO SEPARATE OPPOSING LANES OF TRAFFIC, DIAGONAL MARKING SHALL BE YELLOW (HYL) WITH 100 mm DSYL BOUNDARY.
- (C) ALL DIAGONAL MARKINGS SHALL BE 300 mm IN WIDTH MARKED AT 45 DEGREES TO MARKINGS OUTLINING RESTRICTED AREA OR TO CENTERLINE TO ROADWAY.
- (D) THERE SHALL BE A MINIMUM OF THREE DIAGONAL MARKINGS AT THE REQUIRED SPACING. OTHERWISE, NO DIAGONAL MARKING SHALL BE USED.
- (E) MARKED TRAFFIC ISLANDS SHOULD BE A MINIMUM OF 7.0 m².
- (F) THE RECOMMENDED SPACING IS MEASURED PARALLEL TO THE CENTERLINE OF THE MAIN TRAVELWAY.



ALL UNITS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.

MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

STATE OF TENNESSEE DEPARTMENT OF TRANSPORTATION

MARKING STANDARDS FOR TRAFFIC ISLANDS, MEDIANS & PAVED SHOULDERS ON CONVENTIONAL ROADS.