TENNESSEE D.O.T.
DESIGN DIVISION
FILE NO.

# STATE OF TENNESSEE
# DEPARTMENT OF TRANSPORTATION
# BUREAU OF ENGINEERING

# DYER COUNTY

S.R. 211

FROM: L.M. 10.31 (JCT. S.R. 77)
TO: L.M. 17.09 (JCT. S.R. 105)

## RESURFACING

STATE HIGHWAY NO. 211 F.A.H.S. NO. N.A.

| TENN. | YEAR | SHEET NO. |
|---|---|---|
| | 2014 | 1 |
| FED. AID PROJ. NO. | HSIP-211(13) | |
| STATE PROJ. NO. | 23211-4226-04 | |

REVISED: 02/07/14 CHANGED STANDARD SPECS. DATE BACK TO MARCH 1, 2006.

REVISED: 3/6/14 UPDATED INDEX TO INCLUDE SHEET 3B.

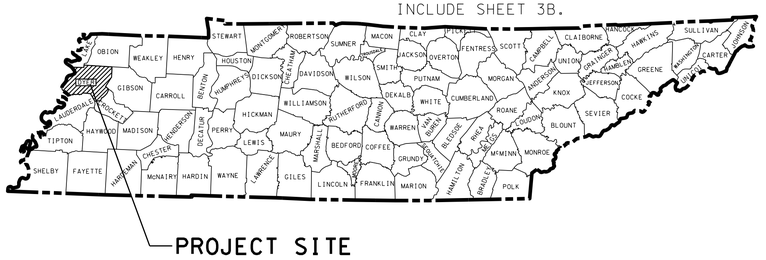


## Index of Sheets


| SHEET NO. | SHEET NAME |
|---|---|
| 1 ... | TITLE SHEET |
| 2 ... | ESTIMATED ROADWAY QUANTITIES |
| 3-3B ... | TYPICAL SECTIONS |
| 4 ... | GENERAL NOTES |
| 4A ... | SPECIAL NOTES |
| 4B-4D... | SPECIAL NOTES FOR RECYCLED ASPHALT |
| 5 ... | PRE-CONSTRUCTION RIDE NUMBERS |


## Standard Roadway Drawings

| SHEET NO. | REV. | DESCRIPTION |
|---|---|---|
| RD-A-1 | 12-18-99 | STANDARD ABBREVIATIONS |
| RD-L-1 | 10-26-94 | STANDARD LEGEND |
| RD01-S-11 | 04-04-03 | DESIGN AND CONSTRUCTION DETAILS FOR ROADSIDE SLOPE DEVELOPMENT |
| D-PG-3 | 04-15-97 | FERROUS AND ALUMINUM CORRUGATED METAL PIPE |
| S-GR-18 | 05-15-08 | GUARDRAIL TERMINAL (TYPE IN-LINE) AND SHOULDER LINE DETAIL |
| S-GR-19 | 06-01-09 | GUARDRAIL TERMINAL ANCHORS, TYPE 12 AND TYPE 13 |
| S-GR-23 | 09-11-02 | GUARDRAIL ATTACHMENT TO STRUCTURES AND PROTECTIVE GUARDRAIL AT BRIDGE ENDS DETAILS |
| S-GR-26 | 08-23-12 | SLOTTED GUARDRAIL TERMINAL ANCHOR (TYPE 21) |
| S-GR-38 | 08-16-12 | DETAILS FOR CONSTRUCTION OF EARTH PAD FOR TYPE 38 GUARDRAIL END TERMINALS |
| S-GR-38A | 06-30-05 | DETAILS FOR CONSTRUCTION OF ALTERNATE EARTH PAD FOR TYPE 38 GUARDRAIL END TERMINALS |
| S-GR-43 | | TANGENTIAL GUARDRAIL TERMINAL ANCHOR (TYPE 38) POST LAYOUT AND ERECTON DETAILS |
| S-GR-44 | | TANGENTIAL GUARDRAIL TERMINAL ANCHOR (TYPE 38) (2 TUBE) GUARDRAIL ELEMENT POST AND ASSEMBLY DETAILS |
| T-M-1 | 11-01-11 | DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS AND MARKING ABBREVIATIONS |
| T-M-2 | 01-15-13 | DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS |
| T-M-3 | 09-19-91 | MARKING STANDARDS FOR TRAFFIC ISLANDS, MEDIANS AND PAVED SHOULDERS ON CONVENTIONAL ROADS |
| T-M-4 | 11-01-11 | STANDARD INTERSECTION PAVEMENT MARKINGS |
| T-RR-1 | 11-01-11 | TYPICAL PAVEMENT MARKING AT RAILROAD-HIGHWAY GRADE CROSSINGS AND RAILROAD ADVANCE WARNING SIGN |
| SBR-2-133 | 01-22-02 | DETAILS SHOWING GUARDRAIL ATTACHMENT AT BRIDGE ENDS TO EXISTING CONCRETE VERTICAL FACE ENDPOST - 1989 |
| SBR-2-134 | 01-04-96 | DETAILS SHOWING GUARDRAIL ATTACHMENT AT BRIDGE ENDS TO EXISTING CONCRETE VERTICAL FACE ENDPOST - 1989 |

BEGIN PROJECT L.M. 10.31
(JCT. S.R. 77)

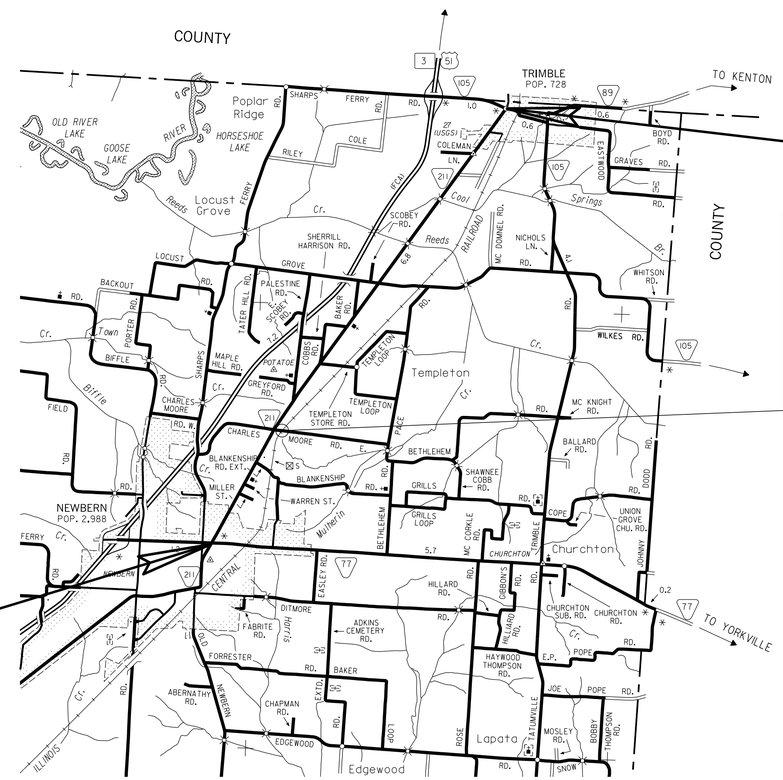


## RAILROAD NOTE:

RXR CROSSING # 297397L CHARLES MOORE RD. E.

THE STATE CONTRACTOR SHALL REPLACE THE ADVANCE WARNING SIGNS, RXR PAVEMENT MARKINGS AND STOP LINES IN THE STATE HIGHWAY AND LOCAL ROADWAY APPROACHES TO THIS GRADE CROSSING.

THE STATE CONTRACTOR SHALL INSTALL EDGE LINES AND CENTER LINES FOR 200 FT ON EACH SIDE OF CROSSING.

## SPECIAL NOTES

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED MARCH 1, 2006 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT

TDOT C.E. MANAGER 1 TABITHA CAVANESS, REG. 4

DESIGNER STEPHANIE KISSELL, REG. 4 CHECKED BY WILLIE COLEMAN, REG. 4

P.E. NO. 98043-4283-04
PIN: 117777.00

SCALE: 0 1 2 3 MILES

PROJECT LENGTH 6.78 MILES
TOTAL LANE MILES RESURFACED 13.97 MILES

| TRAFFIC DATA | |
|---|---|
| ADT (2014) | 1098 |

APPROVED: Paul D. Degges
CHIEF ENGINEER

DATE:

APPROVED:
JOHN SCHROER, COMMISSIONER

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED:

DIVISION ADMINISTRATOR DATE

06-MAR-2014 14:54
\\j04wf01.tdot.state.tn.us\04SHARED\Design\DESIGN\RESURF REG4 PROJ\DYER\SR 211\LMI0-3i-LMI7-09\232ILMI0-3ITITLE.dgn