TENN.	YEAR	SHEET NO.
	2015	1
FED. AID PROJ. NO.	HSIP-52(75)	
STATE PROJ. NO.	67002-3239-94,67002-4239-04	

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
BUREAU OF ENGINEERING

OVERTON COUNTY

STATE ROUTE 52

FROM EAST CLAY COUNTY LINE (LM 0.32)
TO THOMPSON CIRCLE (LM 3.37)

RESURFACING, GUARDRAIL & PAVEMENT MARKINGS

STATE HIGHWAY NO. 52 F.A.H.S. NO. N/A

INDEX

DESCRIPTION	SHT.
TITLE SHEET	1
ESTIMATED QUANTITIES, TYPICAL SECTIONS & DETAILS	2
UTILITY OWNERS, DROP OFF NOTES & PRE-CONST RIDE NOS.	3
GENERAL NOTES	4
SPECIAL NOTES	5

STANDARD ROADWAY DRAWINGS

DWG. NO.	REV.	DESCRIPTION
ROADWAY DESIGN STANDARDS		
RD-A-1	12-18-99	STANDARD ABBREVIATIONS
RD-L-1	10-26-94	STANDARD LEGEND
RD-L-2	09-05-01	STANDARD LEGEND FOR UTILITY INSTALLATIONS
SAFETY APPURTENANCES AND FENCE		
S-CZ-1		CLEAR ZONE CRITERIA
S-PL-1	02-02-15	SAFETY PLAN AT ROADSIDE HAZARDS
S-PL 2		SAFETY PLAN AT SIDE ROADS OR PRIVATE DRIVES
S-GRS-3		SPECIAL CASE: GUARDRAIL FOOTING
S-GRT-2	11-03-14	TYPE 38 GUARDRAIL TERMINAL
TRAFFIC CONTROL APPURTENANCES		
T-FAB-1	05-27-97	FLASHING YELLOW ARROW BOARD
T-M-1	07-24-14	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS AND MARKING ABBREVIATIONS
T-M-2	07-24-14	DETAILS OF PAVEMENT MARKINGS FOR CONVENTIONAL ROADS
T-M-3	07-24-14	MARKING STANDARDS FOR TRAFFIC ISLANDS, MEDIANS & PAVED SHOULDERS ON CONVENTIONAL ROADS
T-M-4	07-24-14	STANDARD INTERSECTION PAVEMENT MARKINGS
T-M-15	04-23-13	ASPHALT SHOULDER RUMBLE STRIP INSTALLATION DETAILS FOR INTERSTATE AND ACCESS CONTROLLED ROUTES
T-M-15A	01-30-15	ASPHALT SHOULDER RUMBLE STRIP INSTALLATION DETAILS FOR NON-ACCESS CONTROLLED ROUTES
T-WZ-10	04-02-12	ADVANCE ROAD WORK SIGNING ON HIGHWAYS AND FREEWAYS
T-WZ-21	03-15-11	LANE CLOSURE WITH LEFT HAND MERGE AND LANE SHIFT

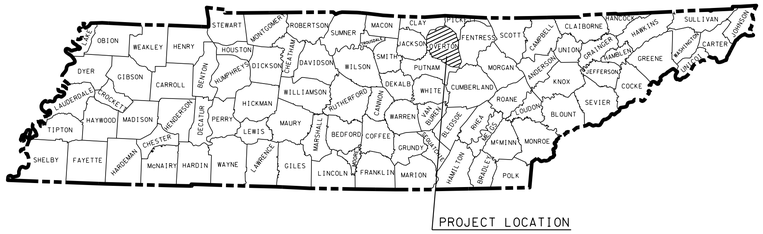

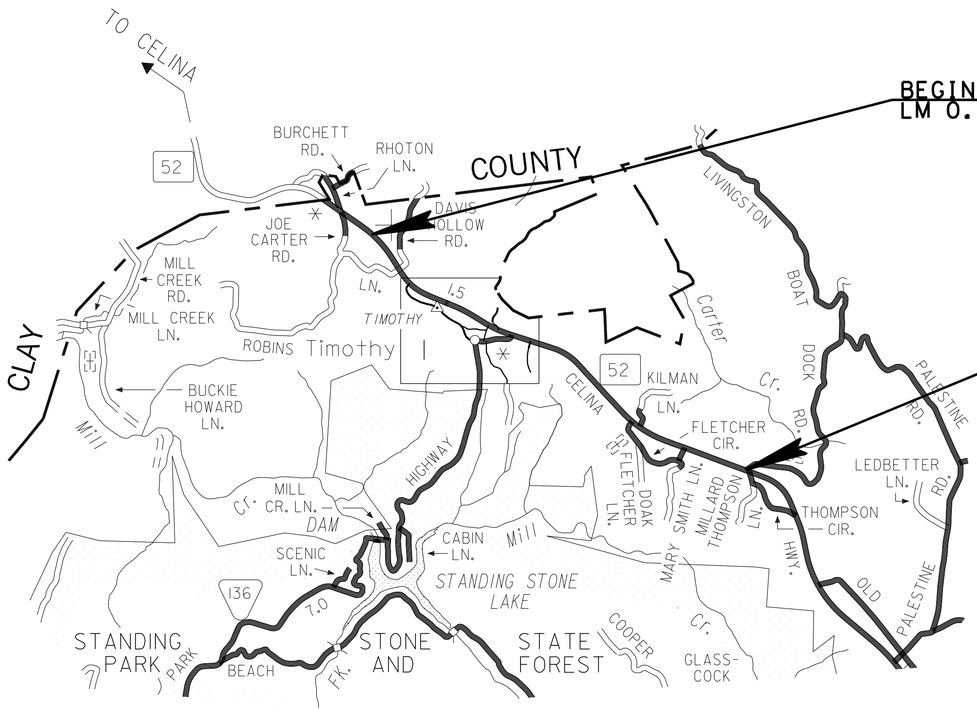

67002-3239-94
67002-4239-04
BEGIN PROJ. NO. HSIP-52(75)
LM 0.32 (RESURF)

67002-3239-94
67002-4239-04
END PROJ. NO. HSIP-52(75)
LM 3.37 (RESURF)

SCALE
0 0.5 1 1.5 mi

SEALED BY
ROBERT W. RODGERS
REGISTERED ENGINEER
AGRICULTURE
03/03/2015
COMMERCE
NO. 00022999
STATE OF TENNESSEE

APPROVED: Paul D. Degges
PAUL D. DEGGES, CHIEF ENGINEER

DATE:

APPROVED:
JOHN SCHROER, COMMISSIONER

SPECIAL NOTES

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED JANUARY 1, 2015 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT ROAD SP. SV. 2 ROBERT RODGERS PE

DESIGNER Jonathan Edwards CHECKED BY Jason Ingram, PE

P.E. NO. 98023-4217-04

PIN NO. 084431.01

PROJECT LENGTH 3.05 MILES
TOTAL LANE MILES RESURFACED 6.68 MILES

OVERTON CO. TRAFFIC DATA	
AADT (2014)	3,500

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED:

DIVISION ADMINISTRATOR DATE

03-MAR-2015 13:41
\\J02WF01.tdot.state.tn.us\02Shared\Design County Folders\Design Resurfacing Folders\Resurf 2015\2015 State Routes\SF6 Overton-52\001_Ove-52_Title.dgn