PROJECT NO.	YEAR	SHEET NO.
79224-4205-04	2015	

REVISIONS

NO.	DATE	BY	BRIEF DESCRIPTION

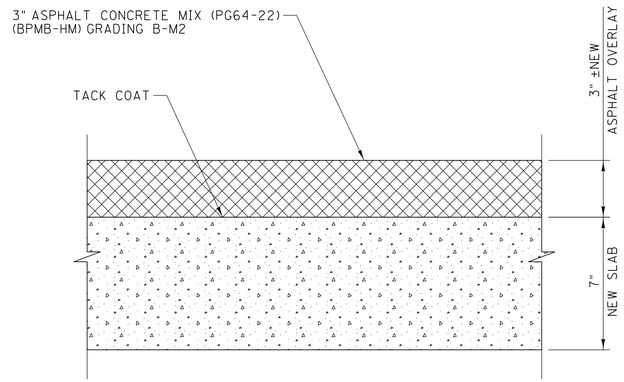

TYPICAL SECTION - CONSTRUCTION

SCALE: 3" = 1'-0"

NOTE:

FOR REPAIR LOCATIONS, SEE DWG. NOS.
BR-118-184 THRU BR-118-190.

FULL DEPTH DECK REPAIR AREAS

COST OF REMOVING EXISTING ASPHALT OVERLAY AT REPAIR SECTIONS SHALL BE PAID FOR UNDER ITEM NO. 604-10.30, BRIDGE DECK REPAIRS (FULL DEPTH OF SLAB), S.Y.

COST OF ALL MATERIALS AND EQUIPMENT TO PLACE 3" ± OF NEW ASPHALT OVERLAY (GRADING B-M2) AND TACK COAT AT REPAIR SECTIONS SHALL BE PAID FOR UNDER ITEM NO. 604-10.30, BRIDGE DECK REPAIRS (FULL DEPTH OF SLAB), S.Y.

SPAN REPLACEMENT REPAIR AREAS

COST OF REMOVING EXISTING ASPHALT OVERLAY AT REPAIR SECTIONS SHALL BE PAID FOR UNDER ITEM NO. 604-10.14, REMOVE EXISTING WEARING SURFACE, LS.

COST OF ALL MATERIALS AND EQUIPMENT TO PLACE TACK COAT AT REPAIR SECTIONS SHALL BE PAID FOR UNDER ITEM NO. 403-01, BITUMINOUS MATERIAL FOR TACK COAT (TC), TON.

COST OF ALL MATERIALS AND EQUIPMENT TO PLACE 3" ± OF NEW ASPHALT OVERLAY (GRADING B-M2) AT REPAIR SECTIONS SHALL BE PAID FOR UNDER ITEM NO. 307-01.08, ASPHALT CONCRETE MIX (PG64-22) (BPMB-HM) GRADING B-M2, TON.

26.28 | 26.74
26.58 | 26.90 | 27.25

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION

BRIDGE REPAIR DETAILS
STATE ROUTE 14
BRIDGE NO. 79-SR14-26.28
BRIDGE NO. 79-SR14-26.58
BRIDGE NO. 79-SR14-26.74
BRIDGE NO. 79-SR14-26.90
BRIDGE NO. 79-SR14-27.25

SHELBY COUNTY
2015

AMJAD S. KHAIRI
REGISTERED ENGINEER
AGRICULTURE
COMMERCE
NO. 106850
STATE OF TENNESSEE
04/27/15

GARVER

DESIGNED BY	L. I. COBOS	DATE	APR 2015
DRAWN BY	C. J. HALBROOK	DATE	APR 2015
SUPERVISED BY	J. H. RUDDELL	DATE	APR 2015
CHECKED BY	A. J. KHAIRI	DATE	APR 2015

TN D.O.T. ENGINEERING SUPERVISOR M. LAWSON

JLHalbrook 4/27/2015 10:41:24 AM
WORKSPACE: TDOT Bridge
L:\2015\5017002 - Repair Five Bridges Shelby County\Drawings\BRG\03 - Final\BR-118-219.dgn