Index Of Sheets
Resurfacing
See Sheet 1A

STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
BUREAU OF ENGINEERING

TENN.	YEAR	SHEET NO.
	2016	1
FED. AID PROJ. NO.	NH-I-65-2(107)	
STATE PROJ. NO.	94002-4193-04(BRIDGE) 94002-8193-44(RESURFACE)	

WILLIAMSON COUNTY

INTERSTATE NO. 65

FROM SOUTH OF CONCORD ROAD (L.M. 17.50)
TO DAVIDSON COUNTY LINE (L.M. 21.38)

RESURFACING

STATE HIGHWAY NO. I-65 F.A.H.S. NO. I-65

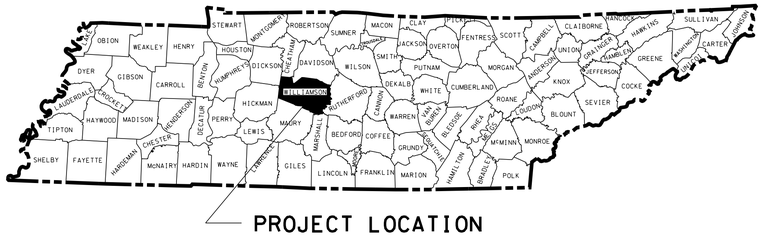

NO EXCLUSIONS

(94100650033)
PARALLEL OVERHEADS (94100650034)

CSX R.R. CROSSING # 877478L
(L.M. 19.54)

94002-4193-04
94002-8193-44
BEGIN PROJ. NO. NH-I-65-2(107)
(L.M. 17.50)

94002-4193-04
94002-8193-44
END PROJ. NO. NH-I-65-2(107)
(L.M. 21.38)

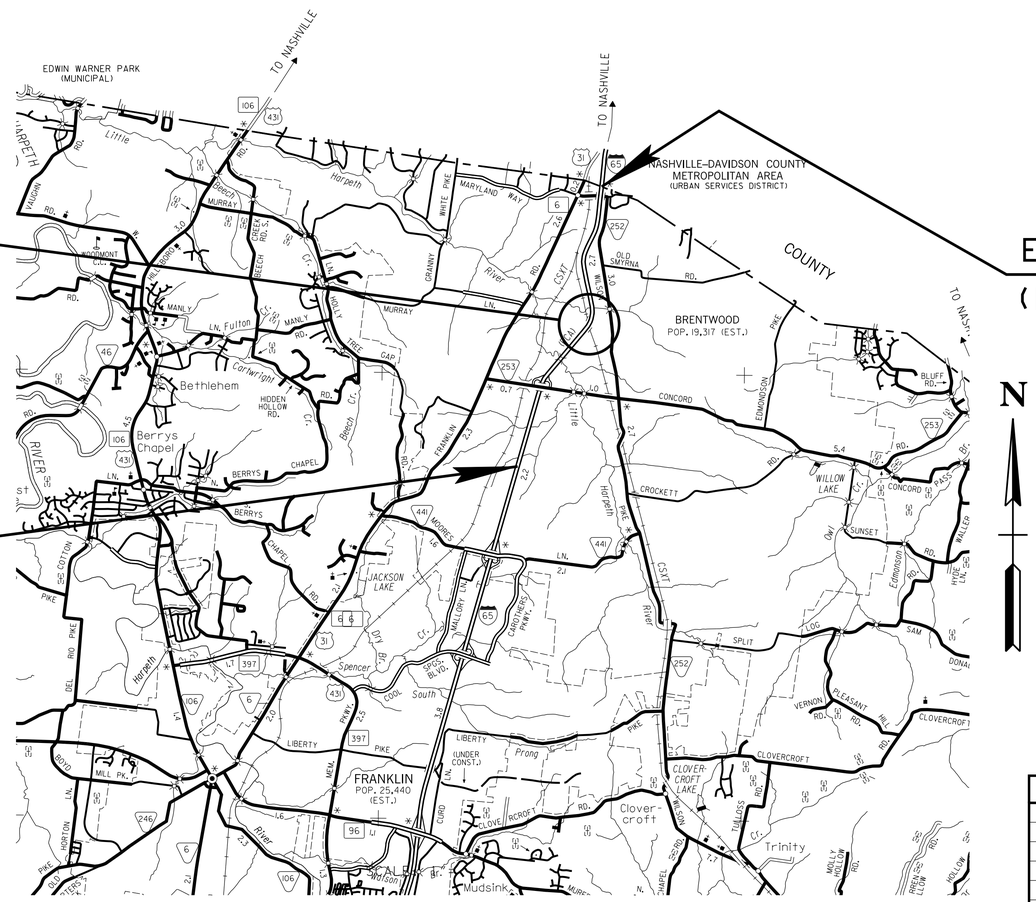

N

SEALED BY

ROBERT RYAN SWEENEY
REGISTERED ENGINEER
AGRICULTURE
COMMERCE
NO. 111998
STATE OF TENNESSEE
10/20/2015

APPROVED: Paul D. Degges
PAUL D. DEGGES, CHIEF ENGINEER

DATE:

APPROVED:
JOHN SCHROER, COMMISSIONER

SPECIAL NOTES

PROPOSALS MAY BE REJECTED BY THE COMMISSIONER IF ANY OF THE UNIT PRICES CONTAINED THEREIN ARE OBVIOUSLY UNBALANCED, EITHER EXCESSIVE OR BELOW THE REASONABLE COST ANALYSIS VALUE.

THIS PROJECT TO BE CONSTRUCTED UNDER THE STANDARD SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION DATED JANUARY 1, 2015 AND ADDITIONAL SPECIFICATIONS AND SPECIAL PROVISIONS CONTAINED IN THE PLANS AND IN THE PROPOSAL CONTRACT.

TDOT ROAD SP. SV. 2 BRAD ABEL, P.E.

DESIGNER NICK KNIAZEWYCZ / TERRY ARNOLD CHECKED BY DARRELL GRAY

P.E. NO. 98034-4194-04

PIN NO. 080466.02

TRAFFIC DATA	
ADT (2016)	146840
ADT (2036)	176210
DHV (2036)	17621
D	55 - 45
T (ADT)	07 %
T (DHV)	05 %
V	70 MPH

PROJECT LENGTH 3.88 MILES
TOTAL LANE MILES RESURFACED 33.3 MILES

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED:

DIVISION ADMINISTRATOR DATE

10/20/2015 4:01:42 PM
N:\SURVEY\DESIGN\Resurfacing Plans\2016Interstate\WilliamsonCo.I-65(LM17.50-LM21.38) NK\00 TitleSheet.sht